

Increasing time needed for data processing



Real-time data files: available within 12-24 hrs

Filename convention: Rwmoid_cyclenumber

DATA_MODE = 'R' (real-time processing)

PARAM = raw measurement

PARAM_QC = qc flag of raw measurement

PARAM_ADJUSTED = not available

PARAM_ADJUSTED_QC = not available

PARAM_ADJUSTED_ERROR = not available

DATA_MODE = 'A' (adjusted in real-time)

PARAM = raw measurement

PARAM_QC = qc flag of raw measurement

PARAM_ADJUSTED = real-time adjusted value

PARAM_ADJUSTED_QC = qc flag of real-time adjusted value

PARAM_ADJUSTED_ERROR = not available

Delayed-mode data files: usually available after 12 months

Filename convention: Dwmoid_cyclenumber

DATA_MODE = 'D' (delayed-mode processing)


PARAM = raw measurement

PARAM_QC = qc flag of raw measurement

PARAM_ADJUSTED = delayed-mode adjusted value

PARAM_ADJUSTED_QC = qc flag of delayed-mode adjusted value

PARAM_ADJUSTED_ERROR = uncertainty of delayed-mode adjusted value

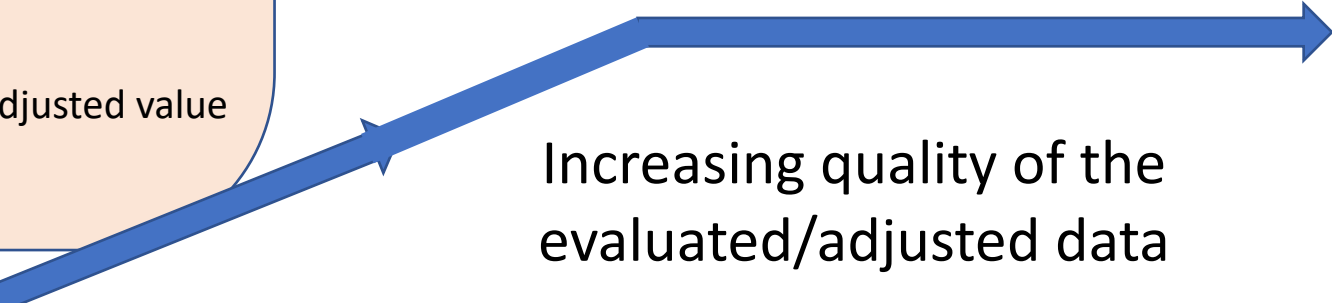

Increasing quality of the
evaluated/adjusted data