Contiguous United States wildland fire emission estimates during 2003-2015

Shawn P. Urbanski¹, Matt C. Reeves², Rachel E. Corley^{1,3}, Robin P. Silverstein^{1,3,4}, and Wei Min Hao¹

⁵ ¹US Forest Service, Rocky Mountain Research Station, Missoula Fire Sciences Laboratory, Missoula MT 59808, United States ²US Forest Service, Rocky Mountain Research Station, Forestry Sciences Laboratory, Missoula MT 59801, United States

³College of Forestry and Conservation, University of Montana, Missoula MT, 59812, United States
 ⁴Currently with Montana Department of Public Health and Human Services, Helena, MT, 59620.

Correspondence to: Shawn Urbanski (surbanski@fs.fed.us)

Abstract. Wildfires are a major source of air pollutants in the United States. Wildfire smoke can trigger severe pollution episodes with substantial impacts on public health. In addition to acute episodes, wildfires can have a marginal effect on air quality at significant distances from the source presenting significant challenges to air regulators' efforts to meet National Ambient Air Quality Standards. Improved emission estimates are needed to quantify the contribution of wildfires to air pollution and thereby inform decision making activities related to the control and regulation of anthropogenic air pollution sources.

5

To address the need of air regulators and land managers for improved wildfire emission estimates we developed the Missoula Fire Lab Emission Inventory (MFLEI), a retrospective, daily wildfire emission inventory for the contiguous United States (CONUS). MFLEI was produced using multiple datasets of fire activity and burned area, a newly developed wildland fuels map and an updated emission factor database. Daily burned area is based on a combination of Monitoring Trends in Burn Severity

- 10 (MTBS) data, Moderate Resolution Imaging Spectroradiometer (MODIS) burned area and active fire detection products, incident fire perimeters, and a spatial wildfire occurrence database. The fuel type classification map is a merger of a national forest type map, produced by the USDA Forest Service (USFS) Forest Inventory and Analysis (FIA) program and the Geospatial Technology and Applications Center (GTAC), with a shrub and grassland vegetation map developed by the USFS Missoula Forestry Sciences Laboratory. Forest fuel loading is from a fuel classification developed from a large set (> 26,000 sites) of FIA surface fuel
- 15 measurements. Herbaceous fuel loading is estimated using site specific parameters with normalized differenced vegetation index from MODIS. Shrub fuel loading is quantified by applying numerous allometric equations linking stand structure and composition to biomass and fuels, with the structure and composition data derived from geospatial data layers of the LANDFIRE Project. MFLEI provides estimates of CONUS daily wildfire burned area, fuel consumption, and pollutant emissions at a 250 m × 250 m resolution for 2003–2015. A spatially aggregated emission product (10 km × 10 km, 1 d) with uncertainty estimates is included to
- 20 provide a representation of emission uncertainties at a spatial scale pertinent to air quality modelling. MFLEI will be updated, with recent years, as the MTBS burned area product becomes available. The data associated with this article can be found at https://doi.org/10.2737/RDS-2017-0039.

1 Introduction

Annually, open biomass fires are estimated to burn in excess of three million km^2 (Giglio et al., 2013) and emit 46.6 Tg of particulate matter (36.6 Tg of fine particulate matter, PM_{2.5}) (van der Werf et al., 2017). Globally, the dominant biomass burning regions are sub-Saharan Africa, Brazil, and Equatorial Asia (van der Werf et al., 2017; Wiedinmyer et al., 2011), regions where

- 5 fire ignitions are driven by human activity (Andela et al., 2017). In many regions across the globe, biomass fires are a significant source of air pollution and can be a major hazard to public health (Johnston et al., 2012). Fresh biomass smoke is a rich mixture containing hundreds of gases (Hatch et al., 2015; Urbanski, 2014) and particulate matter diverse in size, composition, and morphology (Reid et al., 2005a; Reid et al., 2005b). Fine particulate matter (PM_{2.5}) is the smoke constituent presenting the primary public health hazard (Reisen et al., 2015). In addition to PM_{2.5}, the photochemical processing of the volatile organic compounds
- 10 and nitrogen oxides present in smoke can also produce ozone (O₃) (Jaffe and Widger, 2012; Lindaas et al., 2017), another air pollutant which poses a public health threat (Nuvolone et al., 2018). The health impacts associated with exposure to wildfire smoke include increases in respiratory and cardiovascular morbidity and mortality (Fisk and Chan, 2017; Liu et al., 2015; Williamson et al., 2016).

While biomass burning in the contiguous United States (CONUS) is a small contributor to emissions globally, it is a significant
source of air pollution in the US. Wildfire smoke has created severe air pollution episodes with substantial impacts on public health (Fann et al., 2018; Kochi et al., 2012; Rappold et al., 2014). In addition to public health impacts, wildfire smoke presents challenges for air regulators and land managers. Under the US federal Clean Air Act (CAA), the Environmental Protection Agency (EPA) has established National Ambient Air Quality Standards (NAAQS) to protect public health and the environment (USEPA, 2018a). The NAAQS include standards for PM_{2.5} (24 h and annual) and O₃ (8 h). The CAA requires states to adopt plans to

- 20 achieve NAAQS and control emissions that may impact air quality in downwind states (USEPA, 2013). Thus identifying the contribution of wildfires to air pollution, even marginal impacts at long distances from the fires, is important for air regulatory efforts. For example, Liu et al. (2016) have estimated that on days that exceed regulatory $PM_{2.5}$ levels in the western US, wildfires account for >70% of total $PM_{2.5}$ loading. Ozone production from wildfires impacting both rural and urban areas has been reported. At remote monitoring sites in the intermountain west US, Lu et al. (2016) found that 31% of summertime O₃ exceedances (days
- 25 when O₃ exceeded the 8 h NAAQS) were attributable to wildfires. However, given the complex processes involved in O₃ formation, quantifying the amount attributable to fire emissions in urban areas is particularly difficult (Gong et al., 2017; Brey and Fischer, 2016; Jaffe and Wigder, 2012). Air regulators need accurate emission inventories to quantify the contribution of wildfires to air pollution and thereby develop effective and efficient strategies to control anthropogenic air emission sources. Accurate emission inventories also improve the ability of state air regulators to properly identify wildfire induced NAAQS exceedances,
- 30 which qualify for treatment under the EPA exceptional events rule (USEPA, 2018b).

Several biomass burning emission inventories that include CONUS are available (van der Werf et al., 2017; Zhang et al., 2017; French et al., 2014; Larkin et al., 2014; Wiedinmyer et al., 2011). Of these, the global inventories Global Fire Emissions Database (GFED; van der Werf et al., 2017) and Fire INventory from NCAR (FINN; Wiedinmyer et al., 2011) are probably the most widely used in atmospheric chemistry and air quality modelling. The Wildland Fire Emissions Information System (WFEIS; French et

- 35 al., 2014) provides daily fire emission estimates for CONUS for 2001–2013. Given many options, why develop another emission inventory? In terms of wildfire emission estimates for CONUS, we believe the emission inventory presented in this paper, the Missoula Fire Lab Emission Inventory (MFLEI), may improve upon currently available inventories. We are able to employ comprehensive datasets on the distribution and assemblage of vegetation cover and fuel loading (biomass available for combustion) that are available only for CONUS. MFLEI uses a forest type map and a new forest fuel classification, both of which are based on
- 40 a national forest inventory dataset, providing more accurate fuel loading estimates compared to the fuels layer used in WFEIS

(Keane et al., 2013). The methodology used to develop MFLEI is similar to that employed to develop carbon emission estimates for Canadian wildland fires (Anderson et al., 2015; De Groot et al., 2007). As a retrospective inventory, MFLEI is able to leverage geospatial fire activity information including high spatial resolution burned area and burn severity products that are not available for real-time inventories (e.g. FINN). Additionally, much of the fire activity data used in MFLEI is produced by US land

5 management agencies and is available only for US territory, and therefore is not used in global inventories. Our inventory is also able to use a large and growing body of published emission factor data to craft emission factors specifically for fire prone CONUS ecosystems.

Improved CONUS emission estimates will help quantify the contribution of wildfires to air pollution and thereby inform decision making activities related to the control and regulation of anthropogenic air pollution sources. The ability of states to

10 properly identify wildfire induced NAAQS exceedances, which qualify for treatment under the EPA exceptional events rule (USEPA, 2018b), may also be enhanced with an improved inventory. Further, given the benefit of improved fire activity information, retrospective emission inventories may help identify and diminish deficiencies of real-time emission inventories, which are used to forecast smoke impacts on air quality and reduce risks to public health.

2 Methods

15 2.1 Biomass burning emission model

MFLEI provides estimates of daily emissions of CO₂, CO, CH₄, and PM_{2.5} from wildland fires for CONUS. The MFLEI biomass burning emission model is based on Eq. (1), given below, and the implementation and datasets are summarized in Figure 1. The inventory has a spatial resolution of 250 m which is established by the MFLEI land cover map (Sect. 2.2). Burned pixels are identified and assigned nominal burn dates using a spatially resolved burned area dataset developed from four fire activity datasets

- 20 (Sect. 2.3). The land cover classifications of the MFLEI map are used to assign fuel loading (biomass per unit area available for combustion) and combustion completeness to burned pixels. Fuel loading of forested pixels is based on a fuel classification system developed from forest inventory measurements (Sect. 2.4.1). A spatially explicit rangeland fuels map supplies fuel loading for pixels of herbaceous and shrub cover types (Sect. 2.4.2). The inventory estimates emission intensities for each 250 m grid cell (k) and day (t) using Eq. (1):
- 25 $E_i(\mathbf{k}, \mathbf{t}) = \mathrm{EF}(\mathbf{i}, \mathbf{k}) \times \sum_j F(k, t, j) \times C(k, t, j),$

where E_i is the emission intensity of species i for grid cell k on day t in units of kg-i m⁻² day⁻¹. The driving variables in Eq. 1 are the pre-fire dry fuel loading for fuel component j (F; kg m⁻²), combustion completeness, which is the fraction of fuel component j consumed by fire on the day the grid cell burned (C; day⁻¹), and the emission factor for species i, which is the mass of i emitted per mass dry fuel consumed (EF; kg-i kg⁻¹). The inventory assumes that the burning and emissions for each burned grid cell occur on

(1)

30 the estimated burn day (Sect. 2.3.2). Fuel loading (F), combustion completeness (C), and emission factors (EF) all depend on grid cell properties. F is assigned based on a grid cell's forest type group or taken from a rangeland fuel loading map in the case of herbaceous and shrub cover types. C depends on fuel type and also on fuel moisture regime and burn severity classification for forest pixels (Sect. 2.6). EF depend on the fuel type (Sect. 2.7). The mass of species i emitted on the day a grid cell burned (EM_i; kg-i day⁻¹) is the product of the emission intensity (E_i) from Eq. 1 and the grid cell area (A), which is 62,500 m².

2.2 Land cover map

The MFLEI land cover map was created by combining a 250 m spatial resolution CONUS forest type group map with a rangelands map. The forest type group map, the USDA Forest Service (USFS) National Forest Type Dataset (Ruefenacht et al., 2008; available at https://data.fs.usda.gov/geodata/rastergateway/forest_type/), was used as the base map for the MFLEI land cover map. The forest

- 5 classification accuracy of the USFS forest type group map is generally around 60 to 70 percent (Keane et al., 2013; Ruefenacht et al., 2008) with a forest/non-forest classification accuracy ranging from 80 to 98 percent (Blackard et al., 2008). Pixels mapped as non-forest in the forest type group map were then assigned a cover type of shrub, herbaceous, or non-fuel using the CONUS rangelands product of Reeves and Mitchell (2011). The MFLEI cover type map is shown in Fig. 2 and the cover type descriptions are provided in Table 1. The LANDFIRE project (LANDFIRE, 2016) provides CONUS wide maps for Fuel Characteristics
- 10 Classification System (FCCS; Ottmar et al., 2007; McKenzie et al., 2012) and Fuel Loading Models (FLM, Lutes et al., 2009) fuelbed models, both of which are suitable for estimating fuel consumption and emissions. FCCS is used in both the NEI+ (Larkin et al., 2014) and WFEIS (French et al., 2014) CONUS fire emission inventories. We assembled a new map based on the USFS forest type group map because it provides three important benefits over other land cover maps with respect to forests. First, the accuracy of the forest type group map is significantly better than either the FCCS or FLM maps (Keane et al., 2013). Second, it
- 15 enabled us to use the Fuels Type Group (FTG) surface fuel classification system (Sect. 2.4.1) which provides a more accurate estimate of average surface fuel loading than either the FCCS or FLM (Keane et al., 2013). Finally, because the USFS forest type group classification is an FIA plot variable, we are able to use the large (>27,000 plots) dataset of FIA fuel measurements estimate uncertainty in surface fuel loading and emissions (Sect. 2.9). During burned area mapping (Sect. 2.3.1) the land cover type codes of the MFLEI are used to assign the fuel codes listed in Table 1 to burned pixels. Three of the mapped cover types were forest type
- 20 groups for which there was insufficient data to develop a fuel loading classification (Sect. 2.4.1). Therefore, during the burned area processing, the fuel codes associated with these cover types, 1380, 1980, and 1990, were recoded as 1360, 1950, and 1950, respectively. Also during processing of the burned area data, the fuel codes of forest pixels in the eastern US that were classified as 1180, 1700, 1900, and 1950 were recoded to 2180, 2700, 2900, and 2950, respectively. This was done because the forest inventory surface fuels dataset used to develop fuel classifications (Sect. 2.4.1) indicated substantially different fuel loadings
- 25 between eastern and western (11 western states) forests for these forest type groups. Burned grid cells classified as non-fuel in the land cover map were assigned a fuel load = 0 and did not produce emissions. In post-emission processing of the dataset, the non-fuel, zero emission burned pixels were assigned a cover type classification from the National Land Cover Database 2011 (NLCD) (Homer et al., 2015). This was done to track wildfire impacts on agricultural and developed lands or identify possible agricultural burning. Pixels that were not classified as forest or rangeland in the MFLEI land cover map were fixed as 'No Data' when the
- 30 NLCD dataset classification was forest, herb, or shrub.

The focus of MFLEI is wildfires, which are fires resulting from unplanned ignitions (e.g. lightning, arson, accidents). The other types of open biomass burning common in CONUS are prescribed fires and agricultural fires. We define agricultural fires as the burning of crop residue or preparation of fields for planting. Croplands are classified as non-fuel in the MFLEI land cover map and are assigned zero emissions in the inventory. Prescribed fires are intentionally ignited to achieve land management objectives

35 (e.g. hazardous fuel reduction, ecosystem restoration, and preparation of rangeland for grazing). Prescribed fires are not excluded from MFLEI, although given the focus on wildfires they are certainly underrepresented as discussed in Section 3.5.

2.3 Burned area

Burned area was derived from MODIS and Landsat based burned area products, a dataset of fire perimeter polygons mapped to support fire management activities, and a fire occurrence database. Burn dates were primarily assigned based on the MODIS burned

area product and active fire detection products from MODIS and the Visible Infrared Imaging Radiometer Suite (VIIRS). When a burn date could not be assigned from MODIS or VIIRS data, it was estimated from generalized fire activity cycles and the fire size and duration obtained from the fire occurrence database or other administrative records.

2.3.1 Burned area mapping

5 On an annual basis, potentially burned grid cells of the MFLEI land cover map were identified by an overlay of burned area polygons and rasters in ArcMap. Four burned area/fire activity datasets were used to extract potentially burned pixels: Monitoring Trends in Burn Severity (MTBS) fire boundaries (MTBS, 2017a; Eidenshink et al., 2007), the MODIS active fire based Direct Broadcast Monthly Burned Area Product MCD64A1 (MCD64) (MCD64A1, 2016; Giglio et al., 2009), incident fire perimeters from the Geospatial Multi-Agency Coordination Wildland Fire Support archive (GEOMAC, 2015), and a spatial wildfire occurrence database (FOD) (Short, 2017).

10

15

The MTBS project maps fire boundaries and burn severity for large fires (> 404 ha in the west and > 202 ha in the east) across the US from 1984 to the present (Eidenshink et al., 2007; MTBS, 2017c). MTBS fire boundaries are polygons representing burned area detected from post-fire Landsat TM/ETM/OLI imagery (Eidenshink et al., 2007). The polygon attributes for each MTBS boundary include a unique fire ID, fire start date, and fire name. The MTBS fire ID attribute was used to aggregate burned grid cells by fire event and to filter the FOD point dataset to avoid double counting of fires. The primary MTBS product is thematic

burn severity rasters, which classify burn severity within the fire boundaries (Eidenshink et al., 2007; MTBS, 2017b). We used the MTBS burn severity rasters to identify unburned regions within MTBS fire boundaries and to develop scaling factors to approximate unburned patches for burned area mapped using MCD64, GEOMAC, and FOD, as described in Sect. 2.3.3.

The MCD64 product maps burned areas using 500 m MODIS imagery coupled with 1 km MODIS active fire detections (Giglio

- 20 et al., 2009). MCD64 is a monthly, 500 m resolution raster product that provides an estimated burn date for each pixel identified as burned. We used MODIS Collection 5.1 of MCD64A1 (MCD64A1, 2016). The most recent version of the MCD64A1 product, Collection 6, became available in January 2017 (Giglio et al., 2015). The MCD64 product is the primary burned area data source for the Global Fire Emission Database (GFED) (Giglio et al., 2013) during the MODIS era. Details for accessing the product can be found on the GFED website: http://www.globalfiredata.org/ (last access: June 4, 2018).
- 25 The GEOMAC dataset is a collection of fire perimeter polygons. For large fire events, fire perimeters are periodically mapped by incident management teams, typically using airborne infrared imagery. These incident perimeter polygons are produced to support fire management activities. Since their purpose is identifying the fire perimeter, not mapping the actual area burned, the area within a perimeter typically includes unburned regions. We attempt to compensate for this as discussed in Sect. 2.3.3. For these reasons, we give the MTBS dataset precedence over the GEOMAC. Further discussion regarding the use of incident perimeters as 'ground-truth' burned area may be found in Urbanski et al. (2009) and Key and Benson (2006). Final fire perimeters 30 from the GEOMAC dataset were checked against the MTBS fire boundaries using the products' fire name attributes to remove
 - GEOMAC perimeters for fires present in the MTBS dataset.

FOD is a spatial database of wildfires that occurred in the United States from 1992–2015 generated from wildfire records acquired from the reporting systems of federal, state, and local fire organizations (Short, 2017). FOD provides a point location for

each fire, not a spatial object that maps burned area. Other FOD dataset attributes used in our analysis include final fire area, 35 discovery date, containment date, fire name, fire code, and the MTBS fire ID attribute from the MTBS perimeter dataset (MTBS fires only). We used the FOD dataset to capture fires not included in the MTBS, GEOMAC, or MCD64 datasets. We filtered the FOD dataset for fires contained in either the MTBS or GEOMAC datasets using the MTBS fire ID or the fire name and fire code attributes (for GEOMAC) from the datasets. Fires < 4 ha in size were also removed due to their minor contribution to total burned

area; while fires < 4 ha accounted for 86 % of all fires in the FOD database for 2003–2015, they only comprised 1.5 % of total fire area. Finally, FOD fires with locations that fell within a distance D_f ($D_f = 2\sqrt{A/\pi}$, where A is the FOD fire area) of any grid cell identified as burned by either the MCD64 or GEOMAC datasets were removed. Following these filtering actions, MFLEI land cover map grid cells within a distance $D_f/2$ of an FOD fire location were flagged as burned.

5 2.3.2 Burn date assignment

Of the four datasets used to map burned area, only MCD64 provides an estimated burn date, and these were assigned to MFLEI grid cells identified as burned by the MCD64 product. Grid cells identified as burned by the MTBS, GEOMAC, or FOD datasets were assigned an estimated burn date as follows. First, all grid cells (non-MCD64 sourced) were assigned a fire start date and, when available a fire containment date, on a fire event basis. The MTBS, GEOMAC, and FOD datasets include fire event identifiers

10 and fire start dates (or discovery dates) which were added as attributes to burned grid cells. The FOD dataset also includes a containment date for many fire events and it was added as an attribute to burned MFLEI grid cells when available. Most of the fires in the MTBS and GEOMAC dataset are also included in FOD. Fire event identifiers, MTBS Fire ID, and the fire name and fire code attributes from GEOMAC, were used to associate MTBS and GEOMAC sourced burned pixels with FOD fire events and thereby assign containment dates when available. Next, grid cells identified as burned by the MTBS, GEOMAC, or FOD datasets

were assigned an estimated burn date using one of the following methods in order of precedence: 15

1) Grid cells within 500 m of a MCD64 sourced pixel were assigned that pixel's burn date.

20

2) Grid cell burn dates were assigned from MODIS active fire detections (MCD14) (Giglio et al., 2003) using spatial and temporal proximity criteria to associate active fire detections with burned grid cells. We assigned each active fire detection a spatial buffer, X_b, which defines the maximum distance at which it can be associated with a MFLEI grid cell for purposes of ascribing a burn date. MCD14 pixels have nominal dimensions of 1 km \times 1 km; however, the actual size and location of a detected active fire is unknown. In consideration of this spatial uncertainty, we assigned X_b a default value of 2 km. The dimensions of MCD14 pixels are 1 km × 1 km at nadir, but increase with distance off nadir, reaching 4.8 km (scan direction) 25 \times 2 km (track direction) on the edges of the MODIS scanning swath (Nishihama et al., 1997). For off nadir pixels, X_b was set to the dimension of the scan direction when > 2 km (pixel dimensions were among the attributes of the MCD14 product used in analysis). For each burned grid cell, we identified the nearest active fire detection located within a distance X_b and falling in the time frame: (D_{start} - 3 days) to (D_{cont} + 3 days), where D_{start} and D_{cont} are the grid cell's fire start date and fire containment date attributes. The temporal criteria was used to eliminate any active fire detections from an unrelated fire that occurred during 30 a different time period. For the years 2014 and 2015, VIIRS I-band active fire detections (Schroeder et al., 2014) were also used to assign pixel burn dates. The procedure was similar to that used with the MCD14 product, except that the VIIRS active fire detection spatial buffer, X_b , was set to 750 m, which is twice the spatial resolution (375 m) of VIIRS I-band pixels at nadir. Because the VIIRS I-band active fire detection product has significantly superior mapping capabilities compared to the MCD14 product (Schroeder et al., 2014), it was given precedence over MCD14 for assigning pixel burn dates. Burned grid cells not 35 associated with MCD64 were assigned a burn date equal to the date of the nearest active fire detection meeting the above spatial and temporal criteria. The MCD14 and VIIRS I-band active fire data used was obtained from the USDA Forest Service Remote Sensing Application Center's Active Fire Mapping Program (https://fsapps.nwcg.gov/afm/gisdata.php).

3) Event based extrapolation. Following burn date assignment steps 1 and 2, 28% of the burned grid cells were without burn dates. Forty-six percent of these undated grid cells were associated with fire events which had some grid cells that did have burn dates. For these fire events, grid cells without burn dates were assigned the burn date of the nearest grid cell with a burn date.

5

4) The final step for assigning burn dates addressed burned grid cells of "dateless" fire events, those without any burn date associated with the grid cells. In order to assign estimated burn dates to these grid cells, which comprised 15% of all the grid cells, we developed what we refer to as "burn day distributions". These are empirical distributions of the fraction of event total burned area as a function of days since ignition. One set of burn day distributions was derived using MTBS fire events which 10 had a containment date and also had > 95% of grid cells assigned a burn date in steps 1 or 2 above. From these fire events, burn day distributions were created according to six fire size classes (in ha): 200-625, 625-1250, 1250-3125, 3125-6250, 6250-12,500, 12,500-25,000. The burn day distribution for the 12,500-25,000 ha size class is shown in Fig. A1 and the distributions for all six size classes are provided in the dataset supplement (file\Supplements\BurnDayDist.csv, see Sect. 4). The burned grid cells of dateless fire events > 200 ha in size were assigned burn dates using the burn day distribution for the 15 appropriate size class. For fire events with a containment date, the burn day distribution was truncated to correspond to the fire duration (containment date - fire start date) and normalized. When a dateless fire event was < 200 ha and had a containment date, grid cell burn dates were assigned one at time cycling through the days between the fire start date and the containment date in chronological order until all grid cells were assigned. Fire events < 200 ha and without containment dates were assigned durations using Table A1 and the burned grid cells were distributed one per burn day by cycling through the burn days in 20 chronological order until all grid cells were assigned.

2.3.3 Unburned and lightly burned grid cells

Wildfires typically do not impact fuels uniformly across the landscape and it is not unusual for significant area within a fire perimeter to be unburned or only lightly burned (Kolden et al., 2012). MTBS burn severity thematic classifications were used to account for unburned or lightly burned regions (MTBS, 2017b). The MTBS burn severity thematic classifications were developed to represent fire effects on above-ground biomass (Eidenshink et al., 2007; Schwind, 2008). MTBS assigns six burn severity classifications (BSEV) to pixels within fire boundaries: 1) unburned to low burn severity, 2) low burn severity, 3) moderate burn severity, 4) high burn severity, 5) increased green, 6) no data. We elected to designate BSEV = 1 as unburned, which is consistent with MTBS program publications that describe this classification as areas which are either unburned or where visible fire effects occupy < 5 % of the site at the time of observation (Schwind, 2008). The increased green classification may indicate unburned 30 that exhibited more green at the time of the post-fire Landsat scene relative to the pre-fire scene. The increased green classification was assigned to just 0.3% of MTBS pixels and thus has a negligible impact on our inventory. MFLEI burned grid cells associated with a fire analyzed by the MTBS project were compared against a coarse scale MTBS thematic burn severity map (30 m original

35

on a fire event basis in proportion to the frequency of pixels originally classified BSEV 1–4. MFLEI grid cells classified as BSEV = 1, "unburned to low severity", in the coarse scale MTBS product were flagged as unburned. MFLEI burned grid cells not associated with a fire analyzed by the MTBS project were randomly assigned a BSEV value based on a generic cover type–BSEV empirical distribution developed from the CONUS wide MTBS thematic classification maps for 2003–2013. The cover type–BSEV distribution is shown in Table 2.

resampled to the MFLEI 250 m grid using majority sampling). Coarse scale MTBS pixels classified as BSEV = 5 or BSEV = 6, increased green or no data, respectively, were randomly re-assigned a value between 1 and 4. This reassignment was conducted

2.4 Fuel loading

Fuel loading was represented with the 14 fuel components in Table 3. Models of forest fuel loading were developed using data from the USFS Forest Inventory and Analysis (FIA) National Program as described in Sect. 2.4.1. The rangeland fuel product (Sect. 2.4.2) provided spatially explicit fuel loadings for grassland and shrub ecosystems.

5 2.4.1 Forest fuel loading

Surface fuel loadings

We developed an expanded version of the Fuels Type Group (FTG) fuel classification system assembled by Keane et al. (2013) using recently available FIA fuels data and also including plot data from the eastern US. The FIA inventory is comprised of three phases of data collection as described in Bechtold and Patterson (2005). The inventory is designed to cover forested land (10 %

- 10 stocked with tree species, see Bechtold and Patterson (2005)), of all ownership across the US. Phase 1 sampling provides information to stratify inventory ground plots and improve the precision of estimates of population totals (Bechtold and Patterson, 2005). In Phase 2, measurements are taken on the standard FIA base grid which has a density of approximately 1 sample location per ~ 2428 ha (6000 acres). Phase 2 collects information such as height and diameter of standing trees and physiographic class and land ownership. Phase 3 involves sampling of forest health indicators, such as the down woody material (DWM) indicator.
- 15 The DWN indicator estimates dead organic materials including downed woody debris, litter, and duff (Woodall and Monleon, 2008). The DWM indicator was used to estimate plot level surface fuel loading as described below. Phase 3 sampling is conducted on a subset of Phase 2 plots (approximately 1/16 of Phase 2 plots). In the western US, the FIA units began collecting the DWM indicator on all of their Phase 2 plots in the early 2000's (Keane et al., 2013), thus the density of surface fuel plots used to assemble the FTG classification is significantly higher in the west. Fig. 3 maps the locations of the FIA plots used to develop the expanded
- 20 FTG surface fuel classification for MFLEI.

Our FTG classification is based on 27,124 plots compared with 13,138 used in Keane et al. (2013). We used only single condition plots, plots where all four subplots were the same condition (land class, reserved status, owner group, forest type, stand-size class, regeneration status, and stand density) (O'Connell et al., 2016). The FTG classification summarizes fuelbed component loadings (Table 3) by FIA forest type groups using fuels data from the FIA Database acquired from the FIA DataMart website

- 25 (https://www.fia.fs.fed.us/tools-data; FIA, 2015). Five tables were accessed from the FIA dataset: REF_FOREST_TYPE, COND, PLOT, COND_DWM_CALC, and DWM_COARSE_WOODY_DEBRIS. A detailed description of these tables is provided by O'Connell et al. (2016). For an in-depth description of the FIA sampling design, estimation, and analysis procedures see Woodall and Monleon, 2008, O'Connell et al., 2016, and Woodall et al., 2013, and for an abbreviated summary see Keane et al. (2013). Data assembled from the COND_DWM_CALC table included loading (biomass per unit area) of fine woody debris by three size
- 30 classes: small, medium, and large (Table 3), duff loading and depth, and litter loading and depth. Data from the DWM_COARSE_WOODY_DEBRIS table was assembled to provide loadings of coarse woody debris by eight size/decay class combinations (Table 3) following the methods described in Woodall and Monleon (2008). Best estimate loadings of the surface fuel components were taken as the average values of all plots for each fuel classification and are shown in Table 4. The surface fuel loading data for the 27,124 plots used to develop Table 4 and to derive uncertainty estimates in the emission modeling (Section
- 35 2.9) are included in the MFLEI dataset (file \Supplements\Fuel_Load_Plot_Data.csv, see Sect. 4). The MFLEI land cover type map assigns an FTG to all forest pixels. Four FTG, 180, 700, 900, and 950, had significant fuel loading differences between western (11 western states) and eastern plots. Therefore, separate fuel classifications, west and east, were made for these FTG and they are differentiated by the fuel code (Table 1) which is assigned during burned area mapping as described in Sect. 2.2. As discussed in Keane et al. (2013), the variability of surface fuel loading within FTGs is quite large. Figure 4 plots the distribution

of surface fuel loading for the FIA plots of three FTG, Loblolly/shortleaf pine (160), Douglas-fir (200), and California mixed conifer (370). The surface fuel loading plot data have a log-normal like distribution with long tails. The high variability in surface fuel loading is the primary source of uncertainty in the emission estimates for forest fires (Section 2.9).

5 Understory fuels

The loading of forest understory fuels, shrubs (vascular plants with woody stems that are not defined as trees by FIA Phase 2) and herbs (non-woody vascular plants including but not limited to ferns, moss, lichens, sedges, and grasses), was derived from raster maps of forest understory carbon (Wilson et al., 2013). The raster maps of forest understory carbon were combined with the USFS FIA Forest Type Group map (Ruefenacht et al., 2008) to derive empirical distributions of understory fuel loading for each FTG

- 10 class (assuming a biomass carbon content of 50%). The fuel loading distributions were used to provide uncertainty estimates for the emission modeling (Sect. 2.9). Partitioning of the understory fuel loading between shrubs and herbs was based on herb to shrub ratios from the Fuel Characteristics Classification System (FCCS) and First Order Fire Effects Model (FOFEM) reference fuel models (Ottmar et al., 2007; Riccardi et al., 2007; Lutes, 2016a). The empirical distributions of understory fuel loading for all FTG classes are included in the MFLEI dataset (file \Supplements\Understory_Fuel_Dist.csv, see Sect. 4). Best estimate
- 15 loadings for herb and shrub fuel components were taken as the average values of all plots for each fuel classification and are shown in Table 4.

Canopy fuels

Available canopy fuel (ACF), the dry mass of canopy fuels likely to be consumed in a fully active crown fire (needles, lichen,

- 20 moss, and live and dead branch wood ≤ 6 mm in diameter) (Scott and Reinhardt, 2001), was derived from FIA plot Treelist tables. FIA Treelist tables (which are named TREE in the FIA database) provide a detailed inventory of trees on FIA plots (O'Connell et al., 2017). FIA plots with Treelists are based on Phase 2 sampling which are far more numerous than the Phase 3 plots used to derive surface fuel loadings (see above). We used the Treelist table variables: species code (SPCD), diameter (D), crown class code (CCLCD), tree status (STATUSCD), and tree density (TPA) to estimate ACF associated with each Treelist table entry using
- 25 empirical equations from the literature following the approach outlined in the FuelCalc User's Guide (Lutes, 2016b). FuelCalc is a fuel management software system which can be used to calculate forest canopy characteristics at an inventory plot. For each of 363,060 FIA plots with a Treelist, stand level ACF was calculated using Eq. 2:

$$ACF_{stand} = \sum_{i}^{N} (acf_{i} \times TPA_{i}), \qquad (2)$$

where the subscript i is the index for the softwood tree species in the stand and acf_i and TPA_i are tree level available canopy fuel and tree density. acf_i and TPA_i are calculated as described in the Supplement. ACF_{stand} were aggregated by FTG (an FIA plot variable) and the mean was taken as the best estimate which are listed in Table 4. The ACF_{stand} aggregated by FTG were fit to Weibull probability distribution functions to derive uncertainty estimates for the emissions modeling (Sect. 2.9). Best estimate ACF and optimized parameters for fits to Weibull probability distribution functions (PDF) are provided in Table B1.

35 Total forest fuel loading

Average forest fuel loading is dominated by the surface fuels for all forest fuel types (25 FTG plus 4 eastern variants (see Sect. 2.2)), as shown in Figure 5. Greater than 70% of total fuel loading resides in the surface fuels for 25 of the 29 forest fuel types. Surface fuel components (Table 3) are often grouped into litter, fine woody debris (fwd; down dead wood with diameter < 7.62 cm), coarse woody debris (cwd; down dead wood with diameter >=7.62 cm), and duff. These groupings reflect the surface to

volume ratio of the fuel particles, an important determinant in the rate of fire spread (Scott and Burgan, 2005) as well as the combustion characteristic of the fuels. Litter and fine woody debris tend to favor flaming combustion while coarse woody debris, and duff especially, favor smoldering combustion processes (Urbanski, 2014). Figure 6 plots the fraction of total fuel load residing in duff, litter, fine woody debris, and coarse woody debris for the 29 forest fuel types.

5 2.4.2 Rangeland fuel loading

Rangeland fuels were estimated using the Rangeland Vegetation Simulator (RVS) (Reeves, 2016) and began with delineating the spatial domain of rangelands in CONUS (land cover type codes 1 and 2 in Figure 2), as described in Reeves and Mitchell (2011), and constrained using the forest type map developed by Blackard et al. (2008). If a forest type was indicated for a given pixel in the Blackard et al. (2008) map, no rangeland fuel data were estimated for that pixel. The vegetation form (herbaceous or shrub)

10 and type (e.g. Chihuahuan Mixed Desert and Thornscrub) were assigned from the Landfire Project (LF) Existing Vegetation Type (EVT) geospatial data layer (LANDFIRE, 2016). Different methods were used to quantify woody and herbaceous fuels (Figure 7).

Shrub

- 15 The derivation of shrub fuel loading used two LF products in addition to EVT as input: Existing Vegetation Height (EVH) and Existing Vegetation Cover (EVC). The height estimates at each pixel in the EVH product are thematic classes representing a range of potential heights (Table C1). The range of potential heights provided by the EVH enables three values of shrub fuels to be estimated at each pixel (median, maximum, and minimum). EVC represents the vertically projected percent cover of the live canopy.
- 20 Generation of shrub fuel loading data involves several steps (Fig. 7) which are briefly described here. Details of the approach are illustrated in Appendix C. First, crown dimensions are derived from EVH and the projected crown area on a horizontal surface (PCH), the latter of which is estimated using Eq. 3 (Frandsen, 1983):

$$log_{10}(PCH) = -0.8471 + 2.2953 log_{10}(HT),$$
(3)

25

where PCH is in cm² and HT is the estimated height class of shrubs in cm at each pixel (from the EVH product). Crown dimensions are then used in one of 31 species specific equations from the RVS allometric library to estimate per stem biomass (PSB; kg stem⁻¹). Next, the estimate of stem density (SD) at each pixel, (stem ha⁻¹) is used to expand PSB to a per-area basis. SD is estimated as:

30

$$SD = (PCH / 10^8) * EVC$$
 (4)

where SD is stem density, and the value 10⁸ converts cm² to a per hectare basis. In effect, the number of times PCH can be divided into a hectare is scaled by the canopy cover (EVC). The total shrub biomass (TSB; kg ha⁻¹) is the product of PSB and SD. This

35

four step process was conducted at each pixel using the minimum, maximum, and median shrub heights from EVH (Table C1) to provide lower, upper, and middle estimates of fuel loading, respectively.

Herb

The derivation of herb fuel loading used the EVT and MODIS growing season maximum Normalized Difference Vegetation Index (NDVI), and the Soil Survey Geographic (SSURGO) annual productivity map, which consists of polygons with estimates of rangeland productivity (dry-weight/area/year) for normal, favourable, and unfavourable production years (Soil Survey Staff, 2016).

- 5 The SSURGO productivity data were derived from the USDA National Resource Conservation Service soil survey geographic database (Soil Survey Staff, 2016). Herbaceous biomass is estimated as a function of the annual maximum NDVI across 51 grassland vegetation types. The three SSURGO production values reported at each soil polygon were paired with the average, minimum, and maximum NDVI values (from 2000–2016) for each of the 51 vegetation types dominated by herbaceous species (Fig. 8). When this relationship is applied for each year in the time series between 2000 and 2016, an annual estimate of rangeland
- 10 production can be made at every pixel. The present year's herbaceous production (from 2000–2016) is added to estimated standing dead herbaceous vegetation ("holdover") resulting from previous growth (see below). Annual production added to the holdover from previous years creates the 'herbaceous loading' pool (HL; Fig. 7).

Estimating the previous year's standing dead or herbaceous litter material is based upon experimental (Irisarri et al. 2016) and anecdotal observations. This topic is not widely studied across multiple ecosystems and it is difficult and time consuming to derive

- 15 experiments that track the fate of herbaceous growth, senescence and decomposition across multiple vegetation types. The paucity of suitable plot data for estimating the amount of standing dead material is therefore based on observations of various vegetation stands with significant herbaceous components throughout the western US. In addition, the USDA Agricultural Research Service (ARS) recently provided results from 10 years of grassland observations on shortgrass steppe near Cheyenne, Wyoming and standing dead values averaged 22% across treatments. This means that, on average, in shortgrass steppe, standing crop of the present year includes 22% of the previous year's production plus the present annual production. The function used in the RVS to
 - estimate the standing dead material is $y = 100e^{-1.495x}$, which yields values of 22% at year 1 and 5% at year 2.

To capture the range of variability of the herbaceous response, the coefficient of variation (C.V. = mean / standard deviation of the annual production between 2000 and 2016) was applied at each pixel dominated by herbaceous lifeforms. This yields three potential values of herbaceous loading at each pixel (mean, mean \pm C.V.). Likewise the range of standing dead values over 2000–2016 was estimated using the mean \pm C.V. At this stage herbaceous loading (HL) and total shrub biomass loading (TSB)

25 2000–2016 was estimated using the mean +/- C.V. At this stage herbaceous loading (HL) and total shrub biomass loading (TSB) have been produced and are mosaicked together to form a seamless depiction of fuels and are available for simulation of fuel consumption and emissions. Raster files of the herbaceous C.V. and the shrub minimum and maximum are included in the MFLEI dataset.

2.4.3 Total fuel loading

30 Best estimate total fuel loading of both forests and rangelands are mapped in Figure 9. Forest fuel loadings range from 1.3 to 13.3 kg m⁻² (Table 4, Fig. 5). Fuel loadings are considerably less for rangelands, varying from ~0.1 to 5.2 kg m⁻², with a median value of 1.8 kg m⁻². Regions without a mapped fuel loading are classified as non-fuel and are largely agriculture, barren, developed lands or water.

2.5 Fuel conditions

35 Fuel moisture content is a key driver of fuel consumption, especially for coarse woody debris and duff. The National Fire Danger Rating System (NFDRS; Cohen and Deeming, 1985) provides fuel moisture models that classify dead fuels by time lag intervals which are proportional to the fuel particle diameter. The NFDRS classifications for dead fuel moisture are 1 h, 10 h, 100 h, and 1000 h corresponding to diameters of < 0.64, 0.64–2.54, 2.54–7.62, > 7.62 cm. The algorithms used to simulate surface fuel consumption require fuel moisture content for 1000 h time lag fuels and duff. Surface fuel consumption was simulated for the four fuel moisture regimes shown in Table 5. In the emission modeling, MFLEI grid cells were assigned the 1000 h time lag or 100 h time lag fuel moisture content of the nearest NFDRS station for day of concern. 1000 h fuel moisture content is considered a proxy for coarse woody debris (see Table 3). Data for NFDRS stations was obtained from the USFS Wildland Fire Assessment System

5 (WFAS) (Wildland Fire Assessment System, 2015) data archive. Missing values were filled by linear interpolation across days.
 Duff moisture content was estimated using the 100 h fuel moisture content and empirical relationships of Harrington (1982).

2.6 Fuel consumption

Best estimates and ranges of consumption (i.e. combustion completeness), for forest surface and understory fuels for the four moisture regimes used in the emission inventory are shown in Table 6. The best estimate values are based on simulations using
algorithms from the fire effects models CONSUME (Prichard et al., 2006) and FOFEM (Lutes, 2016a). The ranges, which were used to estimate uncertainty in the fuel consumption simulations, were assigned as 10-20%. The best estimate and range for the fraction of forest canopy fuel consumed was based on each pixels' burn severity classification (Table 7), which were assigned as described in Sect. 2.3.3. Fuel consumption for shrub and herbaceous grid cells used the natural fuel equations from CONSUME (Prichard et al., 2006). The rangeland fuel consumption equations used do not include fuel moisture content and therefore were independent of the moisture regime.

2.7 Emission factors

The composition and intensity of emissions produced by biomass burning varies with the relative mix of flaming and smoldering combustion. Modified combustion efficiency (MCE), the molar ratio of emitted CO₂ to the sum of emitted CO₂ and CO (MCE = Δ CO₂/(Δ CO₂ + Δ CO)), is a widely used measure of the relative mix of flaming and smoldering combustion. Because the emission

- 20 factors (EF) of many species are correlated with MCE, it is a useful metric for extrapolating emissions factors from one set of combustion conditions to another (Urbanski, 2014; Akagi et al., 2011). The MCE observed for wildland fires varies significantly across fire types, for example average MCE values are around 0.94 and 0.93 for rangeland and southeastern forest fires, respectively, but ~0.88 for wildfires in western forests (Urbanski, 2014). This difference in fire properties was accounted for in the emission inventory by using three sets of EF (southern forests, western and northern forests, and rangelands). Data from several
- 25 field studies (Table S4) was used to model EF as a linear function of MCE for forest and rangeland fires (Table 8). The linear functions were combined with best estimate MCE values to derive the EF used in the inventory (Table 9). Since the focus of MFLEI is wildfires, the best estimate MCE used for western and northern forests is based on western wildfires. Sufficient field measurement data of MCE and EF for southern wildfires could not be found in the literature. Therefore, the EF used for southern forest fires are based on the large body of prescribed fire studies in the literature. The linear functions and their standard errors in
- Table 8 were combined with MCE values, sampled from a normal distribution to account for within fuel group uncertainty (Table 9), to provide an estimate of the uncertainty in the EF which was used in the emission modeling uncertainty analysis (Sect. 2.9).

2.8 Emission estimates

The best estimates of fuel loading for the 14 fuel components ($F_{k,j}$, Table 3) were assigned to forest pixels using the mapped forest type group and associated fuel code (Sect. 2.2) and the FTG fuel classification system (Table 4). The fuel code, fuel moisture

regime, and burn severity classification were used to designate combustion completeness by fuel component for each pixel ($C_{k,j}$) using the best estimates from Table 6 and Table 7. Fuel loading for herbaceous and shrub pixels ($F_{k,j}$) was taken from the rangeland fuels map (Sect. 2.4.2). Herbs and shrubs were treated as single component fuels with a combustion completeness that is

independent of fuel moisture regime and burn severity classification. $EF_{k,i}$, were selected from Table 9 based on the fuel type and then the best estimate emission intensities for CO₂, CO, CH₄, and PM_{2.5} were calculated using Eq. 1.

2.9 Uncertainty estimates

- A Monte Carlo style analysis following the general approach outlined in the IPCC Guidelines for National Greenhouse Gas 5 Inventories (Eggleston et al., 2006) was used to estimate the uncertainty in emission intensities (kg m⁻²) at the pixel level. The method involved randomly selecting a sample of N input values (X_i, X_{i+1},...,X_N) for the emission model (Eq. 1) and calculating emission intensities (E_i, E_{i+1},...,E_N), where X_i is the array of input values needed for a single emission calculation: fuel loading by component (Table 3), combustion completeness (Tables 6 & 7), and EF (EFCO₂, EFCO, EFCH₄, EFPM_{2.5}), and E_i is the array of emission intensities for CO₂, CO, CH₄, and PM_{2.5}. The samples of input variables were generated based on each pixel's fuel code
- 10 using the methods summarized in Table 10 and described in more detail below. The value of N was 500 for rangeland pixels. For forest pixels, N was taken as the greatest of 500 or N_{plots}, where N_{plots} is the number of plots in the FIA dataset for a given pixel's forest fuel code (Table 4). Next, quantiles (q = .05, .10, .25, .50, .75, .90, .95) of the emissions ($\mathbf{E}_{q,b}$) were calculated and saved. The process was repeated B times, yielding $\mathbf{E}_{q,1},...\mathbf{E}_{q,B}$ and mean values ($\sum_{1}^{B} E_{q}/B$) were calculated to provide uncertainty estimates of the emissions. Convergence of the distributions was achieved with B = 2000.
- 15 Forest surface fuels were generated by using fuel loading arrays sampled from the FIA plot data (included in the MFLEI dataset: file\Supplements\Fuel_Load_Plot_Data.csv, see Sect. 4), i.e. each element i used surface fuel components from a single FIA plot. This approach was chosen to preserve any correlations among surface fuel components. Uncertainty in the assigned moisture regime and burn severity classification, which are used to determine surface and canopy fuel consumption, respectively, were not considered in this analysis. Therefore, uncertainty analysis produced 464 sets of quantiles for forest pixels (29 forest fuel codes,
- 20

25

) four moisture regimes, and four burn severity classifications). Burned forest pixels were assigned sets of quantiles based on forest fuel code, moisture regime and burn severity classification.

The variability in pixel level shrub fuel loading was simulated using means and standard deviations based on the maps of the mean, minimum, and maximum loading (Sect. 2.4.2); with the standard deviation in loading estimated as half the range in maximum and minimum loading at each pixel. To reduce computational demands, shrub pixels were aggregated into bins of mean loading in 50 g m⁻² increments (50 to 5500 g m⁻²). For each 50 g m⁻² increment in mean loading, simulations were conducted using

- 25 increments of standard deviation each corresponding to 10 percentage points of the mean loading value (10% to 250%), resulting in 2750 fuel loading elements (pairs of μ and σ). Similarly, pixel level variability in herbaceous fuel loading was simulated based on pixel specific mean and standard deviation from the maps of the mean and the coefficient of variation (C.V. = σ/μ) of loading (Sect. 2.4.2). As with the shrub fuel loading, the herbaceous pixels were aggregated to reduce computational demands. Herbaceous
- 30 pixels were grouped according to mean loading by 25 g m⁻² increments (25 to 500 g m⁻²). For each 25 g m⁻² increment in mean loading, simulations were conducted using 22 increments of standard deviation corresponding 5 percentage points of the mean loading value from 5% to 110%, providing 440 fuel loading elements (pairs of μ and σ). Using the general approach described in the first paragraph of this section, a set of emission quantiles were produced for each of the 2750 shrub and 440 herbaceous fuel elements, with fuel loading simulated using a truncated normal distribution with the element's μ and σ , and the combustion
- 35 completeness and EF using probability distributions described in Table 10. Since rangeland fuel consumption was estimated independent of moisture regime and burn severity classification, these variables were not considered in the uncertainty analysis. Each burned rangeland pixel was assigned a set of emission quantiles from the simulations based on its cover type (herb or shrub), fuel loading, and fuel load uncertainty.

The spatial and temporal resolutions required of fire emission inventory systems depend on the specific applications for which they are being used. For regulatory related air quality modeling the EPA recommends a horizontal grid resolution of ≤ 12 km for O₃ and PM_{2.5} NAAQS (USEPA, 2007). Therefore the uncertainty estimation approach described above was applied aggregating burned pixels to a 10 km × 10 km grid. The resultant dataset at 1 d and 10 km spatial resolution provides a more relevant representation of the uncertainties of the emissions when used in typical air quality applications. The approach followed that outlined above, except that the emission intensities for each sample, **E**_i, were the sum of emission intensities for all pixels within each 10 km × 10 km grid cell on a given day. Only grid cell days with > 4 burned pixels were considered for this uncertainty analysis, this excluded 9% of burned area over the 2003–2015 period.

3. Results

5

10 3.1 Annual, seasonal, and monthly

The MFLEI annual burned area, fuel consumed, and $PM_{2.5}$ emitted for 2003–2015 are shown in Figure 10. The average area burned was 22,891 km² y⁻¹; forest accounted for 44% of burned area with the balance split between herb (29%) and shrub (27%) cover types. The maximum annual burned was 40,714 km² in 2011 which was >5 times the minimum of 7688 km² in 2004. Fuel consumed averaged 41.4 Tg y⁻¹, with extremes of 16.6 Tg in 2004 and 61.2 Tg in 2012. The annual rank in fuel consumed differed

- 15 from burned area due to the far greater fuel loading of forests (Sect. 2.4.3). While forest comprised only 44% of burned area over the period, they accounted for 87% of fuel consumed. Average PM_{2.5} emissions were 733 Gg y⁻¹ and, as with fuel consumed, 2004 and 2012 were the extreme years at 270 Gg and 1216 Gg, respectively. There are slight differences in the ranking of annual fuel consumption and PM_{2.5} emitted resulting from the different EFPM_{2.5} used for southern and western/northern forests (Table 9). Maps of annual burned area, fuel consumed, and PM_{2.5} emitted averaged over 2003–2015 are shown in Figure 11. In the eastern
- 20 two-thirds of the domain, fire activity and emissions are spread broadly across the southern tier while being comparatively sparse in the north. In the west (western 11 states), fire activity has no latitudinal split, but there are large pockets where emissions are limited or absent. Much of the area in the west without emissions are in desert regions of the southwest with sparse vegetation.

The monthly distributions of burned area, fuel consumption, and PM_{2.5} emitted over 2003–2015, broken down by cover type, are plotted in Figure 12. Burned area has a bimodal distribution with peaks in April and August. Summer (June, July, August) and

- 25 spring (March, April, May) accounted for 49% and 31% of burned area, respectively. The ratio of herb and shrub to forest burned area was similar for summer (1.3) and spring (1.5), but differs considerably between the peak months of April (2.7) and August (1.0). August was the most significant month for emissions, accounting for 32% PM_{2.5} emitted, more than twice the share of the next highest month, which was July at 15%. While April had the third highest burned area (15% of total), it accounted for only 6.7% of PM_{2.5} emitted. The geographic distribution of emissions varies considerably by season as may be seen in Figure 13.
- 30 Understanding the spatiotemporal distribution of emissions is aided by aggregating the emissions according to six regions in Figure 14. Roughly 8% of fuel consumption and 6% of PM_{2.5} emissions occurred in the winter months (Fig. 12) and were largely limited to the southeast and southcentral regions (Figs. 13). Winter PM_{2.5} emissions comprised 25% and 16% of total PM_{2.5} emissions in the southeast and southcentral, respectively (Fig. 15). In the southeast, 74% of winter emissions resulted from fire activity in Florida and along the gulf coast. The majority of southeast (52%) and southcentral (62%) emissions occurred in the
- 35 spring. Fires in the Flint Hills region of eastern Kansas and northeast Oklahoma accounted for 44% of southcentral spring emissions over the 13 year period. Summer was the most significant season for fuel consumption and emissions due to fire activity in the west (Fig. 13). The majority of CONUS wide fuel consumption (51%) and PM_{2.5} emissions (59%) occurred during the summer. On a regional basis, southwest emissions peaked during June (46%) and during August in both the northwest (59%) and

California (40%). Northwest emissions were concentrated July – September (95%), while California emissions were spread symmetrically across June–October (Fig. 15).

3.2 Daily

While regional level summaries on a seasonal or monthly basis are useful for understanding the general spatiotemporal distribution

- 5 of wildfire emissions, daily emissions are more relevant for appreciating the potential air quality impacts of fires. For instance, US NAAQS includes a 24 h standard for $PM_{2.5}$ and an 8 h standard for O_3 (the latter of which can be produced through photochemical processing of VOC and NOx present in smoke plumes (Jaffe and Wigder, 2012). Wildfires are highly episodic and even though they may persist for weeks, a significant share of a wildfire's emissions generally occur on a handful of days. For example, consider the typical large (> 2000 ha) wildfire in the west, our inventory indicates more than half of its total $PM_{2.5}$
- 10 emissions occur on a single day. In the west, 1171 fires > 2000 ha in size accounted for ~85% of burned area and $PM_{2.5}$ emission from 2003–2015. To characterize wildfire temporal intensity, emissions of $PM_{2.5}$ were summed by region for each of the 4748 days of the inventory. Figure 16 plots the fraction of regional, 2003–2015 $PM_{2.5}$ emissions released on peak emission days, the top first, second, and fifth quantile of days. Since the north accounted for only 3% of total wildfire emissions, it has been excluded from this analysis to simplify the discussion. Figure 16 shows that a small fraction of days (5%) are responsible for the majority
- of wildfire $PM_{2.5}$ emissions in all regions except the southeast. In fact, the percent of $PM_{2.5}$ emissions during just the top 1% of days was > 33% in California and the northwest, > 25% in the southcentral and southwest, and ~13% in the southeast. The spatiotemporal concentration of emissions is further illustrated in Figure 17, which plots the cumulative distribution of daily $PM_{2.5}$ emissions aggregated on a 10 km × 10 km grid. Five percent of the grid cell days produced 69% of total $PM_{2.5}$ emitted, and 10% of grid cell days were responsible for 82% of total $PM_{2.5}$ emitted. This analysis highlights the importance of quantifying wildfire
- 20 emissions on a daily time step when assessing the potential impacts of wildfires on regional air pollution; assessments based on emissions aggregated seasonal, monthly, or even weekly may significantly understate the likelihood of acute pollution episodes.

3.3 Comparison with non-fire emission sources

Next we compare our wildfire PM_{2.5} emissions with those from other sources as estimated in the EPA 2014 National Emission Inventory (NEI14; USEPA, 2014). We focus on the west (the 11 states of the northwest, southwest, and California regions, Fig. 14a) since this region accounts for 72% of total wildfire PM_{2.5} emissions (Fig. 14b) and the emissions are produced with a high temporal intensity (Figs. 15 & 16) and have resulted in severe air pollution episodes (Fann et al., 2018; Kochi et al., 2012; Rappold et al., 2014). Non-fire PM_{2.5} emission estimates for the western states were extracted from the NEI14 Tier 3 summary state level data (USEPA, 2018c). The NEI14 PM_{2.5} emissions were limited to non-fire sources by excluding the Tier 3 source categories of "agricultural fires", "forest wildfires", and "prescribed burning". The NEI14 provides annual emission estimates for 2014, which

- are plotted with the annual sum of MFLEI PM_{2.5} emissions for the west for 2003–2015, in Figure 18. The 2003–2015 annual average western wildfire PM_{2.5} emitted is 525 Gg y⁻¹ (range 126–1034 Gg y⁻¹) compared with the non-fire source strength of 657 Gg y⁻¹ in 2014. As discussed above, when inferring possible air quality impacts of wildfire emissions, 1 d is an appropriate time scale. Assuming the NEI14 emissions are a reasonable proxy for annual non-fire emissions across 2003–2015, and neglecting the seasonal variability of emissions, daily non-fire PM_{2.5} emissions are 1.80 Gg d⁻¹. For all 4748 days of MFLEI period, we calculated
- 35 the wildfire to non-wildfire $PM_{2.5}$ emission ratio; the number of days the ratio exceeds certain thresholds is shown in Figure 19. Across the west, wildfire emissions greatly exceed non-fire sources on active fire days. On ~10% of days, wildfire emissions are more than twice non-fire sources and on 60 days they were >10 times non-fire sources.

3.4 Uncertainty

The MFLEI pixel level best estimates of fuel consumption (FC) and emissions (ECO₂, ECO, ECH₄, EPM_{2.5}) were derived as described in Sect. 2.8 and the uncertainty in these estimates were characterized with quantiles (q=.05, .10, .25, .50, .75, .90, .95) derived from Monte Carlo style simulations (Sect. 2.9). Here we summarize the pixel level uncertainty in terms of the relative

- 5 interquartile range: $RIQR = (q_{75} q_{25})/X$, where q_{75} and q_{25} are the 75% and 25% quantiles and X is the best estimate of FC or EPM_{2.5}; the distributions are shown in Figure 20. The mean RIQR of both FC and EPM_{2.5} are ~ 67% for forest cover type and ~ 47% for herb/shrub. At the pixel level, the uncertainty is driven by the variability in fuel loading. The difference in the uncertainty estimates between forest and herb/shrub cover types results primarily from the high variability in forest fuel loading (Fig. 4). The mean RIQR are nearly 50% higher for forest compared with herb/shrub; however, the latter does have a long positive tail with ~
- 10 11% of pixels having RIQR > 90%. These high uncertainty non-forest pixels are shrub vegetation with low fuel consumption (< 350 g m⁻²).

As discussed in Sect 3.2, CONUS wildfire emissions are temporally and spatially concentrated. Considering this spatiotemporal concentration of emissions and the grid spacing typical of regional and national scale air quality modeling (4 to 12 km; USEPA, 2007; NOAA, 2018), we also estimated the uncertainty in daily MFLEI emissions aggregated on 10 km × 10 km grid

- 15 (Sect. 2.9). For purposes of air quality modeling and air regulatory activities, the uncertainty of these spatially aggregated emissions provides a more relevant metric than the pixel level uncertainty presented above. Uncertainty in the daily, aggregated FC and PM_{2.5} emissions are shown in Figs. 21a-b, expressed in terms of the RIQR (calculated using the quantiles and best estimates for the spatially aggregated data). Compared with the pixel level data, the RIQR is reduced for the aggregated emissions and a difference emerges between FC and EPM_{2.5}, the mean RIQR is 17% for FC and 26% for EPM_{2.5}. For the aggregated data we also
- show, in Figs. 21c-d, the distribution of relative interdecile range, RIDR = $(q_{90} q_{10})/X$, where q_{10} and q_{90} are the 10% and 90% quantiles (Monte Carlo style simulations, Sect. 2.9) and X is the best estimate for FC or EPM_{2.5}. The mean RIDR is 32% for FC and 50% for EPM_{2.5}.

3.5 Prescribed fires

- While the focus of MFLEI is wildfires, it does include an unquantified contribution from prescribed fires fires intentionally ignited to achieve land management objectives. The MTBS product does contain large (> 404 ha the west and > 202 ha elsewhere) prescribed fires, over 2003–2015 ~ 13% of the MTBS burned area was due to fires classified as prescribed or unknown. Additionally, the MODIS burned area product (Giglio et al., 2015) used to supplement MTBS does not distinguish between wildfires and prescribed fires and likely includes some prescribed fire burned area. Information on prescribed fires by federal and state agencies indicate an average fire size of ~ 60 ha (NIFC, 2018). Considering the large fire focus of MTBS and the fact that
- 30 prescribed fires are often low intensity understory burns, which are difficult to detect by satellite (Hawbaker et al., 2008), we believe prescribed fires account for a small share of total MFLEI emissions. Unfortunately, there is not a nationwide database that inventories prescribed fire on federal, state, and private lands. The 2015 National Prescribed Fire Use Survey Report (Melvin, 2016), based on a 2014 comprehensive survey conducted by state forestry agencies, summarizes prescribed fire activity at national and regional levels. Melvin reported CONUS prescribed fire burned area as 35,222 km² in 2014. For the same year, the MTBS
- 35 prescribed fire burned area was 11,954 km² (prior to reduction for unburned to low burn severity patches as described Sect. 2.3.3), suggesting MFLEI may be be missing up to two-thirds of CONUS prescribed fire burned area. The regional summary in Melvin reports prescribed fire burned area of 25,049 km² in their southeast region (the southeast and southcentral regions used in our study, excluding Kansas and Missouri). The 2014 MTBS data reports only 4651 km² of prescribed fire burned area for the same region, indicating most of MFLEI underrepresentation in prescribed fire emissions occurs in these southern states.

3.6 Comparison with other emission inventories

Next we compare the estimated fuel consumption and PM_{2.5} emissions of MFLEI with three fire emissions inventories: GFED v4.1s (GFED, 2018), FINN v1.5 (FINN, 2018), and WFEIS v0.5 (WFEIS, 2018). In this comparison, we have excluded fuel

5 consumption and PM_{2.5} emissions associated with agricultural burning from all three inventories. Regional annual fuel consumption from the four inventories is plotted in Figure 22. Statistics comparing MFLEI regional annual fuel consumption versus the other inventories are given in Table 11. There is significant variability in the agreement between MFLEI and the other inventories. Across the west (NW, CA, SW), MFLEI annual fuel consumption is well correlated with both FINN and GFED (Table 11). MFLEI fuel consumption exceeds the mean of FINN, GFED, and WFEIS in nearly all years and is generally the highest in

10

) northwest and southwest regions (Fig. 22a). In the east regions (SC, SE, NO), MFLEI fuel consumption fluctuates about the FINN/GFED/WFEIS mean value (Fig. 22b). In terms of variability and mean absolute relative difference, MFLEI agrees best with GFED.

Regional annual $PM_{2.5}$ emissions are shown in Figure 23 and statistics comparing MFLEI $PM_{2.5}$ emissions versus the other inventories are given in Table 12. As with fuel consumption, across the west (NW, CA, SW), MFLEI annual $PM_{2.5}$ emissions are

- 15 well correlated with both FINN and GFED, while correlation with WFEIS is weak in most regions (Table 12). In the west, MFLEI annual PM_{2.5} emissions are highest among the inventories in most years (Fig. 23a). The greater PM2.5 emissions of MFLEI in the west are partly attributable to the use of a larger EFPM2.5 for western forests (22.8 g kg⁻¹, Table 9) compared with FINN (12.9 g kg⁻¹), GFED (12.6 g kg⁻¹), and WFEIS (11.9 g kg⁻¹). Because WFEIS uses combustion phase dependent EFs applied in a non-transparent manner, we have taken EFPM_{2.5} as the ratio of the sum of EPM_{2.5} to the sum of fuel consumed for all western forests.
- 20 MFLEI uses EFPM_{2.5} from the synthesis of Urbanski (2014) that accounts for the lower MCE measured for wildfires in western conifer forests (Urbanski, 2013). FINN and GFED use EFPM_{2.5} from Akagi et al (2011), with updates from May et al. (2014), which are based on emission measurements of prescribed fires, most of which occurred in the southeast US. WFEIS employs EFPM_{2.5} measured for prescribed burns of logging slash. The higher EFPM_{2.5} used by MFLEI for wildfires in western forests is consistent with recent emission measurements of Liu et al. (2017). In a study of western US wildfires, Liu et al. (2017) reported
- an average $EFPM_1 = 26.0 \text{ g kg}^{-1}$ (PM₁ = particulate matter with an aerodynamic diameter < 1 μ m), more than 2 times the EF for prescribed fires.

4. Data Availability

MFLEI is archived and publicly available at the USDA Forest Service Research Data Archive with the DOI number 30 <u>https://doi.org/10.2737/RDS-2017-0039</u>.

5. Conclusions

We have presented the Missoula Fire Lab Wildfire Emission Inventory (MFLEI), a retrospective, wildfire emission inventory for CONUS. MFLEI was developed from multiple datasets of fire activity and burned area, a newly developed wildland fuels map and an updated emission factor database. Daily burned area was constructed using a combination of Landsat-based burn severity

35 data (MTBS), MODIS burned area and active fire detection products, VIIRS active fire detections, incident fire perimeters, and a spatial wildfire occurrence database. Forest fuel loading was based on a large set (> 27,000 sites) of forest inventory surface fuel measurements. Herbaceous fuel loading was estimated using site specific parameters from a soil survey database with NDVI from MODIS. Shrub fuel loading was quantified by applying numerous allometric equations linking stand structure and composition to biomass and fuels, with the structure and composition data derived from geospatial data layers of the LANDFIRE Project. MFLEI provides estimates of daily wildfire burned area, fuel consumption, and pollutant emissions at a 250 m × 250 m resolution

- 5 for 2003–2015. The inventory includes a spatially aggregated emission product (10 km × 10 km, 1 d) with uncertainty estimates to provide a more relevant representation of emission uncertainties for use in air quality modelling. MFLEI will be updated with recent years as the MTBS data become available. The focus of MFLEI is wildfires and does not include most prescribed fire activity. In the southeast, where prescribed fire burned area is estimated to greatly exceed that of wildfires on average, the prescribed fire emissions not included in MFLEI are likely to be substantial.
- MFLEI CONUS average wildfire fuel consumption and $PM_{2.5}$ emissions were estimated to be 41.4 Tg y⁻¹ and 733 Gg y⁻¹, respectively over 2003–2015. Annual CONUS $PM_{2.5}$ emissions showed significant variability with a coefficient of variation = 0.41 and a maximum to minimum ratio of 4.5. Summer was the most active season, over half (59%) of total $PM_{2.5}$ emissions occurred in the summer (June–August), with August alone accounting for 32% of the total. Emissions were highly concentrated both temporally and spatially. Just 5% of days accounted for 57% of total $PM_{2.5}$ emitted over 2003–2015. At the spatial scale of
- 15 $10 \text{ km} \times 10 \text{ km}$ grid, 69% of total PM_{2.5} originated from 5% of grid cell days with fire activity. Fires in the west (western 11 states) accounted for 56% of burned area, 60% of fuel consumption, and 72% of PM_{2.5} emitted over 2003–2015. The southeast and south central regions were largely responsible for the balance of burned area and emissions. The northern tier states across central and eastern CONUS produced < 3 % of total PM_{2.5} emissions. In the west, wildfire PM_{2.5} emissions dwarfed those from non-fire sources during active fire periods. Comparison of MFLEI PM_{2.5} emissions with the EPA 2014 National Emission Inventory
- 20 indicated that in the west, wildfires exceeded all non-fire primary sources of $PM_{2.5}$ by a factor of > 5 on nearly 200 days over 2003–2015. Quantified with the relative interdecile range, the uncertainties in daily fuel consumption and $PM_{2.5}$ emissions, at the spatial scale of 10 km × 10 km, were estimated to be 32% and 50% respectively. A regional comparison of MFLEI with three fire emission inventories, FINN v1.5, GFED v4.1s, and WFEIS v0.5, showed MFLEI predicted significant greater $PM_{2.5}$ emissions across the west, in part due to the use of a larger EFM_{2.5} for wildfires in forests.

25 Appendix A

 Table A1. Average small fire duration based the fire discovery and containment dates from years 2003–2015 of the Fire Occurrence

 Database (Short, 2017).

Appendix **B**

Table B1. Available canopy fuel (ACF) best estimates (see Sect. 2.4.1) and optimized parameters for Weibull pdf fits. Parameters30predict ACF in units of ton acre-1

Appendix C

This appendix demonstrates the four step process used to estimate shrub fuel loading. Three LF existing vegetation products are used: EVT, EVC, and EVH. The height estimates at each pixel in the EVH product are thematic classes representing a range of potential heights (Table C1) which enables three values of shrub fuels to be estimated at each pixel (average, maximum, and

35 minimum). Likewise, the EVC product is thematic classes providing a 10 percentage point range in potential vegetation cover

(Table C2). However, the shrub fuel loading calculation simply uses the median value vegetation cover range. To illustrate, consider a pixel with an EVT of class of Big Sagebrush shrubland, an EVH class of 105, and an EVC class of 112 the fuel loading proceed as follows:

First, the crown volume is derived from the three EVH estimates (0.5, 0.75, and 1.0 m) as the product of these EVH values and 5 the projected crown area on a horizontal surface (PCH), the latter of which is estimated using Eq. C1 (Frandsen, 1983):

$$log_{10}(\text{PCH}) = -0.8471 + 2.2953 log_{10}(HT), \tag{C1}$$

where PCH is the projected horizontal crown area in cm² and HT is the estimated shrub height in cm (from the EVH product). Per
stem above ground biomass estimates are then derived from the crown volume estimates using an allometric equation for Sagebrush shrubs from the RVS allometry library:

$$PSB = 201.4062 + 1.162 \times \text{VOL},$$
 (C2)

where PSB is per stem biomass (g stem⁻¹) and VOL is crown volume (dm³). Next, the pixel stem density, SD, (stem ha⁻¹) is estimated to expand PSB to a per-area basis:

15
$$SD = \left(\frac{1.0e8}{PCH}\right) \times CC,$$
 (C3)

where SD is stem density, CC is the fractional canopy cover from EVC (Table C2), and the value 1.0e⁸ converts cm² to a per hectare basis. The total shrub biomass (TSB; kg ha⁻¹) is the product of PSB and SD. Figure C1 shows the TSB estimates for the pixel used in this example. This process was conducted at each pixel with a shrub EVT using the range of heights from EVH to provide lower, upper, and middle estimates of fuel loading. The allometric equation used to estimate PSB depends on the pixel EVT and is selected from 31 available in the RVS allometry library.

Supplement link provided by journal.

- 25 Author contributions. SPU and WMH designed the inventory model and selected the fire activity, land cover, and fuel loading datasets used as inventory input. MCR conceived and produced the rangeland fuel loading dataset and created the final land cover map. RPS processed the FIA data to provide the plot level datasets of surface fuel loading and processed the forest understory carbon dataset used to derive understory fuel loading. REC processed the activity data to create the burned area maps. SPU was responsible for finalizing the burn date assignment, developing forest fuel loading classifications, selecting fuel condition and fuel
- 30 consumption methodologies, and compiling emission factors. SPU conducted all final inventory calculations and devised and implemented the uncertainty analysis. SPU prepared the paper with contributions from MCR and was responsible for preparing the inventory dataset published in the USDA Forest Service Research Data Archive.
- 35 Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. This work was financially supported by the USDA Forest Service Rocky Mountain Research Station, Joint Fire Sciences Program grant No. 12-1-07-1, and NOAA ESS – Atmospheric Chemistry, Carbon Cycle, and Climate (AC4), Grant No. NA13OAR4310087.

References

Akagi, S. K., Yokelson, R. J., Wiedinmyer, C., Alvarado, M. J., Reid, J. S., Karl, T., Crounse, J. D., and Wennberg, P. O.: Emission factors for open and domestic biomass burning for use in atmospheric models, Atmos. Chem. Phys., 11, 4039–4072, doi:10.5194/acp-11-4039-2011, 2011.

5

Andela, N., Morton, D. C., Giglio, L., Chen, Y., van der Werf, G. R., Kasibhatla, P. S., DeFries, R. S., Collatz, G. J., Hantson, S., Kloster, S., Bachelet, D., Forrest, M., Lasslop, G., Li, F., Mangeon, S., Melton, J. R., Yue, C. and Randerson, J. T.: A humandriven decline in global burned area, Science, 356(6345), 1356–1361, doi:10.1126/science.aal4108, 2017.

10 Anderson, K., Simpson, B., Hall, R.J., Englefield, P., Gartrell, M. and Metsaranta, J.M.: Integrating forest fuels and land cover data for improved estimation of fuel consumption and carbon emissions from boreal fires. International Journal of Wildland Fire, 24(5), 665-679, doi: 10.1071/WF14142, 2015.

Bechtold, W.A. and Patterson, P.L. (Eds.): The enhanced Forest Inventory and Analysis program—national sampling design and
estimation procedures, Gen. Tech Rep. SRS-80, USDA, Forest Service, Southern Research Station, Asheville, North Carolina, 85
pp., available at: https://www.treesearch.fs.fed.us/pubs/20371, last access: 27 April 2017, 2005.

Blackard, J. A., Finco, M. V., Helmer, E. H., Holden, G. R., Hoppus, M. L., Jacobs, D.M., Lister, A. J., Moisen, G. G., Nelson, M. D., Riemann, R., Ruefenacht, B., Salajanu, D., Weyermann, D. L., Winterberger, K. C., Brandeis, T. J., Czaplewski, R. L.,

20 McRoberts, R. E., Patterson, P. L., and Tymcio, R. P.: Mapping U.S. forest biomass using nationwide forest inventory data and moderate resolution information, Remote Sensing of Environment, 112, 1658-1677, doi:10.1016/j.rse.2007.08.021, 2008.

Brey, S. J. and Fischer, E. V.: Smoke in the City: How Often and Where Does Smoke Impact Summertime Ozone in the United States?, Environ. Sci. Technol., 50(3), 1288–1294, doi:10.1021/acs.est.5b05218, 2016.

25

Brown, J.K., Marsden, M.M., Ryan, K.C., Reinhardt, E.D.: Predicting duff and woody fuel consumed by prescribed fire in the northern Rocky Mountains. Res. Pap. INT-337, USDA, Forest Service, Intermountain Forest and Range Experiment Station, 23 p., available at: <u>https://www.fs.usda.gov/treesearch/pubs/32531</u>, last access: 30 May 2018, 1985.

30 Cohen, J.D. and Deeming, J.E.: The national fire-danger rating system: basic equations. Gen. Tech. Rep. PSW-GTR-82. Berkeley, CA: U.S. Department of Agriculture, Forest Service, Pacific Southwest Forest and Range Experiment Station. 16 p., https://doi.org/10.2737/PSW-GTR-82, 1985.

De Groot, W.J., Landry, R., Kurz, W.A., Anderson, K.R., Englefield, P., Fraser, R.H., Hall, R.J., Banfield, E., Raymond, D.A.,

35 Decker, V. and Lynham, T.J.: Estimating direct carbon emissions from Canadian wildland fires1. International Journal of Wildland Fire, 16(5), 593-606., doi:10.1071/WF06150, 2007.

Eidenshink, J., Schwind, B., Brewer, K., Zhu, Z., Quayle, B., and Howard S.: A project for monitoring trends in burn severity, Fire Ecology, 3, 3-21, doi: 10.4996/fireecology.0301003, 2007.

Eggleston, H. S., Buendia, L., Miwa, K., Ngara, T., and Tanabe. K. (Eds): IPCC: 2006 Guidelines for National Greenhouse Gas Inventories, National Greenhouse Gas Inventories Programme, IGES, Japan, 3.1-3.66, 2006.

Fann, N., Alman, B., Broome, R. A., Morgan, G. G., Johnston, F. H., Pouliot, G. and Rappold, A. G.: The health impacts and

5 economic value of wildland fire episodes in the U.S.: 2008–2012, Sci. Total Environ., 610–611, 802–809, doi:10.1016/j.scitotenv.2017.08.024, 2018.

FINN, V1.5, Data Access: http://bai.acom.ucar.edu/Data/fire/, last access: 15 November 2018, 2018.

Fisk, W. J. and Chan, W. R.: Health benefits and costs of filtration interventions that reduce indoor exposure to PM_{2.5} during wildfires, Indoor Air, 27(1), 191–204, doi:10.1111/ina.12285, 2017.
 Forest Inventory and Analysis (FIA), Data and Tools: https://www.fia.fs.fed.us/tools-data/, last access: 10 April 2017, 2015.

Frandsen, W.I.: Modeling Big Sagebrush as a Fuel, Journal of Range Management, 36, 596-600, doi: 10.2307/3898349, 1983.

French, N. H. F., McKenzie, D., Erickson, T., Koziol, B., Billmire, M., Endsley, K. A., Scheinerman, N. K. Y., Jenkins, L., Miller,
M. E., Ottmar, R. and Prichard, S.: Modeling Regional-Scale Wildland Fire Emissions with the Wildland Fire Emissions
Information System, Earth Interact., 18, 16, doi:10.1175/EI-D-14-0002.1, 2014.

20 GEOMAC: Geospatial Multi-Agency Coordination Group, Wildland Fire Support, Services and Data: <u>https://www.geomac.gov/</u>, last access: 4 June 2018, 2015.

GFED, V4.1s, Data Access: https://www.globalfiredata.org/data.html, last access: 15 November 2018, 2018.

25 Giglio, L., Descloitres, J., Justice, C. O., and Kaufman, Y. J.: An enhanced contextual fire detection algorithm for MODIS, Remote Sensing of Environment, 87, 273-282, doi:10.1016/S0034-4257(03)00184- 6, 2003.

Giglio, L., Loboda, T., Roy, D. P., Quayle, B., and Justice, C. O.: An active-fire based burned area mapping algorithm for the MODIS sensor, Remote Sens. Environ., 113, 408–420, doi:10.1016/j.rse.2008.10.006, 2009.

30

Giglio, L., Randerson, J. T., and van der Werf, G. R.: Analysis of daily, monthly, and annual burned area using the fourth generation global fire emissions database (GFED4), J. Geophys. Res.-Biogeo., 118, 317–328, doi:10.1002/jgrg.20042, 2013.

Giglio, L., Boschetti, C. J., Roy. D.: MCD64A1 MODIS/Terra+Aqua Burned Area Monthly L3 Global 500m SIN Grid V006 [Data
set], NASA EOSDIS Land Processes DAAC: https://doi.org/10.5067/MODIS/MCD64A1.006, last access: 27 April 2017, 2015.

Gong, X., Kaulfus, A., Nair, U. and Jaffe, D. A.: Quantifying O-3 Impacts in Urban Areas Due to Wildfires Using a Generalized Additive Model, Environ. Sci. Technol., 51(22), 13216–13223, doi:10.1021/acs.est.7b03130, 2017.

Harrington, M. G.: Estimating ponderosa pine fuel moisture using national fire-danger rating fuel moisture values, USDA Forest Service Research Paper RM-233, Rocky Mountain Forest and Range Experiment Station, Fort Collins, CO, 7 pp., available at: http://www.fs.fed.us/rm/pubsrm/rmrn418.pdf, 1982.

5 Hatch, L. E., Luo, W., Pankow, J. F., Yokelson, R. J., Stockwell, C. E. and Barsanti, K. C.: Identification and quantification of gaseous organic compounds emitted from biomass burning using two-dimensional gas chromatography-time-of-flight mass spectrometry, Atmos Chem Phys, 15(4), 1865–1899, doi:10.5194/acp-15-1865-2015, 2015.

Hawbaker, T. J., Radeloff, V. C., Syphard, A. D., Zhu, Z. and Stewart, S. I.: Detection rates of the MODIS active fire product in
the United States, Remote Sens. Environ., 112(5), 2656–2664, doi:10.1016/j.rse.2007.12.008, 2008.

Homer, C.G., Dewitz, J.A., Yang, L., Jin, S., Danielson, P., Xian, G., Coulston, J., Herold, N.D., Wickham, J.D., and Megown,
K.: Completion of the 2011 National Land Cover Database for the conterminous United States-Representing a decade of land cover change information, Photogrammetric Engineering and Remote Sensing, 81, 345-354, doi:10.14358/PERS.81.5.345, 2015.

15

Hough, W.A. Estimating available fuel weight consumed by prescribed fires in the south. Research Paper SE-RP-187. USDA Forest Service, Southern Forest Experiment Station, 12 pp., available at: <u>https://www.fs.usda.gov/treesearch/pubs/42406</u>, last access: 30 May 2018, 1978.

20 Irisarri, J. G. N., Derner, J. D., Porensky, L. M., Augustine, D. J., Reeves, J. L. and Mueller, K. E.: Grazing intensity differentially regulates ANPP response to precipitation in North American semiarid grasslands, Ecol. Appl., 26(5), 1370–1380, doi:10.1890/15-1332, 2016.

Jaffe, D. A. and Wigder, N. L.: Ozone production from wildfires: A critical review, Atmos. Environ., 51, 1–10, doi:10.1016/j.atmosenv.2011.11.063, 2012.

Johnston, F. H., Henderson, S. B., Chen, Y., Randerson, J. T., Marlier, M., DeFries, R. S., Kinney, P., Bowman, D. M. J. S. and Brauer, M.: Estimated Global Mortality Attributable to Smoke from Landscape Fires, Environ. Health Perspect., 120(5), 695–701, doi:10.1289/ehp.1104422, 2012.

30

Keane, R. E., Herynk, J. M., Toney, C., Urbanski, S. P., Lutes, D. C., Ottmar, R. D.: Evaluating the performance and mapping of three fuel classification systems using Forest Inventory and Analysis surface fuel measurements, Forest Ecology and Management, 305, 248-263, doi:10.1016/j.foreco.2013.06.001, last access: 27 April 2017, 2013.

35 Key, C.H. and Benson, N.C.: Landscape Assessment (LA), In: Lutes, D.C., Keane, R.E., Caratti, J.F., Key, C.H., Benson, N.C., Sutherland, S., and Gangi, L.J.: FIREMON: Fire Effects Monitoring and Inventory System, Gen. Tech. Rep. RMRS-GTR-164-CD, USDA, Forest Service, Rocky Mountain Research Station, Fort Collins, CO., pp. LA-1-51. Available at: https://www.treesearch.fs.fed.us/pubs/24066, last access: 28 April 2017, 2006. Kochi, I., Champ, P. A., Loomis, J. B. and Donovan, G. H.: Valuing mortality impacts of smoke exposure from major southern California wildfires, J. For. Econ., 18(1), 61–75, doi:10.1016/j.jfe.2011.10.002, 2012.

Kolden, C. A., Lutz, J. A., Key, C. H., Kane, J. T., and Van Wagtendonk, J. W.: Mapped versus actual burned area within wildfire perimeters: characterizing the unburned, Forest Ecology and Management, 286, 38–47, doi: 10.1016/j.foreco.2012.08.020, 2012.

LANDFIRE, LANDFIRE Project, U.S. Department of Interior, Geological Survey: <u>http://www.landfire.gov/</u>, last access: 28 April 2017, 2016.

10 Larkin, N. K., Raffuse, S. M., & Strand, T. M.: Wildland fire emissions, carbon, and climate: US emissions inventories. Forest Ecology and Management, 317, 61-69, doi:10.1016/j.foreco.2013.09.012, 2014.

Lindaas, J., Farmer, D. K., Pollack, I. B., Abeleira, A., Flocke, F., Roscioli, R., Herndon, S. and Fischer, E. V.: Changes in ozone and precursors during two aged wildfire smoke events in the Colorado Front Range in summer 2015, Atmospheric Chem. Phys., 17(17), 10691–10707, doi:10.5194/acp-17-10691-2017, 2017.

Liu, J. C., Pereira, G., Uhl, S. A., Bravo, M. A. and Bell, M. L.: A systematic review of the physical health impacts from nonoccupational exposure to wildfire smoke, Environ. Res., 136, 120–132, doi:10.1016/j.envres.2014.10.015, 2015.

- 20 Liu, J. C., Mickley, L. J., Sulprizio, M. P., Dominici, F., Yue, X., Ebisu, K., Anderson, G. B., Khan, R. F. A., Bravo, M. A. and Bell, M. L.: Particulate air pollution from wildfires in the Western US under climate change, Clim. Change, 138(3–4), 655–666, doi:10.1007/s10584-016-1762-6, 2016.
- Liu, X., Huey, L. G., Yokelson, R. J., Selimovic, V., Simpson, I. J., Müller, M., Jimenez, J. L., Campuzano-Jost, P., Beyersdorf,
 A. J., Blake, D. R., Butterfield, Z., Choi, Y., Crounse, J. D., Day, D. A., Diskin, G. S., Dubey, M. K., Fortner, E., Hanisco, T. F.,
 Hu, W., King, L. E., Kleinman, L., Meinardi, S., Mikoviny, T., Onasch, T. B., Palm, B. B., Peischl, J., Pollack, I. B., Ryerson, T.
 B., Sachse, G. W., Sedlacek, A. J., Shilling, J. E., Springston, S., St. Clair, J. M., Tanner, D. J., Teng, A. P., Wennberg, P. O.,
 Wisthaler, A. and Wolfe, G. M.: Airborne measurements of western U.S. wildfire emissions: Comparison with prescribed burning and air quality implications, J. Geophys. Res. Atmos., 122(11), 2016JD026315, doi:10.1002/2016JD026315, 2017.
- 30

5

15

Lu, X., Zhang, L., Yue, X., Zhang, J., Jaffe, D. A., Stohl, A., Zhao, Y. and Shao, J.: Wildfire influences on the variability and trend of summer surface ozone in the mountainous western United States, Atmos Chem Phys, 16(22), 14687–14702, doi:10.5194/acp-16-14687-2016, 2016.

35 Lutes, D. C., Keane, R. E. and Caratti, J. F.: A surface fuel classification for estimating fire effects, Int. J. Wildland Fire, 18(7), 802–814, doi:10.1071/WF08062, 2009.

Lutes, D.C.: FOFEM: First Order Fire Effects Model v6.3 User Guide, available at: <u>www.firelab.org/project/fofem</u>, last access: 27 April 2017, 2016a.

Lutes, D. C.: FuelCalc 1.4 User's Guide, USDA, Forest Service, Rocky Mountain Research Station, Fire Modeling Institute, available at: <u>https://www.firelab.org/sites/default/files/images/downloads/FuelCalc_User_Guide_0.pdf</u>, last access: 27 April 2017, 2016b.

- 5 May, A. A., McMeeking, G. R., Lee, T., Taylor, J. W., Craven, J. S., Burling, I., Sullivan, A. P., Akagi, S., Collett, J. L., Flynn, M., Coe, H., Urbanski, S. P., Seinfeld, J. H., Yokelson, R. J. and Kreidenweis, S. M.: Aerosol emissions from prescribed fires in the United States: A synthesis of laboratory and aircraft measurements, J. Geophys. Res. Atmos., 119(20), 2014JD021848, doi:10.1002/2014JD021848, 2014.
- 10 MCD64A1 Collection 5.1, Data Access: <u>ftp://ba1.geog.umd.edu/</u>, last access: 4 June 2018, 2016.

McKenzie, D., French, N. H. F. and Ottmar, R. D.: National database for calculating fuel available to wildfires, Eos, Transactions American Geophysical Union, 93(6), 57–58, doi:10.1029/2012EO060002, 2012.

15 Melvin, M.A.: 2015 National prescribed fire use survey report, Technical Report 02-15, Coalition of Prescribed Fire Councils, Inc. available at: <u>http://www.prescribedfire.net/</u>, last access 4 June 2018, 2016.

Miller, J.D. and Yool, S.R.: Mapping forest post-fire canopy consumption in several overstory types using multi-temporal Landsat TM and ETM data, Remote Sensing of Environment, 82, 481-496, doi: 10.1016/S0034-4257(02)00071-8, 2002.

20

MTBS, Data Access: Burned Area Boundaries Data: https://www.mtbs.gov/direct-download, last access: 4 June 2018, 2017a.

MTBS, Data Access: National MTBS Burn Severity Mosaics Data: <u>https://www.mtbs.gov/direct-download</u>, last access: 4 June 2018, 2017b.

25

MTBS, Monitoring trends in Burn Severity: http://mtbs.gov/index.html, last access: 8 April, 2017c.

NIFC, National Interagency Fire Center, Statistics, Historical Wildland Fire Information, https://www.nifc.gov/fireInfo/fireInfo_statistics.html, last access: 4 June 2018.

30

Nishihama, M., Wofle, R., Solomon, D., Patt, F., Blacnette, J., Fleig, A., and Masuoka, E.: MODIS Level 1A Earth Location: Algorithm Theoretical Basis Document Version 3.0, <u>https://modis.gsfc.nasa.gov/data/atbd/atbd_mod28_v3.pdf</u>, last access: 10 April 2017, 1997.

35 NOAA, National Oceanic and Atmospheric Administration, National Air Quality Forecast Capability Summary: https://www.weather.gov/sti/stimodeling airquality summary, last access: 10 April 2018.

Nuvolone, D., Petri, D. and Voller, F.: The effects of ozone on human health, Environ. Sci. Pollut. Res., 25(9), 8074–8088, doi:10.1007/s11356-017-9239-3, 2018.

O'Connell, B. M., Conkling, B. L., Wilson, A. M., Burrill, E. A., Turner, J. A., Pugh, S. A., Christiansen, G., Ridley, T., Menlove, J.: The Forest Inventory and Analysis Database: Database description and user guide version 6.1 for Phase 2, U.S. Department of Agriculture, Forest Service, 892 pp., available at: <u>https://www.fia.fs.fed.us/library/database-documentation/</u>, last access: 27 April 2017, 2016.

O'Connell, B. M., Conkling, B. L., Wilson, A. M., Burrill, E. A., Turner, J. A., Pugh, S. A., Christiansen, G., Ridley, T., Menlove, J.: The Forest Inventory and Analysis Database: Database description and user guide version 7.0 for Phase 2. U.S. Department of Agriculture, Forest Service, 830 pp., available at: <u>http://www.fia.fs.fed.us/library/database-documentation/</u>, last access: 27 April 2017, 2017.

10

Ottmar, R. D., Sandberg, D. V., Riccardi, C. L., and Prichard, S. J.: An overview of the Fuel Characteristic Classification System – Quantifying, classifying, and creating fuelbeds for resource planning, Can. J. Forest. Res., 37, 2383–2393, doi:10.1139/X07-077, 2007.

15 Prichard, S. J., Ottmar, R. D., and Anderson, G. K.: Consume 3.0 user's guide, Pacific Northwest Research Station, Corvallis, Oregon, 234 pp., available at: <u>http://www.fs.fed.us/pnw/fera/research/smoke/consume30_users_guide.pdf</u>, last access: 27 April 2017, 2006.

Rappold, A. G., Fann, N. L., Crooks, J., Huang, J., Cascio, W. E., Devlin, R. B. and Diaz-Sanchez, D.: Forecast-Based Interventions

Can Reduce the Health and Economic Burden of Wildfires, Environ. Sci. Technol., 48(18), 10571–10579, doi:10.1021/es5012725, 2014.

Reeves, M.C.: Development of the Rangeland Vegetation Simulator: A module of the Forest Vegetation Simulator, A Final Report to the Joint Fire Sciences Program, Project ID:12-1-02-15, 129 p., 2016.

25

Reeves, M. C. and Mitchell, J. E.: Extent of coterminous US rangelands: quantifying implications of differing agency perspectives, Rangeland Ecology and Management, 64, 585-597, doi: 10.2111/REM-D-11-00035.1, 2011.

Reid, J.S., Kooppmann, R., Eck, T.F., and Eleuterio, D.P.: A review of biomass burning emissions part II: intensive physical
properties of biomass burning particles, Atmospheric Chemistry and Physics, 5, 799-825, doi:10.5194/acp-5-799-2005, 2005a.

Reid, J.S., Eck, T.F., Hhristopher, S.A., Kooppmann, R., Bubovik, O., Eleuterio, D.P., Holben, B.N., Reid, E.A., and Zhang, J.: A review of biomass burning emissions part III: intensive optical properties of biomass burning particles, Atmospheric Chemistry and Physics, 5, 827-849, doi:10.5194/acp-5-827-2005, 2005b.

35

Reisen, F., Duran, S. M., Flannigan, M., Elliott, C. and Rideout, K.: Wildfire smoke and public health risk, Int. J. Wildland Fire, 24(8), 1029–1044, doi:10.1071/WF15034, 2015.

Riccardi, C.L., Ottmar, R.D., Sandberg, D.V., Andreu, A., Elman, E., Kopper, K., and Long, J.: The fuelbed: a key element of the 40 fuel characteristic classification system, Canadian Journal of Forest Research, 37, 2394–2412, doi:10.1139/X07-143, 2007.

⁵

Ruefenacht, B., Finco, M.V., Nelson, M.D., Czaplewski, R., Helmer, E.H., Blackard, J. A., Holden, G.R., Lister, A.J., Salajanu, D., Weyermann, D., and Winterberger, K.: Conterminous U.S. and Alaska forest Type mapping using forest inventory and analysis data, Photogrammetric Engineering & Remote Sensing, 74, 1379–1388, doi: 10.14358/PERS.74.11.1379, 2008.

5

10

15

Schroeder, W., Oliva, P., Giglio, L. and Csiszar, I. A.: The New VIIRS 375m active fire detection data product: Algorithm description and initial assessment, Remote Sens. Environ., 143(Supplement C), 85–96, doi:10.1016/j.rse.2013.12.008, 2014.

Schwind, B.: Monitoring trends in burn severity: report on the PNW & PSW fires – 1984 to 2005, MTBS Project Team, U.S. Geologiocal Survey and U.S. Forest Service, Remote Sensing Applications Center, Salt Lake City, Utah, 2008.

Scott, J. H. and Burgan, R.E.: Standard fire behavior fuel models: a comprehensive set for use with Rothermel's surface fire spread model. Gen. Tech. Rep. RMRS-GTR-153. Fort Collins, CO: U.S. Department of Agriculture, Forest Service, Rocky Mountain Research Station. 72 p., doi:10.2737/RMRS-GTR-153, 2005.

Scott, J. H. and Reinhardt, E. D.: Assessing crown fire potential by linking models of surface and crown fire behavior, Res. Pap. RMRS-RP-29, U.S. Department of Agriculture, Forest Service, Rocky Mountain Research Station, Fort Collins, Colorado, 59 p., available at: <u>https://www.treesearch.fs.fed.us/pubs/4623</u>, last access: 27 April 2017, doi:10.2737/RMRS-RP-29, 2001.

20

Short, Karen C.: Spatial wildfire occurrence data for the United States, 1992-2015 [FPA_FOD_20170508], 4th Edition, Fort Collins, CO, Forest Service Research Data Archive, available at: <u>https://doi.org/10.2737/RDS-2013-0009.4</u>, 2017.

Soil Survey Staff, Natural Resources Conservation Service, United States Department of Agriculture. Soil Survey Geographic (SSURGO) Database. Available online at https://sdmdataaccess.sc.egov.usda.gov. Accessed May, 2016.

Urbanski, S.: Wildland fire emissions, carbon, and climate: Emission factors, Forest Ecology and Management, 317, 51-60, doi:10.1016/j.foreco.2013.05.045, 2014.

30 Urbanski, S. P., Salmon, J. M., Nordgren, B. L., and Hao, W. M.: A MODIS direct broadcast algorithm for mapping wildfire burned area in the western United States, Remote Sensing of Environment, 113, 2511-2526, doi:10.1016/j.rse.2009.07.007, 2009.

USDA Forest Service, Remote Sensing Applications Center, Active Fire Mapping Program, Fire detection GIS Data: <u>https://fsapps.nwcg.gov/afm/gisdata.php</u>, last access: 10 April 2017.

35

USEPA, Guidance on the use of models and other analyses for demonstrating attainment of air quality goals for ozone, PM2.5, and Regional Haze, EPA-454/B-07-002, 2007.

USEPA, The Clean Air Act in a nutshell: how it works, https://www.epa.gov/clean-air-act-overview/clean-air-act-nutshell-how-40 it-works, accessed: 03 April 2018, 2013. USEPA, NAAQS table, https://www.epa.gov/criteria-air-pollutants/naaqs-table, accessed: 03 April 2018a.

USEPA, Exceptional events rule and guidance, https://www.epa.gov/air-quality-analysis/exceptional-events-rule-and-guidance, accessed: 04 April 2018b.

USEPA, 2014 National emissions inventory (NEI) data, Tier Summaries: https://www.epa.gov/air-emissions-inventories/2014national-emissions-inventory-nei-data, last access: 10 April 2018c.

10 van der Werf, G. R., Randerson, J. T., Giglio, L., van Leeuwen, T. T., Chen, Y., Rogers, B. M., Mu, M., van Marle, M. J. E., Morton, D. C., Collatz, G. J., Yokelson, R. J. and Kasibhatla, P. S.: Global fire emissions estimates during 1997–2016, Earth Syst. Sci. Data, 9(2), 697–720, doi:10.5194/essd-9-697-2017, 2017.

WFEIS, V0.5, Data Access: http://wfeis.mtri.org/, last access: 15 November 2018, 2018.

15

5

Wiedinmyer, C., Akagi, S. K., Yokelson, R. J., Emmons, L. K., Al-Saadi, J. A., Orlando, J. J. and Soja, A. J.: The Fire INventory from NCAR (FINN): a high resolution global model to estimate the emissions from open burning, Geosci. Model Dev., 4(3), 625–641, doi:10.5194/gmd-4-625-2011, 2011.

20 Wildland Fire Assessment System, USDA Forest Service: http://www.wfas.net/, last access: 27 April 2017, 2015.

Williamson, G. J., Bowman, D. M. J. S., Price, O. F., Henderson, S. B. and Johnston, F. H.: A transdisciplinary approach to understanding the health effects of wildfire and prescribed fire smoke regimes, Environ. Res. Lett., 11(12), 125009, doi:10.1088/1748-9326/11/12/125009, 2016.

25

Wilson, B. T.; Woodall, C. W., and Griffith, D. M.: Forest carbon stocks of the contiguous United States (2000-2009). U.S. Department of Agriculture, Forest Service, Northern Research Station, Newtown Square, PA, available at: https://doi.org/10.2737/RDS-2013-0004, last access: 27 April 2017, 2013.

- 30 Woodall, C.W. and Monleon, V.J.: Sampling protocol, estimation, and analysis procedures for the down woody materials indicator of the FIA program, Gen. Tech. Rep. NRS-22, U.S. Department of Agriculture, Forest Service, Northern Research Station, Newtown Square, PA: 68 pp., available at: <u>https://www.treesearch.fs.fed.us/pubs/13615</u>, last access: 27 April 2017, doi:10.2737/NRS-GTR-22, 2008.
- Woodall, C.W., Walters, B.F., Oswalt, S.N., Domke, G.M., Toney, C., and Gray, A.N.: Biomass and carbon attributes of downed woody materials in forests of the United States, Forest Ecology and Management, 305, 48-59, doi:10.1016/j.foreco.2013.05.030, 2013.

Zhang, X., Kondragunta, S., Da Silva, A., Lu, S., Ding, H., Li, F., and Zhu, Y.: The blended global biomass burning emissions product from modis, viirs, and geostationary satellites (gbbepx) version 2, National Oceanic and Atmospheric Administration, available at: <u>http://www.ospo.noaa.gov/Products/land/gbbepx/docs/GBBEPx_ATBD.pdf</u>, last access 4 June 2018, 2017.

Tables

Table 1. MFLEI cover types and fuel codes

Cover type code	Fuel code	Cover type	Generalized cover type
-99	0	Non-fuel	Non-fuel
1	1	Herbaceous	Herbaceous
2	2	Shrub / scrub	Shrub
100	1100	White / red / jack pine group	Northern conifer
120	1120	Spruce / fir group	Northern conifer
140	1140	Longleaf / slash pine group	Southern conifer
160	1160	Loblolly / shortleaf pine group	Southern conifer
180	1180 /2180	Pinyon / juniper group	Pinyon juniper
200	1200	Douglas-fir group	Western conifer / softwood
220	1220	Ponderosa pine group	Western conifer / softwood
240	1240	Western white pine group	Western conifer / softwood
260	1260	Fir / spruce / mountain hemlock group	Western conifer / softwood
280	1280	Lodgepole pine group	Western conifer / softwood
300	1300	Hemlock / Sitka spruce group	Western conifer / softwood
320	1320	Western larch group	Western conifer / softwood
340	1340	Redwood group	Western conifer / softwood
360	1360	Other western softwoods group	Western conifer / softwood
370	1370	California mixed conifer group	Western conifer / softwood
380	1380	Exotic softwoods group	Western conifer / softwood
400	1400	Oak / pine group	Hardwood
500	1500	Oak / hickory group	Hardwood
600	1600	Oak / gum / cypress group	Hardwood
700	1700/2700	Elm / ash / cottonwood group	Hardwood
800	1800	Maple / beech / birch group	Hardwood
900	1900/2900	Aspen / birch group	Western hardwood
910	1910	Alder / maple group	Western hardwood
920	1920	Western oak group	Western hardwood
940	1940	Tanoak / laurel group	Western hardwood
950	1950/2950	Other western hardwoods group	Western hardwood
980	1980	Tropical hardwoods group	Western hardwood
990	1990	Exotic hardwoods group	Western hardwood

Generalized Cover Type	BSEV = I	BSEV = 2	BSEV = 3	BSEV = 4
Herbaceous	18	68	11	3
Shrub	17	57	22	4
Northern conifer	18	34	19	29
Southern conifer	25	61	12	2
Pinyon juniper	24	43	25	8
Western conifer / softwood	25	32	22	21
Hardwood	27	62	10	1
Western hardwood	18	38	25	19

Table 2. MTBS burn severity class percent distribution by generalized cover types for 2003-2013.Generalized Cover TypeBSEV = 1BSEV = 2BSEV = 3BSEV = 4

Table 3.	Description	of fuel c	components

General fuel type	Fuel component	Strata	Description
			Loose, freshly fallen plant material found on the top surface of
Litter	Litter	Surface	the forest floor which includes needles, leaves, cones, and dead
			herbaceous stems. ¹
Duff	Duff	Surface	Layer just below the litter consisting of partially decomposed
Dull	Duli	Surface	biomass whose origins cannot be determined. ¹
Down dead wood	1 h (small woody)	Surface	< 1 cm diameter
	10 h (medium woody)	Surface	1-2.5 cm diameter
	100 h (large woody)	Surface	2.5-7.6 cm diameter
	s3to9 (coarse woody debris)	Surface	Sound ² logs 7.6-22.9 cm diameter
	s9to20 (coarse woody debris)	Surface	Sound ² logs 22.9-50.8 cm diameter
	sgt20 (coarse woody debris)	Surface	Sound ² logs $>$ 50.8 cm diameter
	r3to9 (coarse woody debris)	Surface	Rotten ² logs 7.6-22.9 cm diameter
	r9to20 (coarse woody debris)	Surface	Rotten ² logs 22.9-50.8 cm diameter
	rgt20r (coarse woody debris)	Surface	Rotten ² logs >50.8 cm diameter
Herb	Herb	Understory	Herbs (above ground portion)
Shrub	Shrub	Understory	Woody shrubs (above ground portion)
Canopy	Available Canopy Fuel (ACF)	Canopy	Foliage and twigs ≤ 6 mm diameter

¹O'Connell et al. (2016)

²Sound logs are logs assigned FIA decay classes 1, 2, or 3 and rotten logs are logs assigned FIA decay class 4 or 5 (O'Connell et al., 2016)

Floid Prior Diff Unit Unit Unit Unit Herb Shrub ACF 1100 100 43 2.34 0.44 0.03 0.14 0.36 0.38 0.21 0.05 0.04 0.00 0.12 2.08 0.00 0.21 2.08 0.00 0.21 2.08 0.00 0.21 2.08 0.00 0.00 0.00 0.00 0.21 2.08 0.03 0.28 0.01 0.00 0.00 0.00 0.00 3.26 0.24 0.05 0.47 0.29 1140 140 79 3.14 0.59 0.01 0.00 0.00 0.00 0.00 3.00 0.00 3.00 0.00 0.00 0.01 0.02 0.01 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.01 0.01 0.01	-	E1	ETC	N-	5)-)	T :44	T				()						Duff			
1120 120 100 0.65 0.34 0.02 0.10 0.22 0.01 0.00 0.22 0.00 0.02 0.01 0.00 3.26 0.24 0.05 0.47 0.29 1160 160 266 3.06 0.56 0.01 0.00 0.22 0.01 0.00 3.26 0.24 0.05 0.47 0.29 1180 180 562 0.43 0.12 0.20 0.05 0.02 0.00 2.64 0.14 0.16 0.16 0.01 0.02 0.02 0.03 0.00 0.38 0.04 0.10 0.16 0.16 0.10 0.29 0.28 1.39 0.28 0.49 0.16 0.29 0.28 0.34 0.11 0.40 0.99 0.28 0.24 0.11 0.44 0.99 0.38 0.15 0.12 0.42 0.45 0.41 0.22 0.25 0.20 0.11 0.40 0.35 0.31 0.46 0.35		Fuel Code	FTG Code	No. Plots	Litter	Litter depth	1 hr	10 hr	100 hr	s3to9	s9to20	sgt20	r3to9	r9to20	rgt20	Duff	Duff depth	Herb		
1140 140 79 3.14 0.59 0.01 0.09 0.17 0.11 0.04 0.00 0.02 0.00 3.26 0.24 0.05 0.47 0.29 1160 160 266 3.06 0.55 0.01 0.01 0.28 0.02 0.02 0.02 0.03 0.00 2.64 0.19 0.03 0.49 0.16 1200 200 358 0.64 0.34 0.01 0.02 0.02 0.03 0.00 0.33 0.04 0.10 0.31 0.64 1200 200 358 0.64 0.34 0.01 0.02 0.02 0.03 1.15 0.41 0.22 0.33 0.15 0.41 0.30 0.46 0.31 0.30 0.15 0.41 0.22 0.22 0.25 0.20 0.20 0.31 1.30 1200 300 521 0.66 0.35 0.31 0.16 0.33 0.67 1.35	_	1100	100	45	2.34	0.44	0.03	0.14	0.36	0.38	0.21	0.05	0.04	0.04	0.00	4.12	0.30	0.06	0.23	0.50
1160 160 266 3.06 0.56 0.01 0.12 0.02 0.06 0.05 0.02 0.03 0.00 0.33 0.44 0.10 0.31 0.48 1180 180 5626 0.43 0.12 0.02 0.06 0.16 0.10 0.07 0.01 0.02 0.03 0.00 0.38 0.04 0.10 0.31 0.68 1202 202 163 1.19 0.33 0.01 0.06 0.26 0.24 0.11 0.08 1.30 0.15 0.10 0.30 0.42 1.31 1202 203 300 0.53 0.27 0.03 0.12 0.42 0.58 0.44 0.11 0.99 1.33 0.15 0.11 0.31 0.45 0.40 0.45 0.40 0.46 0.46 0.41 0.22 1.74 0.35 0.46 0.43 0.40 0.45 0.45 0.45 0.45 0.46 0.40 0.47		1120	120	100	0.65	0.34	0.02	0.10	0.32	0.48	0.18	0.01	0.10	0.05	0.00	10.21	2.08	0.03	0.28	0.91
1180 180 5626 0.43 0.12 0.02 0.06 0.16 0.10 0.07 0.01 0.02 0.03 0.00 0.38 0.44 0.10 0.31 0.68 1200 200 3558 0.64 0.34 0.04 0.14 0.50 0.43 0.50 0.45 0.10 0.28 1.39 0.28 0.30 0.26 0.42 0.11 0.44 0.49 0.88 1.30 0.15 0.10 0.30 0.42 0.41 1260 200 0.53 0.27 0.03 0.12 0.42 0.58 0.84 0.31 0.50 0.41 0.22 0.42 0.37 0.40 0.43 0.42 0.48 0.41 0.42 0.43 0.42 0.43 0.42 0.43 0.43 0.43 0.43 0.43 0.43 0.44 0.45 0.41 0.43 0.44 0.44 0.44 0.43 0.41 0.43 0.41 0.43 0.41 <th></th> <td>1140</td> <td>140</td> <td>79</td> <td>3.14</td> <td>0.59</td> <td>0.01</td> <td>0.09</td> <td>0.17</td> <td>0.11</td> <td>0.04</td> <td>0.00</td> <td>0.02</td> <td>0.01</td> <td>0.00</td> <td>3.26</td> <td>0.24</td> <td>0.05</td> <td>0.47</td> <td>0.29</td>		1140	140	79	3.14	0.59	0.01	0.09	0.17	0.11	0.04	0.00	0.02	0.01	0.00	3.26	0.24	0.05	0.47	0.29
1200 200 3558 0.64 0.34 0.04 0.14 0.50 0.43 0.10 0.29 0.28 1.39 0.28 0.07 0.42 1.18 1200 220 2163 1.19 0.34 0.01 0.09 0.26 0.24 0.11 0.04 0.09 0.88 1.30 0.15 0.10 0.30 0.44 1240 240 30 0.78 0.23 0.01 0.06 0.19 0.25 0.42 0.56 0.07 0.11 0.09 1.33 0.15 0.24 0.36 0.41 1260 260 3000 0.55 0.02 0.09 0.38 0.49 0.06 0.18 0.24 0.77 0.35 0.35 0.31 0.35 0.35 0.31 0.35 0.33 0.46 0.43 0.40 0.41 0.35 0.45 0.45 0.45 0.43 0.45 0.41 0.45 0.43 0.45 0.43 0.40		1160	160	266	3.06	0.56	0.01	0.10	0.28	0.12	0.06	0.00	0.05	0.02	0.00	2.64	0.19	0.03	0.49	0.16
1220 220 2163 1.19 0.34 0.01 0.09 0.26 0.24 0.11 0.04 0.09 0.08 1.30 0.15 0.10 0.30 0.44 1240 240 30 0.78 0.23 0.01 0.06 0.19 0.25 0.42 0.56 0.07 0.11 0.09 1.33 0.15 0.44 0.36 0.11 1260 260 3000 0.53 0.27 0.03 0.12 0.42 0.58 0.44 0.15 0.41 0.22 1.74 0.35 0.66 0.36 1.23 1300 0.02 1.66 0.33 0.67 1.35 1.88 0.18 0.16 0.52 0.55 0.74 2.03 0.12 0.37 0.31 0.09 0.49 1.66 1340 340 63 3.00 0.87 0.33 0.15 0.17 0.15 0.37 0.71 2.73 0.31 0.09 0.32 <		1180	180	5626	0.43	0.12	0.02	0.06	0.16	0.10	0.07	0.01	0.02	0.03	0.00	0.38	0.04	0.10	0.31	0.68
1240 240 30 0.78 0.23 0.01 0.06 0.19 0.25 0.42 0.56 0.07 0.11 0.09 1.33 0.15 0.24 0.36 0.11 1260 260 3000 0.53 0.27 0.03 0.12 0.42 0.58 0.84 0.31 0.15 0.41 0.22 1.74 0.35 0.06 0.36 1.23 1280 280 1334 0.86 0.25 0.02 0.09 0.38 0.89 0.49 0.06 0.18 0.24 0.07 2.22 0.25 0.20 0.67 1300 300 521 0.66 0.35 0.03 0.16 0.52 0.55 0.74 2.03 0.12 0.37 0.71 2.73 0.31 0.09 0.49 0.63 1300 360 796 0.52 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15 <t< td=""><th></th><td>1200</td><td>200</td><td>3558</td><td>0.64</td><td>0.34</td><td>0.04</td><td>0.14</td><td>0.50</td><td>0.43</td><td>0.50</td><td>0.45</td><td>0.10</td><td>0.29</td><td>0.28</td><td>1.39</td><td>0.28</td><td>0.07</td><td>0.42</td><td>1.18</td></t<>		1200	200	3558	0.64	0.34	0.04	0.14	0.50	0.43	0.50	0.45	0.10	0.29	0.28	1.39	0.28	0.07	0.42	1.18
1260 260 3000 0.53 0.27 0.03 0.12 0.42 0.58 0.84 0.31 0.15 0.41 0.22 1.74 0.35 0.06 0.36 1.23 1280 280 1334 0.86 0.25 0.02 0.09 0.38 0.89 0.49 0.66 0.18 0.24 0.07 2.22 0.25 0.20 0.20 0.67 1300 300 521 0.66 0.35 0.03 0.16 0.53 0.67 1.35 1.88 0.18 0.71 0.94 2.66 0.54 0.25 0.31 1.38 1320 320 159 1.37 0.40 0.01 0.55 0.57 0.71 0.14 0.35 0.58 0.32 0.37 0.71 2.73 0.31 0.09 0.32 0.16 0.48 0.60 0.61 0.11 0.13 0.22 0.11 0.30 0.11 0.33 0.21 0.37 0.31		1220	220	2163	1.19	0.34	0.01	0.09	0.26	0.26	0.24	0.11	0.04	0.09	0.08	1.30	0.15	0.10	0.30	0.46
1280 280 1334 0.86 0.25 0.02 0.09 0.38 0.89 0.49 0.06 0.18 0.24 0.07 2.22 0.25 0.20 0.20 0.51 1300 300 521 0.66 0.35 0.03 0.16 0.53 0.67 1.35 1.88 0.18 0.71 0.94 2.66 0.54 0.25 0.31 1.38 1300 320 159 1.37 0.40 0.04 0.17 0.65 0.17 0.14 0.35 0.05 3.29 0.37 0.46 0.05 0.63 1340 340 63 3.00 0.87 0.03 0.15 0.17 0.05 0.03 0.07 0.55 0.68 0.08 0.13 0.20 0.37 1370 370 894 1.70 0.49 0.02 0.15 0.43 0.22 0.24 0.13 0.01 0.01 0.22 0.14 0.14 0.35 <td< td=""><th></th><td>1240</td><td>240</td><td>30</td><td>0.78</td><td>0.23</td><td>0.01</td><td>0.06</td><td>0.19</td><td>0.25</td><td>0.42</td><td>0.56</td><td>0.07</td><td>0.11</td><td>0.09</td><td>1.33</td><td>0.15</td><td>0.24</td><td>0.36</td><td>0.41</td></td<>		1240	240	30	0.78	0.23	0.01	0.06	0.19	0.25	0.42	0.56	0.07	0.11	0.09	1.33	0.15	0.24	0.36	0.41
1300 300 521 0.66 0.35 0.03 0.16 0.53 0.67 1.35 1.88 0.18 0.71 0.94 2.66 0.54 0.25 0.31 1.38 1320 320 159 1.37 0.40 0.44 0.17 0.65 1.24 0.90 0.17 0.14 0.35 0.05 3.29 0.37 0.46 0.05 0.63 1340 340 63 3.00 0.87 0.03 0.15 0.15 0.17 0.05 0.03 0.07 0.05 0.68 0.08 0.13 0.20 0.37 1370 370 894 1.70 0.49 0.02 0.15 0.43 0.40 0.48 0.60 0.66 0.21 0.37 1.85 0.21 0.14 0.32 1.04 1400 400 133 2.68 0.49 0.11 0.32 0.24 0.13 0.01 0.00 0.33 0.01 1.22		1260	260	3000	0.53	0.27	0.03	0.12	0.42	0.58	0.84	0.31	0.15	0.41	0.22	1.74	0.35	0.06	0.36	1.23
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$		1280	280	1334	0.86	0.25	0.02	0.09	0.38	0.89	0.49	0.06	0.18	0.24	0.07	2.22	0.25	0.20	0.20	0.67
1340 340 63 3.00 0.87 0.03 0.16 0.52 0.55 0.74 2.03 0.12 0.37 0.71 2.73 0.31 0.09 0.49 1.66 1360 360 796 0.52 0.15 0.15 0.15 0.15 0.17 0.05 0.03 0.07 0.05 0.68 0.08 0.13 0.20 0.39 1370 370 894 1.70 0.49 0.02 0.15 0.43 0.22 0.12 0.03 0.01 0.12 0.43 0.22 0.12 0.00 0.66 0.44 0.00 2.58 0.18 0.05 0.42 0.13 1500 500 1375 1.79 0.39 0.01 0.09 0.32 0.24 0.13 0.01 0.04 0.03 0.01 1.25 0.25 0.22 0.15 1600 600 129 1.37 0.30 0.11 0.15 0.35 0.37 <td< td=""><th></th><td>1300</td><td>300</td><td>521</td><td>0.66</td><td>0.35</td><td>0.03</td><td>0.16</td><td>0.53</td><td>0.67</td><td>1.35</td><td>1.88</td><td>0.18</td><td>0.71</td><td>0.94</td><td>2.66</td><td>0.54</td><td>0.25</td><td>0.31</td><td>1.38</td></td<>		1300	300	521	0.66	0.35	0.03	0.16	0.53	0.67	1.35	1.88	0.18	0.71	0.94	2.66	0.54	0.25	0.31	1.38
1360 360 796 0.52 0.15 0.01 0.05 0.15 0.17 0.05 0.03 0.07 0.05 0.68 0.08 0.13 0.20 0.39 1370 370 894 1.70 0.49 0.02 0.15 0.43 0.40 0.48 0.60 0.06 0.21 0.37 1.85 0.21 0.14 0.32 1.04 1400 400 133 2.68 0.49 0.01 0.12 0.43 0.22 0.12 0.00 0.66 0.04 0.00 2.58 0.18 0.05 0.42 0.13 1500 500 1375 1.79 0.39 0.01 0.09 0.22 0.15 0.15 0.03 0.04 0.09 0.00 3.28 0.28 0.00 0.39 0.33 1700 700 50 1.14 0.36 0.31 0.44 0.37 0.36 0.49 0.40 0.39 0.39 0.29 <td< td=""><th></th><td>1320</td><td>320</td><td>159</td><td>1.37</td><td>0.40</td><td>0.04</td><td>0.17</td><td>0.65</td><td>1.24</td><td>0.90</td><td>0.17</td><td>0.14</td><td>0.35</td><td>0.05</td><td>3.29</td><td>0.37</td><td>0.46</td><td>0.05</td><td>0.63</td></td<>		1320	320	159	1.37	0.40	0.04	0.17	0.65	1.24	0.90	0.17	0.14	0.35	0.05	3.29	0.37	0.46	0.05	0.63
1370 370 894 1.70 0.49 0.02 0.15 0.43 0.40 0.48 0.60 0.06 0.21 0.37 1.85 0.21 0.14 0.32 1.04 1400 400 133 2.68 0.49 0.01 0.12 0.43 0.22 0.12 0.00 0.06 0.04 0.00 2.58 0.18 0.05 0.42 0.13 1500 500 1375 1.79 0.39 0.01 0.09 0.32 0.24 0.13 0.01 0.09 0.02 0.05 0.01 0.09 0.32 0.24 0.13 0.01 0.09 0.02 0.15 0.03 0.04 0.09 0.00 3.28 0.28 0.00 0.39 0.33 1700 700 50 1.14 0.36 0.31 0.44 0.54 0.37 0.66 0.09 0.09 0.00 3.39 0.29 0.07 0.22 0.21 0.21 0.21 0.21 0.21 0.21 0.22 0.21 0.21 0.21 0.21 0.21 </td <th></th> <td>1340</td> <td>340</td> <td>63</td> <td>3.00</td> <td>0.87</td> <td>0.03</td> <td>0.16</td> <td>0.52</td> <td>0.55</td> <td>0.74</td> <td>2.03</td> <td>0.12</td> <td>0.37</td> <td>0.71</td> <td>2.73</td> <td>0.31</td> <td>0.09</td> <td>0.49</td> <td>1.66</td>		1340	340	63	3.00	0.87	0.03	0.16	0.52	0.55	0.74	2.03	0.12	0.37	0.71	2.73	0.31	0.09	0.49	1.66
14004001332.680.490.010.120.430.220.120.000.060.040.002.580.180.050.420.13150050013751.790.390.010.090.320.240.130.010.030.011.220.100.000.370.0616006001291.370.300.010.100.290.150.150.030.040.090.003.280.280.000.390.331700700501.140.360.030.150.850.320.390.040.090.003.280.290.010.250.2218008003361.970.440.020.140.440.540.370.060.090.090.003.390.290.070.220.2119009006191.250.250.020.090.470.330.040.110.130.033.310.260.030.300.3419109102222.070.460.020.140.470.380.590.950.080.260.483.330.290.050.470.4019209209071.730.370.020.100.110.110.020.060.200.322.530.210.400.4419409402632.230.48		1360	360	796	0.52	0.15	0.01	0.05	0.15	0.15	0.17	0.05	0.03	0.07	0.05	0.68	0.08	0.13	0.20	0.39
1500 500 1375 1.79 0.39 0.01 0.09 0.32 0.24 0.13 0.01 0.03 0.01 1.22 0.10 0.00 0.37 0.06 1600 600 129 1.37 0.30 0.01 0.10 0.29 0.15 0.15 0.03 0.04 0.09 0.00 3.28 0.28 0.00 0.39 0.33 1700 700 50 1.14 0.36 0.03 0.15 0.85 0.32 0.39 0.04 0.04 0.12 0.12 2.40 0.29 0.01 0.25 0.22 1800 800 336 1.97 0.44 0.02 0.14 0.44 0.54 0.37 0.06 0.09 0.00 3.39 0.29 0.07 0.22 0.21 1900 900 619 1.25 0.25 0.02 0.09 0.47 0.33 0.04 0.11 0.13 0.03 3.31 0.26 0.48 3.33 0.29 0.55 0.47 0.40 1910 910		1370	370	894	1.70	0.49	0.02	0.15	0.43	0.40	0.48	0.60	0.06	0.21	0.37	1.85	0.21	0.14	0.32	1.04
1600 600 129 1.37 0.30 0.01 0.10 0.29 0.15 0.15 0.03 0.04 0.09 0.00 3.28 0.28 0.00 0.39 0.33 1700 700 50 1.14 0.36 0.03 0.15 0.85 0.32 0.39 0.04 0.04 0.12 0.12 2.40 0.29 0.01 0.25 0.22 1800 800 336 1.97 0.44 0.02 0.14 0.44 0.54 0.37 0.06 0.09 0.00 3.39 0.29 0.07 0.22 0.21 1900 900 619 1.25 0.25 0.02 0.09 0.47 0.37 0.36 0.11 0.13 0.03 3.31 0.26 0.03 0.30 0.34 1910 910 222 2.07 0.46 0.02 0.14 0.47 0.38 0.59 0.95 0.08 0.26 0.48 3.33 0.29 0.05 0.47 0.40 1920 920 907 1.73		1400	400	133	2.68	0.49	0.01	0.12	0.43	0.22	0.12	0.00	0.06	0.04	0.00	2.58	0.18	0.05	0.42	0.13
1700700501.140.360.030.150.850.320.390.040.040.120.122.400.290.010.250.2218008003361.970.440.020.140.440.540.370.060.090.090.003.390.290.070.220.2119009006191.250.250.020.090.470.470.330.040.110.130.033.310.260.030.300.3419109102222.070.460.020.140.470.380.590.950.080.260.483.330.290.050.470.4019209209071.730.370.020.100.280.210.170.110.030.060.050.990.080.100.400.2419409402632.230.480.030.160.490.460.440.620.060.200.322.530.210.090.540.48195095015900.930.200.020.070.170.110.090.040.020.030.010.940.080.060.310.41195095015900.930.200.020.070.170.110.000.000.000.000.000.300.330.100.310.41<		1500	500	1375	1.79	0.39	0.01	0.09	0.32	0.24	0.13	0.01	0.04	0.03	0.01	1.22	0.10	0.00	0.37	0.06
18008003361.970.440.020.140.440.540.370.060.090.090.003.390.290.070.220.2119009006191.250.250.020.090.470.470.330.040.110.130.033.310.260.030.300.3419109102222.070.460.020.140.470.380.590.950.080.260.483.330.290.050.470.4019209209071.730.370.020.100.280.210.170.110.030.060.050.990.080.100.400.2419409402632.230.480.030.160.490.460.440.620.060.200.322.530.210.090.540.48195095015900.930.200.020.070.170.110.090.040.020.030.010.940.080.060.310.41195095015900.930.200.020.070.170.110.090.040.020.030.010.940.080.060.310.41195095015900.450.130.000.030.130.020.000.010.000.000.300.330.100.310.411950 <th></th> <td>1600</td> <td>600</td> <td>129</td> <td>1.37</td> <td>0.30</td> <td>0.01</td> <td>0.10</td> <td>0.29</td> <td>0.15</td> <td>0.15</td> <td>0.03</td> <td>0.04</td> <td>0.09</td> <td>0.00</td> <td>3.28</td> <td>0.28</td> <td>0.00</td> <td>0.39</td> <td>0.33</td>		1600	600	129	1.37	0.30	0.01	0.10	0.29	0.15	0.15	0.03	0.04	0.09	0.00	3.28	0.28	0.00	0.39	0.33
19009006191.250.250.020.090.470.470.330.040.110.130.033.310.260.030.300.300.3419109102222.070.460.020.140.470.380.590.950.080.260.483.330.290.050.470.4019209209071.730.370.020.100.280.210.170.110.030.060.050.990.080.100.400.2419409402632.230.480.030.160.490.460.440.620.060.200.322.530.210.090.540.48195095015900.930.200.020.070.170.110.090.040.020.030.010.940.080.060.310.4121801807590.450.130.000.030.130.020.000.010.000.000.300.300.100.310.4127007002020.790.250.010.110.370.210.120.040.040.050.000.470.060.010.250.172900900922.390.490.010.110.370.210.120.010.100.040.003.590.280.030.300.18 <th></th> <td>1700</td> <td>700</td> <td>50</td> <td>1.14</td> <td>0.36</td> <td>0.03</td> <td>0.15</td> <td>0.85</td> <td>0.32</td> <td>0.39</td> <td>0.04</td> <td>0.04</td> <td>0.12</td> <td>0.12</td> <td>2.40</td> <td>0.29</td> <td>0.01</td> <td>0.25</td> <td>0.22</td>		1700	700	50	1.14	0.36	0.03	0.15	0.85	0.32	0.39	0.04	0.04	0.12	0.12	2.40	0.29	0.01	0.25	0.22
1910 910 222 2.07 0.46 0.02 0.14 0.47 0.38 0.59 0.95 0.08 0.26 0.48 3.33 0.29 0.05 0.47 0.40 1920 920 907 1.73 0.37 0.02 0.10 0.28 0.21 0.17 0.11 0.03 0.06 0.05 0.99 0.08 0.10 0.40 0.24 1940 940 263 2.23 0.48 0.03 0.16 0.49 0.46 0.44 0.62 0.06 0.20 0.32 2.53 0.21 0.99 0.48 0.40 0.44 1950 950 1590 0.93 0.20 0.02 0.07 0.17 0.11 0.09 0.04 0.02 0.03 0.01 0.94 0.08 0.06 0.31 0.41 1950 950 1590 0.45 0.13 0.00 0.01 0.00 0.03 0.01 0.04 0.02 0.03 0.01 0.31 0.41 2180 180 759 0.45		1800	800	336	1.97	0.44	0.02	0.14	0.44	0.54	0.37	0.06	0.09	0.09	0.00	3.39	0.29	0.07	0.22	0.21
1920 920 907 1.73 0.37 0.02 0.10 0.28 0.21 0.17 0.11 0.03 0.06 0.05 0.99 0.08 0.10 0.40 0.24 1940 940 263 2.23 0.48 0.03 0.16 0.49 0.46 0.44 0.62 0.06 0.20 0.32 2.53 0.21 0.09 0.54 0.48 1950 950 1590 0.93 0.20 0.02 0.07 0.17 0.11 0.09 0.04 0.02 0.03 0.01 0.94 0.08 0.06 0.31 0.41 2180 180 759 0.45 0.13 0.00 0.03 0.13 0.02 0.00 0.01 0.00 0.30 0.33 0.10 0.31 0.40 2700 700 202 0.79 0.25 0.01 0.11 0.37 0.21 0.12 0.04 0.04 0.05 0.00 0.47 0.06 0.01 0.25 0.17 2900 900 92 2.39		1900	900	619	1.25	0.25	0.02	0.09	0.47	0.47	0.33	0.04	0.11	0.13	0.03	3.31	0.26	0.03	0.30	0.34
1940 940 263 2.23 0.48 0.03 0.16 0.49 0.46 0.44 0.62 0.06 0.20 0.32 2.53 0.21 0.09 0.54 0.48 1950 950 1590 0.93 0.20 0.02 0.07 0.17 0.11 0.09 0.04 0.02 0.03 0.01 0.94 0.08 0.06 0.31 0.41 2180 180 759 0.45 0.13 0.00 0.03 0.13 0.02 0.00 0.01 0.00 0.30 0.33 0.10 0.31 0.40 2700 700 202 0.79 0.25 0.01 0.11 0.37 0.21 0.12 0.04 0.04 0.05 0.00 0.47 0.06 0.01 0.25 0.17 2900 900 92 2.39 0.49 0.01 0.11 0.37 0.20 0.01 0.10 0.04 0.00 3.59 0.28 0.03 0.30 0.18 2900 900 92 2.39 0.49		1910	910	222	2.07	0.46	0.02	0.14	0.47	0.38	0.59	0.95	0.08	0.26	0.48	3.33	0.29	0.05	0.47	0.40
1950 950 1590 0.93 0.20 0.02 0.07 0.17 0.11 0.09 0.04 0.02 0.03 0.01 0.94 0.08 0.06 0.31 0.41 2180 180 759 0.45 0.13 0.00 0.03 0.13 0.02 0.00 0.01 0.00 0.30 0.03 0.13 0.40 2700 700 202 0.79 0.25 0.01 0.11 0.37 0.21 0.12 0.04 0.05 0.00 0.47 0.06 0.01 0.25 0.17 2900 900 92 2.39 0.49 0.01 0.11 0.31 0.39 0.20 0.01 0.10 0.04 0.05 0.00 0.47 0.06 0.01 0.25 0.17		1920	920	907	1.73	0.37	0.02	0.10	0.28	0.21	0.17	0.11	0.03	0.06	0.05	0.99	0.08	0.10	0.40	0.24
2180 180 759 0.45 0.13 0.00 0.02 0.00 0.00 0.01 0.00 0.30 0.03 0.10 0.31 0.40 2700 700 202 0.79 0.25 0.01 0.11 0.37 0.21 0.12 0.04 0.05 0.00 0.47 0.06 0.01 0.25 0.17 2900 900 92 2.39 0.49 0.01 0.31 0.39 0.20 0.01 0.10 0.04 0.00 3.59 0.28 0.03 0.18		1940	940	263	2.23	0.48	0.03	0.16	0.49	0.46	0.44	0.62	0.06	0.20	0.32	2.53	0.21	0.09	0.54	0.48
2700 700 202 0.79 0.25 0.01 0.11 0.37 0.21 0.12 0.04 0.05 0.00 0.47 0.06 0.01 0.25 0.17 2900 900 92 2.39 0.49 0.01 0.11 0.31 0.39 0.20 0.01 0.10 0.04 0.00 3.59 0.28 0.03 0.30 0.18		1950	950	1590	0.93	0.20	0.02	0.07	0.17	0.11	0.09	0.04	0.02	0.03	0.01	0.94	0.08	0.06	0.31	0.41
2900 900 92 2.39 0.49 0.01 0.11 0.31 0.39 0.20 0.01 0.10 0.04 0.00 3.59 0.28 0.03 0.30 0.18		2180	180	759	0.45	0.13	0.00	0.03	0.13	0.02	0.00	0.00	0.01	0.00	0.00	0.30	0.03	0.10	0.31	0.40
		2700	700	202	0.79	0.25	0.01	0.11	0.37	0.21	0.12	0.04	0.04	0.05	0.00	0.47	0.06	0.01	0.25	0.17
2950 950 1813 0.47 0.10 0.01 0.05 0.13 0.02 0.00 0.00 0.00 0.00 0.00 0.09 0.01 0.06 0.31 0.13		2900	900	92	2.39	0.49	0.01	0.11	0.31	0.39	0.20	0.01	0.10	0.04	0.00	3.59	0.28	0.03	0.30	0.18
		2950	950	1813	0.47	0.10	0.01	0.05	0.13	0.02	0.00	0.00	0.00	0.00	0.00	0.09	0.01	0.06	0.31	0.13

Table 4. Fuel loading (kg m⁻²) by fuel component for the Fuel Type Group (FTG) Classification. Litter and duff depth in cm. See Table 3 for descriptions.

Regime	NFDRS station data moisture content range	Moisture content used in fuel consumption simulations				
	1000 h (%)	1000 h (%)	duff (%)			
very dry	<= 10	10	20			
dry	> 10 and <= 25	20	40			
moderate	> 25 and <= 35	30	60			
moist	> 35	40	80			

 Table 5. Fuel moisture regimes used for simulating fuel consumption.

Fuel component ¹		Moisture regime													
component	Very dry				Dry		М	oderate		1	Moist				
	best estimate	low	high	best estimate	Low	high	best estimate	low	high	best estimate	low	high	Reference		
							XCEPT Fue								
Shrub	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	а		
Herb	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	b		
HR1	0.95	0.90	1.00	0.95	0.90	1.00	0.95	0.90	1.00	0.95	0.90	1.00	c		
HR10	0.86	0.72	1.00	0.86	0.72	1.00	0.86	0.72	1.00	0.86	0.72	1.00	с		
HR100	0.78	0.62	0.94	0.78	0.62	0.94	0.78	0.62	0.94	0.78	0.62	0.94	c		
Litter	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	d		
Duff	0.75	0.60	0.90	0.67	0.54	0.80	0.58	0.46	0.70	0.50	0.40	0.60	e		
s3to9	0.93	0.86	1.00	0.88	0.76	1.00	0.81	0.65	0.97	0.71	0.56	0.85	с		
s9to20	0.60	0.48	0.72	0.50	0.40	0.60	0.41	0.33	0.49	0.32	0.25	0.38	с		
sgt20	0.50	0.40	0.60	0.41	0.32	0.49	0.32	0.25	0.38	0.24	0.19	0.29	c		
r3to9	0.96	0.92	1.00	0.88	0.76	1.00	0.70	0.56	0.84	0.43	0.34	0.52	c		
r9to20	0.78	0.62	0.94	0.59	0.47	0.71	0.38	0.30	0.46	0.20	0.16	0.24	с		
rgt20	0.57	0.46	0.68	0.43	0.34	0.52	0.31	0.25	0.37	0.21	0.17	0.25	c		
		So	uthern F	orest Type (Groups (Fuel Co	des 1140,116	50,1400,	1500, an	d 1600)					
Shrub	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	а		
Herb	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	b		
HR1	0.95	0.90	1.00	0.95	0.90	1.00	0.95	0.90	1.00	0.95	0.90	1.00	f		
HR10	0.86	0.72	1.00	0.86	0.72	1.00	0.86	0.72	1.00	0.86	0.72	1.00	f		
HR100	0.40	0.32	0.48	0.40	0.32	0.48	0.40	0.32	0.48	0.40	0.32	0.48	f		
Litter	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	d		
Duff	0.15	0.12	0.18	0.10	0.08	0.12	0.05	0.00	0.10	0.05	0.00	0.10	g		
s3to9	0.33	0.26	0.40	0.18	0.14	0.22	0.10	0.08	0.12	0.05	0.04	0.06	f		
s9to20	0.33	0.26	0.40	0.18	0.14	0.22	0.10	0.08	0.12	0.05	0.04	0.06	f		
sgt20	0.33	0.26	0.40	0.18	0.14	0.22	0.10	0.08	0.12	0.05	0.04	0.06	f		
r3to9	0.41	0.33	0.49	0.27	0.22	0.32	0.11	0.09	0.13	0.05	0.04	0.06	f		
r9to20	0.41	0.33	0.49	0.27	0.22	0.32	0.11	0.09	0.13	0.05	0.04	0.06	f		
rgt20	0.41	0.33	0.49	0.27	0.22	0.32	0.11	0.09	0.13	0.05	0.04	0.06	f		
-						Rangel	land								
Herb	0.93	0.86	1.00	0.93	0.86	1.00	0.93	0.86	1.00	0.93	0.86	1.00	b		
Shrub	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	0.90	0.80	1.00	а		

Table 6. Best estimates and ranges of the combustion completeness by fuel component according to moisture regime and forest type group. Best estimates are based on cited references. Low and high ranges assigned as approximately +/- 20 %.

¹See Table 3 for description

References:

CONSUME natural fuels algorithm shrub stratum, adjusted to 0.90 (Prichard et al., 2006) a)

CONSUME natural fuels algorithm non-woody stratum, adjusted to 0.90 (Prichard et al., 2006) b)

c) CONSUME natural fuels algorithm - western woody equations (Prichard et al., 2006)

FOFEM default reduced to 0.90 (Lutes, 2016a) d)

e) Equation 10 of Brown et al. (1985)

f) CONSUME natural fuels algorithm - southern woody equations (Prichard et al., 2006)

Hough (1978)

g) h) CONSUME natural fuels algorithm non-woody stratum (Prichard et al., 2006)

Burn Severity Code	Burn Severity Thematic Class	Fraction of canopy consu		
		Best estimate	Lower range	Upper range
1	Unburned to low severity	0	0	0
2	Low severity	0.125	0.05	0.20
3	Moderate severity	0.60	0.50	0.70
4	High severity	1	1	1

Table 7. Fraction of forest canopy consumed according to burn severity classification. After Miller and Yool (2002).

Table 8. Statistics for the linear regression of EF as a function of MCE for field data from 78 forest fires and 20 rangeland fires (Table S4 and Figs. S1 and S2)

	Intercept	Slope	R ²	Standard
				Error
	Η	Forest		
EFCO ₂	-476	2304	0.87	23
EFCO	1088	-1084	0.99	2.5
EFCH ₄	96.2	-100.7	0.79	1.4
EFPM _{2.5}	209.0	-211.3	0.53	4.9
	Ra	ngeland		
EFCO ₂	-673	2505	0.89	17
EFCO	1105	-1103	1.00	1
EFCH ₄	62.9	-64.2	0.79	0.6
EFPM _{2.5}	76	-70.1	0.07	4.8

Table 9. Best estimate MCE and EF (g kg⁻¹) for generalized fire types from multiple field studies. The standard deviation for MCE is provided in parentheses. EF are based on the linear fits in Table 8 at the fire type average MCE value. The MCE values are from Urbanski (2014).

General Fuel Type	MCE	EFCO ₂	EFCO	EFCH ₄	EFPM _{2.5}
Southern Forests ¹	0.933 (0.013)	1674	77	2.5	11.9
Western & Northern Forests ²	0.881 (0.031)	1554	133	7.5	22.8
Rangeland ³	0.938 (0.020)	1677	70	2.7	10.2

¹Fuel codes 1140, 1160, 1400, 1500, and 1600

 $^2\mbox{All}$ forest fuel codes except 1140, 1160, 1400, 1500, and 1600

³Fuel codes 1 and 2

Table 10. Sample generation methods employed in Monte Carlo style simulation of emission intensity uncertainty

Fuel Component	Sample Generation	Details
Surface Fuel Loading	Sampling of surface fuel data from FIA plots	Supplemental dataset Fuel_Load_Plot_Data.csv
Understory Fuel Loading	Empirical distribution	Supplemental dataset Understory_Fuel_Dist.csv
Available Canopy Fuel	Weibull distribution	Table B4
Herbaceous Fuel Loading	Normal Distribution	See text
Shrub Fuel Loading	Normal Distribution	See text
Fraction of Fuel Consumed	Uniform distribution	Table 6 and Table 7
Emission Factors	Normal or truncated normal distribution	Table 8 and Table 9. See text.

Region CONUS NW CA SW NO SC SE MFLEI versus FINN v1.5 (2003-2015) Mean -35% RD^{a} -17% 6% 50% 103% -65% -75% Min RD -71% -94% -25% 61% -103% -131% -135% 41% Max RD 81% 115% 131% 68% 21% -31% \mathbf{r}^{b} 0.62 0.90 0.87 0.92 0.57 0.24 0.70 MFLEI versus GFED 4.1s (2003–2015) 29% Mean RD 14% 3% 75% 16% 35% 43% Min RD 0% -4% -27% -83% -45% -1% 41% Max RD 60%40% 52% 105% 90% 91% 76% 0.90 0.97 0.79 0.76 r 0.97 0.96 0.62 MFLEI versus WFEIS v0.5 (2003–2013) Mean RD -2% 30% -99% 40% -26% 130% -51% Min RD -41% -110% -177% 35% -161% -175% -104% Max RD 56% 196% 181% 137% 112% -17% 121% 0.95 -0.20 r 0.43 0.88 0.20 -0.34 0.06

Table 11. Statistics for comparison of annual fuel consumption by region between MFLEI and FINN v1.5, GFED v4.1s, and WFEIS v0.5. Regions are as defined in Fig. 14a.

 $RD = 100 \times \frac{X(t)_{MFLEI} - Y(t)_i}{0.5 * (X(t)_{MFLEI} + Y(t)_i)}$

 $X(t)_{MFLEI} = MFLEI$ fuel consumed in year = t

 $Y(t)_i = i$ fuel consumed in year = t, where i = FINN, GFED, or WFEIS

 ${}^{b}r = correlation coefficient$

5

a

	U		U				
				Region			
	CONUS	NW	CA	SW	NO	SC	SE
MFLEI ve	rsus FINN v	1.5 (2003–	2015)				
Mean							
RD^{a}	98%	56%	85%	136%	24%	-55%	-70%
Min RD	-70%	-43%	15%	-55%	-44%	-123%	-136%
Max RD	86%	123%	147%	157%	125%	35%	-27%
$\mathbf{r}^{\mathbf{b}}$	0.61	0.90	0.88	0.94	0.52	0.20	0.71
MFLEI ve	rsus GFED 4	l.1s (2003-	-2015)				
Mean RD	76%	76%	61%	137%	71%	59%	60%
Min RD	50%	58%	29%	104%	-24%	-29%	18%
Max RD	99%	98%	106%	158%	136%	119%	94%
r	0.94	0.97	0.98	0.97	0.65	0.70	0.73
MFLEI ve	rsus WFEIS	v0.5 (2003	8–2013)				
Mean RD	49%	98%	96%	151%	66%	103%	82%
Min RD	19%	-59%	-154%	63%	-118%	-174%	-86%
Max RD	104%	167%	161%	198%	59%	122%	183%
r	0.98	0.42	-0.15	0.90	0.23	-0.33	0.11

Table 12. Statistics for comparison of annual $PM_{2.5}$ emitted consumption by region between MFLEI and FINN v1.5, GFED v4.1s, and WFEIS v0.5. Regions are as defined in Fig. 14a.

a

$$RD = 100 \times \frac{X(t)_{MFLEI} - Y(t)_i}{0.5 * (X(t)_{MFLEI} + Y(t)_i)}$$

 $X(t)_{MFLEI} = MFLEI PM_{2.5}$ emitted in year = t

 $Y(t)_i = i PM_{2.5}$ emitted in year = t, where i = FINN, GFED, or WFEIS

 ${}^{b}r$ = correlation coefficient

Fire size (ha)	Number of fires	Average duration (d)	Standard Deviation of duration (d)
0-31	43915	2	7
31 - 62	6894	4	12
62 - 94	2673	5	13
94 - 125	1704	7	16
125 – 156	962	8	17
156 - 188	838	8	18
188 - 625	216	9	17

Table A1. Average small fire duration based the fire discovery and containment dates from years 2003 – 2015 of the Fire

 Occurrence Database (Short, 2017).

Fuel Code	\mathbf{N}^1	Best est. ACF (kg m ⁻²)	Best est. ACF (ton acre ⁻¹)	Shape parameter	Scale parameter
1100	12199	0.50	2.23	1.73	2.48
1120	21990	0.91	4.05	1.33	4.40
1140	21443	0.29	1.28	1.30	1.38
1160	61276	0.16	0.71	1.33	0.77
1170	1582	0.36	1.60	1.55	1.77
1180	19045	0.68	3.02	1.56	3.37
1200	15112	1.18	5.25	1.70	5.85
1220	9554	0.46	2.06	1.66	2.30
1240	90	0.41	1.85	1.54	2.04
1260	10886	1.23	5.48	1.80	6.14
1280	5425	0.67	2.99	1.59	3.32
1300	2002	1.38	6.16	1.56	6.82
1320	684	0.63	2.80	1.48	3.07
1340	239	1.66	7.39	2.29	8.29
1360	2573	0.39	1.75	1.19	1.86
1370	2173	1.04	4.62	1.91	5.19
1380	543	0.63	2.80	1.01	2.82
1400	34528	0.13	0.57	1.03	0.57
1500	58266	0.06	0.25	0.85	0.23
1600	17157	0.33	1.48	0.62	0.98
1700	134	0.22	0.97	0.91	0.93
1800	25727	0.21	0.92	0.91	0.88
1900	1736	0.34	1.50	1.03	1.51
1910	945	0.40	1.76	1.02	1.78
1920	1564	0.24	1.05	0.80	0.93
1940	774	0.48	2.13	1.19	2.26
1950	294	0.41	1.81	1.02	1.82
1970	2119	0.18	0.82	1.05	0.83
1980	166	0.10	0.43	1.04	0.44
1990 ¹	0	0.10	0.43	1.04	0.44
2180	1257	0.40	1.79	1.36	1.96
2700	6859	0.17	0.77	0.82	0.69
2900	18279	0.18	0.79	0.92	0.75
2950	690	0.13	0.57	0.91	0.55

Table B1. Available canopy fuel (ACF) best estimates (see Sect. 2.4.1) and optimized parameters for Weibull PDF fits. Parameters predict ACF in units of ton acre⁻¹.

 ^{1}N = number of FIA plots used in deriving best estimate ACF and Weibull PDF fits.

5 ²Values for fuel code 1990 set to those of fuel code 1980 due to lack of data

 Table C1. Thematic classes representing shrub heights in the Landfire EVH product and the associated height values represented in the RVS fuel modelling system.

 EVH Class

1	Code	EVH Classes	RVS shrub height (m)		(m)
			Minimum	Median	Maximum
	104	Shrub height 0 to 0.5 m	0.1	0.25	0.5
	105	Shrub height 0.5 to 1.0 m	0.5	0.75	1
	106	Shrub height 1.0 to 3.0 m	1	2	3
	107	Shrub height > 3.0 m	3	4	5

EVC Class Code	EVC Classes	RVS canopy cover
	0/0	
111	Shrub cover ≥ 10 and ≤ 20	15
112	Shrub cover ≥ 20 and < 30	25
113	Shrub cover ≥ 30 and < 40	35
114	Shrub cover ≥ 40 and < 50	45
115	Shrub cover ≥ 50 and < 60	55
116	Shrub cover ≥ 60 and < 70	65
117	Shrub cover ≥ 70 and < 80	75
118	Shrub cover >= 80 and < 90	85
119	Shrub cover ≥ 90 and ≤ 100	95

Table C2. Thematic classes representing shrub canopy in the Landfire EVC product and the associated canopy cover used in the RVS fuel modelling system.

Figure captions

- Figure 1. Diagram of MFLEI biomass burning emission model methodology and datasets. 5
 - Figure 2. MFLEI land cover type map. White regions are non-fuel cover type. Cover type codes are described in Table 1.

Figure 3. Location of FIA plots used to develop surface fuel loading classifications.

10 Figure 4. The distribution of surface fuel loading for the FIA plots of three FTG: Loblolly/shortleaf pine (160), Douglas-fir (200), and California mixed conifer (370).

Figure 5. Best estimate (Table 4) forest fuel loading in canopy, understory, and surface fuels by fuel type.

15 Figure 6. Fraction of best estimate (Table 4) total forest fuel loading in surface fuel loading groups by fuel type.

Figure 7. Abbreviated flow of data and actions in RVS to produce rangeland fuel loadings. EVT, EVC and EVH are Existing Vegetation Type, Existing Vegetation Cover, and Existing Vegetation Height from the Landfire Project.

20 Figure 8. Relationship between annual production and annual maximum NDVI on 51 grassland vegetation types.

Figure 9. Map of best estimate fuel loading for forest and rangelands in g m⁻².

Figure 10. Annual burned area, fuel consumed, and PM_{2.5} emitted for 2003-2015.

Figure 11. Annual burned area, fuel consumed, and PM_{2.5} emitted averaged over 2003-2015.

Figure 12. Monthly distributions of burned area, fuel consumption, and PM_{2.5} emitted over 2003-2015, broken down by cover type.

30

25

Figure 13. Seasonal PM_{2.5} emitted average over 2003-2015.

Figure 14. Top panel: geographic regions. Bottom panel: Burned area, fuel consumption, and PM_{2.5} emitted by region.

35 Figure 15. Monthly PM_{2.5} emitted averaged over 2003-2015.

Figure 16. Fraction of regional, 2003-2015 PM_{2.5} emissions released on peak days.

Figure 17. Cumulative distribution of daily $PM_{2.5}$ emissions aggregated on a 10 km × 10 km grid. Dashed line and dashed – 40 dotted line mark 5% and 10% of grid cell days with emissions.

Figure 18. Annual PM_{2.5} emitted in the west.

Figure 19. Number of days over 2003-2015 when the wildfire to non-wildfire $PM_{2.5}$ emission ratio in the west exceeds thresholds 45 of 2, 5, 10, 15, and 20.

Figure 20. Distribution of relative interquartile range from pixel level Monte Carlo style simulations.

Figure 21. Distribution of relative interquartile range (top panels) and relative interdecile range (bottom panels) from 10 km × 10 km gridded Monte Carlo style simulations.

Figure 22a. Annual fuel consumption from MFLEI, FINN v1.5, GFED v4.1s, and WFEIS v0.5 for northwest, California, and southwest regions.

55 Figure 22b. Annual fuel consumption from MFLEI, FINN v1.5, GFED v4.1s, and WFEIS v0.5 for north, southcentral, and southeast regions.

Figure 23a. Annual PM_{2.5} emitted from MFLEI, FINN v1.5, GFED v4.1s, and WFEIS v0.5 for northwest, California, and southwest regions.

Figure 23b. Annual PM_{2.5} emitted from MFLEI, FINN v1.5, GFED v4.1s, and WFEIS v0.5 for north, southcentral, and southeast regions.

Figure A1. The burn day distribution for the 12,500–25,000 ha size class. Distributions for all six size classes are provided in the dataset supplement (file\Supplements\BurnDayDist.csv).

10 Figure C1. Total shrub biomass estimates for a pixel with EVT class of Big Sagebrush shrubland, EVH class of 105, and EVC class of 112 (see text).


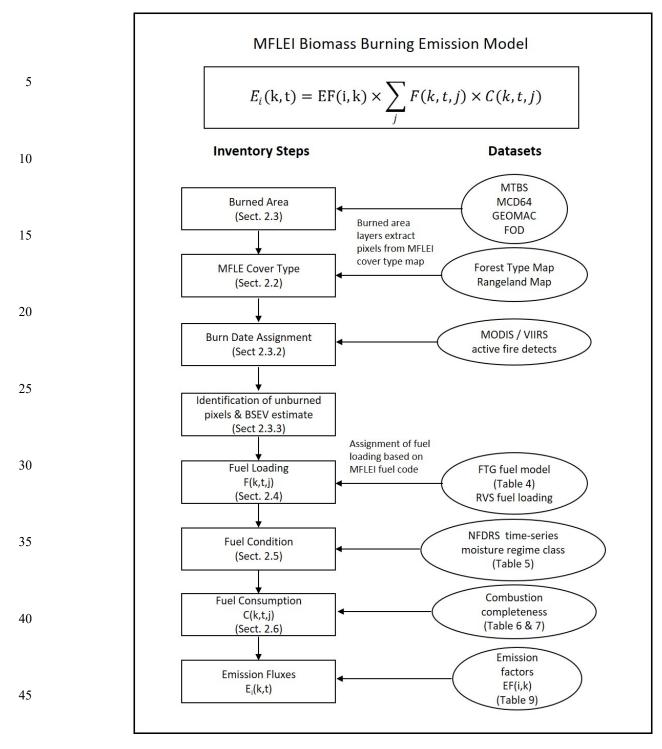


Figure 1. Diagram of MFLEI biomass burning emission model methodology and datasets.

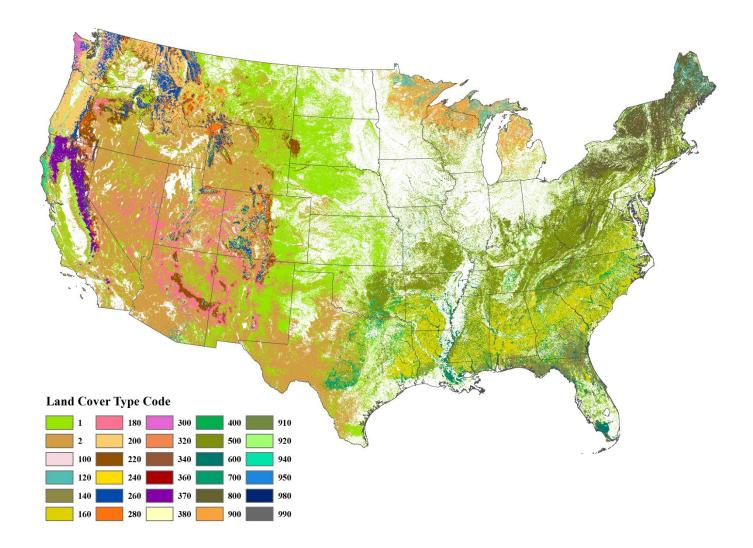

5 Figure 2. MFLEI land cover type map. White regions are non-fuel cover type. Cover type codes are described in Table 1.

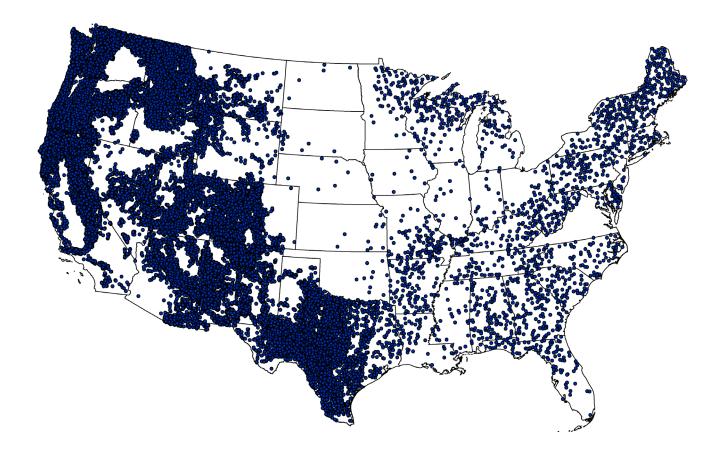


Figure 3. Location of FIA plots used to develop surface fuel loading classifications.

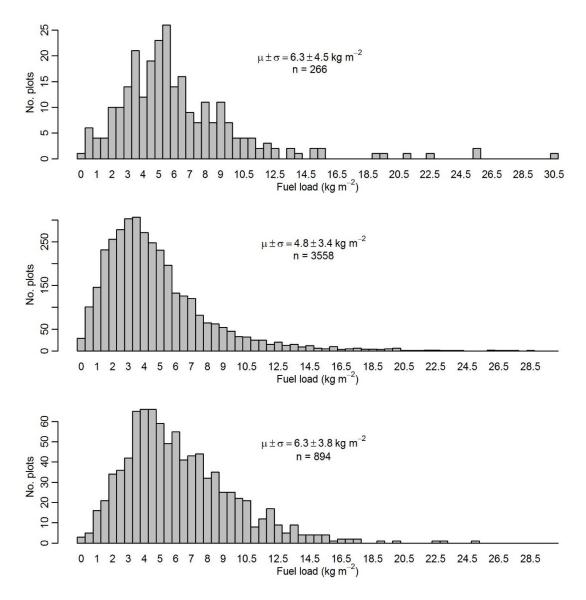


Figure 4. The distribution of surface fuel loading for the FIA plots of three FTG: Loblolly/shortleaf pine (160), Douglas-fir (200), and California mixed conifer (370).

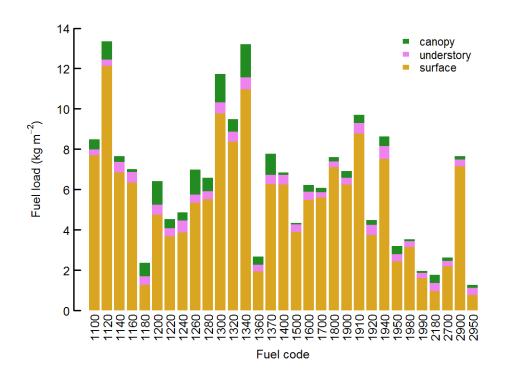


Figure 5. Best estimate (Table 4) forest fuel loading in canopy, understory, and surface fuels by fuel type. 10


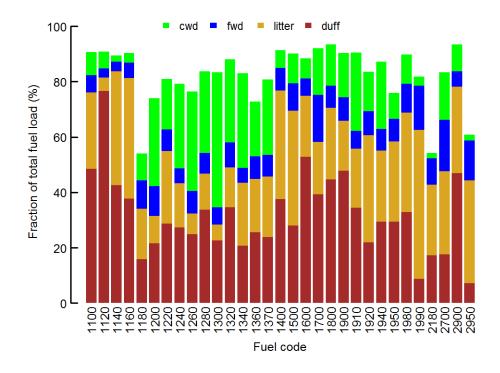


Figure 6. Fraction of best estimate total forest fuel loading in surface fuel loading groups (Table 4) by fuel type.

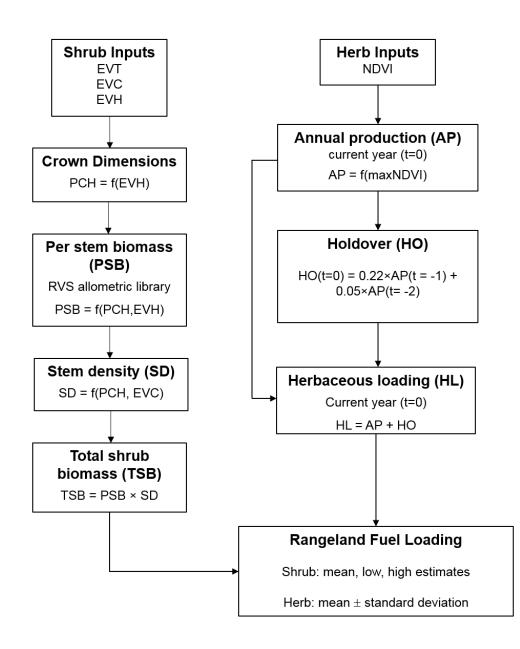

5 Figure 7. Abbreviated flow of data and actions in RVS to produce rangeland fuel loadings. EVT, EVC and EVH are Existing Vegetation Type, Existing Vegetation Cover, and Existing Vegetation Height from the Landfire Project.

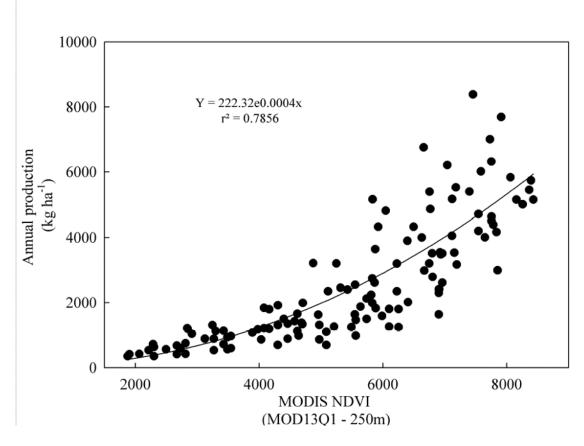


Figure 8. Relationship between annual production and annual maximum NDVI on 51 grassland vegetation types.



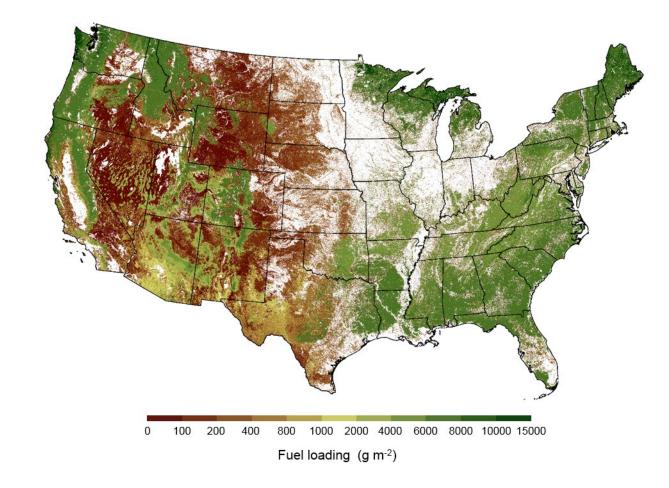


Figure 9. Map of best estimate fuel loading for forest and rangelands in g m^{-2} .





(c) PM_{2.5} emitted




Figure 10. Annual burned area, fuel consumed, and $PM_{2.5}$ emitted for 2003-2015.

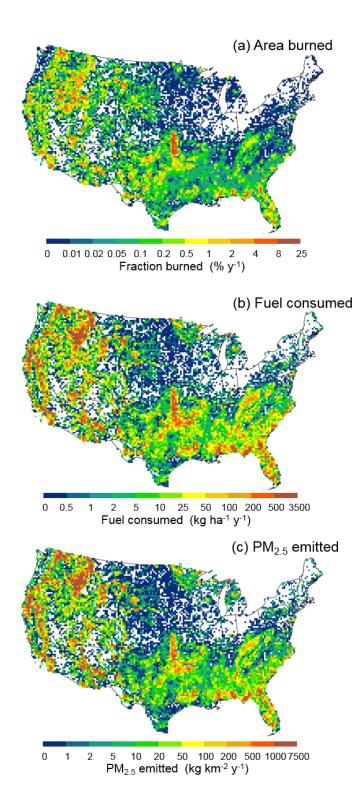


Figure 11. Annual burned area, fuel consumed, and PM_{2.5} emitted averaged over 2003-2015.

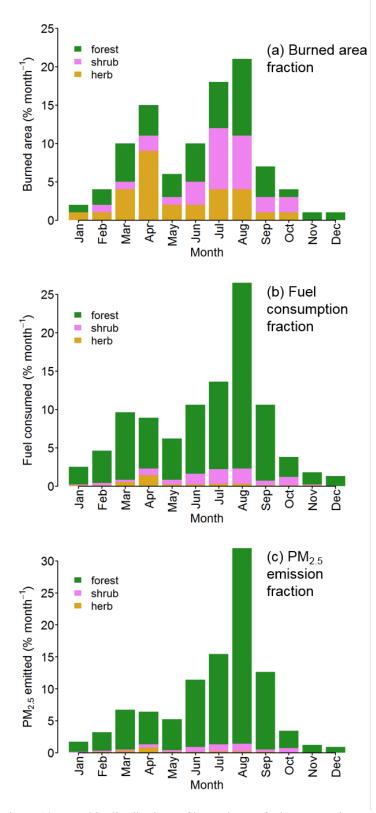


Figure 12. Monthly distributions of burned area, fuel consumption, and $PM_{2.5}$ emitted over 2003-2015, broken down by cover type.

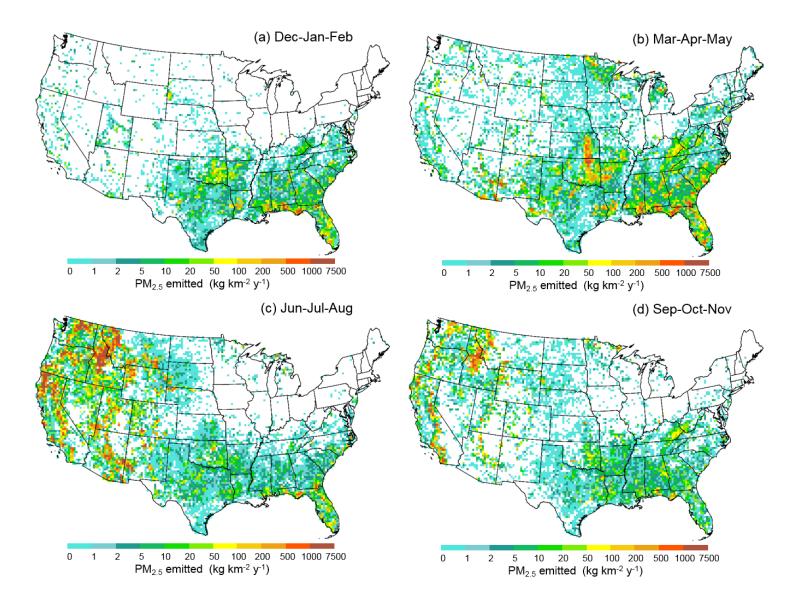


Figure 13. Seasonal $PM_{2.5}$ emitted average over 2003-2015.

(a) Regions

5



(b) Fraction of burned area, fuel consumption, and $\text{PM}_{2.5}$ emitted over 2003-2015 by region

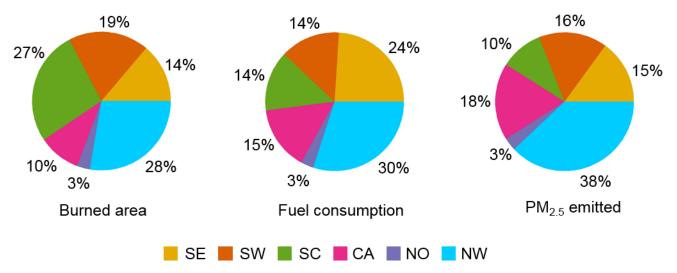


Figure 14. Top panel: geographic regions. Bottom panel: Burned area, fuel consumption, and PM_{2.5} emitted by region.


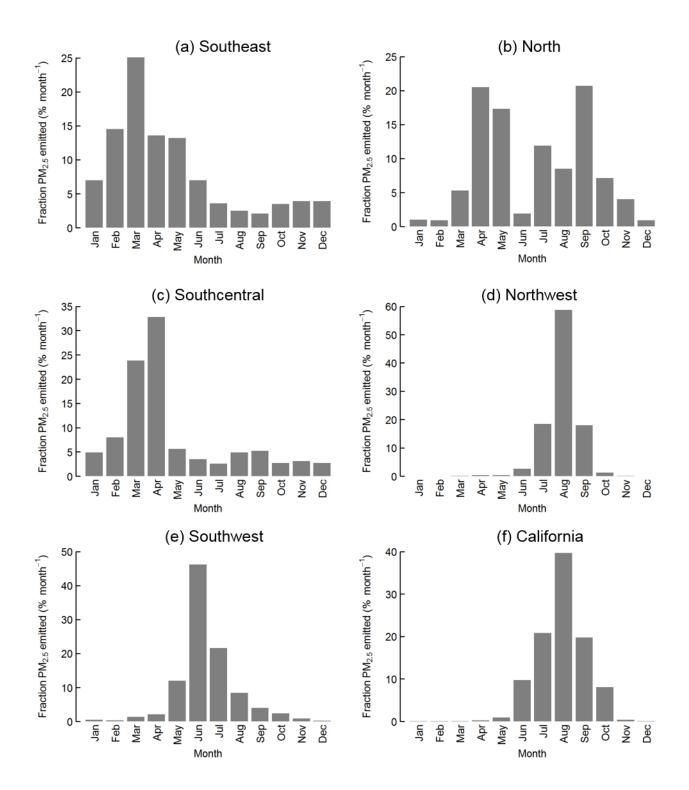


Figure 15. Monthly PM_{2.5} emitted averaged over 2003-2015.

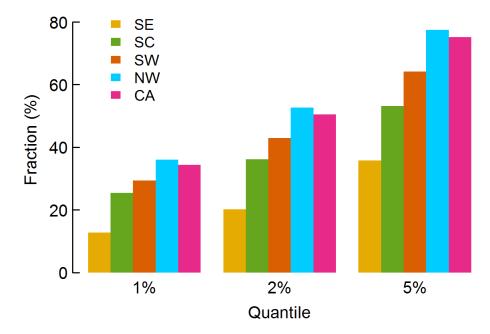

Fraction of $PM_{2.5}$ emitted on peak emission days

Figure 16. Fraction of regional, 2003-2015 PM_{2.5} emissions released on peak days.





Figure 17. Cumulative distribution of daily $PM_{2.5}$ emissions aggregated on a 10 km × 10 km grid. Dashed line and dashed – 5 dotted line mark 5% and 10% of grid cell days with emissions.

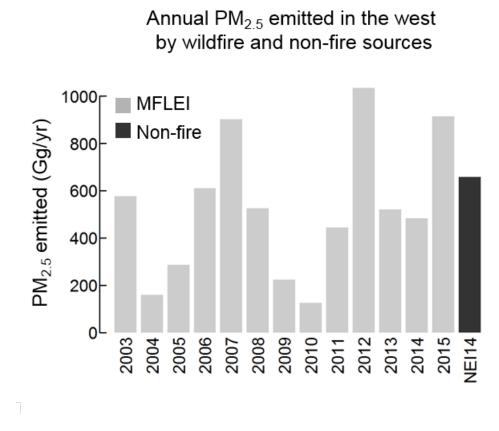

5 Figure 18. Annual PM_{2.5} emitted in west.


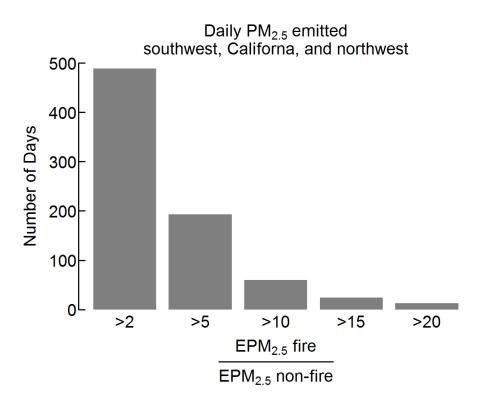


Figure 19. Number of days over 2003-2015 when the wildfire to non-wildfire $PM_{2.5}$ emission ratio in the west exceeds thresholds of 2, 5, 10, 15, and 20.

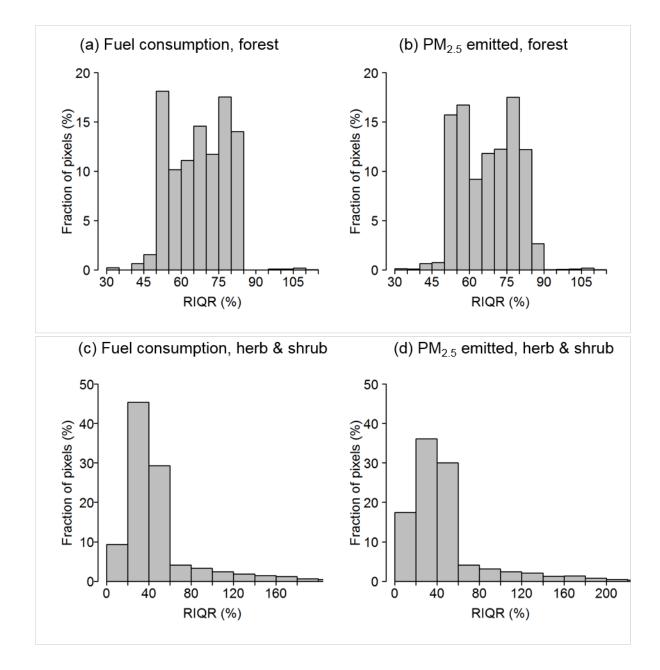

5 Figure 20. Distribution of relative interquartile range from pixel level Monte Carlo style simulations.

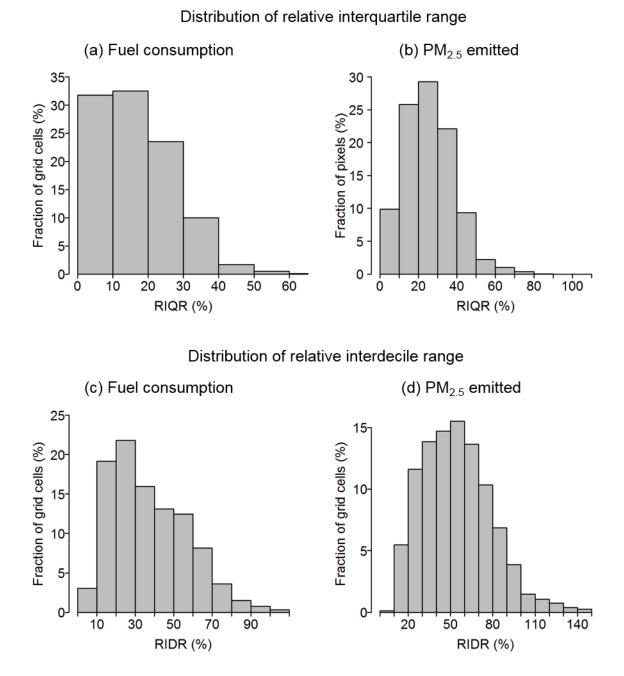


Figure 21. Distribution of relative interquartile range (top panel) and relative interdecile range (bottom panels) from $10 \text{ km} \times 10$ 5 km gridded Monte Carlo style simulations.

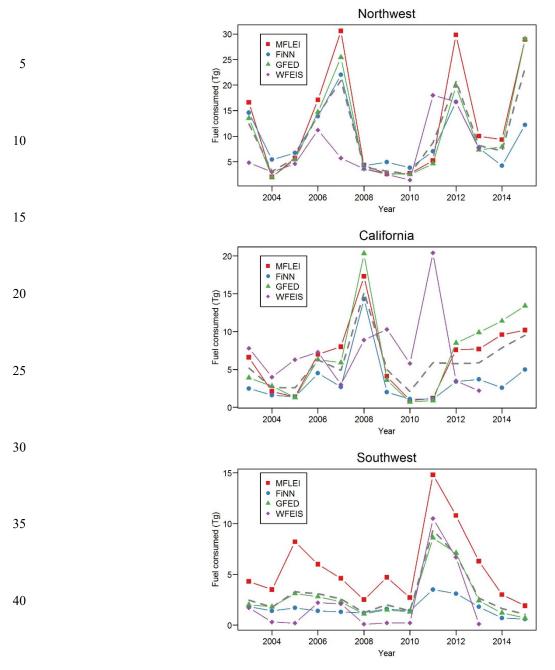


Figure 22a. Annual fuel consumption from MFLEI, FINN v1.5, GFED v4.1s, and WFEIS v0.5 for northwest, California, and southwest regions.

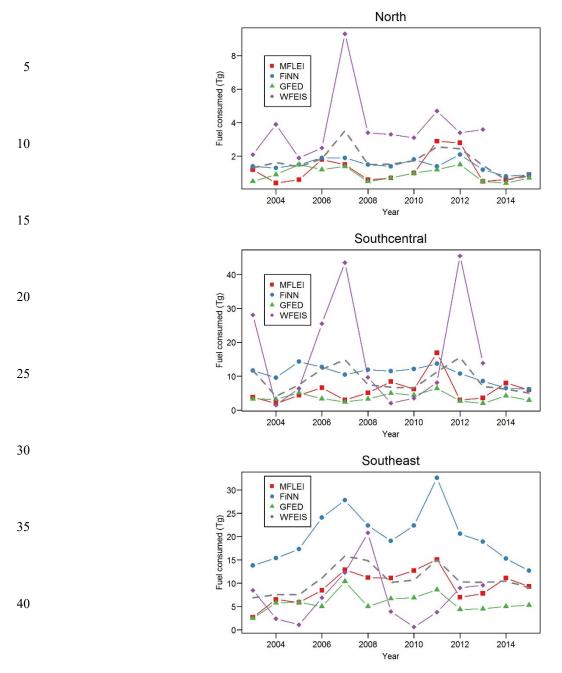


Figure 22b. Annual fuel consumption from MFLEI, FINN v1.5, GFED v4.1s, and WFEIS v0.5 for north, southcentral, and southeast regions.


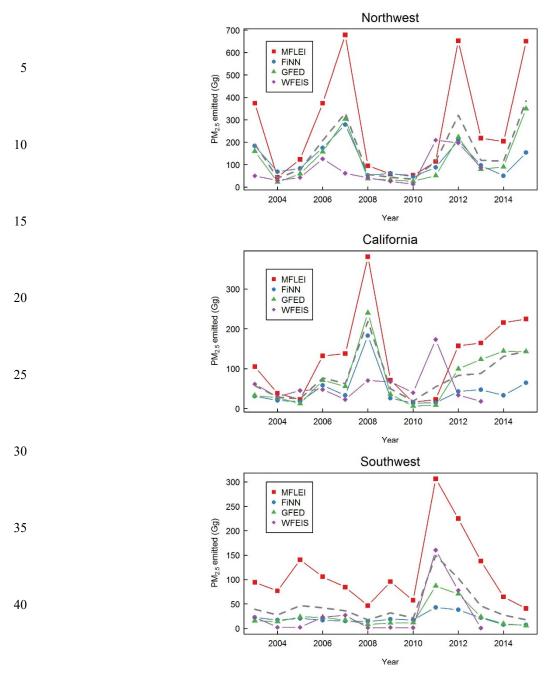


Figure 23a. Annual PM_{2.5} emitted from MFLEI, FINN v1.5, GFED v4.1s, and WFEIS v0.5 for northwest, California, and southwest regions.

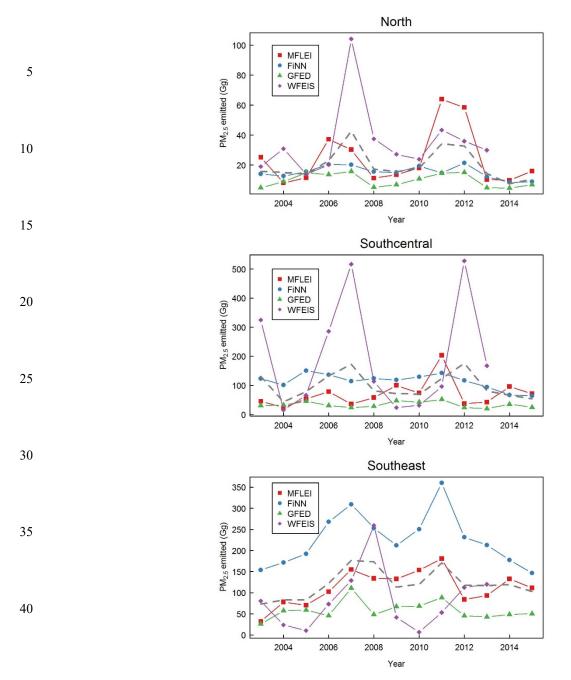

45 Figure 23b. Annual PM_{2.5} emitted from MFLEI, FINN v1.5, GFED v4.1s, and WFEIS v0.5 for north, southcentral, and southeast regions.





Figure A1. The burn day distribution for the 12,500–25,000 ha size class. Distributions for all six size classes are provided in the dataset supplement (file\Supplements\BurnDayDist.csv).

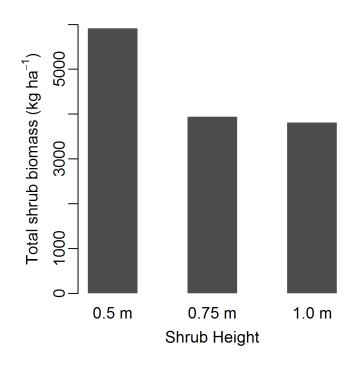

5 Figure C1. Total shrub biomass estimates for a pixel with EVT class of Big Sagebrush shrubland, EVH class of 105, and EVC class of 112 (see text).