

## Response to Reviewers

Earth Syst. Sci. Data Discuss.,  
<https://doi.org/10.5194/essd-2019-206-RC1>, 2019

We thank the reviewers for their thoughtful and constructive comments. We have addressed each comment below, with the original comment re-stated in italics followed by our response in regular font.

### Reviewer 1

*Overall, this paper provides a good description of the measurement network that will hopefully be used for many years to come. It is certainly worthy of publication in this journal. I only have a few minor comments, listed below.*

We thank the reviewer for the careful reading and helpful comments.

*My only real complaint/disappointment with the paper has to do with the re-calibration of the standard gases by NOAA GMD. I wonder how drift in the calibration standards would affect the uncertainty calculations. However, this is probably a subject for a future paper, not this one.*

As the reviewer notes, the topic of tank drift was not investigated in this work, as we do not have information yet on how some of the standards may have drifted during the network deployment. We do not expect them to drift significantly (i.e. more than their stated uncertainty) for CO<sub>2</sub> or CH<sub>4</sub>, as prior studies have seen little to no drift in the tanks provided by NOAA (Andrews et al., 2013). We also note that the target tank residual will increase if one of the two tanks drifts relative to the other, and that will be captured in the calculated uncertainty. Only if the target and calibration tanks drift in the same direction would this not be captured. However, for CO, we suspect tank drift may be a factor in our large flask vs. in-situ discrepancy at Mashpee (MSH), where we do see relatively large target tank residuals as well. This issue at MSH is still under investigation.

*line 13, I think of the “network” referring to the stations, not the measurements themselves. Perhaps use “observation stations” instead of “observations”?*

This change has been made, thank you.

*line 16, suggest “northeast U.S.” instead of “US northeast”*

Done.

*line 49, “powerplants” should be two words*

Done.

*Table 1, I’m not sure (mm/yyyy) is necessary, especially since the one digit months do not have a 0 in front. I suggest (mo./yr.)*

We agree and have made this suggested change.

*line 135, suggest “sample” rather than “pull air”, and remove “one” from the sentence*

We have made the change to “sample” but we actually inserted “and one line samples from a lower level”, because that is what we were trying to convey. Two lines sample from the top level. The third line samples from the lower level.

*line 141, I assume that's also OD*

Yes, and OD has been added now.

*line 147, this looks to be a Picarro. I'd mention that, since the authors have mentioned the other companies (Valco, Permapure, etc.)*

Yes, added.

*line 190, suggest “ $^{12}\text{C}/^{13}\text{C}$  ratio in  $\text{CO}_2$ ” for the general readership*

Changed.

*line 278, in the equation “ $m + b = 1$ ”, is that a lower case “L” or a “one”? I assume it's a “one”, but it's confusing, because later in the sentence the “ $\text{SDC}_{\text{cal}} = 1$ ” is clearly a non-italicized “one”.*

We have changed all the “ones” to be not italicized so that it is clearer that they are not “L”s. Thanks for pointing this inconsistency out.

*line 346, suggest “analyzed” instead of “measured”  
line 508 and elsewhere, suggest “by Verhulst: :”*

Both changes have been made.

*line 560, it seems these numbers should have negative signs to be consistent with Figure 9.*

We agree, and this has been done now.

## **Reviewer 2**

*The paper presents an interesting dataset which is very important in the contexts of climate negotiations. The paper is well written and presents enough details to allow for evaluation of the quality of the presented dataset.*

*There are several technical and editorial points to be addressed prior to publication.*

We thank the reviewer for the comments and have addressed the points below.

*lines 28-29: please consider revising the language as “atmospheric measurements” do not detect trends by themselves, rather an analysis of those measurements*

That is a good point; the change has been made in the text.

*lines 47-51: the sentence is confusing, it reads as if agriculture is not included in anthropogenic emissions. Do you actually talk about the separation of fossil fuel and biogenic emissions?*

The reviewer makes a good point that we have confused biogenic with natural and included agriculture incorrectly here. The statement has been revised to remove the reference to agricultural sources as separate from anthropogenic sources.

*line 75: section 4 presents etc*

Thank you, this has been fixed (“presents” added)

*line 105: are the coordinates of the planned sites known? If so, please include them in the table. Could you please explain why the inlet heights are different. What impact on the station footprint does the change of the inlet height have?*

The general locations are known, although until lease agreements with the providers are in place we cannot provide exact locations because they may still change. We have updated the locations of the sites in Bluemont, VA, Burke, VA, and Waterford Works, NJ, in both Table 1 and Figure 1, as those site locations are certain and lease agreements on those towers are in place. We have added an explanation in the Table legend as well.

The inlet heights are different due to the towers that were available in desired locations having different heights. We generally install the inlet as close to the top as possible; although we would like all the towers to be at 100 m that is not always feasible. We have done some analysis with a model (WRF-STILT) that indicates that for many sites the footprint does not differ between heights in the middle of the afternoon when the PBL is well-mixed. However, that is not always true, especially if the site is close to sources (which many of them are) or at night. This is indicated by the gradient analysis later in the paper, which shows that the different inlet heights measure slightly different concentrations even in the middle of the afternoon at some urban sites. Thus, we would expect that measurements at 30 meters differ from those at 100 meters, even in the mid-afternoon, depending on the surrounding emissions sources. We do think this topic is important which is why we present the inlet heights in the table along with the brief analysis of vertical gradients later in the manuscript; we hope that users of this data set keep the inlet heights in mind in their analysis.


We have now added the following to the text (107-110): “Although inlet heights were desired to be 100 m above ground level (agl), often shorter towers were used due to the lack of availability of tall towers in ideal locations; the shortest tower in this network has the uppermost inlet at 38 m agl (HRD).”

*line 113: please spell out “USGS”.*

Done.

*The intensity in development is used from the 2011 database. Has there been an evaluation of the trend in the intensity since 2011? Can those changes have an impact on the stations’ representativeness?*

Thank you for this comment. We have updated Figs 2& 3 now using the 2016 NLCD database and found little to no difference between the two years. See the figure below, indicating the fraction for the 4 developed categories for the sites in figure 2 between the two products. The regional sites do not change very much either. We have updated the paper figures to use the 2016 database, as that is indeed more applicable to our data which covers 2015-2018.

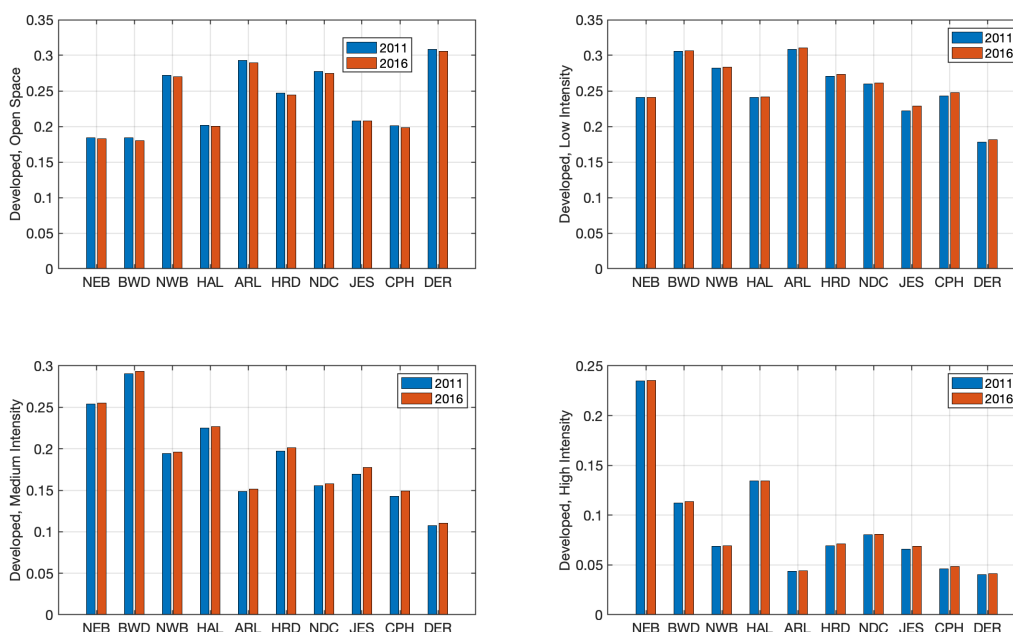

line 131: please spell out “EN GHG”

These acronyms were both spelled out earlier in the text and are used throughout the manuscript. However, we agree that in this beginning of the section it may be helpful to spell out Earth Networks once more, so we define it again, and remove “GHG” as it is not needed here.

line 141: what defined 20 min sampling period?

The 20-minute sampling period was chosen so that each of the three inlets is sampled in each hour. This allows for hourly calculation of differences. Some text has been added to this effect in the document.

line 155: please spell out “WMO”

line 167: WMO is the World Meteorological Organization

Thank you for catching these errors, they are fixed (WMO defined at first reference, and properly!).

lines 175-179: in the calibration procedure, the first 10 to 15 min of data are filtered out to allow system for equilibration. It seems not to be the case for ambient air sampling.  
Could you please explain why you cut 75% of data in calibration and do not do the same in the other case (lines 330-340)?

We neglected to indicate in the original manuscript that the first 10 minutes of data are indeed filtered when the analyzer switches from a standard (calibration, target, or high standards) to ambient air, but only one minute is filtered when it switches between ambient levels. We made this decision assuming that the concentration difference between ambient levels will be smaller and should equilibrate after a shorter time, while switching from a standard tank to ambient air and vice-versa could be a large difference that requires longer equilibration. The other main reason is the need to flush out the regulators after they remain with stagnant air for 22 hours between samples. We have added text in the first section (was 175-

179, now 205 in the revision): “The first 10 minutes of the ambient air sample following a standard run are also filtered for equilibration, and the first one minute of each 20-minute ambient air run is filtered if it follows another ambient air run (i.e. an inlet switch). The longer flush time is desired for the standard runs because of the need to flush stagnant air remaining in the regulators and tubing when sampling from the cylinder, while the ambient air lines are continuously flushed.”.

*line 231 states that the sensitivity is time-varying, though the calibrations happen every 22 hours. What is the temporal scale of variability you are talking about (as current calibration cycle misses diurnal variability)? What process drives the variability?*

Indeed, the sensitivity is time-varying on the scale of the calibration frequency, so at the 22-hour cycle, as we calculate it (the real sensitivity may vary on shorter scales as well). The goal of 22-hour cycle is to avoid sampling the calibrations at the same time every day. The variability of the analyzer response has different frequency characteristics, and the process is unknown. We have found in tests the same variability (1-sigma standard deviation, for example), no matter what the sampling rate. We show Allan Deviation tests for the Picarro analyzers in Verhust et al., ACP, 2017 (SI Figure S8) for the shorter time scales, but we in general find that the variability is the same (in magnitude) at all the temporal scales. Sometimes, there may be longer-term (monthly/annual scale) analyzer drift in the sensitivity that we are trying to capture by using a time-varying sensitivity. We do not know the cause of long-term analyzer drift.

*line 420: how does this equation account for the uncertainty of the sampling itself?*

By sampling, we assume the reviewer is referring to errors that can arise from issues with the sample stream, i.e. the tubing, the valve, etc., either from materials, small leaks, or other unknown effects. Eq. 8 does not account for these effects, which would be largely unknown unfortunately. We hope that they are encompassed in the target tank residual (Eq. 9), which supersedes and is used if it is larger than the uncertainty as calculated using Eq. 8. However, leaks in the sampling line that do not affect the standards (leaks in the tubing before the sample arrives at the calibration box) would not be detected using these variables, and indeed, cannot be detected using the system in an automated way. In practice, these are discovered by monitoring the variability of the air measurements, their absolute CO<sub>2</sub> magnitude relative to other similar sites, looking for sudden changes in the concentration time series, or observing the differences between inlets (either measurements from the two inlets at the same height disagreeing systematically, or sudden increase in differences between lower and upper inlets). We also monitor the level differences to ensure that the data from a given inlet is actually being pulled from that inlet (i.e. to discover possible mistakes during installation where tubing gets switched). When leaks are discovered and confirmed with a site visit, all the measurements affected are flagged and removed from the data. The uncertainty calculation does not account for leaks or other sampling issues that are not indicated by the water vapor or target tank data.

We now believe some of these additional quality checks that we perform should be mentioned in the paper, as it might be useful to readers who are operating similar systems. We have included some additional information in Section 3.5, Line 375: “Some additional quality checking is performed at this stage, specifically checking for systematic differences between measurements from two different inlets at the same height and checking for inconsistency in the difference between measurements at different heights. For example, if the lower inlet is systematically reading lower CO<sub>2</sub> than the upper inlet, especially at night, it would indicate that the inlet lines may be switched (mislabelled) or there is a leak occurring. These indications would be then verified by a field technician and the data either re-processed or flagged accordingly.”

*line 482: are there 1000 physical tanks?*

No, there are only the tanks shown on the figure, i.e. 5 tanks. We did a bootstrap of 1000 random choices of two tanks from the five. We have now clarified this ambiguity in the text by rephrasing.

*line 544 that states that each measurement period represents a full hour is in contradiction with the earlier elaborations related to the comparison with NOAA flask sampling described in lines 380-387 (where it says that 40 min maybe not representative of the hourly variability)*

What we meant in line 544 is that for the gradient analysis, we are making the **assumption** that the measurement is representative of the full hour even though the concentrations are not measured through the entire hour. As the reviewer notes, the flask comparison also makes this assumption, and in the discussion of possible reasons for disagreement between the flask and in-situ systems, we note that this assumption may be flawed, causing larger differences than expected between the flask and in-situ systems.

*line 546 refers to the vertical gradient that is calculated based on the measurements taken at the different heights and probably representing different parts of the planetary boundary layer. How reasonable is putting all estimates in one dataset and elaborate on the physical processes driving variability of the vertical gradients under such an approach?*

We thank the reviewer for making a very good point here, in that we have averaged together gradients from sites that are sampling air at different heights. The gradient itself (at night especially) is a function of height – we would expect larger gradients at lower heights, which we do find in our data. We also see larger gradients at sites that have more nearby sources, so these two effects are confounded in this analysis, especially because the towers located in more dense urban areas (NEB, NWB) are also shorter. We have revised Fig. 9(b) to now only include three urban sites that sample at similar levels (lower level at 50 m and upper level at ~90 m), and the background sites we show do also sample at very similar levels (around 50 m and 100 m). This allows for interpreting differences in the gradient as differences in the local fluxes. Now that we show only three urban sites, we are showing each individual trace rather than the mean and deviation as we did in the previous version of this figure. [Also note that due to smaller CH<sub>4</sub> gradient in 9(b), the axes were rescaled, and they were rescaled for the following figure with the background site gradients as well for consistency]. We have edited the text accordingly in this section.

### **Reviewer 3**

*This paper presented the greenhouse gas observation network in the organization, structure, instrumentation and measurements of the Northeast Corridor, and gave the greenhouse gas analysis for vertical gradients and seasonal cycles in the urban and rural areas. Besides, this paper shares about 4 years greenhouse gas observation data (CO<sub>2</sub>, CH<sub>4</sub>, CO) of 23 sites. Overall, this manuscript is clear and well written.*

We thank the reviewer for their reading of the paper and comments, addressed below.

*However, following questions are needed to answer:*

- (1) This paper provides the observation data from 2015 to 2018. I think the short observation time and few observation stations are the weaknesses of this paper. There should be other observation*

*data in the selected urban area in this study. So, I suggest that the author compare with other data and describe the characteristics and innovation points of this data.*

To our knowledge, there are no other stationary, in-situ, CO<sub>2</sub>/CH<sub>4</sub> concentration measurements being made in ambient air in the Washington DC/Baltimore region. The NOAA/ESRL tall tower network does measure CO<sub>2</sub> continuously at 2 sites within our regional domain: a tower in Maine and one in Virginia (Shenandoah National Park), in addition to flask measurements of both CO<sub>2</sub> and CH<sub>4</sub> at these sites and as mentioned in our paper at MSH and LEW. We have compared with the flask measurements in Section 3.6. We have compared our measurements with the Maine and Virginia towers, as well, but believe such a comparison of observations at different locations and influenced by different surface fluxes is beyond the scope of this paper, which is focused in presenting the data that we have and describing our processing and data quality methods. We do not claim that these are innovative, but are presenting them for transparency to potential users of the data. We also point out that although our record is currently only 4 years, we plan to continue to update the data repository annually, as we intend for this to be a long-term record. We did not believe it was appropriate to wait for a longer record before making the data (and methods) public.

*(2) What's the differences between single-point calibration and multiple-point calibration? What's the reference data when you did single-point and multiple-point calibration?*

A single-point calibration uses only a single known value to derive the calibration curve of the instrument. This value is from sampling a standard tank with known concentration. When a multiple point calibration is used, more than one standard is used, typically one at ambient level (referred to as “calibration standard (cal)” in the text) and one at a higher concentration (referred to as a “high-concentration standard (hstd)” in the text). The text in Sections 3.3 and 3.4 describe the different methodologies in detail, and we have now added a sentence in the beginning of each of these sections defining what we mean by single-point and multiple-point calibration, to clarify this distinction. All of our standards are referenced to World Meteorological Organization scales (L195-196 in the new draft).

*(3) Is there any quality flag in the observation data?*

No, there is not. In lieu of a quality flag, we have opted to provide a numerical uncertainty on each observation, derived as described in the text. We believe this is superior to providing a flag, as it provides the user more information. We do not report data that is of such poor quality that it would not be able to be used in any analysis (for example, during times when a known leak has occurred from the room).

# Greenhouse gas observations from the Northeast Corridor tower network

Anna Karion<sup>1</sup>, William Callahan<sup>2</sup>, Michael Stock<sup>2</sup>, Steve Prinzivalli<sup>2</sup>, Kristal R. Verhulst<sup>3</sup>, Jooil Kim<sup>4</sup>, Peter K. Salameh<sup>4</sup>, Israel Lopez-Coto<sup>5</sup>, James Whetstone<sup>1</sup>

<sup>1</sup>Special Programs Office, National Institute of Standards and Technology, Gaithersburg, MD, USA  
<sup>2</sup>Earth Networks, Inc., Germantown, MD, USA  
<sup>3</sup>NASA Jet Propulsion Laboratory, California Institute of Technology, Pasadena, CA, USA  
<sup>4</sup>Scripps Institution of Oceanography, University of California San Diego, La Jolla, CA, USA  
<sup>5</sup>Engineering Laboratory, National Institute of Standards and Technology, Gaithersburg, MD, USA

Correspondence to: Anna Karion (Anna.Karion@nist.gov)

**Abstract.** We present the organization, structure, instrumentation, and measurements of the Northeast Corridor greenhouse gas observation network. This network of tower-based in-situ carbon dioxide and methane observation stations was established in 2015 with the goal of quantifying emissions of these gases in urban areas in the north-eastern United States. A specific focus of the network is the cities of Baltimore, Maryland, and Washington, D.C., USA, with a high density of observation stations in these two urban areas. Additional observation stations are scattered throughout the northeast US, established to complement other existing urban and regional networks and to investigate emissions throughout this complex region with a high population density and multiple metropolitan areas. Data described in this paper are archived at the National Institute of Standards and Technology and can be found at <https://doi.org/10.18434/M32126> (Karion et al., 2019).

## 1 Introduction

As the population of cities grows globally due to trends toward urbanization, so does their relative contribution to global anthropogenic greenhouse gas (GHG) budgets (Edenhofer O., 2014; O'Neill et al., 2010). City governments are making commitments to reduce their emissions of GHGs through various sustainability and efficiency measures and coordination with organizations like the C40 Climate Leadership Group ([www.c40.org](http://www.c40.org)), the Global Covenant of Mayors for Climate and Energy ([www.globalcovenantofmayors.org](http://www.globalcovenantofmayors.org)), and others. These organizations require individual cities to conform to certain standardized mechanisms and practices for reporting their carbon emissions. City governments rely on inventories compiled using data on fuel use, energy usage, etc. to estimate their total emissions and changes over time, and to determine the efficacy of various emissions mitigation policies. Analysis of atmospheric measurements provides additional useful information to such efforts, by confirming inventory estimates (Sargent et al., 2018; Lauvaux et al., 2016), detecting trends (Mitchell et al., 2018), or estimating emissions that are not well quantified using inventory methods, such as methane emissions (McKain et al., 2015; Ren et al., 2018; Lamb et al., 2016; Yadav et al., 2019). Several urban top-down measurement efforts are underway in various

Deleted: s

Deleted: northeast



35 cities that include networks of observations, often in-situ CO<sub>2</sub> and CH<sub>4</sub> measurements from rooftops or towers (Verhulst et al.,  
2017; Xueref-Remy et al., 2018; Bares et al., 2019), or using other long-path and remote sensing methods (Waxman et al.,  
2019; Hedelius et al., 2018; Wong et al., 2016; Pillai et al., 2016).

The National Institute of Standards and Technology (NIST) has partnered with other federal, private, and academic institutions  
to establish three urban testbeds in the United States: the Indianapolis Flux Experiment (INFLUX, [influx.psu.edu](http://influx.psu.edu)), the Los  
40 Angeles Megacities Carbon Project ([megacities.jpl.nasa.gov](http://megacities.jpl.nasa.gov)), and the Northeast Corridor (NEC,  
[www.nist.gov/topics/northeast-corridor-urban-test-bed](http://www.nist.gov/topics/northeast-corridor-urban-test-bed)). The goals of the urban testbeds are to develop and refine techniques  
for estimating greenhouse gas emissions from cities and to understand the uncertainty of emissions estimates at various spatial  
and temporal scales (e.g., whole city annual emissions vs. 1-km weekly emissions). Recent results from the longest-running  
testbed, INFLUX, show that whole city emissions can be estimated using three different methods to within 7% (Turnbull et  
45 al., 2019).

The Northeast Corridor (NEC) was established in 2015 as the third NIST urban testbed. The goals for this project are to  
demonstrate that top-down atmospheric emissions estimation methods can be used in a domain that is complicated by many  
upwind and nearby emissions sources in the form of surrounding urban areas. The objective is to isolate the anthropogenic  
50 GHG emissions from urban areas along the U.S. East Coast from many confounding sources upwind (cities, oil and gas  
development, coal mines, and power plants) and from the large biological CO<sub>2</sub> signal from the highly productive forests nearby  
and within the cities. The presence of highly vegetated areas such as urban parks, local agriculture, and managed lawns is  
expected to dominate the CO<sub>2</sub> signal in summertime, as has been found in Boston, Massachusetts (Sargent et al., 2018). The  
NEC project has a current focus on the urban areas of Washington, D.C. and Baltimore, Maryland, U.S.A., with existing plans  
55 to expand northward to cover the entire urbanized corridor of the northeast U.S., including the cities of Philadelphia and New  
York City, and eventually linking up with existing measurement stations in Boston, Massachusetts (McKain et al., 2015;  
Sargent et al., 2018).

The NEC project includes multiple measurement and analysis components. The backbone of the NEC project is a network of  
60 in-situ CO<sub>2</sub> and CH<sub>4</sub> observation stations with continuous high-accuracy measurements of these two greenhouse gases. In  
addition, periodic flight campaigns of multiple weeks each year are conducted by the University of Maryland (FLAGG-MD,  
[www.atmos.umd.edu/~flaggmd](http://www.atmos.umd.edu/~flaggmd)) and Purdue University  
(<https://www.science.purdue.edu/shepson/research/ALARGreenhouseGas/>), focusing on wintertime observations of CO<sub>2</sub>,  
CH<sub>4</sub>, CO, O<sub>3</sub>, SO<sub>2</sub>, NO<sub>2</sub>, from instrumented aircraft (Ren et al., 2018; Salmon et al., 2018; Lopez-Coto et al., 2019b). The use  
65 of low-cost CO<sub>2</sub> sensors is also being investigated in Washington, D.C., with work focusing on calibration and determination  
of long-term stability of inexpensive non-dispersive infrared (NDIR) sensors with potential for use in CO<sub>2</sub> data assimilation  
techniques (Martin et al., 2017). The NEC project also includes an extensive modelling component. First, high-resolution

Deleted: agricultural areas and

70 meteorological modelling (using the Weather Research and Forecast (WRF) model) is being conducted (Lopez-Coto et al.,  
2019a), with output coupled to Lagrangian dispersion models such as STILT (Lin et al., 2003; Nehrkorn et al., 2010) and  
HYSPLIT (Stein et al., 2015). These transport and dispersion models are used to interpret observations from both aircraft and  
tower stations and in atmospheric inverse analyses to estimate fluxes of CO<sub>2</sub> and CH<sub>4</sub> from the cities of Washington, D.C. and  
Baltimore, Maryland (Lopez-Coto et al., in prep; Ghosh et al., in prep.). A high-resolution fossil-fuel CO<sub>2</sub> inventory, Hestia,  
is also being developed for this project (Gurney et al., 2012; Gurney et al., 2019).


75 Here we focus on the high-accuracy tower observation network and associated data collection and processing methods. Section  
2 describes the tower network design and characterizes the different site locations; Section 3 describes the measurement  
methods, instrumentation, and calibration; Section 4 presents the uncertainty derivation for the measurements; and finally,  
Section 5 presents some of the observations from the current record.

80 **2 Network design and site characterization**

The NEC project includes 29 observation stations, all managed and operated by Earth Networks, Inc <sup>1</sup>.  
(www.earthnetworks.com/why-us/networks/greenhouse-gas). Ten stations were existing Earth Networks (EN) measurement  
sites in the northeast U.S. that became part of the NEC project in 2015. Nineteen stations were established (or will be  
established) specifically for the NEC project, with site locations identified by NIST. Sixteen of these station locations were  
85 chosen to be used for emissions estimation in a domain around Baltimore and Washington, D.C. (red boundary, Fig. 1) using  
inverse modelling techniques (Lopez-Coto et al., 2017; Mueller et al., 2018). Three others are in Mashpee, MA, Philadelphia,  
PA, and Waterford Works, NJ. As of publication, 14 of these 19 have been established, with delays occurring due to difficulty  
finding suitable tower locations to agree to house the systems. The hardware and software operating all the sites is identical  
with few exceptions as noted in the text.

Deleted: 3

<sup>1</sup> Certain commercial equipment, instruments, or materials are identified in this paper in order to specify the experimental  
procedure adequately. Such identification is not intended to imply recommendation or endorsement by the National Institute  
of Standards and Technology, nor is it intended to imply that the materials or equipment identified are necessarily the best  
available for the purpose.

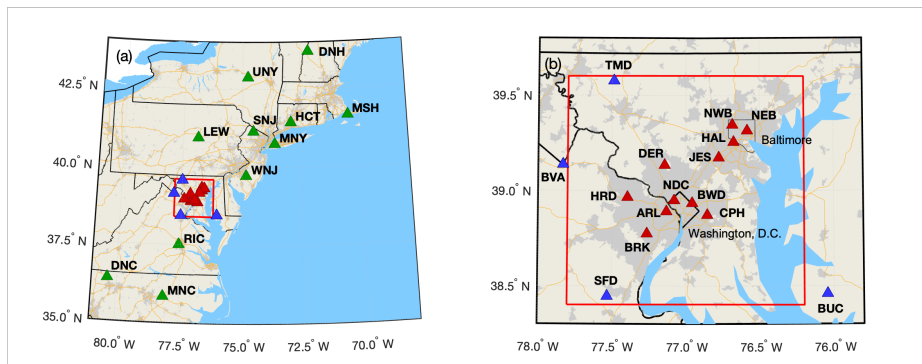

**Figure 1. Locations of Northeast Corridor (NEC) established tower-based observations, corresponding to Table 1. The red rectangle indicates the modelling analysis domain. Light grey shading indicates census-designated urban areas; yellow lines are interstate highways; black boundaries are state lines, with a thinner black line showing the City of Baltimore. Green triangles indicate regional sites, red triangles indicate urban sites, while blue triangles are more rural or background sites surrounding the Washington/Baltimore domain. (a) Regional map. (b) Inset focusing on Washington, D.C., and Baltimore, Maryland. All map data layers obtained from either Natural Earth (naturalearthdata.com) or U.S. Government sources (www.census.gov) and are in the public domain.**

The initial design of the core urban Baltimore/Washington network was focused on optimizing tower site locations with the goal of reducing uncertainty in estimating anthropogenic CO<sub>2</sub> emissions from Washington, D.C., and Baltimore using an atmospheric inversion model (Lopez-Coto et al., 2017). Twelve communications towers were identified as part of that study as ideal locations for measurements. Actual measurement sites were sometimes established at locations near the ideal study location usually due to logistical difficulties obtaining leases at the ideal tower sites. A second design study determined ideal locations for background stations, i.e. observation station locations that would aid in the determination of background CO<sub>2</sub> entering the analysis domain (Mueller et al., 2018). Four stations were identified as part of that study; an existing EN site in Bucktown, MD, serves as a fifth background station southeast of the analysis domain (Fig. 1). Although inlet heights were desired to be 100 m above ground level (agl), often shorter towers were used due to the lack of availability of tall towers in ideal locations; the shortest tower in this network has the uppermost inlet at 38 m agl (HRD). Table 1 indicates details and locations of each site.

115 Table 1. Northeast Corridor Site List. Sites lacking location information are still in the planning phase, with no assigned site code or exact location. \*If a station was established prior to the beginning of the project, its established date is listed as 1/2015, the start date of the project. Data prior to this date is not part of the NIST data release.

Site Code	EN Site ID	Location	Latitude	Longitude	Elev. (m)	Intake Heights (m)	Measurements	Est. (mo./yr.)
Northeast Corridor Regional Sites (12)								
DNC	GHG12	Danbury, NC	36.3769	-80.3689	703	100/50	CO <sub>2</sub> , CH <sub>4</sub>	1/2015*
MNC	GHG15	Middlesex, NC	35.8313	-78.1453	74	213/50	CO <sub>2</sub> , CH <sub>4</sub>	1/2015*
RIC	GHG18	Richmond, VA	37.5088	-77.5761	104	95/50	CO <sub>2</sub> , CH <sub>4</sub>	1/2015*
SNJ	GHG19	Stockholm, NJ	41.1436	-74.5387	406	53/42	CO <sub>2</sub> , CH <sub>4</sub>	1/2015*
HCT	GHG21	Hamden, CT	41.4337	-72.9452	204	100/50	CO <sub>2</sub> , CH <sub>4</sub>	1/2015*
LEW	GHG25	Lewisburg, PA	40.9446	-76.8789	166	95/50	CO <sub>2</sub> , CH <sub>4</sub>	1/2015*
DNH	GHG35	Durham, NH	43.7089	-72.1541	559	100/50	CO <sub>2</sub> , CH <sub>4</sub>	1/2015*
UNY	GHG38	Utica, NY	42.8790	-74.7852	483	45/35	CO <sub>2</sub> , CH <sub>4</sub>	1/2015*
MNY	GHG47	Mineola, NY	40.7495	-73.6384	34	90/50	CO <sub>2</sub> , CH <sub>4</sub>	1/2015*
MSH	GHG54	Mashpee, MA	41.6567	-70.4975	32	46/25	CO <sub>2</sub> , CH <sub>4</sub> , CO	12/2015
WNJ	GHG69	Waterford Works, NJ	39.7288	-74.8441	33	241/201/151/98/43	CO <sub>2</sub> , CH <sub>4</sub>	Planned 2020
		Philadelphia, PA					CO <sub>2</sub> , CH <sub>4</sub>	
Washington, D.C. and Baltimore Urban Sites (12)								
HAL	GHG48	Halethorpe, MD	39.2552	-76.6753	70	58/29	CO <sub>2</sub> , CH <sub>4</sub>	10/2015
ARL	GHG55	Arlington, VA	38.8917	-77.1317	111	92/50	CO <sub>2</sub> , CH <sub>4</sub>	1/2016
NDC	GHG56	Northwest DC	38.9499	-77.0796	128	91/45	CO <sub>2</sub> , CH <sub>4</sub>	12/2015
NWB	GHG58	NW Baltimore, MD	39.3445	-76.6851	135	55/27	CO <sub>2</sub> , CH <sub>4</sub>	9/2016
NEB	GHG59	NE Baltimore, MD	39.3154	-76.5830	44	67/50	CO <sub>2</sub> , CH <sub>4</sub>	9/2016
JES	GHG60	Jessup, MD	39.1723	-76.7765	67	91/49	CO <sub>2</sub> , CH <sub>4</sub>	5/2016
DER	GHG63	Derwood, MD	39.1347	-77.1419	125	54/30	CO <sub>2</sub> , CH <sub>4</sub>	5/2018
CPH	GHG66	Capitol Heights, MD	38.8707	-76.8537	50	44/24	CO <sub>2</sub> , CH <sub>4</sub>	2/2018
HRD	GHG67	Herndon, VA	38.9663	-77.3935	120	38/27	CO <sub>2</sub> , CH <sub>4</sub>	10/2017
BWD	GHG64	Brentwood, MD	38.9343	-76.9556	17	51/33	CO <sub>2</sub> , CH <sub>4</sub>	8/2018
BRK	GHG68	Burke, VA	38.7742	-77.2631	111	40/24	CO <sub>2</sub> , CH <sub>4</sub>	Planned 2020
		Southeast DC					CO <sub>2</sub> , CH <sub>4</sub>	
Washington, D.C. and Baltimore Background Sites (5)								
BUC	GHG01	Bucktown, MD	38.4597	-76.0430	3	75/46	CO <sub>2</sub> , CH <sub>4</sub>	1/2015*
TMD	GHG61	Thurmont, MD	39.5768	-77.4881	561	113/49	CO <sub>2</sub> , CH <sub>4</sub>	5/2017
SFD	GHG65	Stafford, VA	38.4459	-77.5300	77	152/100/50	CO <sub>2</sub> , CH <sub>4</sub>	7/2017
BVA	GHG62	Bluemont, VA	39.1379	-77.8326	486	50/111	CO <sub>2</sub> , CH <sub>4</sub>	2/2020
		Delta, PA					CO <sub>2</sub> , CH <sub>4</sub>	

Deleted: mm

Deleted: yyyy

120 The stations in Table 1 are all situated in areas with different land use. Even among the Washington D.C. and Baltimore area urban stations, the degree of urban intensity varies, from densely urbanized areas (such as northeast Baltimore, NEB) to dense and moderately developed suburbs (such as Capitol Heights (CPH), and Derwood (DER), both suburbs of Washington, D.C.

located in Maryland). Fig. 2 indicates the intensity of development from the US Geological Survey (USGS) 2016 National Land Cover Database (Yang et al., 2018) surrounding each urban station in the Washington DC/Baltimore network.

Deleted: 1

Deleted: (Homer et al., 2015)

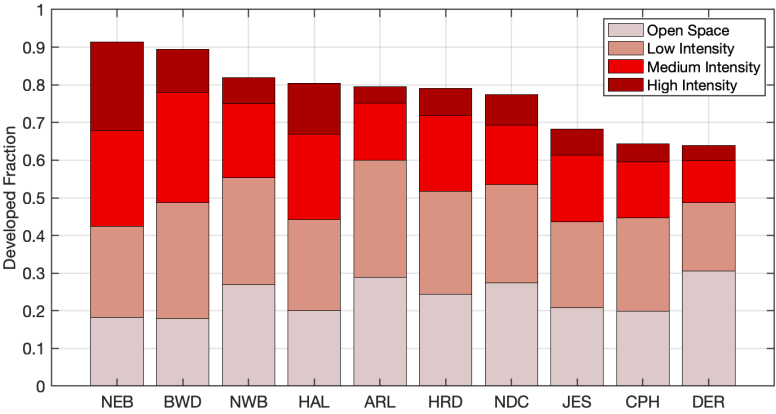


Figure 2. Fraction of developed land cover (from the 2016 National Land Cover Database (NLCD)(Yang et al., 2018)) within 5 km of each observation station in the urban regions of Washington, D.C. and Baltimore, MD.

Deleted: 1

Deleted: (Homer et al., 2015)

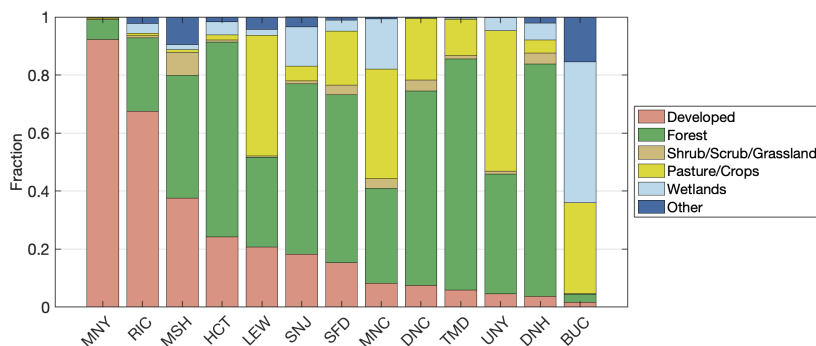


Figure 3. Average fraction of land cover type within 5 km of regional tower sites in the Northeast Corridor network, in order of decreasing developed land. Several NLCD classifications have been grouped for clarity (e.g. Developed includes Open Space, Low, Medium, and High Intensity Developed land). SFD, TMD, and BUC are sites established to help characterize background conditions for the Washington D.C. and Baltimore urban network.

Similar variability in land cover for the regional stations exists, as indicated in Fig. 3. The sites established to characterize background conditions for the urban network in Washington, D.C. and Baltimore (SFD, TMD, BUC) are in areas with little development: SFD and TMD are both in forested regions, while BUC is near the Chesapeake Bay and large wetland areas. The other regional sites span a range of land cover types from urban (MNY in New York City and RIC in Richmond, VA), to mostly rural and forested (DNH in Durham, NH).

### 3 Carbon dioxide, methane, and carbon monoxide measurements, instrumentation, and calibration

#### 3.1 Instrumentation

The instrumentation contained in the [Earth Networks \(EN\)](#) system module has been described elsewhere (Welp et al., 2013; Verhulst et al., 2017); we will summarize the system here but refer the reader to those publications for further details, including additional equipment and part numbers. Figure 4 indicates the plumbing diagram of the typical tower setup. Three inlet lines reach from the sampling location on the tower into the equipment housed in a full-size rack inside a shed at the base of the tower. Typically, two inlet lines [sample](#) from the topmost level and one [line samples from](#) a lower level on the tower. Stafford, Virginia (SFD) is [one](#) exception with inlets at three different levels (50 m, 100 m, and 152 m), [and a planned tower in New Jersey \(Waterford Works\) will have 5 inlet height levels, as indicated in Table 1](#). At some sites there was no space to house the equipment in existing structures, so small single- or double-rack sized enclosures were purchased and installed. Air is pulled through a filter into the inlet lines (0.953 cm (3/8”) OD Synflex 1300) that are continuously flushed at ~10 L min<sup>-1</sup> by

Deleted: GHG

Deleted: pull air

Deleted: at

Deleted: the

aquarium pumps (Alita AL-6SA). The three air lines are connected to a rotary multi-port valve (MPV; 8-port, VICI, Valco Instruments Co. Inc.) housed within a sample control box (calibration box). Two or three calibration standards are also connected to the MPV with 0.156 cm (1/16") [OD](#) stainless steel tubing. The control system for the MPV directs the air stream to the analyser cycling every 20 minutes through each of the three inlet lines, [so that each inlet is sampled at least once in an hour](#), and every 22 hours through each standard (Section 3.2). The common port of the MPV is connected to a pressure controller that reduces the pressure to 80 kPa (800 mb), after which the sample (either ambient air or air from a standard gas cylinder) enters a 183 cm long Nafion dryer (Permapure, Inc., model MD-050-72S-1) where it is dried to a water vapor mole fraction of ~0.1 % prior to flowing through the cavity ringdown spectroscopic (CRDS) analyser (Picarro, Inc., Model 2301). The lower-than-ambient inlet pressure of 80 kPa is prescribed in order to lower the flow rate of the analyser to ~70 standard cm<sup>3</sup> min<sup>-1</sup>. At Mashpee, Massachusetts (MSH), a CRDS [Picarro](#) Model 2401 analyser is operational, and this is the only site currently also measuring carbon monoxide (CO) in addition to CO<sub>2</sub> and CH<sub>4</sub>. The CRDS analysers report measurements of dry air mole fraction of each gas in air, also known as the mole fraction, i.e., moles of the trace gas per mole of dry air. Throughout, we refer to these measurements in units of μmol mol<sup>-1</sup> for CO<sub>2</sub> and nmol mol<sup>-1</sup> for CH<sub>4</sub> and CO, following the SI recommendations (Bureau International des Poids et Mesures, 2019). Software (GCWerks, Inc.) installed on a separate mini-PC computer at each site controls the run cycle and the MPV selection valve. The data is collected on this computer and sent to the central EN data server, also running GCWerks. All data is processed on the central EN data server but additional post-processing and uncertainty assignment to hourly observations is performed at NIST. As recommended by the [World Meteorological Organization](#) (WMO), the software has the capability of re-processing all the data from the original raw files, thus can accommodate any changes to the assigned values of the standards (due to a reference scale update, for example) at any time (WMO, 2018).

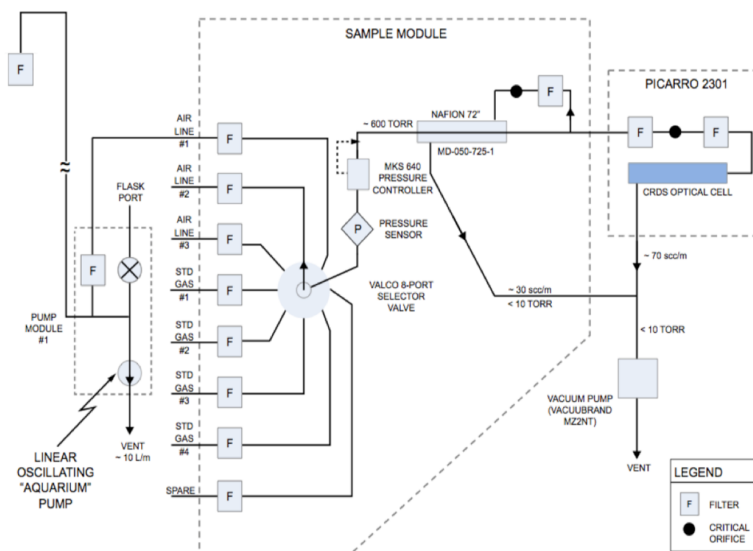


Figure 4. Plumbing diagram for the Earth Networks sampling system implemented at the NEC tower stations. Figure replicated from Fig. S1 in Verhulst et al. (2017), adapted from Welp et al. (2013).

### 3.2 Calibration cylinders

When the Earth Networks GHG monitoring system was established in 2011, each site hosted two calibration cylinders (standards) with ambient level dry air mole fractions as part of the original system design. This continues to be the case at most NEC sites. At the NEC sites, these standards have values close to  $400 \mu\text{mol mol}^{-1}$  dry air  $\text{CO}_2$ ,  $1890 \text{ nmol mol}^{-1}$  dry air  $\text{CH}_4$  and  $115 \text{ nmol mol}^{-1}$  dry air  $\text{CO}$  (at MSH only) and are sampled by the analyser periodically, in a sequence identical to that described for the Los Angeles Megacity network by Verhulst et al. (2017). The standards are purchased from the WMO Central Calibration Laboratory (CCL), the National Oceanographic and Atmospheric Administration's Earth System Research Laboratory (NOAA/ESRL) Global Monitoring Division in Boulder, Colorado, USA, where they have been calibrated on the WMO scales (X2007 for  $\text{CO}_2$ , X2004A for  $\text{CH}_4$ , and X2014A for  $\text{CO}$  (Zhao et al., 1997; Dlugokencky et al., 2005; Novelli et al., 2003)). One of these two cylinders serves as a standard for calibration and drift-correction while the second serves as a target tank or check standard. The target tank is used for data-quality checks and uncertainty calculations (Section 4). The residual of the target tank (the RMS difference between its value assignment when treated as an unknown and its reference value from NOAA) is a critical indicator of data quality and is monitored in order to alert the operators of any general problems

Deleted: in

Deleted: World Meteorological Association (

Deleted: )



in the system such as leaks, mistakes in the assignment of MPV ports, or drift in calibration tank value. In the field, all gas standards are sampled for 20 minutes every 22 hours. In data processing, the first 10 minutes of any tank run are filtered out to allow for the system equilibration, including flushing of the regulator and tubing. In some cases when the standard runs were found not to equilibrate as quickly as desired, 15 minutes of data were filtered, until the problem could be fixed (typically either contamination or inadequate regulator flushing). The first 10 minutes of the ambient air sample following a standard run are also filtered for equilibration, and the first one minute of each 20-minute ambient air run is filtered if it follows another ambient air run (i.e. an inlet switch). The longer flush time is desired for the standard runs because of the need to flush stagnant air remaining in the regulators and tubing when sampling from the cylinder, while the ambient air lines are continuously flushed.

At a few NEC sites (currently BWD and MSH, with more planned), a third gas cylinder is installed at the site to serve as a permanent high-concentration standard (referred to as the high standard), to improve calibration and reduce uncertainties. This standard typically contains air with a mole fraction of CO<sub>2</sub> close to 500 µmol mol<sup>-1</sup>, CH<sub>4</sub> at approximately 2300 nmol mol<sup>-1</sup> to 2500 nmol mol<sup>-1</sup>, and at MSH, CO near 320 nmol mol<sup>-1</sup>. At MSH, this cylinder has been provided directly by NOAA/ESRL, while at BWD this cylinder was purchased as natural whole air from Scott-Marrin, Inc (now Praxair). The Scott-Marrin air is stripped of its original trace gases (CO<sub>2</sub>, CH<sub>4</sub>, CO, hydrocarbons, etc.) with CO<sub>2</sub>, CH<sub>4</sub>, and CO added back in to prescribed values. Several such standards have been purchased with the intent to place them at urban stations to serve as high standards after calibrating them onto the WMO scales. We note that because they are being used together with NOAA/ESRL standards in the field, it is essential that these standards also be assigned values on the same scales. This calibration is transferred in the NIST laboratory using five standards calibrated and purchased from NOAA/ESRL. The CO<sub>2</sub> in the Scott-Marrin cylinders is isotopically different (in terms of the 12 C/13 C ratio in CO<sub>2</sub>) from the ambient air tanks that are filled by NOAA/ESRL at Niwot Ridge, Colorado. However, the calibration is transferred from the NOAA standards to the Scott-Marrin gases using the same model (Picarro 2301) analyser used in the field (i.e. measuring only <sup>12</sup>CO<sub>2</sub>) in the NIST laboratory, effectively cancelling out the error that would be caused by this isotopic mismatch (Chen et al., 2010; Santoni et al., 2014). Thus, the CO<sub>2</sub> values assigned by NIST to these standards are effectively the total dry air mole fraction of CO<sub>2</sub> the cylinders would contain if they were isotopically similar to the NOAA cylinders.

Additional sites in the network also benefit from the improved two-point calibration method in cases where measurements of a high standard were performed prior to analyser deployment (NWB, NEB, JES, TMD, CPH, and HRD). Prior to system installation at these sites, tests were conducted at the EN laboratory in which the designated analyser was set up measuring the calibration standard, target standard, and a high-value standard at ~490 µmol mol<sup>-1</sup> CO<sub>2</sub>, ~2560 nmol mol<sup>-1</sup> CH<sub>4</sub> daily for several days (enough for 3-5 measurements of 20 minutes each). This single high standard cylinder was also calibrated by and purchased from NOAA/ESRL, with assigned values on the WMO scales. These laboratory tests allow the determination of the secondary correction to the instrument response, or sensitivity, as described in Section 3.4.

The high standard gas measurements are used to perform a secondary correction (referred to as a two-point calibration) (Section 3.4) to the original one-point calibration described by Verhulst et al. (2017) and in Section 3.3., reducing the uncertainty of the measurements. We note that while in principle a secondary correction is desirable, and the uncertainty is indeed reduced by its implementation (see Section 4.2), it remains quite small relative to the signals of interest in an urban network. Deployment of high standards at all sites has not yet occurred due to both costs and logistical and operational constraints; for example, at many sites the space available for the equipment is limited and prohibits the installation of a permanent third tank. Thus, we plan to implement a round-robin procedure circulating additional standards at various values through the network to evaluate the calibrations and implement the secondary correction throughout the network. Although the current state of having two different calibration methods co-existing in the network is not ideal, we aim to implement the secondary correction throughout the network as soon as possible.

### 3.3 Drift correction and single-point calibration

Here we describe the calibration and drift correction applied to all the mole fraction data. This single-point calibration uses only a single reference value, that of the calibration standard, to correct the raw mole fractions for each gas. The equations are identical (with a few nomenclature differences) to those found in Verhulst et al. (2017). In the following analysis,  $X'$  denotes a raw dry mole fraction measurement (i.e. a reported value from the CRDS analyser after internal water vapor correction), while  $X$  denotes a mole fraction after some correction has been applied (drift and/or calibration, as described in the equations below). A subscript *cal* indicates the main calibration standard (usually a single ambient level standard tank calibrated by NOAA/ESRL), subscript *std* indicates any other standard tank, *tgt* indicates a standard tank that is being used as a target, and the subscript *air* indicates the sample measurement. Note that within the GCWerks software, the meanings of the abbreviations *cal* and *std* are reversed from what is defined here; we choose to use the nomenclature by Verhulst et al. (2017) here for consistency in the literature. We note that we have changed some nomenclature slightly from Verhulst et al. (2017) for additional clarity and conciseness. We refer to the drift-corrected mole fraction as  $X_{DC}$ , which is noted as  $X_{corr}$  by Verhulst et al. (2017); we refer to the mole fraction after a secondary correction is applied as  $X_{Sc}$ . We also refer to the assigned mole fraction of a standard by the calibration laboratory as  $C$  rather than  $X_{assign}$ . We define the sensitivity  $S$  to be the response of the analyser, or the ratio of the measured to the true value. In the case of the calibration tank, this is the ratio of the raw measured value,  $X'_{cal}$ , to the assigned value of the standard by the calibration laboratory on the WMO scale for the given species,  $C_{cal}$ :

$$S = \frac{X'_{cal}}{C_{cal}} \quad (1)$$

Deleted: in

Deleted: in

Deleted: in

When only a single calibration standard is present (which is the case at most sites in the NEC network), this sensitivity is assumed to be constant across mole fractions, but time-varying. The sensitivity for the calibration tank is thus interpolated in time and applied as a correction for the dry air mole fractions of CO<sub>2</sub> and CH<sub>4</sub> reported by the CRDS analyser ( $X'_{air}$ ):

$$X_{DC,air} = \frac{X'_{air}}{S}, \quad (2)$$

where  $X_{DC,air}$  is the drift-corrected air data. An alternative drift-correction is to use an additive offset, which is also interpolated in time, rather than a sensitivity for drift correction:

$$X_{DC,air} = X'_{air} + (C_{cal} - X'_{cal}). \quad (3)$$

Measurements from MSH that include a high value cylinder suggest that the single tank drift correction performs (very slightly) better using the ratio correction (Eq. 2) than the difference method (Eq. 3) for CO<sub>2</sub> and CH<sub>4</sub>, while the opposite is true for CO (Fig. 5), so the difference method is used only for CO in our network.

The calibration standard mole fractions are interpolated in time between subsequent runs in order to apply the above corrections to the air data, thus removing drift in the instrument's response. This drift-corrected fraction is reported in the hourly data files for sites and time periods where no range of concentrations is available in the standard tanks.

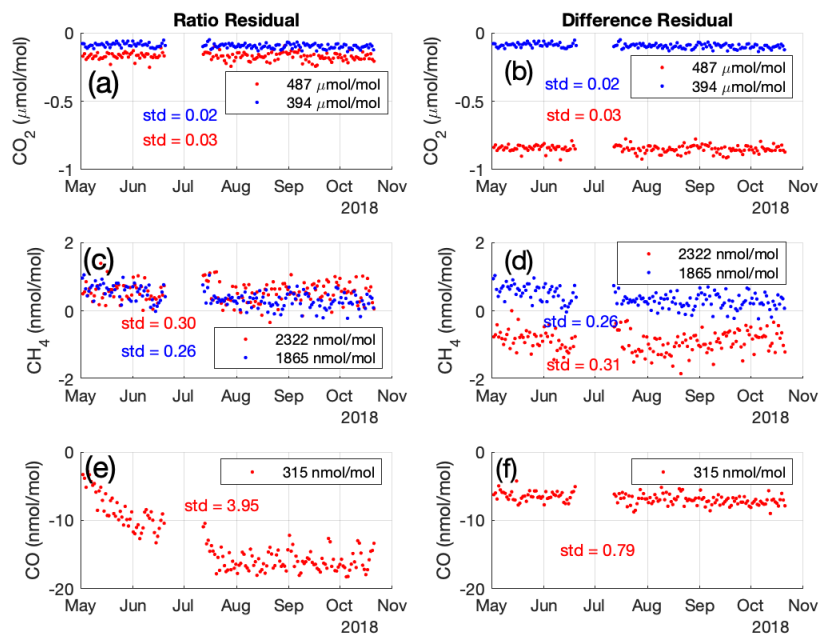


Figure 5. Time series of standard tank run residuals (i.e.  $X_{DC} - C$ ) for  $\text{CO}_2$  (a,b),  $\text{CH}_4$  (c,d) and  $\text{CO}$  (e,f).  $X_{DC}$  is calculated using a single calibration tank (not shown) and the ratio method (Eq. 2) on the left (a,c,e) and the difference method (Eq. 3) on the right (b,d,f). Assigned tank values are shown in the legend; one tank was not calibrated for  $\text{CO}$  so only the residuals of the high concentration tank at  $315 \text{ nmol mol}^{-1}$  are shown. The residual magnitude is smaller for  $\text{CO}_2$  and  $\text{CH}_4$  using the ratio method, but the standard deviations (variability) are similar using both methods. For  $\text{CO}$ , both the magnitude of the residual and also the standard deviation are smaller using the difference equation; the ratio equation does not properly account for the drift in the analyser at the start of the time series (May-June). Data shown are from MSH; a measurement gap exists in July.

### 3.4 Multiple-point calibration

At some sites and for some time periods, a higher-mole-fraction standard is available, and a second-order correction can be made to the instrument sensitivity, accounting for the sensitivity being a function of mole fraction. Usually in the field, this correction employs only one additional standard, the higher-mole-fraction standard, so that it is a two-point calibration; here we describe the general procedure for applying a correction using multiple standards at a range of concentrations. This is applied as a second-order correction to the drift-corrected air data. In general, if a range of standard concentrations is available,

the correction in GCWerks is applied as described below. First, a drift-corrected sensitivity ( $S_{DC}$ ) is calculated for each standard when it is measured, which is the ratio of the drift-corrected mole fraction of that standard ( $X_{DC,std}$ , based on Eq. (2) for CO<sub>2</sub> and CH<sub>4</sub> or Eq. (3) for CO) to its assigned value:

$$S_{DC,std} = \frac{X_{DC,std}}{c_{std}} \quad (4)$$

For the calibration standard, this value is necessarily equal to 1, but measurements of standard tanks with different assigned values indicate that the instrument sensitivity is dependent on the composition of the sample gas (in this case, the mole fraction of the standard tank). In laboratory calibrations, we find that the drift-corrected sensitivity defined in Eq. (4) is a linear function of the mole fraction ratio to the calibration gas ( $X'/X'_{cal}$ ), so we use a linear fit to the range of standards to determine the slope  $m$  and intercept  $b$ :

$$S_{DC} = m \left( \frac{X'}{X'_{cal}} \right) + b. \quad (5)$$

In this fit, we force  $m + b = 1$  by fitting a slope  $m$  and then setting  $b = 1 - m$  in order to maintain the proper relationship for the calibration tank itself, when  $S_{DC,cal} = 1$ . Applying this fit to the air data, the final air mole fraction  $X_{SC,air}$  is determined from:

$$X_{SC,air} = \left( \frac{X_{DC,air}}{S_{DC}} \right). \quad (6)$$

In the NEC tower network, there are no sites with multiple standard tanks at various concentrations. At several sites, there are measurements of a single high-concentration standard ( $hstd$ ) in addition to the calibration and target standards. The high standard measurements are either performed in the laboratory before the instrument is deployed to the field, or in the field if the third standard is permanently installed (Section 3.2). The above secondary correction is applied using only two tanks to perform the fit and obtain the drift-corrected sensitivity. In this special case, the fit has zero degrees of freedom with no residuals. The correction parameters (slope and intercept) are determined based on measurements over time or single measurements in the laboratory prior to a specific analyser deployment. The correction is applied to the data from the site for a time period that is specified, i.e. it is not automatically applied based on daily measurements of the high standard. It is determined by the science team and applied for the time period that is appropriate. This is necessary to avoid applying the wrong correction if an analyser is replaced or if there are changes made to the analyser that might affect its calibration response. At eight sites where a high standard has been measured at any point (MSH, BWD, NWB, NEB, JES, TMD, CPH, and HRD), slopes and intercepts have been determined and the correction has been applied to the data. At stations with no high standard measurements we rely on the single tank drift-correction described in Section 3.3.

Formatted: Font: Not Italic

Formatted: Font: Not Italic

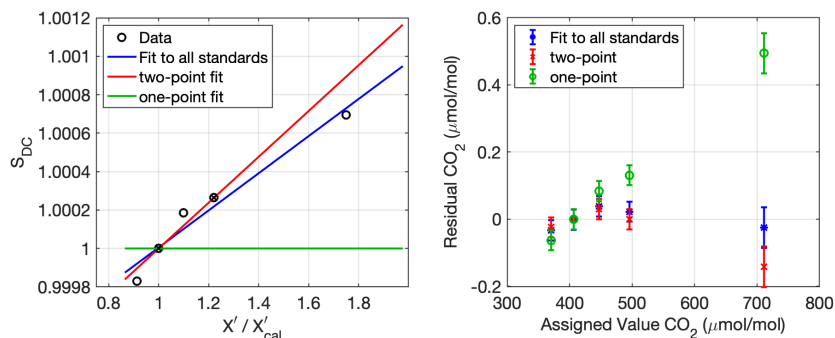


Figure 6. Example of a laboratory calibration of a CRDS analyser with five standards of different assigned CO<sub>2</sub> mole fractions. (a) Secondary correction of drift-corrected sensitivity using either two (red) or all five (blue) standards. Green line at 1 indicates the assumed sensitivity when only a single standard is used. (b) Residual of each type of fit; error bars represent 1-sigma reproducibility stated by NOAA/ESRL. The simple single-tank drift correction results in the green circles as residuals; these residuals were used in the Verhulst et al. (2017) analysis to estimate the extrapolation uncertainty of the single-point correction. Red x symbols are the residuals of a fit to two standards, and blue asterisks the residuals of the fit to all five standards.

Laboratory tests with multiple standards with the same model instrument used in the network (Picarro 2301) were performed to assess the relative improvement of a fit to two standards over a fit to a single standard. Figure 6(a) illustrates the fit of the drift-corrected sensitivity ( $S_{DC}$ ) to two standards (red line) vs. all five standards (blue line) for CO<sub>2</sub>, along with corresponding residuals in (b). As was shown by Verhulst et al. (2017) for multiple analysers, the fit to a single standard has a linearly varying residual that is typically 0.1 to 0.2  $\mu\text{mol mol}^{-1}$  at 100  $\mu\text{mol mol}^{-1}$  above the calibration standard value (green circles, (b)). The average slope of the one-point residual from multiple tests is used by Verhulst et al. (2017) to estimate the uncertainty of the single-point calibrations (called the extrapolation uncertainty,  $U_{extrap}$ ), described in Section 4.1. Performing the additional correction using a high standard shows improvement in the residuals of the fit (Fig. 6(b)), while using all five standards only improves the residuals incrementally. The two-point correction (red) in this figure was applied using the 406  $\mu\text{mol mol}^{-1}$  tank as the calibration and the 496  $\mu\text{mol mol}^{-1}$  tank as the high standard; thus, the measurement at  $\sim 711 \mu\text{mol mol}^{-1}$  is an extrapolation of the two-point fit. The residuals at values between the calibration and high standard are very small, equal to or below the uncertainty (reproducibility) of the scale reported by NOAA; this was confirmed for other analysers and other species.

The improvement in calibration from the secondary correction is quite small compared to the signals and gradients of interest in our network. For example, when considering the enhancement between the rural site TMD and a polluted urban site, HRD, the calibration method makes a median difference of 0.4% for CO<sub>2</sub> and 0.3% for CH<sub>4</sub> (over all hours over one calendar year).

Deleted: in Verhulst et al. (2017)

We intend to implement this calibration throughout the network through deployment of additional standards and periodic traveling calibrations when permanent installation is not practical for logistical reasons.

### 3.5 Data quality and processing

Automated data filtering is performed within the GCWerks software with parameters set identically to those extensively described ~~by~~ Verhulst et al. (2017) for the Los Angeles Megacities network. For example, individual measurements that are outside limits for cavity temperature, cavity pressure, and during transitions between sample streams are filtered. The data is automatically downloaded from each site's Linux PC to the central EN Linux server, where it is processed automatically every hour. We note that all mole fraction assignments can be re-calculated by the GCWerks software from the archived raw files if required due to a change in filtering or flagging, or in assignment of a standard tank, for example, in the case of a scale change by the CCL. The data files exported from GCWerks contain 1-minute, 5-minute, and 20-minute averaged air data, as well as separate files with 1 min, 5 min and 20 min averages of all standard runs. Individual or groups of 1-minute data points are flagged manually by EN or NIST researchers in the GCWerks if there is cause (e.g. a site visit that disrupted the sample stream, or a leak in the line, etc.). Some additional quality checking is performed at this stage, specifically checking for systematic differences between measurements from two different inlets at the same height and checking for inconsistency in the difference between measurements at different heights. For example, if the lower inlet is systematically reading lower CO<sub>2</sub> than the upper inlet, especially at night, it would indicate that the inlet lines may be switched (mislabelled) or there is a leak occurring. These indications would be then verified by a field technician and the data either re-processed or flagged accordingly. Filtered and flagged points are excluded from the subsequent averaging exported by GCWerks. The 1-minute air data files and 20-minute standards data files are post-processed at NIST to calculate hourly averages from each air inlet level, and to assign uncertainties to each hourly average (Section 4). Data from the two top-level inlets, when at the same height, are combined for inclusion into the hourly average. Thus, because of the 20-minute cycling through the three inlets (Section 3.1), hourly averages at the upper inlet include approximately 40 minutes of measurements, and for the lower inlet only 20 minutes (fewer if a calibration occurs). Publicly released hourly data from this second-level processing is contained in separate files for each species and each level for each site. The files contain the hourly average mole fraction (i.e. mole fraction) along with its uncertainty, standard deviation, and number of 1-minute air measurements included in that particular hourly average. These last two quantities are provided so users can determine the standard error of the hourly means, in terms of the observed atmospheric variability within the hour. Observations at higher frequency and standard tank data are available by request.

### 3.6 Comparison with measurements of NOAA whole air samples

Ongoing whole air sampling in flasks at several of the NEC sites by NOAA Earth System Research Laboratory's Global Monitoring Division (NOAA/GMD) provides a check on the quality of the in-situ measurements. The flasks are ~~analyzed~~ for CO<sub>2</sub>, CH<sub>4</sub>, and CO, among a suite of additional trace gases and isotopes which are not discussed here. The flask sampling equipment draws air from one of the inlet lines at the top of the tower that is also shared by the in-situ continuous measurement

Deleted: in

Deleted: measured

395 equipment (as indicated by the flask port in Fig. 4). The flask measurements are otherwise independent from the continuous in-situ measurements. Flask samples at LEW and MSH are collected over a period of 10-30 seconds (Sweeney et al., 2015; Andrews et al., 2014), while flask samples integrated over one hour are collected at TMD, NEB, NWB, and BWD (Turnbull et al., 2012) specifically as part of the Northeast Corridor project. All flask samples are taken in mid-afternoon local time (usually 19 UTC). Comparisons at all the sites with available data indicate good agreement with little or no bias in the mean  
400 over the time period of the comparison, with the exception of CO at MSH, which shows a consistent bias with a median of 8 nmol mol<sup>-1</sup>, which is larger than the 1-sigma uncertainty assigned to either measurement (described in Section 4) and the standard deviation of the offsets themselves (Table 2). Target tank residuals for CO in this period range from 1 to 7 nmol mol<sup>-1</sup>, depending on the cylinders installed, indicating that some of this difference at least is caused by the calibration standard assigned value (possibly due to cylinder drift in time between the NOAA calibration and deployment to the site). Similar  
405 differences between NOAA flasks and in-situ CO measurements were reported in Indianapolis (Richardson et al., 2017). This result requires further investigation, by sending the cylinders for recalibration and/or deploying different standards to the station. A significant bias in the CH<sub>4</sub> offset at NWB is also apparent, at a mean of -5.5 nmol mol<sup>-1</sup> but a median of -1.7 nmol mol<sup>-1</sup>, the result of a single outlier at -30 nmol mol<sup>-1</sup>, but with only 17 samples compared. BWD did not have any samples at the time of this writing so we compare only LEW, MSH, TMD, NEB, and NWB.

410 Table 2 also reports the mean uncertainty, intended as a metric for comparison of the standard deviation of the offsets. For each flask sample, this uncertainty is the quadrature sum of the continuous data uncertainty (described in Section 4) at that hour, the standard deviation of the 1-minute averages in the continuous data during that hour, and the uncertainty expected in the flask measurement, estimated here as 0.04 μmol mol<sup>-1</sup> for CO<sub>2</sub>, 1.12 nmol mol<sup>-1</sup> for CH<sub>4</sub>, and 0.59 nmol mol<sup>-1</sup> for CO.  
415 The values for the flask uncertainty are from Table 1 in Sweeney et al. (2015), which reports the average offset between measurements of surface network and 12-pack flasks (such as those used for the NEC) filled with identical air after a short-term storage test. For CO<sub>2</sub>, flask offsets can be larger than indicated by those dry-air laboratory tests (Sweeney et al., 2015; Andrews et al., 2014; Karion et al., 2013), but we use 0.04 μmol mol<sup>-1</sup> regardless, because the average uncertainty in Table 2 is dominated by the atmospheric variability term and increasing the CO<sub>2</sub> uncertainty in the flasks to 0.1 μmol mol<sup>-1</sup> (for  
420 example) does not change the values significantly.

Standard deviations of the offsets (Table 2) show that there is quite a bit of scatter in the results, especially at the more urban sites that exhibit a lot of variability in the continuous data. For comparison, Turnbull et al. (2015) report agreement for CO<sub>2</sub> between the same flask system and continuous in-situ measurements in Indianapolis as 0.04 μmol mol<sup>-1</sup> (mean) with a standard  
425 deviation of 0.38 μmol mol<sup>-1</sup>, somewhat smaller than observed at our sites. The standard deviation of offsets is usually lower than the average uncertainty, however, with the exception of CO<sub>2</sub> at MSH and LEW, the two sites for which the flask samples are not integrated over an hour. It is likely that the large variability seen over an hour is the reason for the large scatter in the



offsets. Because the in-situ continuous measurements do not cover the entire hour of sampling (at the top level, the hourly average is typically the mean of only 40 minutes), the variability may not be captured in the mean uncertainty reported here, and has a larger impact on the comparison than it would if the continuous hourly average was based on the full hour of observations. For example, a large plume or spike in concentration during a given hour might occur while the continuous system is sampling from the lower inlet, and thus would not be included in the hourly average from the continuous system, while it would be included in the full one-hour flask sample.

**Table 2. Offsets (in-situ - flask) between continuous in-situ and NOAA/GMD flask measurements. CO<sub>2</sub> offsets are reported in μmol mol<sup>-1</sup>, CH<sub>4</sub> and CO in nmol mol<sup>-1</sup>. Continuous in-situ CO is only measured at MSH. The average uncertainty column for each gas indicates the 1-sigma uncertainty (summed in quadrature over flask uncertainty, in-situ uncertainty, and atmospheric variability over the hour) averaged over the flask samples. See text for discussion.**

Site	Number of flask samples	CO <sub>2</sub> mean offset	CO <sub>2</sub> median offset	CO <sub>2</sub> standard deviation of offsets	CO <sub>2</sub> mean unc.	CH <sub>4</sub> mean offset	CH <sub>4</sub> median offset	CH <sub>4</sub> standard deviation of offsets	CH <sub>4</sub> mean unc.	CO mean offset	CO median offset	CO standard deviation of offsets	CO mean unc.
MSH	163	0.02	-0.02	0.65	0.43	-0.2	-0.2	2.3	2.1	-9.0	-8.2	5.9	6.0
LEW	315	0.01	-0.07	0.88	0.68	1.1	0.4	8.4	7.8	--	--	--	--
TMD	80	0.17	0.15	0.51	0.69	0.0	0.5	5.5	5.2	--	--	--	--
NEB	32	-0.09	0.08	0.75	1.02	-0.5	0.6	6.8	13.4	--	--	--	--
NWB	17	-0.01	0.02	0.73	0.99	-5.5	-1.7	9.8	8.3	--	--	--	--

#### 4 Uncertainty

The data set includes an uncertainty estimate on each hourly average data point, consistent with recommendations from the WMO (WMO, 2018). This uncertainty is our estimate of the uncertainty of the measurement itself and does not include atmospheric variability or assess the representativeness of the measurement of a true hourly mean.

##### 4.1 Uncertainty of hourly mole fraction data

Verhulst et al. (2017) outlined a method for calculating an uncertainty on mole fraction measurements when using the single tank calibration correction (drift correction). Here we present a brief overview but refer the reader to that paper for further details. All uncertainties are standard uncertainties, i.e. 1-sigma or  $k=1$ . In the analysis below, we assume independent uncorrelated error components, given no evidence to the contrary and no physical reason to believe that they should be correlated; therefore we sum the various components of the uncertainty in quadrature.

The uncertainty on the final mole fractions ( $U_{air}$ ) is expressed as the quadrature sum of several uncertainty components:

$$(U_{air})^2 = (U_{extrap})^2 + (U_{H2O})^2 + (U_M)^2 \tag{7}$$

where  $U_{H2O}$  is the uncertainty due to the water vapor correction,  $U_M$  is a measurement uncertainty, and  $U_{extrap}$  is the uncertainty of the calibration fit when assigning values relative to a single standard tank (more detail on this can be found later in this section and in the following section).  $U_M$  encompasses errors due to drifting standard tank measurements ( $U_b$ ), short-term precision ( $U_p$ ), and error in the calibration standard's mole fraction assignment by the calibration laboratory ( $U_{scale}$ ):

$$(U_M)^2 = (U_p)^2 + (U_b)^2 + (U_{scale})^2. \quad (8)$$

Here we note that  $U_p$  for CO<sub>2</sub> and CH<sub>4</sub> is assigned as described by Verhulst et al. (2017), as the standard deviation of the individual measurements during each 1-minute average during a calibration, but for CO it is assigned as the standard error (standard deviation divided by the square root of the number of samples in the mean), based on Allan variance tests (not shown) indicating that the precision of the CO measurement increases with the number of points used in the average. If no calibrations have been performed over an entire calendar year,  $U_p$  is set to the 10<sup>th</sup> percentile of the standard deviation of air measurements, and  $U_b$  is set to a default value of 0.1  $\mu\text{mol mol}^{-1}$ , 0.5  $\text{nmol mol}^{-1}$ , and 4  $\text{nmol mol}^{-1}$  for CO<sub>2</sub>, CH<sub>4</sub>, and CO respectively. This default value for  $U_b$  is based on an upper limit of values that are observed in the network; typically,  $U_b$  is much smaller than these values (Verhulst et al., 2017). In the current data set, this has only occurred once: there were no calibrations run at MNC over the entire 2015 calendar year, but we have no knowledge of abnormal operations or changes during this period, with analyser sensitivity being similar before and after this period.

Deleted: in

Because these uncertainty components are also tested through the use of a target tank, or check standard, the uncertainty  $U_M$  is assigned as the root-mean-squared of the target tank errors when those exceed the sum of the uncertainties above:

$$U_M = U_{TGT} = \sqrt{\frac{\sum ((X_{DC,TGT} - C_{TGT})^2)}{N}}. \quad (9)$$

This residual is calculated by GCWerks, and the root mean square residual is interpolated in time as a moving 10-day average. If a target tank has not been run through the system for 10 days or longer,  $U_{TGT}$  is set to a default value that is currently set to 0.2  $\mu\text{mol mol}^{-1}$ , 1  $\text{nmol mol}^{-1}$ , and 6  $\text{nmol mol}^{-1}$  for CO<sub>2</sub>, CH<sub>4</sub>, and CO, respectively, based on typical maximum values for this uncertainty calculated from many sites over several years. The target tank in the field generally has a concentration value very similar to the calibration tank, so this residual is a good estimate of the uncertainty caused by the precision, baseline changes, and tank value assignment. However, it is not a good indicator of uncertainty at mole fractions different from that of the calibration tank. Therefore, we assign an added uncertainty component,  $U_{extrap}$ , indicating the uncertainty that increases as the measurement value moves farther from the value of the calibration tank in the case of a single calibration standard. This was

found to be a linear relationship for a series of similar model analysers that were tested in a laboratory, and the uncertainty was described as:

$$U_{extrap} = |\epsilon| |X_{DC,air} - C_{cal}| \quad (10)$$

See Verhulst et al. (2017) for details on determining the unitless slope of the uncertainty, epsilon ( $\epsilon$ ), which is currently assigned as 0.0025, 0.0031, and 0.0164 for CO<sub>2</sub>, CH<sub>4</sub>, and CO, respectively, for all data that is only drift corrected (i.e. not using a high standard).

#### 4.2 Uncertainty for observations with additional standards available

When a high standard tank is available and the secondary correction described in Section 3.4 is applied, the uncertainty analysis remains similar, but the uncertainty  $U_{extrap}$  from Eq. (7) and Eq. (10) is replaced by an uncertainty in the two-point fit,  $U_{fit}$ . To estimate this uncertainty for CO<sub>2</sub> and CH<sub>4</sub>, we use the reported uncertainty of the assigned value of the high standard and calibration standard tanks,  $U_{scale}$ , (typically 0.03  $\mu\text{mol mol}^{-1}$  CO<sub>2</sub> and 0.5 nmol mol<sup>-1</sup> CH<sub>4</sub> at 1-sigma) along with an estimate of the precision of the analyser,  $U_p$ , to estimate an uncertainty on the drift-corrected sensitivity of the high standard,  $U_{SDC,hstd}$ , using standard propagation of errors (black error bar, Fig. 7(a)). We note that in the case where the value assigned to the high standard is through a propagation of the WMO scale at NIST, the assigned value has additional uncertainty; i.e.  $U_{scale}$  includes both the uncertainty that NOAA assigned to the cylinders used for the assignment and the uncertainty from the laboratory fit at NIST. This second uncertainty is equal to the standard deviation of the residuals of the fit and it is added in quadrature to the NOAA uncertainty.

We note that the analysis described below assumes uncorrelated independent errors. We express the slope of drift corrected sensitivity ( $m$ ) and the overall drift-corrected sensitivity ( $S_{DC}$ ) as functions only of the drift-corrected sensitivity of the high standard,  $S_{DC,hstd}$ :

$$m = \frac{S_{DC,hstd}^{-1}}{X'_{hstd}/X'_{cal} - 1} \quad (11)$$

$$S_{DC} = m \left( \frac{X'}{X'_{cal}} - 1 \right) + 1. \quad (12)$$

This second equation uses  $b=1-m$ . Here we do not include uncertainty in the x-coordinate, i.e.  $X'/X'_{cal}$ . Uncertainty in the slope is thus:

$$U_m = \left| \left( \frac{U_{SDC,hstd}}{(X'_{hstd}/X'_{cal})^{-1}} \right) \right| \quad (13)$$

We propagate the uncertainty in the drift-corrected sensitivity of the high standard,  $U_{SDC,hstd}$ , to the overall drift corrected sensitivity of all the air values using Eq. (14), and then to the two-point corrected air data by propagating through to obtain Eq. (15).

$$U_{SDC} = U_m \left( X' / X'_{cal} - 1 \right)$$

$$= \left| \left( \frac{U_{SDC,hstd}}{(X'_{hstd}/X'_{cal})^{-1}} \right) \left( X' / X'_{cal} - 1 \right) \right| \quad (14)$$

$$U_{XSC,air} = U_{fit} = \left| \frac{U_{SDC}}{S_{DC}} \right| X_{SC,air} \quad (15)$$

To evaluate the use of standard propagation of errors, we also use a bootstrap to estimate the uncertainty using the laboratory calibration shown in Fig. 6 by randomly selecting two tanks of the five tanks from the test to calculate 1000 versions of the correction (blue shading shows the standard deviation of the result, Fig. 7). For this test, the calculated 1-sigma uncertainty (red shading) was similar to the 1-sigma bootstrap uncertainty (slightly larger for CO<sub>2</sub> and slightly smaller for CH<sub>4</sub> (not shown)). This comparison indicates that the estimated uncertainty using the equations above compares reasonably well with the uncertainty we would derive from a bootstrap analysis, which gives us confidence in our methodology.

**Deleted:** calculating the correction using 1000

**Deleted:** ly selected pairs of

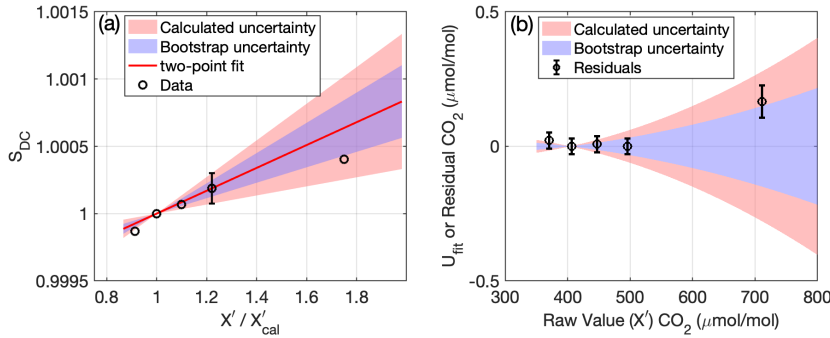


Figure 7. Uncertainty (1-sigma) in fit for two-point calibrations. (a) two-point fit to drift-corrected sensitivity ( $S_{DC}$ ) (red line) with uncertainty (red shading) calculated using the uncertainty in the high standard (black circle with error bar). Blue shading shows

540 uncertainty calculated using a bootstrap conducted by randomly selecting sets of two standards from the laboratory test (black circles) to calculate the slope. There is no uncertainty at 1 because the drift-corrected sensitivity is defined as equal to one at the value of the calibration standard. (b) Uncertainty in final CO<sub>2</sub> as a function of raw CO<sub>2</sub>; red and blue shading as in (a).

The uncertainty in  $S_{DC}$  leads to the estimate of the fit uncertainty,  $U_{fit}$ , shown in Fig. 7(b). To implement this uncertainty across all times and towers, we calculate it assuming a fixed nominal value of the high calibration standard of 490.50  $\mu\text{mol mol}^{-1}$  CO<sub>2</sub> and 2560.61  $\text{nmol mol}^{-1}$  CH<sub>4</sub>. This is based on the value of the high standard that was in residence in the Earth Networks laboratory when several of the CRDS analysers were tested and assigned two-point calibration corrections. We use the site-specific (instrument-specific and period-specific) slope and intercept that are applied to the data (which are static over the time period they are applied), and the value of the calibration tank, to calculate the remainder of the values required for the uncertainty analysis.

550 Only one site so far, MSH, measures continuous CO, and the history of standard tanks there indicates significant uncertainty in tank value assignments with high target tank residuals and corresponding  $U_{TGT}$  relative to errors in slope. We have chosen not to implement the two-point calibration at this site for CO, because the range of slopes of  $S_{DC}$  includes one, i.e. the correction is so small that the uncertainty dwarfs the correction.

555 Mean absolute residuals of the two-point fit for nine laboratory calibrations analysed (7 tested at NOAA/ESRL and described by Verhulst et al. (2017) Table S2 and two additional units at NIST) average to 0.03  $\mu\text{mol mol}^{-1}$  for CO<sub>2</sub> between the calibration and high standard, and larger for the test that included an even higher-concentration tank, shown in Fig. 7 at  $\sim 711 \mu\text{mol mol}^{-1}$  for CO<sub>2</sub>. The fit uncertainty encompasses (at 1-sigma) this residual as well (Fig. 7(b)). The residuals at lower values can be explained by the uncertainty in the measurement (precision) and uncertainty in value assignment of the tanks. For CO, only eight tests were available, with a mean residual inside the range of the calibrations of 1.1  $\text{nmol mol}^{-1}$ , higher than the reported reproducibility from NOAA of 0.4  $\text{nmol mol}^{-1}$  (all values are noted here at 1-sigma although they are given by NOAA at 2-sigma). This larger residual is likely caused by the lower precision of the analysers for CO but also could be caused by larger uncertainty in the tank assignments, possibly due to drift in the mole fraction of the tanks themselves. We intend to conduct additional tests outside the two-point calibration range with additional analysers and tanks to evaluate and possibly update this uncertainty component,  $U_{fit}$ , as needed, and especially focus on CO if/when additional CO measurements are added to our network.

## 5 Network observations

570 Here we show some observations and time series of CO<sub>2</sub> and CH<sub>4</sub> from the NEC in-situ tower network, focusing on data coverage, vertical gradients, and observed differences between urban and rural or outer suburban sites.

Deleted: in

5.1 Data coverage and network expansion

The NEC network is continuously growing, with sites coming online at different times. Figure 8 shows the availability of hourly observations as the various sites have come online.


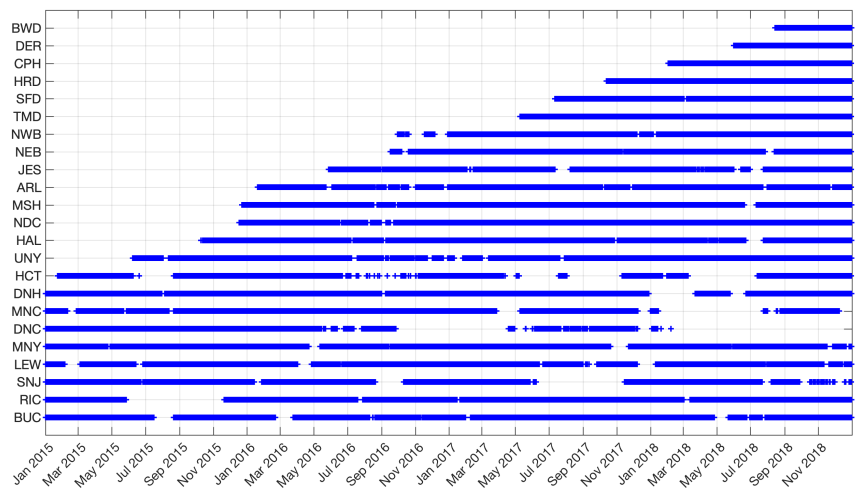


Figure 8. Data (CO<sub>2</sub> and CH<sub>4</sub>, and CO for MSH only) availability from the various NIST-EN tower sites in the Northeast Corridor network included in this data release. Gaps represent data outages due to various failures (analyser, communications, etc.).

5.2 Vertical gradients

Observations in global trace gas measurement networks (e.g. AGAGE, GGRN) are specifically sited far from local sources or strong sinks, to ensure that air reaching the site is representative of the large spatial scales of interest to a global study. This allows the observations to be more easily interpreted by a coarser global model (e.g. Peters et al. (2007)). In urban networks, it is desirable to measure trace gas concentrations closer to sources so that finer spatial gradients can be used to inform emissions estimates at urban scales. However, a balance must be struck between the necessity to observe and distinguish sources that are in close proximity to each other and the ability of a transport and dispersion model to simulate the observations. In some instances, novel ways to simulate observations at low heights above ground level and in very dense networks have been used to resolve this problem (Berchet et al., 2017). In the NEC urban network in Washington DC and Baltimore, the tower sites were selected to be between 50 m and 100 m above the ground given the desire to place a tower in a specific location (as identified in an initial network design study by Lopez-Coto et al. (2017)). Inlets at two (or three, at SFD) heights on the tower give some insight as to the proximity of each tower to sources whose emissions are not always vertically well-

590 mixed by the time they reach the inlets, depending on atmospheric stability conditions. Here we report average vertical  
gradients, determined using the observations at different levels, for the urban and background sites in our network. These  
gradients were calculated using hourly average data from each level, but because the instruments are only sampling from one  
level at any given time and cycling between them, there is an assumption of measurements averaged in a given hour to be  
representative of the entire hour. Because different towers have different inlet heights and different vertical spacing between  
595 the lower and upper inlet, here we compare three urban sites (ARL, NDC, and JES) with inlets at similar heights, ~90 m and  
~50 m a.g.l. We define the gradient as the mole fraction of CO<sub>2</sub> or CH<sub>4</sub> at the topmost inlet minus that of the lowermost inlet  
divided by the distance between them, so that a negative gradient indicates a higher concentration at the lower inlet (the most  
common case).

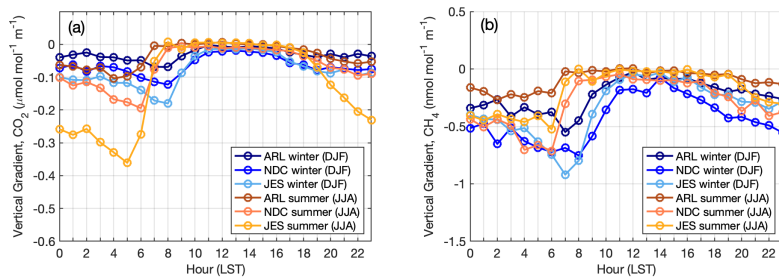

600 **Figure 9.** Diurnal cycle of vertical gradients in CO<sub>2</sub> (a) and CH<sub>4</sub> (b) for urban towers in the Washington/Baltimore area, averaged  
over 2015-2017 in winter (blue) and summer (orange), with shading indicating 1-sigma standard deviation among sites. Some of the  
spread can be caused by sampling in different years at the different sites. Sites included are: HAL, ARL, NDC, NEB, NWB, and  
JES. HRD was excluded due to lack of data in this period.

605 Analysis of the diurnal cycle of the vertical gradient at urban sites in the Washington / Baltimore area (Fig. 9) indicates different  
characteristics in summer vs. winter. These differences are most likely caused by different meteorology and possible seasonal  
differences in timing of fluxes, especially for sites influenced by the urban biosphere. Greater turbulent mixing in summertime  
boundary layers and different timing in the boundary layer growth and collapse mostly dominate the seasonal differences. This  
analysis shows that at these three sites the wintertime average gradient in mid-afternoon hours (defined based on these figures  
610 as 11-16 LST) is approximately -0.016 μmol mol<sup>-1</sup> m<sup>-1</sup> for CO<sub>2</sub> (-0.105 nmol mol<sup>-1</sup> m<sup>-1</sup> for CH<sub>4</sub>), which translates to a -0.8  
μmol mol<sup>-1</sup> (-5.2 nmol mol<sup>-1</sup> for CH<sub>4</sub>) difference between levels spaced 50 m apart; this is not an insignificant gradient. At  
other urban sites with shorter towers, they can be even larger. These observations can help evaluate vertical mixing in transport  
and dispersion models that might be used to estimate emissions, or to identify times when modelled and observed vertical  
gradients agree. Large vertical gradients overnight into the early morning at all sites and seasons are indicative of local sources  
615 (likely mostly anthropogenic but also including respiration from the biosphere) influencing the observations at these times

**Deleted:** to compare between sites we use gradients

**Deleted:** (i.e. difference in mole fraction per meter), not absolute differences.

**Deleted:** The only except is for SFD (inlets at 152, 100, and 50 m), where we use the 100 m and 50 m inlets to define the gradient, to be more consistent with the typical inlet heights of the other rural towers (Table 1).

**Deleted:** overall

**Deleted:** 028

**Deleted:** 2


**Deleted:** 1

**Deleted:** .4

**Deleted:** 10.

**Deleted:** 3

when there is stable stratification in the boundary layer and concentrations are higher near the surface. The larger CO<sub>2</sub> gradients overnight in summer compared to winter periods suggest a strong respiration signal at these urban sites, with a large degree of variability between sites indicated by large spread. Night-time CH<sub>4</sub> gradients are slightly larger in winter than summer, possibly reflecting greater wintertime anthropogenic CH<sub>4</sub> emissions, or possibly due to seasonality in mixing layer heights.

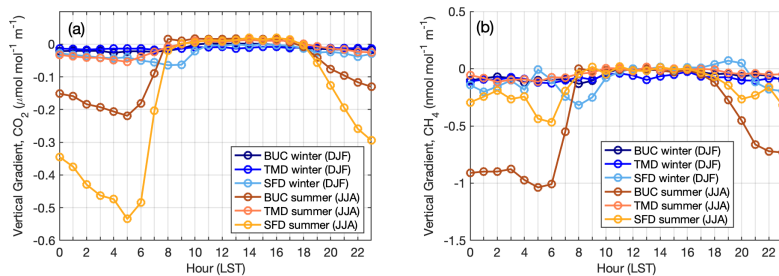

**Figure 10. Diurnal cycle of vertical gradients in CO<sub>2</sub> (a) and CH<sub>4</sub> (b) at the three background towers for the Washington / Baltimore region, in summer (orange shades) and winter (blue shades).**


The diurnal cycle of the vertical gradients from the sites identified as background stations for the Washington/Baltimore urban network shows large variability in summertime gradients between the three stations (Fig. 10). Stafford, VA (SFD) shows that the surrounding biosphere causes relatively large gradients in night-time and early morning hours at this low-density suburban site. These are apparent at Bucktown, MD (BUC) as well, but much less so at Thurmont, MD (TMD), a forested site in western Maryland. The large difference between summertime early morning vertical CO<sub>2</sub> gradients at SFD and TMD, despite the similar surrounding land use (mostly deciduous forest, Fig. 3), might be caused by the elevation difference, as SFD is close to sea level while TMD is on a ridge at 561 m elevation. BUC observations show larger CH<sub>4</sub> gradients in summer, due to surrounding wetlands and agriculture (Fig. 3). Wintertime gradients are near zero at all hours at all three of these sites, indicating that they are far from local anthropogenic sources of either gas. We note that the top inlet height at BUC is lower, at 75 m, than at SFD or TMD (100 m and 111 m), while the lower inlet is similar for all three (~50 m). For SFD (inlets at 152, 100, and 50 m), we use the 100 m and 50 m inlets to define the gradient, to be more consistent with the inlet heights of the other towers (Table 1).

### 5.3 Urban and rural differences in seasonal cycles

Here we continue to describe the network in terms of differences between rural (background) and urban stations, determining typical enhancements from urban influences. The seasonal cycles of CO<sub>2</sub> and CH<sub>4</sub> indicate enhancements in the urban sites in our network relative to the more rural stations throughout the year (Fig. 11). Summertime CH<sub>4</sub> at urban sites is not as enhanced compared to the rural sites as it is in winter, possibly due to wetland sources influencing the background station at BUC or



655 lower CH<sub>4</sub> emissions from natural gas in urban areas. Similarly, for CO<sub>2</sub>, some of the rural stations surrounded by active  
 vegetation (Fig. 3) are likely to show stronger influence from biospheric uptake than urban sites in the summer months  
 especially (Fig. 10). We specifically caution against using any of the in-situ data from the NEC rural stations directly as a  
 background for analysis of the urban enhancement without examining these issues. Sargent et al. (2018) indicate that for an  
 analysis of CO<sub>2</sub> enhancements in the Boston urban area, CO<sub>2</sub> observations from upwind stations alone did not represent the  
 660 correct background. Even when the air that reaches an urban tower originates near an upwind rural site, back trajectories (from  
 a Lagrangian Particle Dispersion Model such as STILT, for example) indicate that much of the air may originate from a higher  
 altitude than the upwind station. Thus the measurement at an upwind station is not necessarily representative of the proper  
 background, or incoming, concentration, given the large concentration gradients between measurements within the planetary  
 boundary layer and in the free troposphere near background stations with local fluxes. Mueller et al. (2018) conducted an  
 665 analysis of the issues concerning background determination for this urban network, mostly concerning the large emissions of  
 both CO<sub>2</sub> and CH<sub>4</sub> upwind of the region that is difficult to capture by upwind stations. We will examine the proper background  
 for investigating urban enhancements in the Washington DC and Baltimore, MD area further in future work.

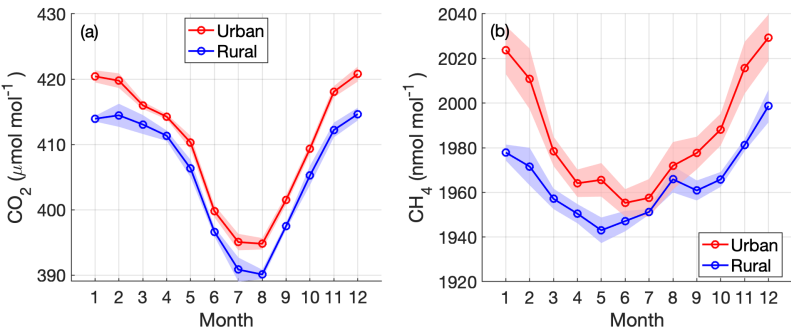

670 **Figure 11.** Seasonal cycles from urban and rural sites in the Washington DC /Baltimore region with at least one year of observations. Mid-afternoon (13-18 LST) daily averages are detrended using a linear fit to the annual trend at Mauna Loa (for CO<sub>2</sub>) and the global average (for CH<sub>4</sub>) (data from NOAA/ESRL) and then averaged monthly. Rural sites include TMD, SFD, and BUC; urban sites are ARL, NDC, JES, HAL, NEB, and NWB. Shading indicates one standard deviation of the averages from all the sites.

## 6 Conclusions

Here we present a data set of hourly average observations of CO<sub>2</sub>, CH<sub>4</sub> and CO (where applicable) from a network of towers  
 675 in the north-eastern United States. Measurements are funded by NIST and conducted in a collaboration with Earth Networks,  
 Inc., with quality control, assurance, and uncertainty determination conducted by a science team that includes NIST, Earth  
 Networks, and collaborators from the Los Angeles Megacities Carbon Project from NASA/JPL and the Scripps Institution of  
 Oceanography. We present four calendar years of data (2015 through 2018), with different stations coming online through the

years, and most Washington, D.C. and Baltimore, MD urban stations becoming established after late 2015. We also have  
680 presented our methodology for calibrating the measurements to WMO scales for each gas and determining uncertainties for  
these measurements, as recommended by the WMO (WMO, 2018). We show that analysis of observations at two different  
inlet heights can be useful for determining the presence of emissions close to the towers, which may be necessary for evaluating  
the efficacy and choice of transport model used to analyse the data. We also note that the tower stations that were established  
to characterise incoming or background air are not necessarily appropriate for use directly as background for the urban stations,  
685 as they often are affected by local fluxes that do not influence the urban stations. A more careful treatment of incoming  
background air is necessary for any given analysis.

### 7 Data availability

This data set of hourly-averaged observations from the Northeast Corridor tower-based network is available on the NIST data  
portal at data.nist.gov under the DOI 10.18434/M32126 (Karion et al., 2019). Initially, the repository will contain data from  
690 23 sites (Table 1) for years spanning 2015-2018; not all years are available for all sites. Files are version-dated, and the current  
plan is to provide annual updates for 2019 and beyond.

### Acknowledgements

We acknowledge the Earth Networks engineering and technical team, including Uran Veseshta, Clayton Fain, Bryan Biggs,  
695 Seth Baldelli, Joe Considine, and Charlie Draper. We also thank Tamae Wong, Kimberly Mueller, Sharon Gourdji, Subhomoy  
Ghosh, and Antonio Possolo (NIST) for helpful discussions.

### References

- Andrews, A. E., Kofler, J. D., Trudeau, M. E., Williams, J. C., Neff, D. H., Masarie, K. A., Chao, D. Y., Kitzis, D. R., Novelli, P. C., Zhao,  
700 C. L., Dlugokencky, E. J., Lang, P. M., Crotwell, M. J., Fischer, M. L., Parker, M. J., Lee, J. T., Baumann, D. D., Desai, A. R., Stanier,  
C. O., De Wekker, S. F. J., Wolfe, D. E., Munger, J. W., and Tans, P. P.: CO<sub>2</sub>, CO, and CH<sub>4</sub> measurements from tall towers in the  
NOAA Earth System Research Laboratory's Global Greenhouse Gas Reference Network: instrumentation, uncertainty analysis, and  
recommendations for future high-accuracy greenhouse gas monitoring efforts, *Atmos. Meas. Tech.*, 7, 647-687, 10.5194/amt-7-647-  
2014, 2014.
- Bares, R., Mitchell, L., Fasoli, B., Bowling, D. R., Catharine, D., Garcia, M., Eng, B., Ehleringer, J., and Lin, J. C.: The Utah urban carbon  
705 dioxide (UUCON) and Uintah Basin greenhouse gas networks: instrumentation, data, and measurement uncertainty, *Earth Syst. Sci.*  
*Data*, 11, 1291-1308, 10.5194/essd-11-1291-2019, 2019.
- Berchet, A., Zink, K., Muller, C., Oettl, D., Brunner, J., Emmenegger, L., and Brunner, D.: A cost-effective method for simulating city-wide  
air flow and pollutant dispersion at building resolving scale, *Atmos. Environ.*, 158, 181-196, 10.1016/j.atmosenv.2017.03.030, 2017.
- 710 Bureau International des Poids et Mesures: The International System of Units (SI), 9 ed., edited by: BIPM, BI PM, Pavillon de breteuil, F-  
92312 Sevres Cedex, France, 2019.
- Chen, H., Winderlich, J., Gerbig, C., Hoefer, A., Rella, C. W., Crosson, E. R., Van Pelt, A. D., Steinbach, J., Kolle, O., Beck, V., Daube, B.  
C., Gottlieb, E. W., Chow, V. Y., Santoni, G. W., and Wofsy, S. C.: High-accuracy continuous airborne measurements of greenhouse  
gases (CO<sub>2</sub> and CH<sub>4</sub>) using the cavity ring-down spectroscopy (CRDS) technique, *Atmos. Meas. Tech.*, 3, 375-386, 10.5194/amt-3-  
375-2010, 2010.

- 715 Dlugokencky, E. J., Myers, R. C., Lang, P. M., Masarie, K. A., Crotwell, A. M., Thoning, K. W., Hall, B. D., Elkins, J. W., and Steele, L. P.: Conversion of NOAA atmospheric dry air CH<sub>4</sub> mole fractions to a gravimetrically prepared standard scale, *Journal of Geophysical Research: Atmospheres*, 110, doi:10.1029/2005JD006035, 2005.
- Edenhofer O., R. P.-M., Y. Sokona, S. Kadner, J.C. Minx, S. Brunner, S. Agrawala, G. Baiocchi, I.A. Bashmakov, G. Blanco, J. Broome, T. Bruckner, M. Bustamante, L. Clarke, M. Conte Grand, F. Creutzig, X. Cruz-Núñez, S. Dhakal, N.K. Dubash, P. Eickemeier, E. Farahani, M. Fishedick, M. Fleurbaey, R. Gerlagh, L. Gómez-Echeverri, S. Gupta, J. Harnisch, K. Jiang, F. Jotzo, S. Kartha, S. Klasen, C. Kolstad, V. Krey, H. Kunreuther, O. Lucon, O. Masera, Y. Mulugetta, R. B. Norgaard, A. Patt, N. H. Ravindranath, K. Riahi, J. Roy, A. Sagar, R. Schaeffer, S. Schlömer, K. C. Seto, K. Seyboth, R. Sims, P. Smith, E. Som-anathan, R. Stavins, C. von Stechow, T. Sterner, T. Sugiyama, S. Suh, D. Ürge-Vorsatz, K. Urama, A. Venables, D. G. Victor, E. Weber, D. Zhou, J. Zou, and T. Zwickel: Technical Summary, in: *Climate Change 2014: Mitigation of Climate Change: Contribution of Working Group III Contribution to the IPCC Fifth Assessment Report*, edited by: Intergovernmental Panel on Climate Change, Cambridge University Press, Cambridge, 2014.
- 720 Gurney, K. R., Razliwanov, I., Song, Y., Zhou, Y. Y., Benes, B., and Abdul-Massih, M.: Quantification of Fossil Fuel CO<sub>2</sub> Emissions on the Building/Street Scale for a Large US City, *Environmental Science & Technology*, 46, 12194-12202, 10.1021/es3011282, 2012.
- 725 Gurney, K. R., Liang, J., O'Keefe, D., Patarasuk, R., Hutchins, M., Huang, J., Rao, P., and Song, Y.: Comparison of Global Downscaled Versus Bottom-Up Fossil Fuel CO<sub>2</sub> Emissions at the Urban Scale in Four U.S. Urban Areas, *Journal of Geophysical Research: Atmospheres*, 124, 2823-2840, 10.1029/2018jd028859, 2019.
- 730 Hedelius, J. K., Liu, J. J., Oda, T., Maksyutov, S., Roehl, C. M., Iraci, L. T., Podolske, J. R., Hillyard, P. W., Liang, J. M., Gurney, K. R., Wunch, D., and Wennberg, P. O.: Southern California megacity CO<sub>2</sub>, CH<sub>4</sub>, and CO flux estimates using ground- and space-based remote sensing and a Lagrangian model, *Atmospheric Chemistry and Physics*, 18, 16271-16291, 10.5194/acp-18-16271-2018, 2018.
- Karion, A., Sweeney, C., Wolter, S., Newberger, T., Chen, H., Andrews, A., Kofler, J., Neff, D., and Tans, P.: Long-term greenhouse gas measurements from aircraft, *Atmos. Meas. Tech.*, 6, 511-526, 10.5194/amt-6-511-2013, 2013.
- 735 Karion, A., Whetstone, J. R., and Callahan, W.: Observations of CO<sub>2</sub>, CH<sub>4</sub>, and CO mole fractions from the NIST Northeast Corridor urban testbed, <https://doi.org/10.18434/M32126>, 2019.
- Lamb, B. K., Cambaliza, M. O. L., Davis, K. J., Edburg, S. L., Ferrara, T. W., Floerchinger, C., Heimbürger, A. M. E., Herndon, S., Lauvaux, T., Lavoie, T., Lyon, D. R., Miles, N., Prasad, K. R., Richardson, S., Roscioli, J. R., Salmon, O. E., Shepson, P. B., Stirm, B. H., and Whetstone, J.: Direct and Indirect Measurements and Modeling of Methane Emissions in Indianapolis, Indiana, *Environmental Science & Technology*, 50, 8910-U8530, 10.1021/acs.est.6b01198, 2016.
- 740 Lauvaux, T., Miles, N. L., Deng, A. J., Richardson, S. J., Cambaliza, M. O., Davis, K. J., Gaudet, B., Gurney, K. R., Huang, J. H., O'Keefe, D., Song, Y., Karion, A., Oda, T., Patarasuk, R., Razliwanov, I., Sarmiento, D., Shepson, P., Sweeney, C., Turnbull, J., and Wu, K.: High-resolution atmospheric inversion of urban CO<sub>2</sub> emissions during the dormant season of the Indianapolis Flux Experiment (INFLUX), *J. Geophys. Res.-Atmos.*, 121, 5213-5236, 10.1002/2015jd024473, 2016.
- 745 Lin, J. C., Gerbig, C., Wofsy, S. C., Andrews, A. E., Daube, B. C., Davis, K. J., and Grainger, C. A.: A near-field tool for simulating the upstream influence of atmospheric observations: The Stochastic Time-Inverted Lagrangian Transport (STILT) model, *Journal of Geophysical Research: Atmospheres*, 108, n/a-n/a, 10.1029/2002JD003161, 2003.
- 750 Lopez-Coto, I., Ghosh, S., Prasad, K., and Whetstone, J.: Tower-based greenhouse gas measurement network design—The National Institute of Standards and Technology North East Corridor Testbed, *Advances in Atmospheric Sciences*, 34, 1095-1105, 10.1007/s00376-017-6094-6, 2017.
- Lopez-Coto, I., Hicks, M., Karion, A., Sakai, R. K., Demoz, B., Prasad, K., and Whetstone, J.: Assessment of WRF PBL schemes in an urban region and comparison of the impact of the urban heat island, submitted, 2019a.
- 755 Lopez-Coto, I., Ren, X., Salmon, O. E., Karion, A., Shepson, P., Dickerson, R. R., Stein, A., Prasad, K., and Whetstone, J.: Wintertime CO<sub>2</sub>, CH<sub>4</sub>, and CO emissions estimation for the Washington DC / Baltimore metro area using an inverse modeling technique, in preparation., 2019b.
- Martin, C. R., Zeng, N., Karion, A., Dickerson, R. R., Ren, X., Turpie, B. N., and Weber, K. J.: Evaluation and environmental correction of ambient CO<sub>2</sub> measurements from a low-cost NDIR sensor, *Atmospheric Measurement Techniques*, 10, 2383, 2017.
- 760 McKain, K., Down, A., Raciti, S. M., Budney, J., Hutyrá, L. R., Floerchinger, C., Herndon, S. C., Nehr Korn, T., Zahniser, M. S., Jackson, R. B., Phillips, N., and Wofsy, S. C.: Methane emissions from natural gas infrastructure and use in the urban region of Boston, Massachusetts, *Proc. Natl. Acad. Sci. U. S. A.*, 112, 1941-1946, 10.1073/pnas.1416261112, 2015.
- Mitchell, L. E., Lin, J. C., Bowling, D. R., Pataki, D. E., Strong, C., Schauer, A. J., Bares, R., Bush, S. E., Stephens, B. B., Mendoza, D., Mallia, D., Holland, L., Gurney, K. R., and Ehleringer, J. R.: Long-term urban carbon dioxide observations reveal spatial and temporal dynamics related to urban characteristics and growth, *Proceedings of the National Academy of Sciences*, 115, 2912-2917, 10.1073/pnas.1702393115, 2018.
- 765 Mueller, K., Yadav, V., Lopez-Coto, I., Karion, A., Gourdji, S., Martin, C., and Whetstone, J.: Siting Background Towers to Characterize Incoming Air for Urban Greenhouse Gas Estimation: A Case Study in the Washington, DC/Baltimore Area, *Journal of Geophysical Research: Atmospheres*, 123, 2910-2926, doi:10.1002/2017JD027364, 2018.

770 Nehr Korn, T., Eluszkiewicz, J., Wofsy, S. C., Lin, J. C., Gerbig, C., Longo, M., and Freitas, S.: Coupled weather research and forecasting-  
stochastic time-inverted lagrangian transport (WRF-STILT) model, *Meteorol. Atmos. Phys.*, 107, 51-64, 10.1007/s00703-010-0068-x,  
2010.

Novelli, P. C., Masarie, K. A., Lang, P. M., Hall, B. D., Myers, R. C., and Elkins, J. W.: Reanalysis of tropospheric CO trends: Effects of  
the 1997–1998 wildfires, *Journal of Geophysical Research: Atmospheres*, 108, doi:10.1029/2002JD003031, 2003.

775 O'Neill, B. C., Dalton, M., Fuchs, R., Jiang, L., Pachauri, S., and Zigova, K.: Global demographic trends and future carbon emissions,  
*Proceedings of the National Academy of Sciences*, 107, 17521-17526, 10.1073/pnas.1004581107, 2010.

Peters, W., Jacobson, A. R., Sweeney, C., Andrews, A. E., Conway, T. J., Masarie, K., Miller, J. B., Bruhwiler, L. M. P., Petron, G., Hirsch,  
A. I., Worthy, D. E. J., van der Werf, G. R., Randerson, J. T., Wennberg, P. O., Krol, M. C., and Tans, P. P.: An atmospheric perspective  
on North American carbon dioxide exchange: CarbonTracker, *Proc. Natl. Acad. Sci. U. S. A.*, 104, 18925-18930,  
10.1073/pnas.0708986104, 2007.

780 Pillai, D., Buchwitz, M., Gerbig, C., Koch, T., Reuter, M., Bovensmann, H., Marshall, J., and Burrows, J. P.: Tracking city CO<sub>2</sub> emissions  
from space using a high-resolution inverse modelling approach: a case study for Berlin, Germany, *Atmospheric Chemistry and Physics*,  
16, 9591-9610, 10.5194/acp-16-9591-2016, 2016.

Ren, X. R., Salmon, O. E., Hansford, J. R., Ahn, D., Hall, D., Benish, S. E., Stratton, P. R., He, H., Sahu, S., Grimes, C., Heimbürger, A. M.  
F., Martin, C. R., Cohen, M. D., Stunder, B., Salawitch, R. J., Ehrman, S. H., Shepson, P. B., and Dickerson, R. R.: Methane Emissions  
785 From the Baltimore-Washington Area Based on Airborne Observation: Comparison to Emissions Inventories, *J. Geophys. Res.-Atmos.*,  
123, 8869-8882, 10.1029/2018jd028851, 2018.

Richardson, S. J., Miles, N. L., Davis, K. J., Lauvaux, T., Martins, D. K., Turnbull, J. C., McKain, K., Sweeney, C., and Cambaliza, M. O.  
L.: Tower measurement network of in-situ CO<sub>2</sub>, CH<sub>4</sub>, and CO in support of the Indianapolis FLUX (INFLUX) Experiment, *Elementa-  
Sci. Anthropol.*, 5, 14, 10.1525/elementa.140, 2017.

790 Salmon, O. E., Shepson, P. B., Ren, X., He, H., Hall, D. L., Dickerson, R. R., Stirn, B. H., Brown, S. S., Fibiger, D. L., McDuffie, E. E.,  
Campos, T. L., Gurney, K. R., and Thornton, J. A.: Top-Down Estimates of NO<sub>x</sub> and CO Emissions From Washington, DC-Baltimore  
During the WINTER Campaign, *J. Geophys. Res.-Atmos.*, 123, 7705-7724, 10.1029/2018jd028539, 2018.

Santoni, G. W., Daube, B. C., Kort, E. A., Jimenez, R., Park, S., Pittman, J. V., Gottlieb, E., Xiang, B., Zahniser, M. S., Nelson, D. D.,  
McManus, J. B., Peischl, J., Ryerson, T. B., Holloway, J. S., Andrews, A. E., Sweeney, C., Hall, B., Hints, E. J., Moore, F. L., Elkins,  
795 J. W., Hurst, D. F., Stephens, B. B., Bent, J., and Wofsy, S. C.: Evaluation of the airborne quantum cascade laser spectrometer (QCLS)  
measurements of the carbon and greenhouse gas suite - CO<sub>2</sub>, CH<sub>4</sub>, N<sub>2</sub>O, and CO - during the CalNex and HIPPO campaigns, *Atmos.  
Meas. Tech.*, 7, 1509-1526, 10.5194/amt-7-1509-2014, 2014.

Sargent, M., Barrera, Y., Nehr Korn, T., Hutyra, L. R., Gately, C. K., Jones, T., McKain, K., Sweeney, C., Hegarty, J., Hardiman, B., Wang,  
J. A., and Wofsy, S. C.: Anthropogenic and biogenic CO<sub>2</sub> fluxes in the Boston urban region, *Proceedings of the National  
Academy of Sciences*, 115, 7491-7496, 10.1073/pnas.1803715115, 2018.

800 Stein, A. F., Draxler, R. R., Rolph, G. D., Stunder, B. J. B., Cohen, M. D., and Ngan, F.: NOAA's Hysplit Atmospheric Transport and  
Dispersion Modeling System, *Bull. Amer. Meteorol. Soc.*, 96, 2059-2077, 10.1175/Bams-D-14-00110.1, 2015.

Sweeney, C., Karion, A., Wolter, S., Newberger, T., Guenther, D., Higgs, J. A., Andrews, A. E., Lang, P. M., Neff, D., and Dlugokencky,  
E.: Seasonal climatology of CO<sub>2</sub> across North America from aircraft measurements in the NOAA/ESRL Global Greenhouse Gas  
805 Reference Network, *Journal of Geophysical Research: Atmospheres*, 120, 5155-5190, 2015.

Turnbull, J., Guenther, D., Karion, A., Sweeney, C., Anderson, E., Andrews, A., Kofler, J., Miles, N., Newberger, T., Richardson, S., and  
Tans, P.: An integrated flask sample collection system for greenhouse gas measurements, *Atmos. Meas. Tech.*, 5, 2321-2327,  
10.5194/amt-5-2321-2012, 2012.

Turnbull, J. C., Karion, A., Davis, K. J., Lauvaux, T., Miles, N. L., Richardson, S. J., Sweeney, C., McKain, K., Lehman, S. J., Gurney, K.  
R., Patarasuk, R., Liang, J., Shepson, P. B., Heimbürger, A., Harvey, R., and Whetstone, J.: Synthesis of Urban CO<sub>2</sub> Emission Estimates  
810 from Multiple Methods from the Indianapolis Flux Project (INFLUX), *Environmental Science & Technology*, 53, 287-295,  
10.1021/acs.est.8b05552, 2019.

Verhulst, K. R., Karion, A., Kim, J., Salameh, P. K., Keeling, R. F., Newman, S., Miller, J., Sloop, C., Pongetti, T., Rao, P., Wong, C.,  
Hopkins, F. M., Yadav, V., Weiss, R. F., Duren, R. M., and Miller, C. E.: Carbon dioxide and methane measurements from the Los  
815 Angeles Megacity Carbon Project – Part 1: calibration, urban enhancements, and uncertainty estimates, *Atmos. Chem. Phys.*, 17, 8313-  
8341, 10.5194/acp-17-8313-2017, 2017.

Waxman, E. M., Cossel, K. C., Giorgetta, F., Truong, G. W., Swann, W. C., Coddington, I., and Newbury, N. R.: Estimating vehicle carbon  
dioxide emissions from Boulder, Colorado, using horizontal path-integrated column measurements, *Atmospheric Chemistry and Physics*,  
19, 4177-4192, 10.5194/acp-19-4177-2019, 2019.

820 Welp, L. R., Keeling, R. F., Weiss, R. F., Paplawsky, W., and Heckman, S.: Design and performance of a Nafion dryer for continuous  
operation at CO<sub>2</sub> and CH<sub>4</sub> air monitoring sites, *Atmos. Meas. Tech.*, 6, 1217-1226, 10.5194/amt-6-1217-2013, 2013.

WMO: 19th WMO/IAEA Meeting on Carbon Dioxide, Other Greenhouse Gases and Related Measurement Techniques (GGMT-2017),  
WMO / GAW Report No. 242, 2018.

- 825 Wong, C. K., Pongetti, T. J., Oda, T., Rao, P., Gurney, K. R., Newman, S., Duren, R. M., Miller, C. E., Yung, Y. L., and Sander, S. P.: Monthly trends of methane emissions in Los Angeles from 2011 to 2015 inferred by CLARS-FTS observations, *Atmospheric Chemistry and Physics*, 16, 13121-13130, 10.5194/acp-16-13121-2016, 2016.
- Xueref-Remy, I., Dieudonne, E., Vuillemin, C., Lopez, M., Lac, C., Schmidt, M., Delmotte, M., Chevallier, F., Ravetta, F., Perrussel, O., Ciais, P., Breon, F. M., Broquet, G., Ramonet, M., Spain, T. G., and Ampe, C.: Diurnal, synoptic and seasonal variability of atmospheric CO<sub>2</sub> in the Paris megacity area, *Atmospheric Chemistry and Physics*, 18, 3335-3362, 10.5194/acp-18-3335-2018, 2018.
- 830 Yadav, V., Duren, R., Mueller, K., Verhulst, K. R., Nehrkorn, T., Kim, J., Weiss, R. F., Keeling, R., Sander, S., Fischer, M. L., Newman, S., Falk, M., Kuwayama, T., Hopkins, F., Rafiq, T., Whetstone, J., and Miller, C.: Spatio-temporally Resolved Methane Fluxes From the Los Angeles Megacity, *Journal of Geophysical Research: Atmospheres*, 124, 5131-5148, 10.1029/2018jd030062, 2019.
- 835 Yang, L., Jin, S., Danielson, P., Homer, C., Gass, L., Bender, S. M., Case, A., Costello, C., Dewitz, J., Fry, J., Funk, M., Granneman, B., Liknes, G. C., Rigge, M., and Xian, G.: A new generation of the United States National Land Cover Database: Requirements, research priorities, design, and implementation strategies, *ISPRS Journal of Photogrammetry and Remote Sensing*, 146, 108-123, <https://doi.org/10.1016/j.isprsjprs.2018.09.006>, 2018.
- Zhao, C. L., Tans, P. P., and Thoning, K. W.: A high precision manometric system for absolute calibrations of CO<sub>2</sub> in dry air, *Journal of Geophysical Research: Atmospheres*, 102, 5885-5894, doi:10.1029/96JD03764, 1997.