

## Response to Reviewers

5 “Hydromorphological attributes for all Australian river reaches derived from Landsat dynamic inundation remote sensing” by Jiawei Hou et al.

We thank the two reviewers for their constructive comments and helpful technical corrections, which enabled us to greatly improve the quality of our manuscript. The reviewers’ comments are reproduced below in blue, and our responses are presented in black.

10

### Reviewer #1 Comments:

(1) “Figure 1d: The vector stream network is much more generalized than the actual stream course in the image, so is this problematic? How are vector layers linked to the inundation frequency raster?”

15 We agree with the reviewer that the vector stream network cannot reflect the real stream course thoroughly everywhere, but the Geofabric Surface Network is able to display most of the river network accurately. In addition, Mueller et al. (2016) demonstrated that there is a strong agreement between Geofabric watercourse and WOfS surface water. We added a sentence to emphasize this point in P4L25-26:

*“The strong agreement between Geofabric water course and WOfS surface water has been demonstrated by Mueller et al. (2016).”*

20 and we added a sentence to explain the way that vector layers linked to the inundation frequency raster in P4L26-27:

*“The sub-catchment polygon is used to select the area and extract information from the inundation frequency raster for its corresponding river polyline.”*

(2) “Pg. 5, line 10: How does WOfS get 25 m pixels when Landsat has 30 m pixels?”

25 The Landsat images used for producing WOfS were derived from raw data using the USGS Landsat Product Generation System with a pixel size of 0.00025°, which is approximately 25 m resolution (Mueller et al., 2016). We modified the sentence in P4L13-16 to explain the spatial resolution of WOfS:

*“The Landsat images used to produce WOfS were the Australian archives of Landsat-5 and Landsat-7 data, which were derived from raw data using the USGS Landsat Product Generation System with a spatial resolution of 0.00025° (approximately 25 m pixel size) and cover 27 years from 1987 to 2014 (Mueller et al., 2016).”*


30 (3) “Pg. 5, Line 25: Does this imply some bias in the frequency data, as the rivers are more likely to be imaged under clear sky conditions when flows are likely to be relatively low?”

As the unequal number of clear observations is mainly caused by overlapping Landsat scenes (major influence), not cloud and shadow frequency (minor influence), this would not be the main cause for bias in the frequency data. We rephrased the sentence in P5L29-30:

5           *“The pixels in WofS do not have equal numbers of clear observations mainly due to overlapping Landsat scenes, with minor influence of cloud and shadow frequency.”*

(4) “Pg. 6, line 7: A figure illustrating different distributions for different values of the gamma parameter would be helpful.”

Thank you for your suggestion. We added a new figure (Figure 2) to explain how the gamma parameter reflects different river width distributions.

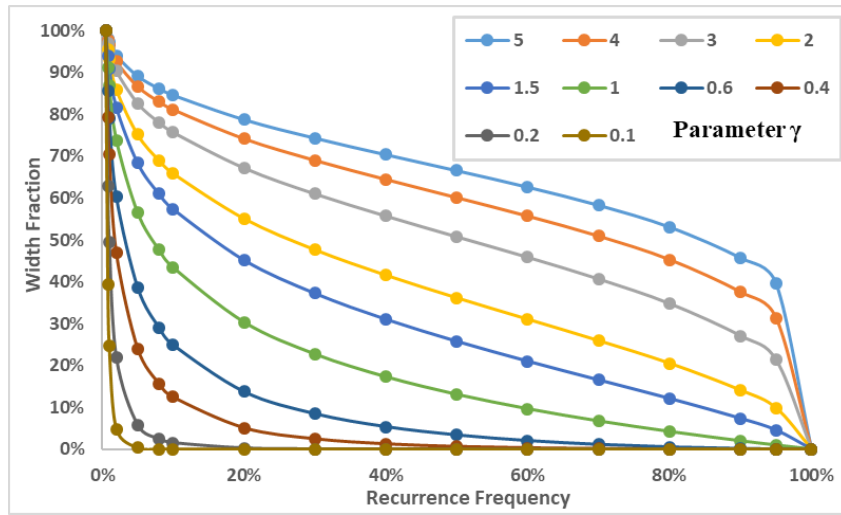

10           **Figure 2** Different river width distributions for different values of the gamma parameter.


(5) “Table 3 and figures 3 and 6 should be presented as percentages rather than absolute lengths.”

Agreed. We changed absolute lengths to percentages for Table 3, Figure 3 and 6 (Table 3, Figure 4 and 9 in the revised manuscript).


15

**Table 3** The length percentages in different width ranges of maximum (a) and minimum (b) river widths for Australia (all river segments include flow segments and segments flowing through water bodies).

River Width Range (m)	Length (All River Segments)		Length (Flow Segments)	
	Maximum Width (R=0.5%)	Minimum Width (R=80%)	Maximum Width (R=0.5%)	Minimum Width (R=80%)
25~50	22.56%	28.59%	25.69%	35.46%
50~100	20.95%	25.67%	22.84%	31.69%
100~250	24.86%	24.16%	25.99%	23.91%
250~500	14.79%	10.11%	14.22%	5.95%
500~1000	9.46%	6.51%	7.56%	1.90%
1000~2500	5.56%	3.86%	3.16%	1.00%
2500~5000	1.31%	0.88%	0.41%	0.08%
5000~10000	0.39%	0.20%	0.09%	0.01%
>10000	0.14%	0.02%	0.03%	0.00%
Total (m)	$5.84 \times 10^8$	$2.80 \times 10^7$	$4.12 \times 10^8$	$1.66 \times 10^7$

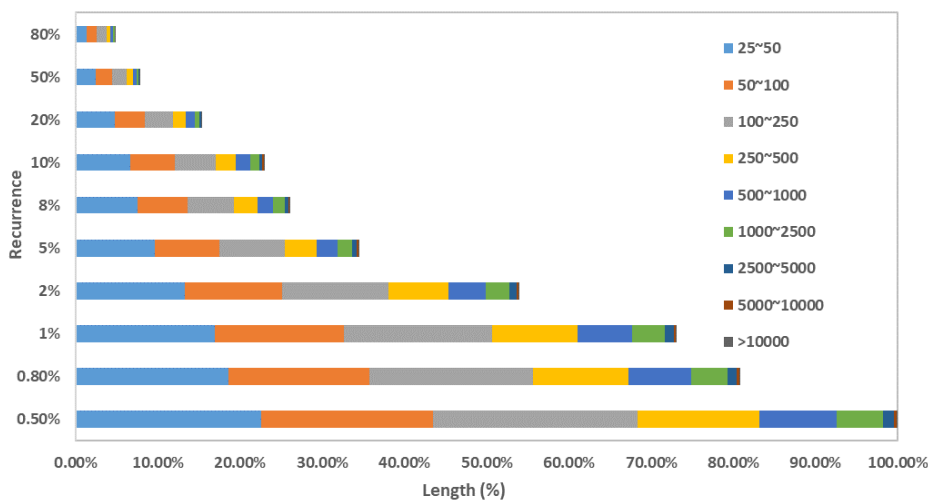


5 **Figure 4** The length percentages in different width ranges at different recurrence frequencies for Australia.

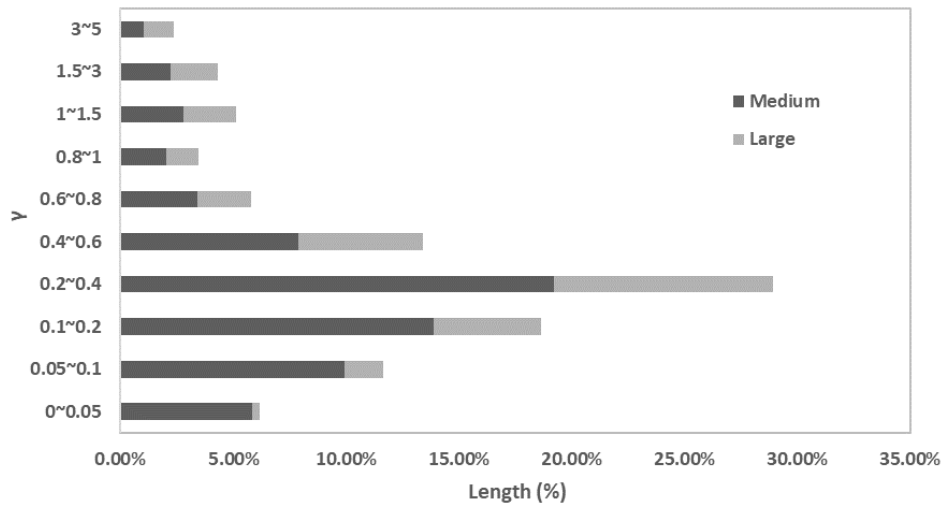

**Figure 9** The length percentages of medium and large rivers for different  $\gamma$  value ranges across Australia.

(6) “Pg. 7, line 29: A map showing the width variations in your data set vs. those in GRWL would be informative and could be added as a new figure.”

5 Thank you for your comment. We added a new figure (Figure 7) to show the Spearman’s rank correlations between these two datasets in 111 river regions across Australia.

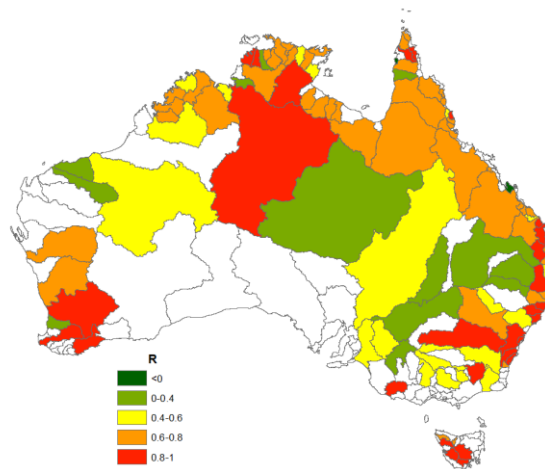

**Figure 7** The Spearman’s rank correlations between our dataset and GRWL dataset in 111 river regions across Australia.

(7) “Pg. 8, line 5: How were "standard differences" calculated?”

10 We calculated the standard differences by the equation of  $SD = (1/n \times \sum (O-M)^2)^{1/2}$ , where O is the observation matrix, M the estimate matrix, n the number of elements, and SD the standard difference. We added this equation in P6L27-30:

“The standard differences were calculated for each category to evaluate their biases by the equation as follows:

$$SD = \sqrt{\frac{\sum (O - M)^2}{n}} \quad (5)$$

where  $O$  is the observation matrix,  $M$  is the estimate matrix,  $n$  is the number of elements, and  $SD$  is the standard difference.”

- 5 (8) “Pg. 10, line 19: You should refer to the recent work by Jones in Remote Sensing on the Dynamic Surface Water Extent (DSWE) product derived from landsat time series.”

Thank you for your suggestion. We included this very relevant reference in P11L18-20:

“Thus, it would seem feasible to use a similar methodology as that employed here to develop a global river hydromorphology dataset using global inundation time series Landsat mapping produced by Donchyts et al. (2016),  
10 Pekel et al. (2016) or Jones (2019), for example.”

### Technical Corrections

Thank you. We accepted all edits by the reviewer and clarified the sentences that were unclear.

### Reference

- 15 Mueller, N., Lewis, A., Roberts, D., Ring, S., Melrose, R., Sixsmith, J., Lymburner, L., McIntyre, A., Tan, P., and Curnow, S., Ip, A. (2016). Water observations from space: Mapping surface water from 25 years of Landsat imagery across Australia. Remote Sensing of Environment, 174, 341-352.

### Reviewer #2 Comments:

- 20 The data repository may have been temporarily offline when the reviewer tried to access the dataset. It should work well now using the link of <http://dx.doi.org/10.25914/5c637a7449353>. The dataset will also be available on the research group website (<http://wald.anu.edu.au/data/>) if the manuscript is accepted for publication.

- 25 (1) I suspect that this study’s method likely substantially overestimates river width because it assumes that all surface water measured within a given subcatchment is river water. This means that all oxbow lakes, impoundments, wetlands and other lentic waterbodies will be counted in the river width calculation. This point is briefly mentioned in the Discussion but should be acknowledged in the method section as a major assumption and limitation of the Methods and should be further discussed in the Discussion. For example, how does this assumption affect the relationship between recurrence interval and river width? Does this approach overestimate width variability with changes recurrence frequency? Would the authors be able to quantify the degree to which this approach affects their width estimates using a sample of subcatchments?

We agree that off-channel water bodies can lead to overestimation of river width. However, the use of sub-catchment boundaries for each river reach eliminated most unrelated water bodies where possible. As for the unrelated water bodies remaining in the sub-catchment, they generally merge with channel at low recurrence frequencies (i.e. high flows) and separate at high (i.e. low flows). For analysing width dynamics, these nearby water bodies are assumed to be part of the river channel conceptually. Otherwise, we could fail to detect the maximum river width (removing nearby water bodies) or there would be abrupt changes in river width (keeping nearby water bodies at low recurrence frequencies and removing them at high recurrence frequencies). We added sentences to emphasize this point in P10L28-32:

*“However, for analysing width dynamics, the unrelated water bodies remaining in the sub-catchment can be assumed to be part of the river channel conceptually. Because they generally merge with channel at low recurrence frequencies (i.e. high flows) and separate at high (i.e. low flows). If these nearby water bodies are removed, it could fail to detect the maximum river width; if they are remained at high flows and removed at low flows, there would be abrupt changes in river width.”*


(2) This study assumes that maximum river width corresponds to the recurrence interval of when the Landsat imagery does not show artifacts associated with cloud, shadow, or the SLC-error. This seems like an arbitrary threshold and could use more justification. Could this assumption be better justified or further discussed?

Thank you for your comment. We added more justification on this threshold in P5L30-P6L3:

*“The number of clear observations in the overlapping scene areas could be more than twice that in most of the rest areas. The estimated river width is supposed to increase much more sharply in the overlapping areas than the rest areas as recurrence changes towards very low ranges, even for the same river reach, as a larger number of clear observations provide more chance to catch the extreme conditions. As a result, the surface water extent map shows oblique strips across the Australian continent for very low recurrence frequencies. To standardise the width and analyse width dynamic of rivers across Australia as a whole, a more homogeneous condition was desirable.”*

(3) Table 4 – readers may be interested in the variability of the parameters shown.

Agreed. We changed this table to a figure (Figure 6) to show the variability of the parameters along different reach gradients.

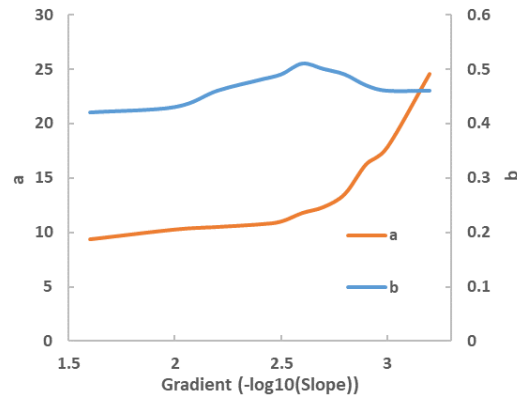

**Figure 6** The coefficients *a* and exponents *b* of the power scaling relationship predicting maximum river width from upstream cumulative runoff (Eq. 1) calculated for different reach gradient.

(4) In the methods or discussion the authors should provide an indication (preferably quantitatively) of the uncertainty of the input variables that are used in this analysis (e.g., slope, runoff, width).

Thank you for your suggestion. We added sentences to discuss the uncertainty of the input variables in P11L4-14:


“Besides, there are some uncertainties from input variables, including DEM, runoff, and length. The SRTM-derived 1 second (approximately 30 m) DEM has an RMS error of 3.868 m, and its uncertainties include residual stripes, broad scale stripes, steps in elevation, large offsets along the edge of the valley floor, noise due to the nature of the radar acquisition and processing, incomplete removal of vegetation offsets and urban and built infrastructure, and vegetation height over-estimated (Gallant et al., 2011). However, the majority of rivers flow on flat plains without vegetation cover and urban and built infrastructure and river gradients were only produced for the main river reaches, presumably with wider channels, which reduce the influence from uncertainties and limitations of DEM. Uncertainties from input data, parameterisation and conceptual structure in the model could affect runoff estimates, although the AWRA-L model has a strong documented pedigree in runoff estimation in comparisons with gauge data (e.g., Van Dijk and Warren, 2010, Frost et al., 2018). The raster-vector conversion anomalies to produce the Geofabric lead to overestimation of the segment length, which to some extent may counterbalance the overestimation of river width.”

(5) Add a quick sentence about the method(s) used to define river segments and subcatchment extent in Muller et al. This is an important piece of information that likely impacts the results of this study considerably.

Thank you for your comment. We added a sentence to describe this in P4L26-27 (see the response to comment #1 from reviewer #1).

(6) P7 L18: “We excluded river widths with small upstream cumulative runoff (<104.5 m<sup>3</sup> or 0.37 m<sup>3</sup>/s)” – please provide the reviewers with the plot over the full range of data so we can judge the appropriateness of this action.

Agreed. The figure in fact showed the full range of data, but we added a vertical line to show the threshold in the Figure 5.

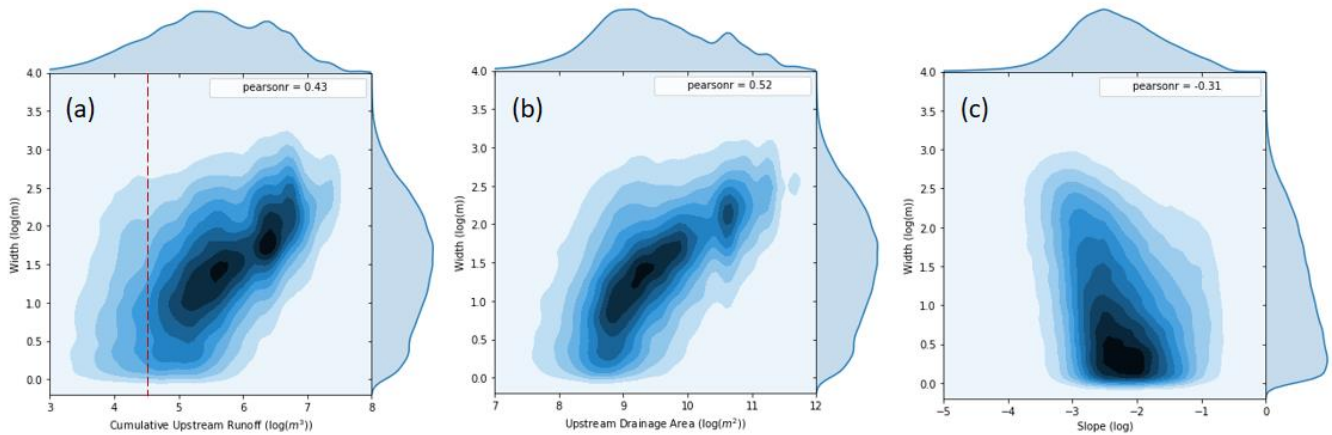

5 **Figure 5** The relationships between maximum river width and cumulative upstream runoff (a), upstream drainage area (b) and river gradient (c) (The color coding is related to data counts with highest in dark blue, lowest in light blue, which is corresponding to the histogram on the axes; red dash line: the threshold).

(7) Table 6: Andreadis et al. (2013) used hydraulic geometry equations from Moody and Troutman, (2002) - <https://doi.org/10.1002/esp.403>. It would be better to cite this paper in this table. Also, a recently-published study has done a similar analysis at the global scale and should at least be included in Table 6, if not elsewhere in the manuscript. <https://doi.org/10.1029/2019GL082027>

10 Thank you for your suggestion. We included the first reference in Table 5:

**Table 5** Comparison of coefficients and exponents for equation (1) and (2) between different research

Research	Equation	a	b	c	d	Scale
Coe et al. (2008)	$w = cA^d$	-	-	0.42	0.59	Amazon
Paiva et al. (2013)	$w = cA^d$	-	-	0.35-3.75	0.36-0.63	Amazon
Decharme et al. (2008)	$w = \max(25, aQ^b)$	$a = (10^{-4}Q_{m,mouth} + 6)^{*1}$	0.5	-	-	South America
Getirana et al. (2012, 2013)	$w = \max(10, aQ^b)$	18	0.5	-	-	Amazon
Andreadis et al. (2013) <sup>*2</sup>	$w = aQ^b$	7.2	$0.5 \pm 0.02$	-	-	Globe
This Study	$w = aQ^b$ ; $w = cA^d$	13.17	0.49	0.91	0.43	Australia

<sup>\*1</sup>suggested by Arora and Boer (1999) ( $Q_{m,mouth}$  is the mean annual discharge at the mouth of the river)

<sup>\*2</sup>based on the regression relation developed by Moody and Troutman (2002)

and we included the second reference in P10L5-6:

15 “The positive relationships of discharge-width and catchment area-width, and negative relationship of width-gradient have also been demonstrated by Frasson et al. (2019).”



## Technical Corrections

Thank you. We accepted all the technical corrections by the reviewer.

### Reference

- 5 Frost, A. J., Ramchurn, A., and Smith, A. (2018). The Australian Landscape Water Balance model (AWRA-L v6). Technical Description of the Australian Water Resources Assessment Landscape model version 6. Bureau of Meteorology Technical Report. [http://www.bom.gov.au/water/landscape/assets/static/publications/AWRALv6\\_Model\\_Description\\_Report.pdf](http://www.bom.gov.au/water/landscape/assets/static/publications/AWRALv6_Model_Description_Report.pdf).
- Gallant, J.C., Dowling, T.I., Read, A.M., Wilson, N., Tickle, P., Inskip, C. (2011). 1 second SRTM Derived Digital Elevation Models User Guide. Geoscience Australia. [https://d28rz98at9flks.cloudfront.net/72759/1secSRTM\\_Derived\\_DEMs\\_UserGuide\\_v1.0.4.pdf](https://d28rz98at9flks.cloudfront.net/72759/1secSRTM_Derived_DEMs_UserGuide_v1.0.4.pdf).
- 10 Van Dijk, A. I. J. M., and Warren, G. (2010). The Australian Water Resources Assessment System. Technical Report 4. Landscape Model (version 0.5) Evaluation Against Observations. CSIRO: Water for a Healthy Country National Research Flagship. <http://www.clw.csiro.au/publications/waterforahealthycountry/2010/wfhc-awras-evaluation-against-observations.pdf>.

# Hydromorphological attributes for all Australian river reaches derived from Landsat dynamic inundation remote sensing

Jiawei Hou<sup>1</sup>, Albert I.J.M. van Dijk<sup>1</sup>, Luigi J. Renzullo<sup>1</sup>, Robert A. Vertessy<sup>1,2</sup>, Norman Mueller<sup>3</sup>

<sup>1</sup>Fenner School of Environment and Society, Australian National University, Canberra, Australian Capital Territory, Australia

<sup>2</sup>School of Engineering, University of Melbourne, Melbourne, Victoria, Australia

<sup>3</sup>Geoscience Australia, GPO Box 378, Canberra, Australian Capital Territory, Australia

*Correspondence to:* Jiawei Hou (jiawei.hou@anu.edu.au)

**Abstract.** Hydromorphological attributes such as flow width, water extent and gradient play an important role in river hydrological, biogeochemical and ecological processes; ~~helping and can help~~ to predict river conveyance capacity, discharge and flow routing. While there are some river width datasets at global or regional scales, they do not consider temporal variation in river width and do not cover all Australian rivers. We combined detailed mapping of 1.4 million river reaches across the Australian continent with inundation frequency mapping from 27-years of Landsat observations. From these, the average flow width at different recurrence frequencies was calculated for all reaches, having a combined length of 3.3 million km. A parameter  $\gamma$  was proposed to describe the shape of the frequency-width relationship and can be used to classify reaches by the degree to which flow regime tends towards permanent, frequent, intermittent or ephemeral. Proposed scaling rules relating river width to gradient and contributing catchment area and discharge were investigated, demonstrating that such rules capture relatively little of ~~the~~ real-world variability. Uncertainties mainly occur in multi-channel reaches and reaches with unconnected water bodies. The calculated reach attributes are easily combined with the river vector data in a GIS, which should be useful for research and practical applications such as water resource management, aquatic habitat enhancement, and river engineering and management. The dataset is available at <http://dx.doi.org/10.25914/5c637a7449353> (Hou et al. 2019).

## 1. Introduction

Temporal and spatial information on river morphology is fundamental for understanding ~~bedrock lithology,~~ CO<sub>2</sub> and nutrient exchange, aquatic habitat distribution and migration, ~~managing fishery management,~~ transportation, ~~and~~ flooding hazards, and ~~developing~~ hydrologic and hydrodynamic models (Miller et al., 2014). River morphology is mainly controlled by eight variables: width, gradient, depth, velocity, discharge, roughness, sediment size and sediment load (Leopold et al., 1964). In the ~~platform longitudinal~~-dimension, river patterns have been categorized as either single or anabranching channels. Laterally, active channels and inactive channels can be further classified as straight, sinuous, meandering and braided forms (Nanson and Knighton, 1996). For a deeper understanding of river morphology, Rosgen (1994) established a river classification inventory system using delineation criteria or ranges in different levels including the number of channels,

entrenchment, width-depth ratio, sinuosity, gradient, and channel material. Importantly, the interaction between river channel and floodplain results in different river morphology. For instance, the width of a channel changes in response to formation and destruction of the floodplain, which subsequently alters bar patterns as bar pattern ~~it~~ is dominated by width-depth ratio (Kleinhans and Van den Berg, 2011).

5

Among the variables affecting river morphology, river width is an essential parameter to calculate river discharge, assess river conveyance capacity, and improve river routing in models (Yamazaki et al., 2014). River width at overbank flow level plays a significant role in delineating inundated flooding-area, which affects water vapour fluxes and groundwater recharge (Dadson et al., 2010; Pedinotti et al., 2012; Doble et al., 2014). From flood inundation simulation with one-dimensional  
10 finite difference solutions of the St. Venant equations to two-dimensional finite element and finite difference models, the need for data on river morphology increases from field survey measurements to continuous digital elevation models. Using a low-resolution DEM, details of flow channel features and connectivity gradually disappear~~cannot be provided~~. Thus, river characteristics are not always represented well in coarse-resolution grids used in large-scale river routing models (Yamazaki et al., 2011). Although a high-resolution DEM can mitigate this issue, there is an associated increase in computational cost  
15 and sufficient computing resources are ~~it is~~ not always available. One way to deal with this problem is to construct a simpler model structure (Bates and De Roo, 2000). Another way is to parameterize sub-grid-scale topography of river channels and floodplains in modelling (Neal et al., 2012; Yamazaki et al., 2011). For example, Coe et al. (2008) considered sub-grid-scale floodplain morphology (i.e. fractional flooding of grid cells), which resulted in significant improvement in the simulations of seasonal and inter-annual flooding.

20

The lack of detailed data on river characteristics often means that river width is either ignored or left as a parameter for calibration, which may increase model uncertainty and decrease accuracy (Andreadis et al., 2013). River width may be set to a constant value without consideration of spatial and temporal variations (Biancamaria et al., 2009). Alternatively, river width may be estimated by empirical functions of drainage area (Coe et al., 2008; Paiva et al., 2013) or river discharge  
25 (Decharme et al., 2008; Getirana et al., 2012; Getirana et al., 2013; Andreadis et al., 2013). However, river width estimates from empirical functions cannot provide accurate representations of river reach morphology, as relationships between river width and discharge or drainage area are known to vary in different geomorphological and climate conditions (Yamazaki et al., 2014). If river width is overestimated in hydrological modelling, it may result in both overestimation of river channel storage and underestimation of water storage on the floodplain, and vice versa (O'Loughlin et al., 2013). This will in turn  
30 cause errors in the timing and location of flood wave and floodplain inundation predictions.

The development of more accurate and explicit river width dataset has been approached in several ways. Pavelsky and Smith (2008) developed a software tool, RivWidth, to automatically extract river width along a river course, combining one channel mask distinguishing water pixels from non-water pixels and another river mask describing areas within the river

boundary or outside it. Miller et al. (2014) and Allen and Pavelsky (2015, 2018) successfully applied this pioneering approach to map river width at mean discharge for the Mississippi River Basin, North American rivers, and the whole world, respectively. However, laborious manual inspection and corrections are needed in pre-processing of the water masks, which prohibit its automated application over large scales. For example, undetected channels in water masks have to be drawn manually in order to make the river network fully connected (Neal et al., 2012). To address this issue, Yamazaki et al. (2014) applied an automated algorithm to produce a global river width database for large rivers, GWD-LR, using flow direction maps and water masks. Isikdogan et al. (2017) also developed an automated analysis and mapping engine, RivMap, which is able to delineate rivers and estimate river width, and used it to generate a river width dataset for North America. However, none of these regional and global datasets consider temporal variability of river width or river width beyond overbank flow conditions.

Our aim was to develop a method for estimating temporal and spatial river width dynamics and use these to find summary parameters to represent river morphology characteristics that could support a classification of river type over the Australian continent. River width dynamics at different recurrence frequencies were estimated from 27-year time series of 25-m resolution surface water extent maps from Landsat remote sensing (Mueller et al., 2016), and a detailed Geographic Information System (GIS) database containing all 1,410,404 river segments and 1,474,271 sub-catchments mapped across Australia (Bureau of Meteorology, 2012a). The width estimates were compared with the global river width dataset (Allen and Pavelsky, 2018) at average flow conditions in 218 river regions of Australia. We analysed the relationships between river width and discharge, drainage area, and gradient, and calculated the coefficient and exponent of ~~a the now classic~~ hydraulic geometry equation for Australia. The river morphology parameters were intended to provide a description of temporal river width dynamics, relating to dominant flow regime (permanent, frequent, intermittent, or ephemeral). We demonstrate the usefulness of our dataset by showing the longitudinal profile of hydromorphological attributes for the main river channel of the Murray River and ~~other the~~ complex river systems in ~~a one classical Australia's dry, and~~ low relief environment.

## 25 **2. Data and method**

### **2.1 Data**

#### **2.1.1 River and sub-catchment segments**

The Australian Hydrological Geospatial Fabric (Geofabric) is a digital database of spatial surface and groundwater features based on a GIS platform that relates important hydrologic features such as catchments, rivers, lakes and aquifers (Bureau of Meteorology, 2012a). The Geofabric Surface Network provides a consistent hydrological surface stream network, which was derived using the 9-second ANUDEM raster streams product (Bureau of Meteorology, 2012b). The surface network has 6

attributes/features, namely network stream, upstream network connectivity, downstream network connectivity, network node, water body, and catchment area. Any information associated to the surface network can be easily connected to features in other Geofabric products, including surface cartography, surface catchment, groundwater cartography, and hydrological reporting catchments and regions, for further applications. The network stream is divided into major rivers and minor rivers, and major rivers generally represent the main watercourses across Australia (Figure 1a and b). These rivers are further classified as flow segments (natural rivers), water area segments (rivers passing through a water body), and artificial segments (to keep the stream network connected). The catchment refers to sub-catchment corresponding to each river segment. The network stream and catchment features are the main data we used to extract information from surface water extent observations (Figure 1d).

## 10 2.1.2 Surface water extent observations

Water Observations from Space (WOfS) is a publicly-accessible 25-m resolution gridded dataset providing surface water persistence and recurrence information for the Australian continent (Mueller et al., 2016). This historical flood information product was developed using a decision tree method on a combination of normalized difference indices and corrected spectral band values from approximately 184,500 Landsat images (Mueller et al., 2016). The Landsat images used to produce WOfS were the Australian archives of Landsat-5 and Landsat-7 data, which were derived from raw data using the USGS Landsat Product Generation System with a spatial resolution of 0.00025° (approximately 25 m pixel size) and cover 27 years from 1987 to 2014 (Mueller et al., 2016). Here we used the water summary product from WOfS, which provides the recurrence frequency of surface water occurring as a percentage of the number of times the surface was clearly observed for each grid cell. For example, a frequency of 5% means surface water extent was detected on average once in 20 clear-sky Landsat acquisition for that given pixel (Figure 1c). The WOfS product reflects inundation extent for rivers at both in-channel and overflow levels, but cannot relate directly inundated area to its associated river regime (Figure 1a and c). However, this can be achieved by the network stream and catchment features from Geofabric (Figure 1d).

## 2.2 Method

### 2.2.1 River widths at different recurrence frequencies

We used Geofabric sub-catchment boundaries to divide the WOfS water summary map into 1,474,271 segments (Figure 1d). Of these, there is a total of 1,379,224 sub-catchments that have river segments. The strong agreement between Geofabric water course and WOfS surface water has been demonstrated by Mueller et al. (2016). The sub-catchment polygon is used to select the area and extract information from the inundation frequency raster for its corresponding river polyline. We calculated inundation extent at different recurrence frequencies (Table 1) in each of these sub-catchments. This step required considerable computational computing power, and so we used a high-performance computer. Next, we estimated corresponding equivalent river width/effective width for each sub-catchment by dividing inundation extent at different

recurrence frequencies by the geodesic length of the river segment calculated from the Geofabric using Vincenty's Inverse Method (Vincenty, 1975). In addition, DEM information was extracted from the 1 Second DEM, an elevation data product developed by Geoscience Australia using the Shuttle Radar Topography Mission (SRTM) data (Geoscience Australia, 2011), for the upstream and downstream end points of each river segment. River gradient was calculated by dividing the elevation difference between upstream and downstream points by river length for each river segment. Finally, we obtained estimated spatial and temporal river widths, and river gradients for 1,379,224 river reaches across the Australian continent.

We compared our spatial and temporal river width data to the Global River Widths from Landsat (GRWL) dataset (Allen and Pavelsky, 2018) over Australia. Allen and Pavelsky (2018) produced estimates of global river width at approximately mean discharge, which is related to the month that rivers are most likely to be at mean discharge value from the nearest gauging station for each Landsat tile. However, it is less likely to represent the average conditions of ungauged river reaches as the distance from the nearest gauging station increases—and; most river reaches around the world are ungauged. Additionally, mean discharge ~~it~~ does not correspond with any particular recurrence frequency. Thus, to facilitate comparison between the two sets of results, we calculated Spearman correlations between our river width estimates at a frequency of 50% and GRWL river widths ~~and did this~~ separately for the 218 river regions in Australia. High correlations mean our river width data reflect the same relative width variations along the river channel from upstream to downstream for a river region as the global river width dataset.

In addition, upstream cumulative mean runoff of each river segment was calculated based on the Australian Water Resources Assessment (AWRA) landscape hydrology model (Van Dijk, 2010), which is used by the Australian Bureau of Meteorology to operationally estimate daily water balance component across Australia at a spatial resolution of 0.05 °×0.05 ° (Frost et al., 2016). We analysed the relationship between river width and upstream cumulative runoff or upstream drainage area, and also the correspondence between river width and gradient for Australia. Furthermore, we established hydraulic geometry classical functional ~~power-law~~ relationships that relate river width to upstream cumulative runoff or upstream drainage area as follows:

$$w = aQ^b \quad (1)$$

$$w = cA^d \quad (2)$$

where  $w$  is river width (m),  $Q$  is cumulative upstream runoff (m<sup>3</sup>/s),  $A$  is upstream drainage area (km<sup>2</sup>). Coefficients  $a$  and  $c$  and exponents  $b$  and  $d$  were fitted and compared to the results from published studies.

### 2.2.2 River morphology characteristics

The pixels in WofS do not have equal numbers of clear observations mainly due to overlapping Landsat scenes, with minor influence of cloud and shadow frequency, ~~and cloud and shadow frequency~~. The number of clear observations in the

overlapping scene areas could be more than twice that in most of the rest areas. The estimated river width is supposed to increase much more sharply in the overlapping areas than the rest areas as recurrence changes towards very low ranges, even for the same river reach, as a larger number of clear observations provide more chance to catch the extreme conditions. As a result, the surface water extent map shows oblique strips across the Australian continent for very low recurrence frequencies.

5 To standardise the width and analyse width dynamic of rivers across Australia as a whole, a more homogeneous condition was desirable. ~~As a result, the surface water extent map shows oblique strips across the Australian continent for very low recurrence frequencies.~~ To avoid these artefacts, we generated river width maps by varying recurrence frequency from ~~between~~ low to high until the majority of artefacts disappeared. We regarded the resulting lowest frequency river width map without artefacts as representing the maximum river width. Next, we standardized river widths at different recurrence  
10 frequencies by dividing them by maximum river width, producing a width fraction representing the ratio of river width at different recurrence frequencies to maximum width.

$$F_i = W_i / W_{\max} \quad (3)$$

where  $F_i$  is width fraction at  $i$ -th frequency (Table 1),  $W_i$  is river width (m) at  $i$ -th frequency, and  $W_{\max}$  is maximum river width (m). The relationship between width fraction and its corresponding frequency was generally well-described by a  
15 Weibull distribution, and therefore we used the Weibull inverse survival function (Croarkin et al., 2006) to fit the relationship for each river reach as follows:

$$F_i = (-\ln(R))^{1/\gamma} \quad (4)$$

where  $R$  is width fraction corresponding frequency  $i$ ,  $\gamma$  is a parameter. We used differential evolution (Storn and Price, 1997) to estimate the parameter for each river reach. The parameter  $\gamma$  reflects different curve shapes for relationships between  
20 width fraction and frequency (Figure 2), and was used to characterize river morphology for 1,379,224 river reaches across the continent. The larger  $\gamma$ , the more time the river width is close to minimum width, and the closer to 0, the more time the river width is close to maximum width. The characteristic curves for rivers of invariable width show a horizontal line, which leads to infinitely large estimates of  $\gamma$ . We empirically limited  $\gamma$  between 0 and 5, which was suitable for the large majority of rivers in Australia.

25

After  $\gamma$  was estimated for each river reach, we classified river reaches into 10 categories according to their corresponding  $\gamma$  values (Table 2). We selected median values of width fraction at certain recurrence frequencies (Table 1), respectively, for each category, and used equation (4) to fit the relationship between width fraction and its corresponding frequency for estimating  $\gamma$  value. Lastly, we used equation (4) and estimated  $\gamma$  values to predict width fraction for each category, and  
30 compared them with observed width fraction. The standard differences were calculated for each category to evaluate their biases by the equation as follows:

$$SD = \sqrt{\frac{\sum (O - M)^2}{n}} \quad (5)$$

where  $O$  is the observation matrix,  $M$  is the estimate matrix,  $n$  is the number of elements, and  $SD$  is the standard difference. This process was intended to test whether the parameter  $\gamma$  represented recurrence-width relationship for different river reaches well.

### 3. Results

#### 5 3.1 Reach width-frequency distribution

Temporal observation frequency artefacts largely disappeared at 0.5% frequency. Hence, we selected river width at this frequency as the maximum river width (Figure 32a). We chose inundation at 80% frequency to represent minimum river extent (Figure 32b). Large differences existed between maximum and minimum width (Figure 32). Although there are many rivers reaches across Australia, most of them are ephemeral. Most of the (semi-) permanent rivers are located along the northern and eastern coast. There are many ephemeral river reaches with very broad maximum widths in the tributary catchments of the Murray-Darling Basin and in the interior Lake Eyre catchment, as well as along the Gulf of Carpentaria. River reaches flowing through a large water body, e.g. reservoir or lake, also have very large calculated widths. We did not exclude these river reaches, because they keep the river network connected and because such reaches are identified in the Geofabric mapping and hence can be selected as required. Some regions showed no meaningful river network (Figure 32a). Most of these regions are arid catchments with a sandy alluvial substrate. Presumably, this leads to an infiltration capacity that is sufficient to prevent significant surface runoff accumulation, whereas several of the catchments also contain recent dune systems that have interrupted a pre-existing drainage network (Figure 32a).

We divided river reaches into three categories based on their maximum width: small (<25 m), medium (25-250 m), and large (>250 m). It is noted that small rivers will not be narrower than 25 m along their entire width; a non-zero width is calculated because some of the 25m pixels along the reach were mapped as inundated at 0.5% maximum extent. Therefore, we only list summary statistics here for medium and large rivers (Table 3). The total length of reaches in different maximum and minimum width classes is listed in Table 3, showing the same distribution pattern ~~regardless of whether when including respectively excluding~~ segments flowing through water bodies are included or excluded. The total length decreases as maximum and minimum river width increases from 25 m up to more than 10 km. The total reach length in different width ranges and at different recurrence frequencies (Figure 34) decreases by a factor 21 as frequency increases from 0.5% to 80%. The majority of river reaches are 25-250 m broad irrespective of frequency range (Figure 34).

We compared river width at different recurrence frequencies with river gradient for all river reaches, as well as with upstream drainage area and cumulative runoff. For comparison with drainage area and runoff, we included only major rivers because the contribution of upstream flow to minor rivers can be uncertain, for example for anabranches and distributaries.



Upstream drainage area and total runoff best predicted maximum reach width, with Pearson correlations of 0.52 and 0.43, respectively, while gradient showed the expected negative relationship with maximum river width (Figure 45). Reflecting the most common method way of river width estimation, we fitted equation (1) to our data. We excluded river widths with small upstream cumulative runoff ( $<10^{4.5}$  m<sup>3</sup> or 0.37 m<sup>3</sup>/s) due to the influence of their sparse distribution on the overall relationship. This resulted in a relationship with a coefficient  $a=13.17$  and exponent  $b=0.49$ . We found that reach gradient affects  $a$  significantly, with decreasing width as gradient increases, but it did not appear to affect  $b$  except perhaps for the highest gradient class ( $>0.01$ , Figure 6Table-4).

River width at 50% frequency (i.e., median width) was compared with river widths considered representative of ‘average’ flows contained in the GRWL. Among the 218 Australian river regions, only 111 regions had any inundated river channel under ‘average’ conditions in the GRWL river width dataset, whereas all 218 river regions contained detected rivers in our analysis results. The Spearman’s rank correlation between median river width and river widths from the global dataset exceeded 0.6 for 68% (75) of 111 river regions and above 0.4 for 86% (95) of them, suggesting that the two datasets show reasonably similar relative width variations (Figure 7).

### 3.2 River hydromorphology classification

The parameter  $\gamma$  represents the degree to which rivers tend towards permanent or ephemeral flow regime. Most rivers, particularly the larger rivers along the coast flow through estuaries or other (quasi) permanent water bodies, and hence are classified as permanent or frequent ( $\gamma>0.8$ , Figure 85). Calculating the combined length of medium and large river reaches in different  $\gamma$  ranges (Figure 96) shows that the majority fall within  $\gamma=0.1-0.6$ , indicating that the dominant flow regime for Australian rivers is ephemeral or intermittent.

The average frequency-width data and fitted curves for different  $\gamma$  classes are shown in Figure 107. The standard differences between observed and fitted width fractions range from 0.0075 to 0.0725 (Table 45). Relative width was overestimated for frequencies between 20–50% for  $\gamma$  0.6–1.5, and for frequencies between 5–20% for  $\gamma$  0.2–0.8. Despite these biases, the curves generally capture the relationship between width fraction and frequency well.

### 3.3 Qualitative evaluation

A longitudinal profile of river width, gradient and flow regime parameter  $\gamma$  for the main channel of the Murray River (Figure 118) illustrates several features in the data. Strong width variations between 0.5% and 80% frequency can occur, indicating that the river channel contains water for most of the time ( $>50\%$  frequency) but contained within a relatively narrow channel. River width increases significantly between 5-8% and 1–2% frequency, which coincides with the threshold for overbank flows. The greatest widths are in reaches flowing through large water bodies, such as Lake Hume (C; storage reservoir), Yarrawonga Weir (D; impoundment), Lake Alexandrina (K; the terminal lake system), and other wetlands (H and I). Where

river flows are confined, widths do not change much (e.g. G; Mildura). Where flow splits into multiple channels before converging again, minimum channel width reduces (e.g., E and F) whereas maximum width increases corresponding to a broader floodplain. Between A and B, river reaches have water for 5–8% of the time in our data, but not in the GRWL dataset (Allen and Pavelsky, 2018) (Figure 11b). The GRWL widths under ‘average’ conditions are contained within the distribution in our data, but for rather widely varying frequencies. A narrowing relative difference between the 0.5% and 80% frequency widths corresponds with higher  $\gamma$  values, and vice versa (Figure 11b). This shows that the river morphology parameter  $\gamma$  can capture river flow regime. In line with Figure 4e5c, river width increases as gradient decreases from upstream to downstream overall (Figure 118b and c).

10 Figure 129 illustrates some of the data characteristics and challenges in complex river systems common in Australia’s dry and low relief environments. During floods, all river channels are inundated, and rivers are broad (Figure 129a). Only the main Darling River channel contains water frequently (Figure 129b) but is still very narrow during low flows (Figure 129c). All reaches have an ephemeral or intermittent flow regime (Figure 129f) with  $\gamma < 0.8$ , with the southern Talyawalka Creek showing a more ephemeral regime than the Darling River.

#### 15 4. Discussion

The Geofabric contains nearly 1.4 million river segments across the Australian continent, and provides valuable information on river path, length and contributing sub-catchment area. We were able to assign summary metrics derived from spatial and temporal surface water extent information contained in the satellite-derived WOfS to the river reaches and calculate river widths at different recurrence frequencies. The Geofabric Surface Network had a total length of 3.3 million km. Compared to 20 HydroSHEDS (Lehner et al., 2008), probably the most commonly used global hydrological dataset, the Geofabric delineates a finer-resolution stream network and describes the natural variation in drainage density and complex distributary and anabranching drainage patterns better (Stein et al., 2014). Nonetheless, the 9s DEM resolution is still insufficient to delineate all floodplains and river flow paths accurately. A new version of the Geofabric at 1s resolution has been produced for part of Australia, and once available nationally could be used to improve derived river characteristics. Similarly, the WOfS data will 25 continues to receive updates.

Errors in the calculated river characteristics also derive from uncertainties in WOfS inundation mapping. Narrow rivers, small water bodies, and wetlands with vegetation cover may be missed in mapping, and conversely topographical shadows in steep terrain or in high-rise cityscapes can be misclassified as water. Noise in very clear water can also result in 30 misclassification (Mueller et al., 2016). There are also data gaps in WOfS, and occasional linear artefacts caused by the Scan-Line-Corrector-Off (SLC-Off) problem in Landsat-7 (Mueller et al., 2016). Nevertheless, the overall accuracy of the water classifier used in WOfS was 97%, which gives confidence in our derived metrics.

Our dataset has some advantages over existing datasets such as GRWL. Firstly, it provides spatial and temporal information on river dynamics at both in-channel and overbank flows. Secondly, if one river reach has multiple channels, we calculated river width for each channel rather than considering them a single channel. Thirdly, our data provides more detailed information due to the finer river network contained in the Geofabric. Finally, our product can ~~is~~ readily related to any hydrological feature in the Geofabric for further application.

The relationship between river width and contributing catchment area, cumulative runoff and reach gradient can be compared to literature values. The positive relationships of discharge-width and catchment area-width, and negative relationship of width-gradient have also been demonstrated by Frasson et al. (2019). Empirically relating drainage area to river width (i.e. Eq (2)), Coe et al. (2008) obtained a coefficient  $c=0.42$  and exponent  $d=0.59$ , whereas Paiva et al. (2013) found  $c$  of 0.35–3.75 and  $d$  of 0.36-0.63 for different river basins (Table 56). We found intermediate values of  $c=0.91$  and  $d=0.43$ . A more common way to estimate river width is from mean annual discharge (i.e. Eq (1)). Decharme et al. (2008), Getirana et al. (2012, 2013) and Andreadis et al. (2013) all assumed an exponent  $b=0.5$ , as suggested by Leopold and Maddock (1953) and Leopold et al. (1964) (Table 56). We found very similar values for the exponent. By contrast, the value of the coefficient  $a$  varies widely between studies (Table 56). Getirana et al. (2012, 2013) used a high value of  $a=18$  for the Amazon basin whereas Andreadis et al. (2013) used  $a=7.2$  for their global application. We estimated  $a=13.1$  for all Australian reaches combined, but also found evidence that  $a$  correlates to the river reach gradient (Figure 6Table-4), which may help explain differences between previous studies.

Although the empirical scaling functions discussed here can be used to estimate river width based on drainage area or modelled runoff with modest skill, there are also clear limitations. Firstly, they are not able to estimate river widths at different recurrence frequencies. Secondly, individual river reach with the same upstream drainage area or cumulative runoff can have widely different river widths. For example, as mentioned, we found evidence that a reach with a more gentle gradient can be expected to be wider in comparison (Figure 6Table-4), consistent with the Manning equation. Thirdly, scaling equations cannot be applied to multi-channel rivers. Therefore, rather than empirical functions, the river width-frequency relationships derived here should help to improve the description of river morphology in hydrological modelling.

Some uncertainties are inherent to the approach followed here and would benefit from further research. Firstly, we calculated river width based on inundation extent within the entire designated sub-catchment boundary for each river reach. Although this excluded most unrelated water bodies and other river channels, the water mapping may still include unconnected water bodies, such as off-channel storages. This would cause overestimation of river width. However, for analysing width dynamics, the unrelated water bodies remaining in the sub-catchment can be assumed to be part of the river channel conceptually. Because they generally merge with channel at low recurrence frequencies (i.e. high flows) and separate at high

(i.e. low flows). If these nearby water bodies are removed, it could fail to detect the maximum river width; if they are remained at high flows and removed at low flows, there would be abrupt changes in river width. Secondly, although the data provide detailed information on the width of individual channels in anabranching river systems, the multiple channels will often merge into a single channel during overbank flow events. Our data do not reflect this merging and separating of channels at different flow levels and it is challenging to find a way to conceptually address this in the Geofabric framework.

Besides, there are some uncertainties from input variables, including DEM, runoff, and length. The SRTM-derived 1 second (approximately 30 m) DEM has an RMS error of 3.868 m, and its uncertainties include residual stripes, broad scale stripes, steps in elevation, large offsets along the edge of the valley floor, noise due to the nature of the radar acquisition and processing, incomplete removal of vegetation offsets and urban and built infrastructure, and vegetation height over-estimated (Gallant et al., 2011). However, the majority of rivers flow on flat plains without vegetation cover and urban and built infrastructure and river gradients were only produced for the main river reaches, presumably with wider channels, which reduce the influence from uncertainties and limitations of DEM. Uncertainties from input data, parameterisation and conceptual structure in the model could affect runoff estimates, although the AWRA-L model has a strong documented pedigree in runoff estimation in comparisons with gauge data (e.g., Van Dijk and Warren, 2010, Frost et al., 2018). The raster-vector conversion anomalies to produce the Geofabric lead to overestimation of the segment length, which to some extent may counterbalance the overestimation of river width.

Looking beyond Australia, the method proposed here is applicable in any region of the world where high-resolution inundation time series mapping is feasible, and where good quality DEM-derived river path, length, and sub-catchment area data are available. Thus, it would seem feasible to use a similar methodology as that employed here to develop a global river hydromorphology dataset using global inundation time series Landsat mapping produced by Donchyts et al. (2016), Pekel et al. (2016) or Jones (2019), (Donchyts et al., 2016; Pekel et al., 2016), for example.

## 5. Data availability

The river hydromorphology data is available at <http://dx.doi.org/10.25914/5c637a7449353> (Hou et al. 2019) and also can be downloaded directly from <http://wald.anu.edu.au/data/>. The data is in ASCII format, which can be directly joined to the Geofabric products, including surface cartography, surface catchments, surface network, groundwater cartography, and hydrological reporting catchments and regions. The Geofabric Surface Network can be accessed from <http://www.bom.gov.au/water/geofabric/>. The instruction for using these ~~to use this~~ data can be found in the 'readme' file. The data may be converted to any format (e.g., shapefile or raster) and combined with other Geofabric data, such as river name, length, feature type (nature, artificial, or water area flow segment), hierarchy (major or minor rivers), flow direction, and upstream drainage area.

## 6. Conclusion

We developed a river hydromorphology dataset for Australia by combining surface water recurrence information from the WOfS Landsat-derived dynamic water mapping product and GIS-based hydrological features from the Australian Geofabric. Our data provide river widths at different recurrence frequencies for  $5.84 \times 10^8$  m river reaches across the Australian continent. A river morphology parameter  $\gamma$  is proposed to describe the shape of the width-frequency curve and can be interpreted as the degree to which rivers tend towards permanent, frequent, intermittent or ephemeral. The majority of medium and large rivers in Australia have widths between 25–250 m and show an ephemeral or intermittent flow regime. The data show correlation between maximum river width and cumulative upstream runoff, upstream drainage area and gradient, in line with previously published results. The dataset developed here may be useful in providing fundamental information for understanding hydrological, biogeochemical and ecological processes in floodplain-river systems; describing river width features in hydrological modelling; estimating river depth and discharge; assessing river conveyance capacity; identifying flooding-prone areas, and determining potential locations for satellite-based river gauging (Hou et al., 2018).

## Acknowledgements:

The authors acknowledge Australian Bureau of Meteorology and Geoscience Australia for developing Australian Hydrological Geospatial Fabric (Geofabric) and Water Observations from Space (WOfS). We are grateful to Dr. Adam Lewis for his assistance in reviewing this paper. The first author thanks the ANU-CSC (the Australian National University and the China Scholarship Council) Scholarship for supporting his PhD study at the Australian National University. Calculations were performed on the high-performance computing system, Raijin, from the National Computational Infrastructure (NCI), which is supported by the Australian Government. This paper is published with the permission of the CEO, Geoscience Australia. We also thank the anonymous reviewer and George Allen for their helpful suggestions that improved the manuscript.

## Reference

- Allen, G. H., and Pavelsky, T. M.: Patterns of river width and surface area revealed by the satellite-derived North American river width data set, *Geophysical Research Letters*, 42, 395-402, <https://doi.org/10.1002/2014GL062764>, 2015.
- Allen, G. H., and Pavelsky, T. M.: Global extent of rivers and streams, *Science*, 361, 585-588, <https://doi.org/10.1126/science.aat0636>, 2018.
- Andreadis, K. M., Schumann, G. J. P., and Pavelsky, T.: A simple global river bankfull width and depth database, *Water Resources Research*, 49, 7164-7168, <https://doi.org/10.1002/wrcr.20440>, 2013.
- Arora, V. K., and Boer, G. J.: A variable velocity flow routing algorithm for GCMs, *Journal of Geophysical Research: Atmospheres*, 104, 30965-30979, <https://doi.org/10.1029/1999JD900905>, 1999.

- Bates, P. D., and De Roo, A. P. J.: A simple raster-based model for flood inundation simulation, *Journal of Hydrology*, 236, 54-77, [https://doi.org/10.1016/S0022-1694\(00\)00278-X](https://doi.org/10.1016/S0022-1694(00)00278-X), 2000.
- Biancamaria, S., Bates, P. D., Boone, A., and Mognard, N. M.: Large-scale coupled hydrologic and hydraulic modelling of the Ob river in Siberia, *Journal of Hydrology*, 379, 136-150, <https://doi.org/10.1016/j.jhydrol.2009.09.054>, 2009.
- 5 Bureau of Meteorology: Australian Hydrological Geospatial Fabric (Geofabric) Product Guide, [http://www.bom.gov.au/water/geofabric/documents/v2\\_1/ahgf\\_productguide\\_V2\\_1\\_release.pdf](http://www.bom.gov.au/water/geofabric/documents/v2_1/ahgf_productguide_V2_1_release.pdf), 2012a.
- Bureau of Meteorology: Australian Hydrological Geospatial Fabric (Geofabric) Data Product Specification, [http://www.bom.gov.au/water/geofabric/documents/v2\\_1/ahgf\\_dps\\_surface\\_network\\_V2\\_1\\_release.pdf](http://www.bom.gov.au/water/geofabric/documents/v2_1/ahgf_dps_surface_network_V2_1_release.pdf), 2012b.
- Coe, M. T., Costa, M. H., and Howard, E. A.: Simulating the surface waters of the Amazon River basin: impacts of new river geomorphic and flow parameterizations, *Hydrological Processes*, 22, 2542-2553, <https://doi.org/10.1002/hyp.6850>, 10 2008.
- NIST/SEMATECH e-handbook of statistical methods, <http://www.itl.nist.gov/div898/handbook>, 2018.
- Dadson, S. J., Ashpole, I., Harris, P., Davies, H. N., Clark, D. B., Blyth, E., and Taylor, C. M.: Wetland inundation dynamics in a model of land surface climate: Evaluation in the Niger inland delta region, *Journal of Geophysical Research: Atmospheres*, 115, <https://doi.org/10.1029/2010JD014474>, 2010.
- 15 Decharme, B., Douville, H., Prigent, C., Papa, F., and Aires, F.: A new river flooding scheme for global climate applications: Off-line evaluation over South America, *Journal of Geophysical Research: Atmospheres*, 113, <https://doi.org/10.1029/2007JD009376>, 2008.
- Doble, R., Crosbie, R., Peeters, L., Joehnk, K., and Ticehurst, C.: Modelling overbank flood recharge at a continental scale, 20 *Hydrology and Earth System Sciences*, 18, 1273-1288, <https://doi.org/10.5194/hess-18-1273-2014>, 2014.
- Donchyts, G., Baart, F., Winsemius, H., Gorelick, N., Kwadijk, J., and Van De Giesen, N.: Earth's surface water change over the past 30 years, *Nature Climate Change*, 6, 810-813, <https://doi.org/10.1038/nclimate3111>, 2016.
- [Frasson, R. P. d. M., Pavelsky, T. M., Fonstad, M. A., Durand, M. T., Allen, G. H., Schumann, G., et al.: Global relationships between river width, slope, catchment area, meander wavelength, sinuosity, and discharge, \*Geophysical Research Letters\*, 46, 3252–3262, <https://doi.org/10.1029/2019GL082027>, 2019.](#)
- 25 Frost, A. J., Ramchurn, A., and Smith, A.: The Australian Landscape Water Balance model (AWRA-L v6), Technical Description of the Australian Water Resources Assessment Landscape model version 6, Bureau of Meteorology Technical Report, [http://www.bom.gov.au/water/landscape/assets/static/publications/AWRALv6\\_Model\\_Description\\_Report.pdf](http://www.bom.gov.au/water/landscape/assets/static/publications/AWRALv6_Model_Description_Report.pdf), 2018.
- [Gallant, J.C., Dowling, T.I., Read, A.M., Wilson, N., Tickle, P., Inskip, C.: 1 second SRTM Derived Digital Elevation Models User Guide, Geoscience Australia, \[https://d28rz98at9flks.cloudfront.net/72759/1secSRTM\\\_Derived\\\_DEMs\\\_UserGuide\\\_v1.0.4.pdf\]\(https://d28rz98at9flks.cloudfront.net/72759/1secSRTM\_Derived\_DEMs\_UserGuide\_v1.0.4.pdf\), 2011.](#)
- 30 Getirana, A. C. V., Boone, A., Yamazaki, D., Decharme, B., Papa, F., and Mognard, N.: The hydrological modeling and analysis platform (HyMAP): Evaluation in the Amazon basin, *Journal of Hydrometeorology*, 13, 1641-1665, <https://doi.org/10.1175/JHM-D-12-021.1>, 2012.

- Getirana, A. C. V., Boone, A., Yamazaki, D., and Mognard, N.: Automatic parameterization of a flow routing scheme driven by radar altimetry data: Evaluation in the Amazon basin, *Water Resources Research*, 49, 614-629, <https://doi.org/10.1002/wrcr.20077>, 2013.
- 5 [Hou, J., Van Dijk, A. I. J. M., Renzullo, L. J., and Vertessy, R. A.: Using modelled discharge to develop satellite-based river gauging: a case study for the Amazon Basin, \*Hydrol. Earth Syst. Sci.\*, 22, 6435-6448, <https://doi.org/10.5194/hess-22-6435-2018>, 2018.](#)
- Hou, J., Van Dijk, A. I. J. M., Renzullo, L. J., Vertessy, R. A., Mueller, N.: Hydromorphological attributes for all Australian river reaches, <https://doi.org/10.25914/5c637a7449353>, 2019.
- Isikdogan, F., Bovik, A., and Passalacqua, P.: RivaMap: An automated river analysis and mapping engine, *Remote Sensing of Environment*, 202, 88-97, <https://doi.org/10.1016/j.rse.2017.03.044>, 2017.
- 10 [Jones, J. W.: Improved Automated Detection of Subpixel-Scale Inundation—Revised Dynamic Surface Water Extent \(DSWE\) Partial Surface Water Tests, \*Remote Sensing\*, 11, 374, <https://doi.org/10.3390/rs11040374>, 2019.](#)
- Kleinhans, M. G., and Van Den Berg, J. H.: River channel and bar patterns explained and predicted by an empirical and a physics-based method, *Earth Surface Processes and Landforms*, 36, 721-738, <https://doi.org/10.1002/esp.2090>, 2011.
- 15 [Lehner, B., Verdin, K., and Jarvis, A.: New global hydrography derived from spaceborne elevation data, \*Eos, Transactions American Geophysical Union\*, 89, 93-94, <https://doi.org/10.1029/2008EO100001>, 2008.](#)
- Leopold, L. B., and Maddock, T.: *The hydraulic geometry of stream channels and some physiographic implications*, U.S. Government Printing Office, Washington, D.C., 1953.
- Leopold, L. B., Wolman, M. G., and Miller, J. P.: *Fluvial processes in geomorphology*, W.H. Freeman and Company, San Francisco, 1964.
- 20 [Miller, Z. F., Pavelsky, T. M., and Allen, G. H.: Quantifying river form variations in the Mississippi Basin using remotely sensed imagery, \*Hydrology and Earth System Sciences\*, 18, 4883-4895, <https://doi.org/10.5194/hess-18-4883-2014>, 2014.](#)
- [Moody, J. A., and Troutman, B. M.: Characterization of the spatial variability of channel morphology, \*Earth Surface Processes and Landforms\*, 27, 1251-1266, <https://doi.org/10.1002/esp.403>, 2002.](#)
- 25 [Mueller, N., Lewis, A., Roberts, D., Ring, S., Melrose, R., Sixsmith, J., Lymburner, L., McIntyre, A., Tan, P., and Curnow, S., Ip, A.: Water observations from space: Mapping surface water from 25 years of Landsat imagery across Australia, \*Remote Sensing of Environment\*, 174, 341-352, <https://doi.org/10.1016/j.rse.2015.11.003>, 2016.](#)
- Nanson, G. C., and Knighton, A. D.: Anabranching rivers: their cause, character and classification, *Earth Surface Processes and Landforms*, 21, 217-239, [https://doi.org/10.1002/\(SICI\)1096-9837\(199603\)21:3<217::AID-ESP611>3.0.CO;2-U](https://doi.org/10.1002/(SICI)1096-9837(199603)21:3<217::AID-ESP611>3.0.CO;2-U), 1996.
- 30 [Neal, J., Schumann, G., and Bates, P.: A subgrid channel model for simulating river hydraulics and floodplain inundation over large and data sparse areas, \*Water Resources Research\*, 48, <https://doi.org/10.1029/2012WR012514>, 2012.](#)
- O'Loughlin, F., Trigg, M. A., Schumann, G. J. P., and Bates, P. D.: Hydraulic characterization of the middle reach of the Congo River, *Water Resources Research*, 49, 5059-5070, <https://doi.org/10.1002/wrcr.20398>, 2013.



- Paiva, R. C. D., Buarque, D. C., Collischonn, W., Bonnet, M. P., Frappart, F., Calmant, S., and Mendes, C. A. B.: Large-scale hydrologic and hydrodynamic modeling of the Amazon River basin, *Water Resources Research*, 49, 1226-1243, <https://doi.org/10.1002/wrcr.20067>, 2013.
- Pavelsky, T. M., and Smith, L. C.: RivWidth: A software tool for the calculation of river widths from remotely sensed imagery, *IEEE Geoscience and Remote Sensing Letters*, 5, 70-73, <https://doi.org/10.1109/LGRS.2007.908305>, 2008.
- Pedinotti, V., Boone, A., Decharme, B., Crétaux, J. F., Mognard, N., Panthou, G., Papa, F., and Tanimoun, B. A.: Evaluation of the ISBA-TRIP continental hydrologic system over the Niger basin using in situ and satellite derived datasets, *Hydrology and Earth System Sciences*, 16, 1745-1773, <https://doi.org/10.5194/hess-16-1745-2012>, 2012.
- Pekel, J.-F., Cottam, A., Gorelick, N., and Belward, A. S.: High-resolution mapping of global surface water and its long-term changes, *Nature*, 540, 418-422, <https://doi.org/10.1038/nature20584>, 2016.
- Rosgen, D. L.: A classification of natural rivers, *Catena*, 22, 169-199, [https://doi.org/10.1016/0341-8162\(94\)90001-9](https://doi.org/10.1016/0341-8162(94)90001-9), 1994.
- Stein, J. L., Hutchinson, M. F., and Stein, J. A.: A new stream and nested catchment framework for Australia, *Hydrology and Earth System Sciences*, 18, 1917-1933, <https://doi.org/10.5194/hess-18-1917-2014>, 2014.
- Storn, R., and Price, K.: Differential evolution—a simple and efficient heuristic for global optimization over continuous spaces, *Journal of Global Optimization*, 11, 341-359, <https://doi.org/10.1023/A:1008202821328>, 1997.
- Van Dijk, A. I. J. M.: Australian Water Resources Assessment System. Technical Report 3. Landscape Model (version 0.5) Technical Description. CSIRO: Water for a Healthy Country. National Research Flagship, <http://www.clw.csiro.au/publications/waterforahealthycountry/2010/wfhc-aus-water-resources-assessment-system.pdf>, 2010.
- Van Dijk, A. I. J. M., and Warren, G.: The Australian Water Resources Assessment System. Technical Report 4, Landscape Model (version 0.5) Evaluation Against Observations, CSIRO: Water for a Healthy Country National Research Flagship, <http://www.clw.csiro.au/publications/waterforahealthycountry/2010/wfhc-awras-evaluation-against-observations.pdf>, 2010.
- Vincenty, T.: Geodetic inverse solution between antipodal points, Richard Rapp Geodetic Science Ohio State University, 1975.
- Yamazaki, D., Kanae, S., Kim, H., and Oki, T.: A physically based description of floodplain inundation dynamics in a global river routing model, *Water Resources Research*, 47, <https://doi.org/10.1029/2010WR009726>, 2011.
- Yamazaki, D., O'Loughlin, F., Trigg, M. A., Miller, Z. F., Pavelsky, T. M., and Bates, P. D.: Development of the global width database for large rivers, *Water Resources Research*, 50, 3467-3480, <https://doi.org/10.1002/2013WR014664>, 2014.



**Table 1** The categories of recurrence frequency for which calculations were performed.

Frequency	Description	Frequency	Description
0%	Water not detected	5%	Water detected 5 times in 100 observations
0.1%	Water detected 1 times in 1000 observations	8%	Water detected 8 times in 100 observations
0.2%	Water detected 2 times in 1000 observations	10%	Water detected 10 times in 100 observations
0.3%	Water detected 3 times in 1000 observations	20%	Water detected 20 times in 100 observations
0.4%	Water detected 4 times in 1000 observations	50%	Water detected 50 times in 100 observations
0.5%	Water detected 5 times in 1000 observations	80%	Water detected 80 times in 100 observations
0.8%	Water detected 8 times in 1000 observations	90%	Water detected 90 times in 100 observations
1%	Water detected 1 times in 100 observations	95%	Water detected 95 times in 100 observations
2%	Water detected 2 times in 100 observations	100%	Water detected always

**Table 2** Ten categories of river reaches based on  $\gamma$  values

Flow Regime	Ephemeral			Intermittent			Frequent			Permanent
$\gamma$	0~0.05	0.05~0.1	0.1~0.2	0.2~0.4	0.4~0.6	0.6~0.8	0.8~1	1~1.5	1.5~3	3~5

- 5 **Table 3** The ~~total-lengths~~ percentages in different width ranges of maximum (a) and minimum (b) river widths for Australia (all river segments include flow segments and segments flowing through water bodies).

River Width Range (m)	Length (All River Segments)		Length (Flow Segments)	
	Maximum Width (R=0.5%)	Minimum Width (R=80%)	Maximum Width (R=0.5%)	Minimum Width (R=80%)
<u>25~50</u>	<u>22.56%</u>	<u>28.59%</u>	<u>25.69%</u>	<u>35.46%</u>
<u>50~100</u>	<u>20.95%</u>	<u>25.67%</u>	<u>22.84%</u>	<u>31.69%</u>
<u>100~250</u>	<u>24.86%</u>	<u>24.16%</u>	<u>25.99%</u>	<u>23.91%</u>
<u>250~500</u>	<u>14.79%</u>	<u>10.11%</u>	<u>14.22%</u>	<u>5.95%</u>
<u>500~1000</u>	<u>9.46%</u>	<u>6.51%</u>	<u>7.56%</u>	<u>1.90%</u>
<u>1000~2500</u>	<u>5.56%</u>	<u>3.86%</u>	<u>3.16%</u>	<u>1.00%</u>
<u>2500~5000</u>	<u>1.31%</u>	<u>0.88%</u>	<u>0.41%</u>	<u>0.08%</u>
<u>5000~10000</u>	<u>0.39%</u>	<u>0.20%</u>	<u>0.09%</u>	<u>0.01%</u>
<u>&gt;10000</u>	<u>0.14%</u>	<u>0.02%</u>	<u>0.03%</u>	<u>0.00%</u>
<u>Total (m)</u>	<u><math>5.84 \times 10^8</math></u>	<u><math>2.80 \times 10^7</math></u>	<u><math>4.12 \times 10^8</math></u>	<u><math>1.66 \times 10^7</math></u>

River Width Range (m)	Length (All Reaches; m)		Length (River Segments; m)	
	Maximum Width (R=0.5%)	Minimum Width (R=80%)	Maximum Width (R=0.5%)	Minimum Width (R=80%)
25-50	4.32×10 <sup>8</sup>	8.01×10 <sup>6</sup>	4.06×10 <sup>8</sup>	5.89×10 <sup>6</sup>
50-100	4.22×10 <sup>8</sup>	7.19×10 <sup>6</sup>	9.42×10 <sup>7</sup>	5.26×10 <sup>6</sup>
100-250	4.45×10 <sup>8</sup>	6.77×10 <sup>6</sup>	1.07×10 <sup>8</sup>	3.97×10 <sup>6</sup>
250-500	8.64×10 <sup>7</sup>	2.83×10 <sup>6</sup>	5.86×10 <sup>7</sup>	9.88×10 <sup>5</sup>
500-1000	5.53×10 <sup>7</sup>	1.82×10 <sup>6</sup>	3.12×10 <sup>7</sup>	3.16×10 <sup>5</sup>
1000-2500	3.25×10 <sup>7</sup>	1.08×10 <sup>6</sup>	1.30×10 <sup>7</sup>	1.66×10 <sup>5</sup>
2500-5000	7.65×10 <sup>6</sup>	2.46×10 <sup>5</sup>	1.70×10 <sup>6</sup>	1.25×10 <sup>4</sup>
5000-10000	2.27×10 <sup>6</sup>	5.60×10 <sup>4</sup>	3.78×10 <sup>5</sup>	9.49×10 <sup>3</sup>
≥10000	7.90×10 <sup>5</sup>	6.08×10 <sup>3</sup>	1.13×10 <sup>5</sup>	0
Total	5.84×10 <sup>8</sup>	2.80×10 <sup>7</sup>	4.12×10 <sup>8</sup>	1.66×10 <sup>7</sup>

**Table 4** The coefficients *a* and exponents *b* of the power scaling relationship predicting maximum river width from upstream cumulative runoff (Eq. 1) calculated for different reach gradient classes.

Gradient	All	0-0.0001	0.0001-0.001	0.001-0.01	>0.01
Coefficient <i>a</i>	13.17	26.92	21.38	11.75	8.91
Exponent <i>b</i>	0.49	0.49	0.47	0.48	0.41

5

**Table 45** Validation of curves fitting for different river morphology categories


$\gamma$ interval	0~0.05	0.05~0.1	0.1~0.2	0.2~0.4	0.4~0.6	0.6~0.8	0.8~1	1~1.5	1.5~3	3~5
Percentage	6.18%	11.68%	18.64%	28.93%	13.39%	5.82%	3.49%	5.12%	4.35%	0.98%
Coefficient $\gamma$	0.04	0.07	0.15	0.30	0.51	0.73	0.94	1.32	2.31	4.07
Standard Difference	0.0075	0.0104	0.0202	0.0446	0.0725	0.0489	0.0344	0.0337	0.0407	0.0206

**Table 56** Comparison of coefficients and exponents for equation (1) and (2) between different research


Research	Equation	<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	Scale
Coe et al. (2008)	$w = cA^d$	-	-	0.42	0.59	Amazon
Paiva et al. (2013)	$w = cA^d$	-	-	0.35-3.75	0.36-0.63	Amazon
Decharme et al. (2008)	$w = \max(25, aQ^b)$	$a = (10^{-4} Q_{m,mouth} + 6)^{*1}$	0.5	-	-	South America
Getirana et al. (2012, 2013)	$w = \max(10, aQ^b)$	18	0.5	-	-	Amazon
Andreadis et al. (2013) <sup>*2</sup>	$w = aQ^b$	7.2	0.5±0.02	-	-	Globe
This Study	$w = aQ^b$ ; $w = cA^d$	13.17	0.49	0.91	0.43	Australia

\*1 suggested by Arora and Boer (1999) ( $Q_{m,mouth}$  is the mean annual discharge at the mouth of the river)


10 <sup>2</sup> based on the regression relation developed by Moody and Troutman (2002)

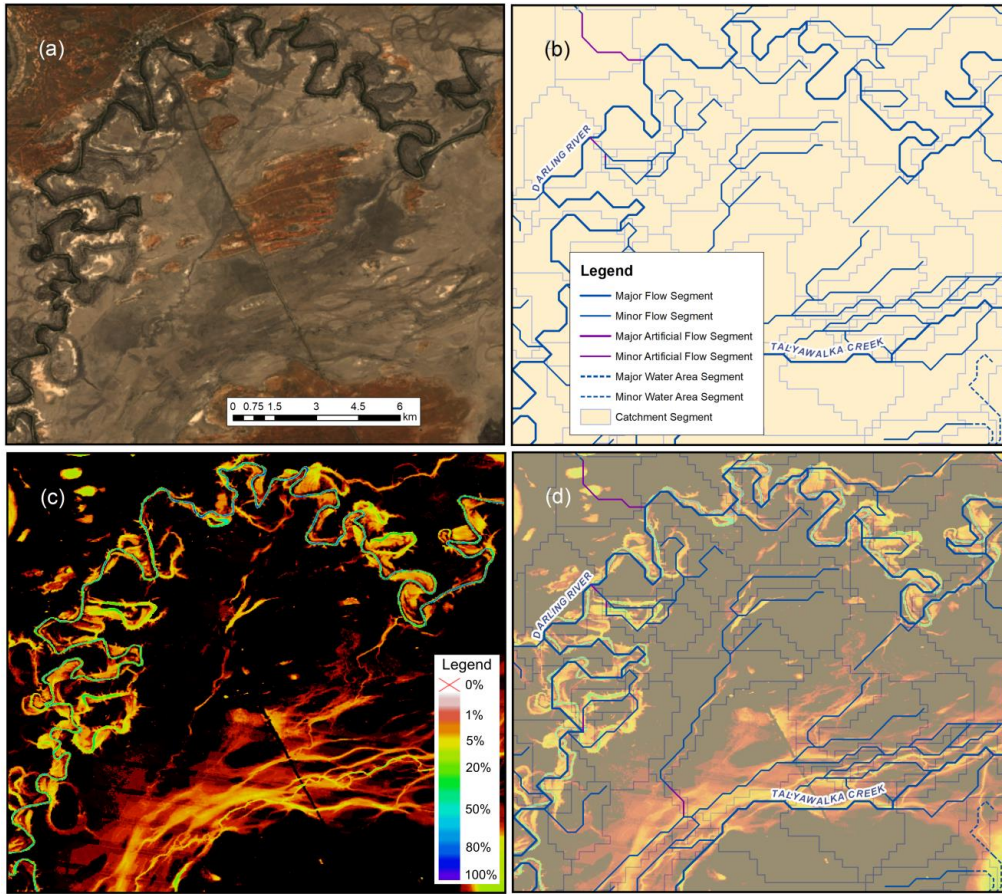


5 **Figure 1** Illustration of the data used in the investigations: (a) true colour median-value composite of Landsat-8 data for a 15.7 km x 15.3 km area centered on 31.62 S and 143.42 N; (b) river segments and corresponding sub-catchment area from the Geofabric Surface Network; (c) WOFS Water Summary showing the percentage of the number of times the surface water was observed; and (d) overlay of the Geofabric onto WOFS (i.e. b and c).

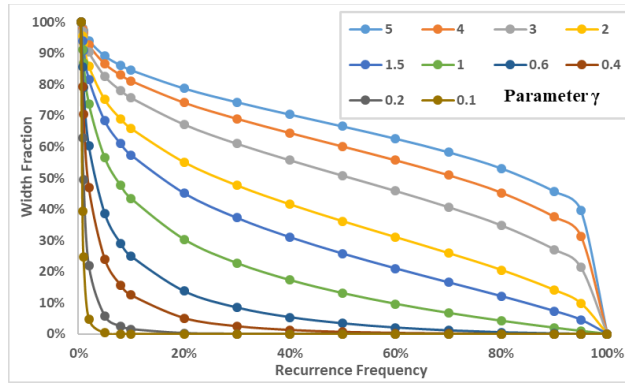

**Figure 2** Different river width distributions for different values of the gamma parameter.

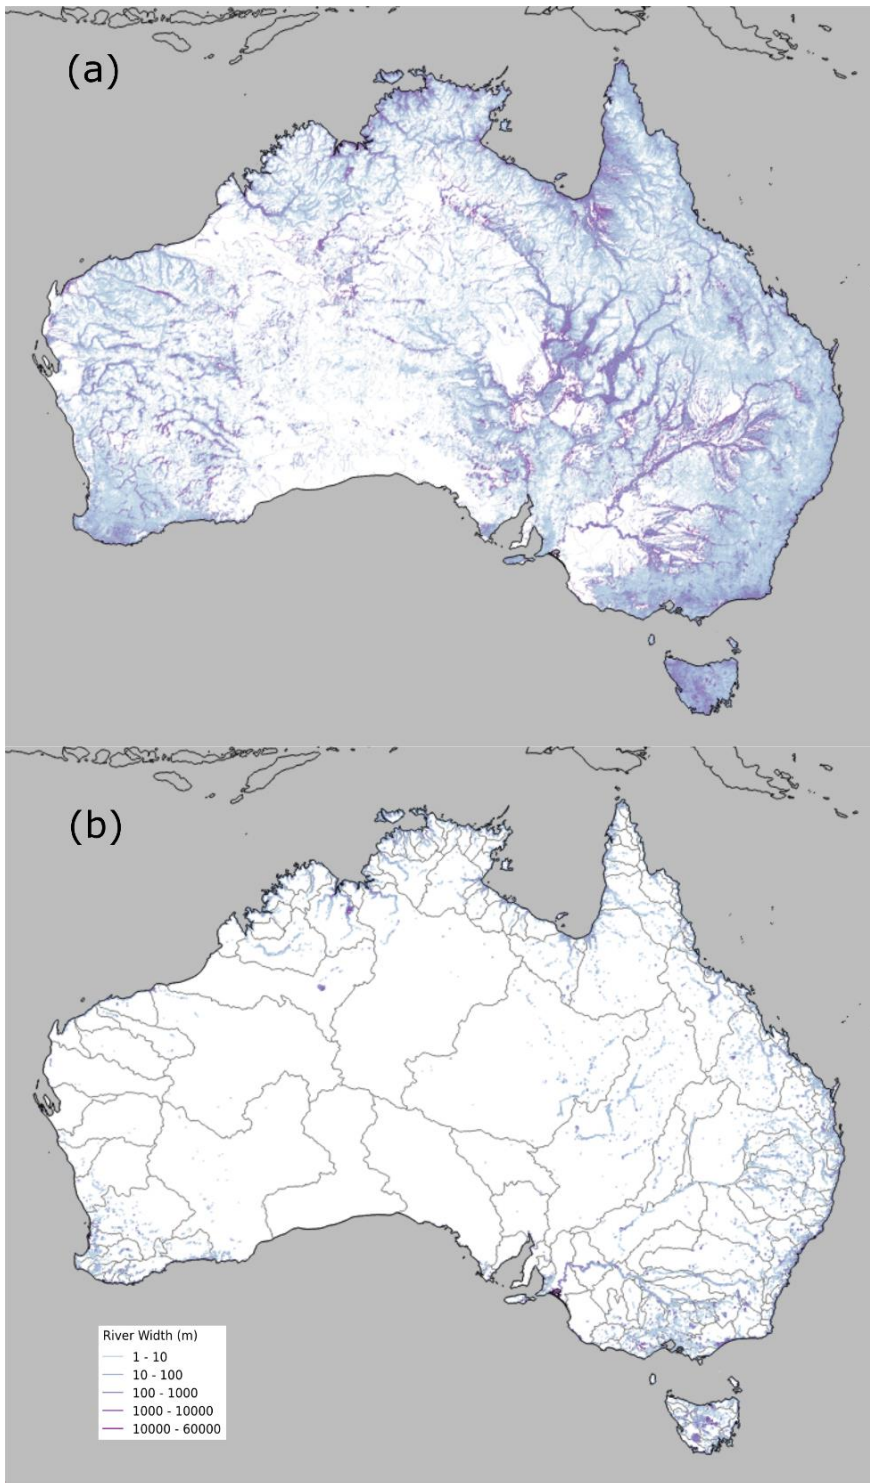



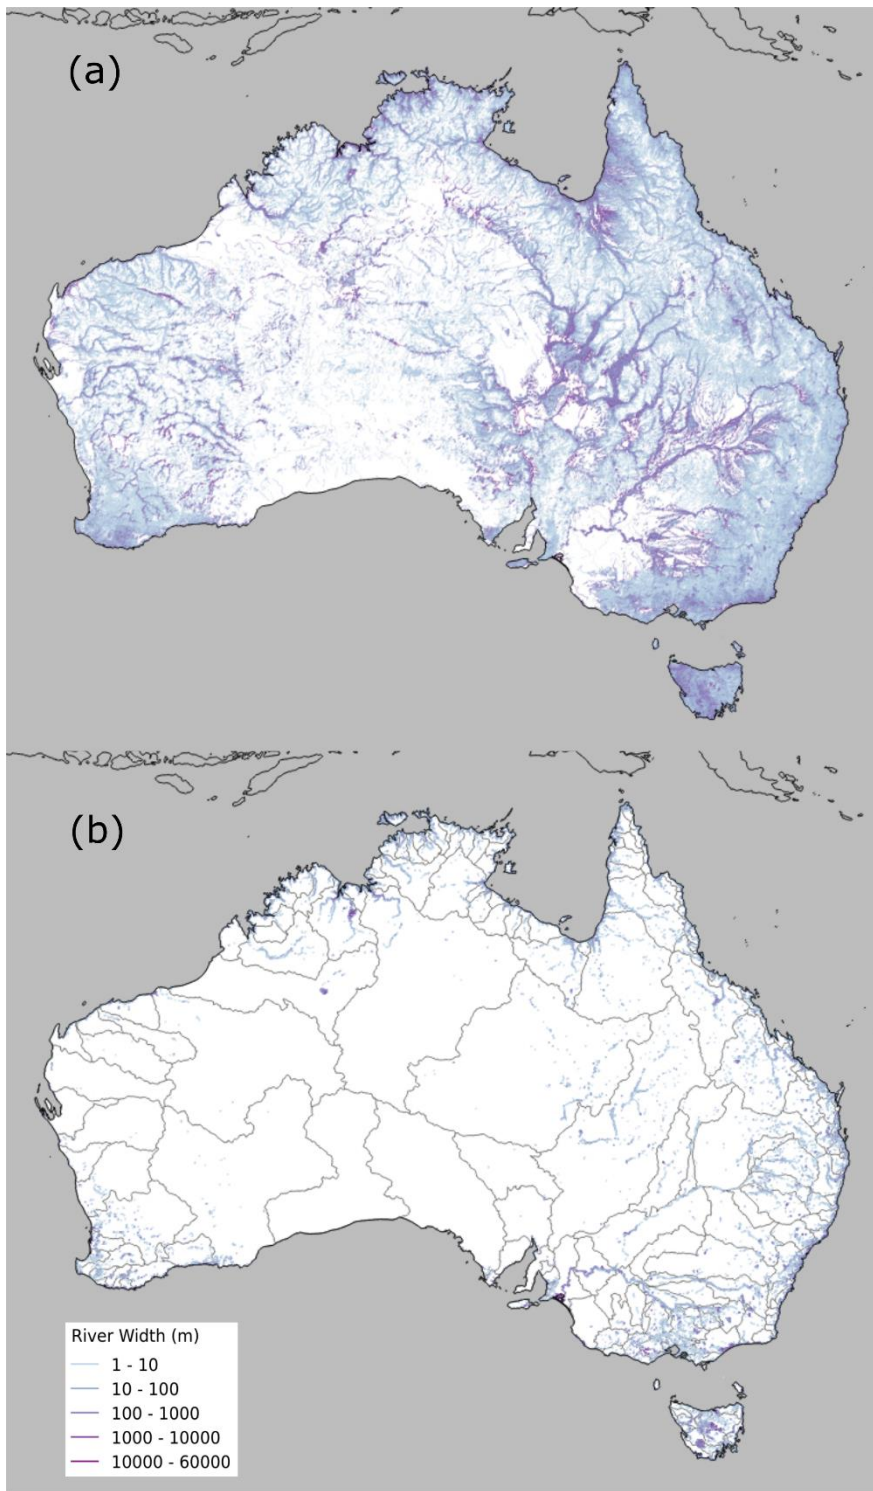

**Figure 2-3** Maximum (a) and minimum (b) river width across Australia. 218 river regions delineated in grey in subfigure b.



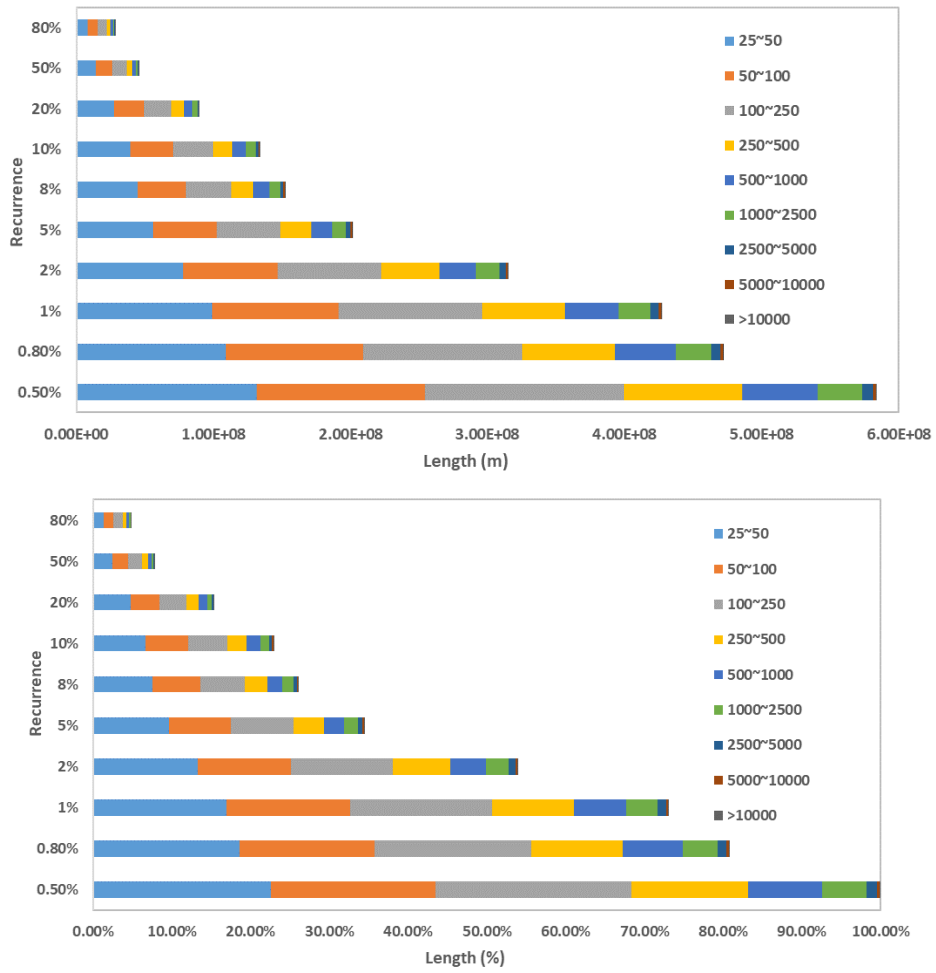


Figure 3-4 The total lengths percentages in different width ranges at different recurrence frequencies for Australia.

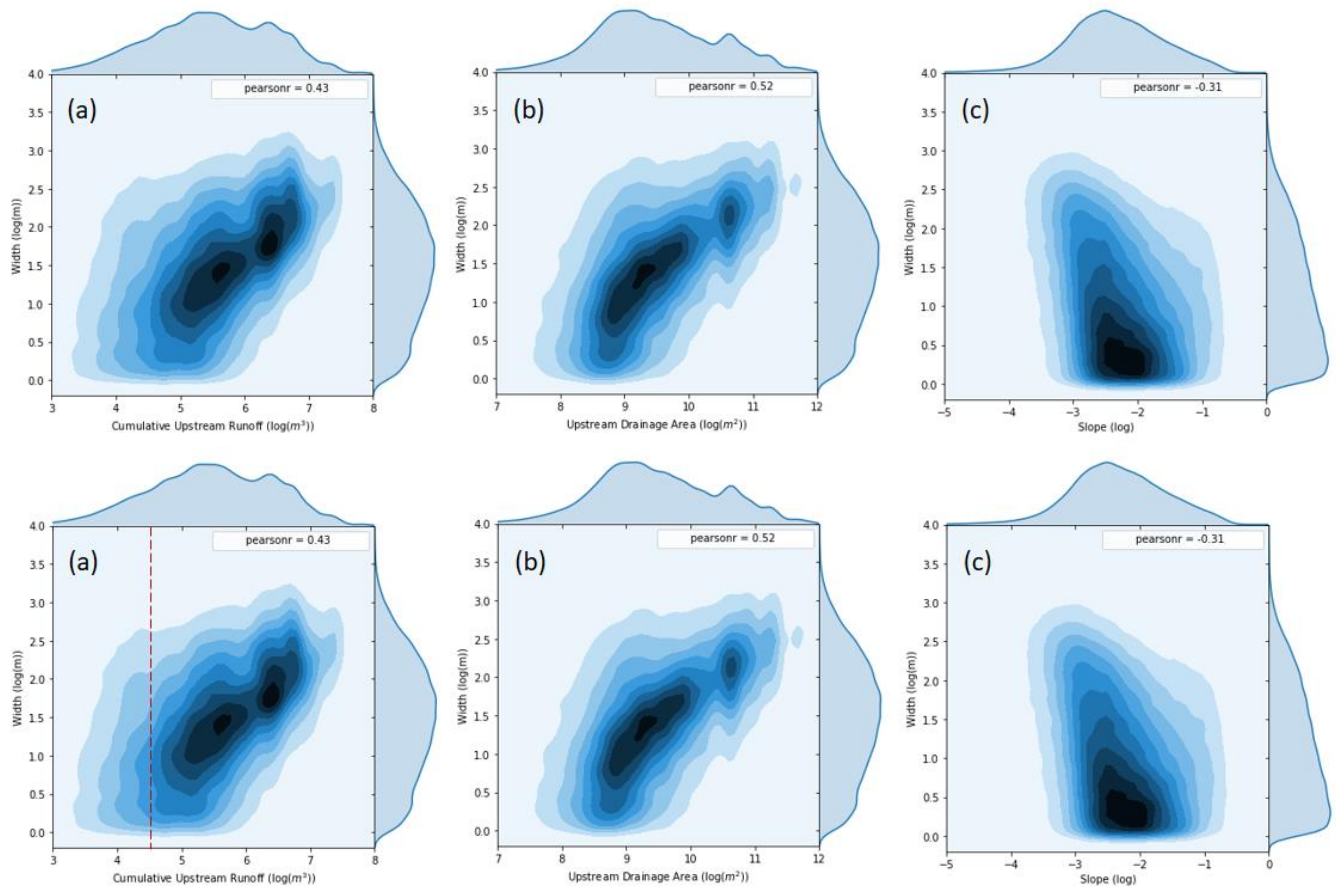


**Figure 4-5** The relationships between maximum river width and cumulative upstream runoff (a), upstream drainage area (b) and river gradient (c) (The color coding is related to data counts with highest in dark blue, lowest in light blue, which is corresponding to the histogram on the axes; red dash line: the threshold).

5

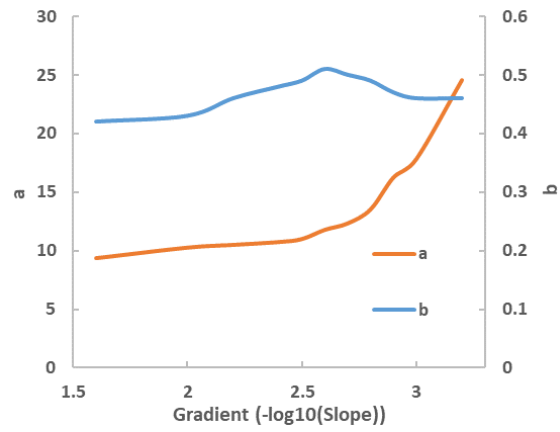


**Figure 6** The coefficients  $a$  and exponents  $b$  of the power scaling relationship predicting maximum river width from upstream cumulative runoff (Eq. 1) calculated for different reach gradient.

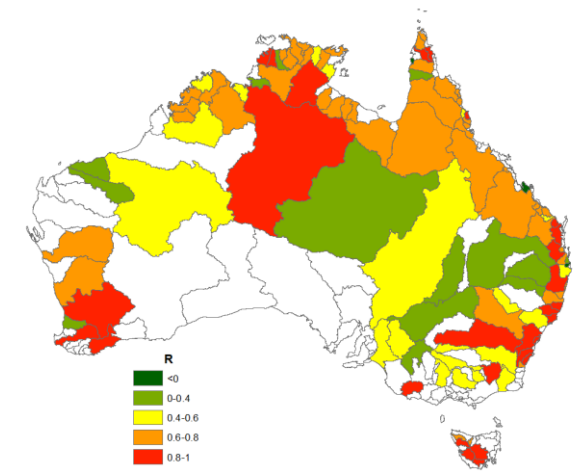

5

**Figure 7** The Spearman's rank correlations between our dataset and GRWL dataset in 111 river regions across Australia.



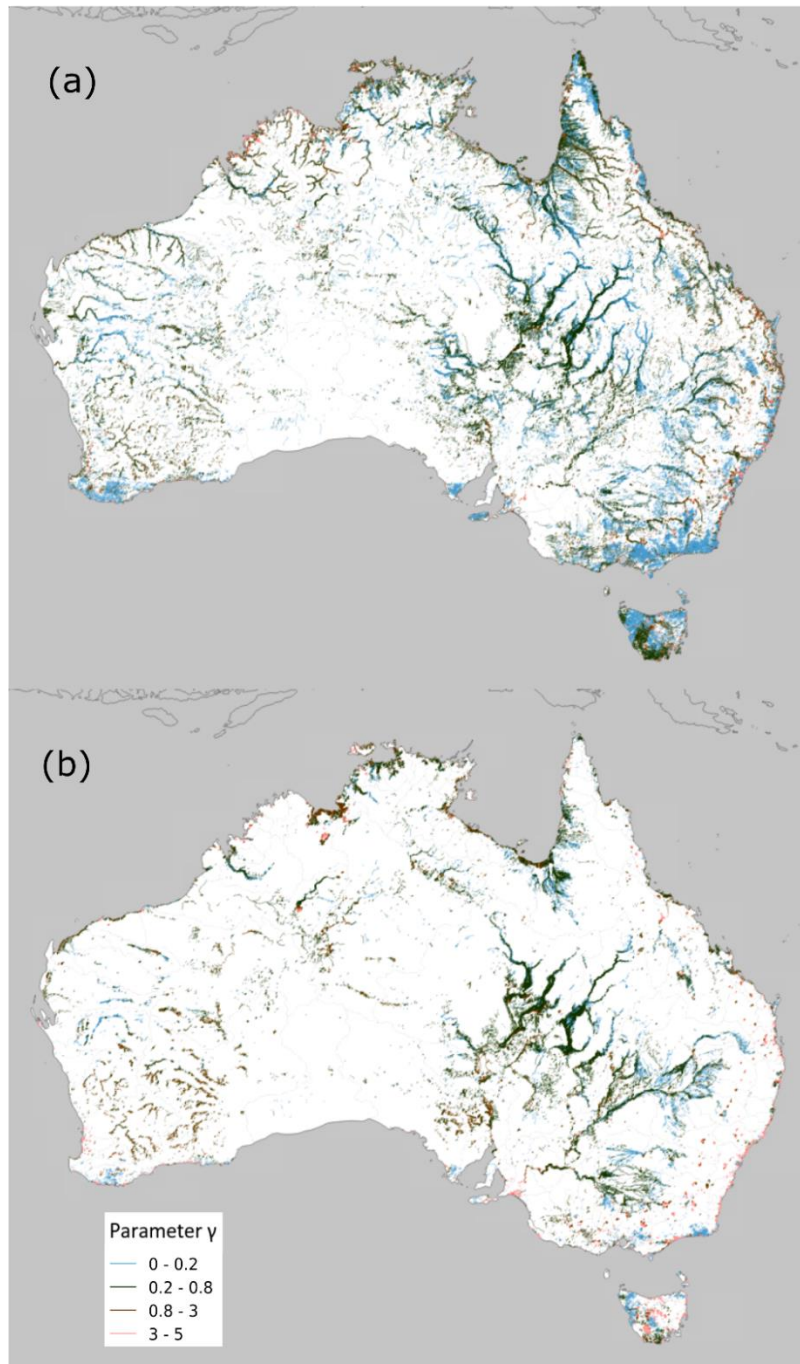

**Figure 85** River morphology classification  $\gamma$  parameter values for medium (a) and large (b) rivers for Australia.

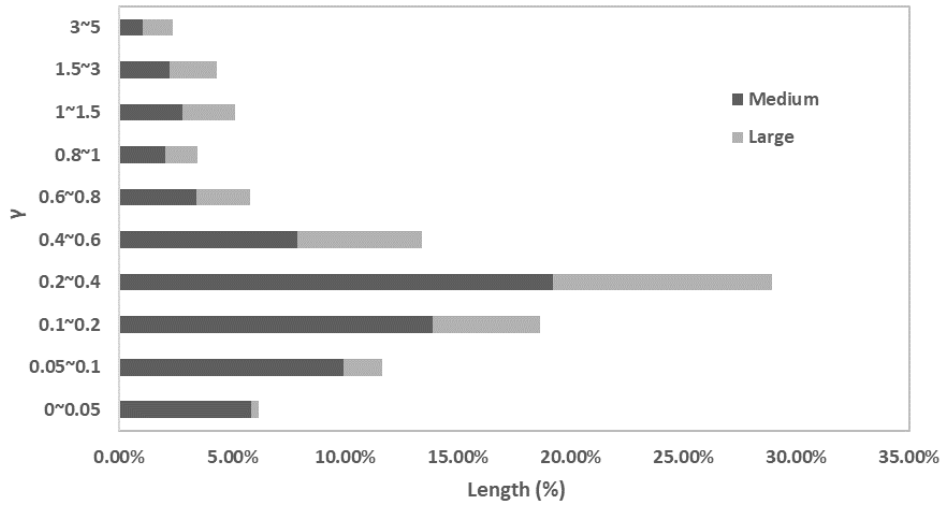
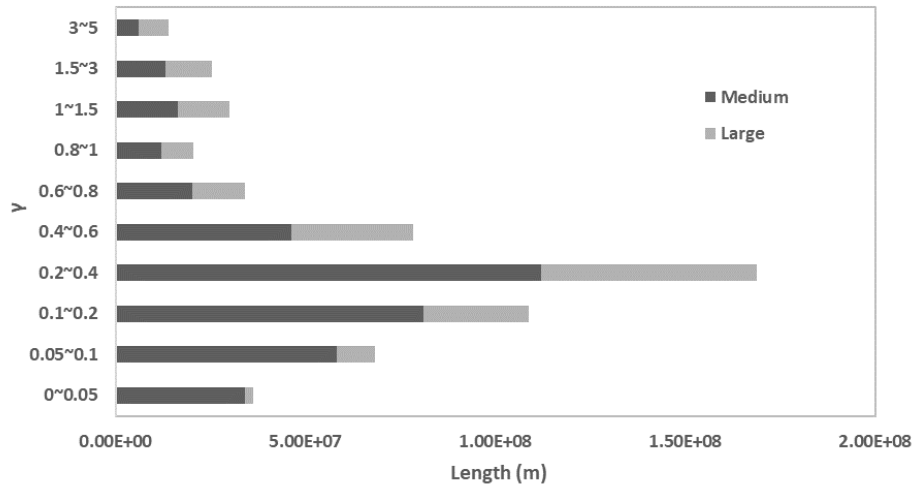


Figure 96 The ~~total~~ lengths percentages of medium and large rivers for different  $\gamma$  value ranges across Australia.



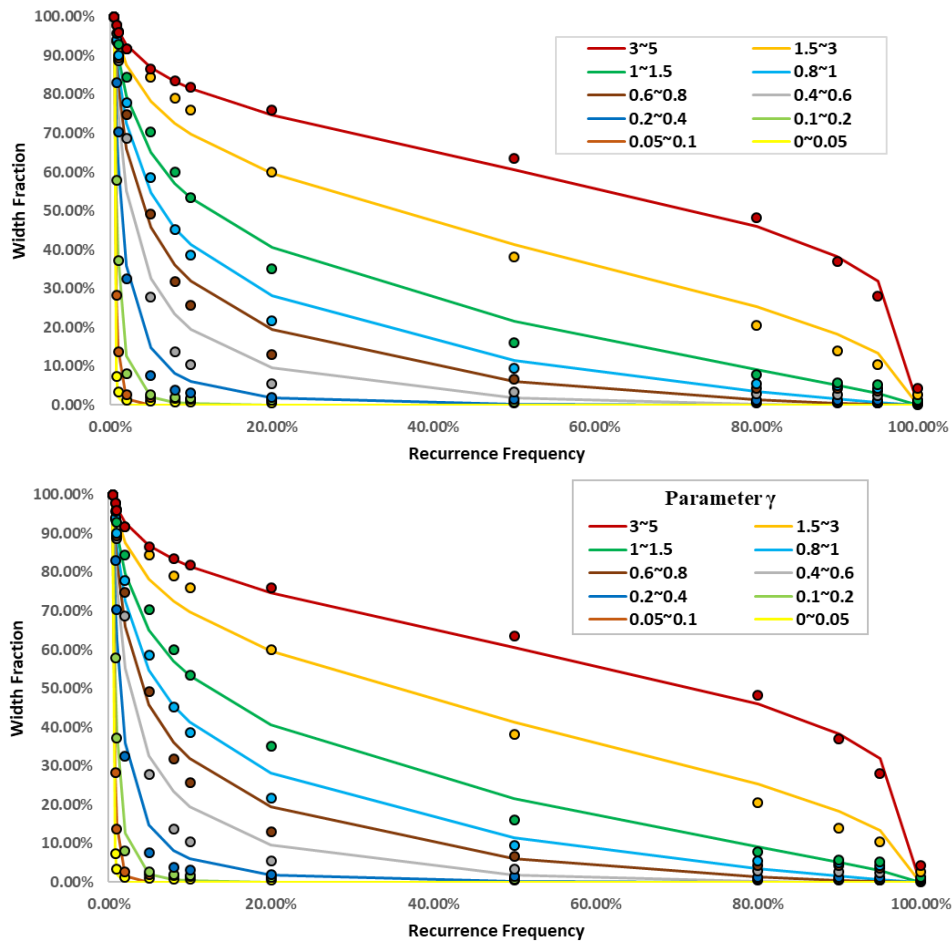


Figure 107 Curves characteristics for different river morphology categories (line: prediction; dot: observation).

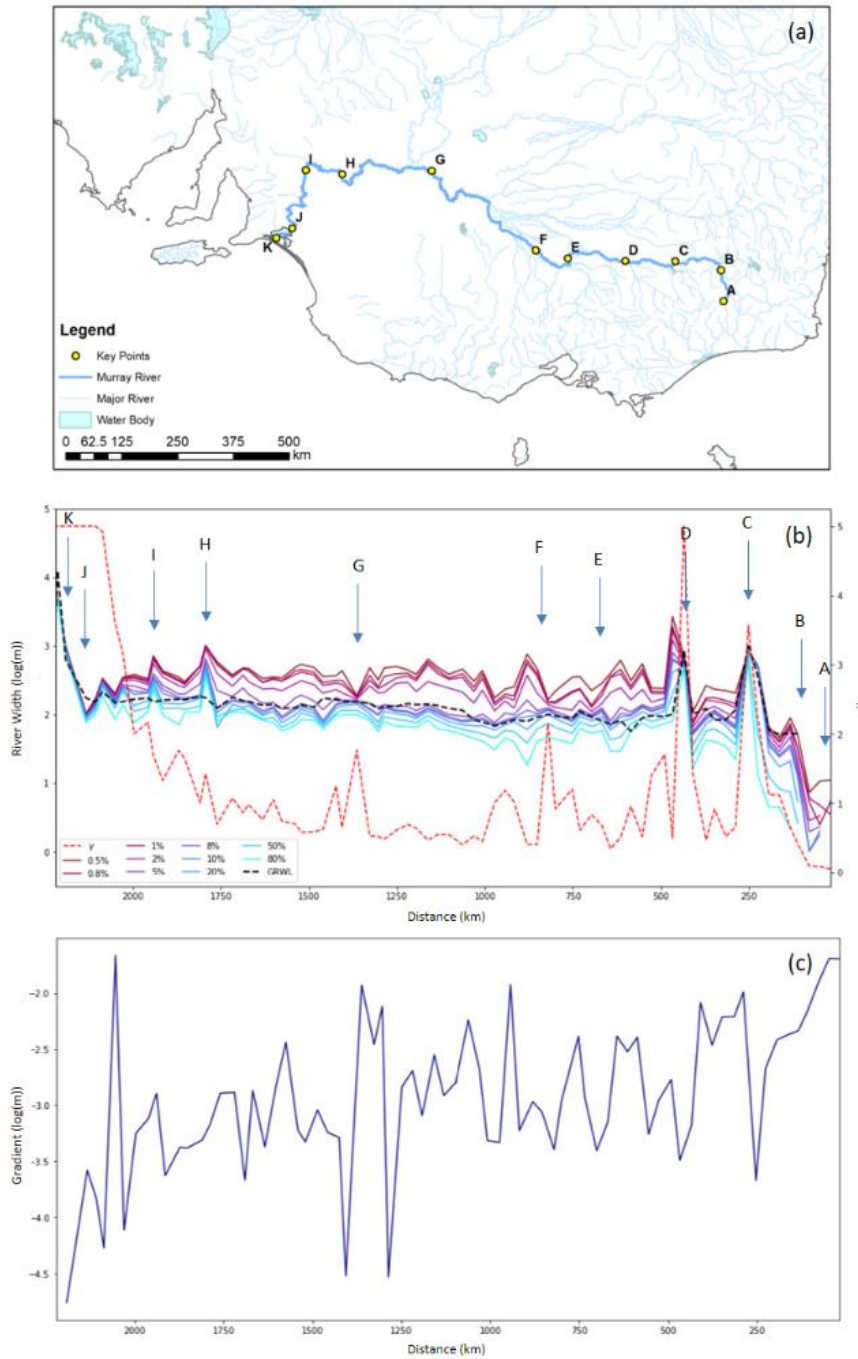

**Figure 118.** Longitudinal profile of the Murray River showing (a) location of river and selected locations; (b) profile of width at different frequencies and river morphology parameter  $\gamma$ , and (c) profile of river gradient. Values are averaged for 30 km sections along the river channel. Letters indicate: (A) source according to our data; (B) source according to GRWL data (Allen and Pavelsky, 2018); (C) Lake Hume; (D) Yarrawonga Weir; (E) and (F) anabranching locations; (G) Mildura; (H-I) Lower Murray wetlands; (J-K) Lake Alexandrina.

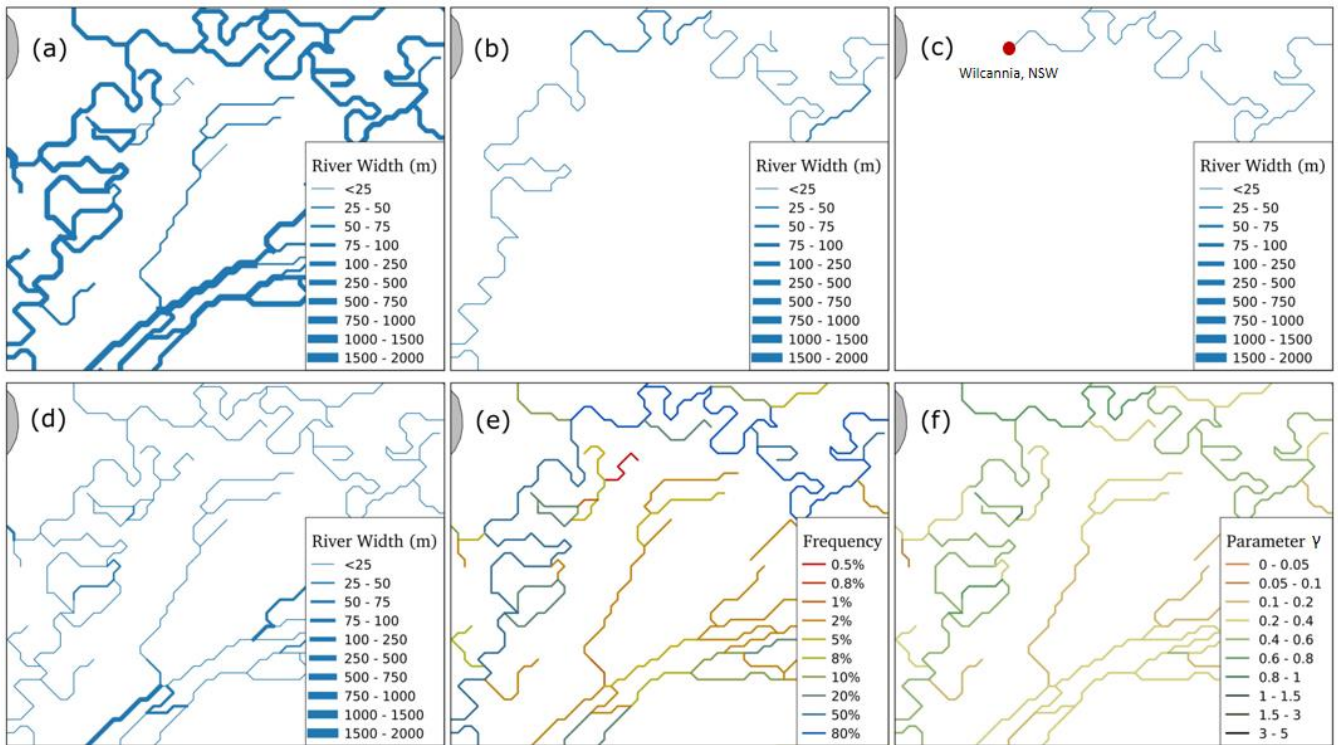

**Figure 129.** Illustration of data characteristics for an area including the Darling River and adjoining Talyawalka Creek near Wilcannia (NSW) (15.7 by 15.3 km centred on 31.62 °S, 143.42°E) . Shown are (a) maximum river width (0.5% frequency); (b) median width (50%); (c) minimum river width (80%), (d) least detected river width and (e) corresponding frequency; (f) hydromorphology parameter  $\gamma$ .