An Arctic watershed observatory at Lake Peters, Alaska: weatherglacier-river-lake system data for 2015-2018

Ellie Broadman¹, Lorna L. Thurston², Erik Schiefer¹, Nicholas P. McKay¹, David Fortin³, Jason Geck⁴, Michael G. Loso⁵, Matt Nolan⁶, Stéphanie H. Arcusa¹, Christopher W. Benson¹, Rebecca A.

⁵ Ellerbroek¹, Michael P. Erb¹, Cody C. Routson¹, Charlotte Wiman¹, A. Jade Wong¹, Darrell S. Kaufman¹

¹School of Earth and Sustainability, Northern Arizona University, Flagstaff, Arizona, 86011, USA ²Stillwater Sciences, 2855 Telegraph Ave, Ste 400, Berkeley, California, 94705, USA

³Department of Geography and Planning, University of Saskatchewan, Saskatoon, SK S7N 5C8, Canada
 ⁴Environmental Science Department, Alaska Pacific University, Anchorage, Alaska, 99508
 ⁵Inventory and Monitoring Program, Wrangell-St. Elias National Park and Preserve, Copper Center, Alaska, 99573, USA
 ⁶Fairbanks Fodar, Fairbanks, Alaska, 99708, USA

1

Correspondence to: Ellie Broadman (ebb42@nau.edu)

15

20

Abstract. Datasets from a four-year monitoring effort at Lake Peters, a glacier-fed lake in Arctic Alaska, are described and presented with accompanying methods, biases, and corrections. Three meteorological stations documented air temperature,

- 35 relative humidity, and rainfall at different elevations in the Lake Peters watershed. Data from ablation stake stations on Chamberlin glacier were used to quantify glacial melt, and measurements from two hydrological stations were used to reconstruct continuous discharge for the primary inflows to Lake Peters, Carnivore and Chamberlin Creeks. The lake's thermal structure was monitored using a network of temperature sensors on moorings, the lake's water level was recorded using pressure sensors, and sedimentary inputs to the lake were documented by sediment traps. We demonstrate the utility of
- 40 these datasets by examining a flood event in July 2015, though other uses include studying intra- and inter-annual trends in this weather-glacier-river-lake system, contextualizing interpretations of lake sediment cores, and providing background for modeling studies. All DOI-referenced datasets described in this manuscript are archived at the National Science Foundation Arctic Data Center at the following overview webpage for the project: <u>https://arcticdata.io/catalog/view/urn:uuid:df1eace5-</u> 4dd7-4517-a985-e4113c631044.
- 45

50

1 Introduction

Arctic glacier-fed lakes are complex and dynamic systems that are influenced by diverse physical processes. Long-term instrumental datasets that document how weather and climate impact glaciers, basin hydrology, and sediment transport through rivers and lakes are rare, especially in the Arctic. Such datasets are critical for studying how Arctic glacier-river-lake catchments operate as a system, for understanding the processes that control sediment accumulation in lakes, and for contextualizing modern climatic and environmental change relative to past centuries.

Here we present the results of a four-year instrumentation campaign in the watershed of Lake Peters, a large glacier-fed lake located in the northeastern Brooks Range within Alaska's Arctic National Wildlife Refuge. The observatory offers the ability to study two contrasting tributaries located in proximity to one another: a relatively small, glacially-dominated catchment (Chamberlin Creek) and a larger primary inlet with proportionally less glacier coverage (Carnivore Creek). A research

- (Chamberlin Creek) and a larger primary inlet with proportionally less glacier coverage (Carnivore Creek). A research station at Lake Peters was first established in the late 1950's by the Department of the Navy as a substation of the Barrow Naval Arctic Research Laboratory, and is maintained as an administrative facility by the U.S. Fish and Wildlife Service. In 2015, an array of instruments were installed and data collection commenced for a variety of components of the weather-glacier-river-lake system (Fig. 1). All instrument installations were non-permanent in recognition of the Wilderness status of the study area, meaning that they were easily removable at the conclusion of the study period and did not cause any lasting
- impact on the landscape.

Our collection of meteorological, glaciological, fluvial, laucustrine, spatial, and geochemical data within the Lake Peters catchment can be used to quantify and explore interconnections in the local hydrologic system. Additionally, this multi-year monitoring study provides useful context for the interpretation of past environmental changes that can be inferred from lake

65 sediments from Lake Peters (Benson, 2018; Benson et al., 2019). In the interest of making these unique and valuable data readily accessible to potential users, the objective of this manuscript is to document and describe the datasets, as well as data-collection methods, biases, and corrections.

2 Site description

Lake Peters (69.32° N, 145.05° W) lies at 853 meters above sea level (m a.s.l.) on the north side of the Brooks Range, an
east-west trending mountain range in Arctic Alaska (Fig. 2). The Brooks Range extends 1000 km, separating the Arctic coastal plain to the north from the Yukon Basin to the south. The third tallest peak in the range, Mount Chamberlin (2712 m a.s.l.; Nolan and Deslauriers, 2016) lies 3 km east of Lake Peters.

One of the largest and deepest glacier-fed lakes in Arctic Alaska, Lake Peters has a maximum water depth of 52 m and an area of ~6.4 km². The lake's catchment (171 km²) has 9 % glacier coverage based on our aerial photography in 2016, and receives a majority of stream flow from Carnivore Creek, which has a 128 km² catchment with 10 % glacier coverage (Fig. 2). The Carnivore catchment contains 6 glaciers exceeding 0.5 km² in area and numerous smaller glaciers, with a median elevation for all glaciers of 1910 m a.s.l. The largest glacier (3.5 km²; 1410 - 2430 m a.s.l.) is situated at the head of Carnivore Creek. Since the Little Ice Age (late 19th century), the largest catchment glaciers have reduced in length by over

- 80 30%. Lake Peters' secondary inflow, Chamberlin Creek, has a 8 km² catchment that is 23 % covered by Chamberlin Glacier (1.7 km²; 1600 2710 m a.s.l.) (Fig. 2). The lake drains to the north into Lake Schrader, whose outflow, the Kekiktuk River, discharges into the Sadlerochit River and ultimately the Arctic Ocean. Lake Peters and Lake Schrader, or "Neruokpuk Lakes", are ice covered from early October through mid-June or July, and often thermally stratify (Hobbie, 1961). The basin is north of the modern tree line in a region underlain by continuous permafrost, with a thin active layer. Soils are rocky with
- 85 thin tundra cover. Bedrock within the basin is Devonian Jurassic sedimentary to meta-sedimentary rocks primarily of the Neruopuk Formation (Reed, 1968).

Climate at Lake Peters is semi-continental, with temperatures more extreme than locations on the coastal plain. A short observational time series of weather from Lake Peters was initiated during the International Geophysical Year (Hobbie, 1962), and was summarized by March (2009). For May 2015 - August 2018, measurements from weather stations installed in the Lake Peters basin indicate that average summer (JJA) temperature ranged from 6.3 °C to 7.7 °C, average winter (DJF) temperature ranged from -24 °C and -17.2 °C, and total summer rainfall was between 112.8 mm and 241.2 mm over the study period (Table 1). Strong temperature inversions develop during the winter, with differences as large as 15 °C between 850 and 1425 m a.s.l. Other key climate variables are summarized in Table 1.

95 **3 Methods**

105

110

120

3.1 Meteorological data

Three weather stations operated in the Lake Peters catchment from May 2015 through August 2018 along an elevational gradient (Fig. 3) (Kaufman et al., 2019a). The lowest elevation station was mounted on the roof of the cabin at the research station at 850 m a.s.l. along the shoreline of Lake Peters. Additional stations were installed on tripods at 1425 m a.s.l. below

100 the proximal flank of the Little Ice Age moraine of Chamberlin Glacier, and the highest elevation station was at 1750 m a.s.l. at the crest of the left lateral moraine of Chamberlin Glacier (Fig. 3).

All three stations were equipped with air temperature and relative humidity sensors (Hobo Pro v2 Temp/RH sensors) and ground temperature sensors at 2 and 30 cm depth (Hobo Pro V2 2X w/ 6ft extension). The 850 and 1425 m a.s.l. stations were equipped with backup air temperature and relative humidity sensors (Hobo Pro v2 Temp/RH sensors). All temperature and relative humidity sensors (Hobo Pro v2 Temp/RH sensors). All temperature and relative humidity sensors (Hobo Pro v2 Temp/RH sensors). All temperature and relative humidity sensors were housed in Hobo Solar Radiation Shields. The 850 m a.s.l. station was additionally equipped with a barometer (Hobo Barometric Pressure Sensor S-BPB-CM50), an anemometer (Young Wind Monitor - 5103), and a pyranometer (Solar Radiation Sensor - S-LIB-M003). At all three stations, tipping bucket rain gauges (Hobo Rain gauge 0.2 mm w/pendant - RG3-M) were installed on the ground away from the stations and equipped with Alter-type windshields to reduce wind-related undercatch. Correlations between daily precipitation recorded at 850 m a.s.l. with daily precipitation recorded at 1425 and 1750 m a.s.l. indicate that trends are coherent within the watershed with minimal (but

expected) differences (Fig. 4).

All three stations were generally continuously operational, though instrument failure caused gaps in the collection of some data from September 21, 2015 to April 19, 2016 at the 850 m a.s.l. station. Shorter instrument failures are documented for each sensor in the data files.

115 3.2 Glaciological data

The elevation of the surface of Chamberlain Glacier and its seasonal snow cover were observed using ablation stakes and interval photography (Geck et al., 2019). Graduated stakes were installed on April 27, 2016 at two sites along the lower part of the glacier: "lower" (69.29312° N, 144.93814° W; 1772 m a.s.l.) and "upper" (69.29031° N, 144.93134° W; 1860 m a.s.l.) (Fig. 5a). Photographs captured the exposed stake height using Wingscapes Time-lapse Cameras (SKU: WCT-00122) set to automatically record every 6 hours. Ablation stake heights were observed on photographs (April 27, 2016 - August, 11, 2017) at a precision of 1 cm. Cameras were mounted on tripods constructed of electrical conduit (Fig. 5b). Air temperature sensors (Hobo Pro v2 Temp/RH sensors and/or Hobo Pendant) housed in Hobo Solar Radiation Shields recorded mean hourly temperatures 2 m above the snow surface at each site (Fig. 5b) (Kaufman et al., 2019b).

125 3.3 Fluvial data

3.3.1 Field methods

Two hydrological stations were established in May 2015: one at Carnivore Creek (Schiefer et al., 2019a; Fig. 6a) and one at Chamberlin Creek (Schiefer et al., 2019b; Fig. 6b). At each station, an In-Situ TROLL 9500 (TROLL) was deployed during the open-channel season to measure pressure, temperature, conductivity, and turbidity, and a Hobo Onset U20 Water Level

- 130 logger was used for backup measurements of pressure and temperature. The instruments were attached to a cage constructed from aluminum tubing and chicken wire. A stage gage was installed at each of the hydrological stations, and water level and reach conditions were captured in hourly photographs by field cameras. Cages were installed in thalwegs of stable reaches and loaded with boulders to resist movement (Fig. 6b). The field procedure was repeated for the 2016, 2017, and 2018 field seasons (May-August), though no instruments were successfully deployed in Chamberlin Creek in 2018, and only Hobo data
- 135 (not TROLL) were recovered from Carnivore Creek in 2018.

In Carnivore Creek, the cage for the hydrological station was secured in the same location in all years, in the thalweg of the main channel, near the outlet to Lake Peters, but upstream of where the channel anabranches on the alluvial plain (Fig. 6a). In contrast, in Chamberlin Creek, the location of the hydrological station was modified from year to year due to the difficulty

- 140 of securing the TROLL and Hobo loggers to withstand the highest flood events of each field season. For 2015, the Hobo data provide a more complete record of water pressure measurements at Chamberlin Creek, and were therefore primarily used for the continuous time series. However, on June 4 the Hobo sensor failed, and was reestablished in a slightly different position on June 5. The small shift in instrument position was corrected by comparing water pressure from the Hobo and TROLL and adjusting the early season Hobo water pressure from June 5 through the end of the season. Following these issues at
- 145 Chamberlin Creek in 2015, the instruments were secured to channel-side bedrock in an upstream pool for the 2016 field season, but were ultimately carried downstream in the largest flood event of 2016 on July 8. For the 2017 field season, the instruments were secured to a large boulder, near the original 2015 hydrological station.

In addition to the continuous measurements from the TROLL and Hobo loggers, discrete discharge (Q) and suspended sediment concentration (SSC) measurements were taken using a hand-held Hach FH950 flow meter and a US DH-48 suspended sediment sampler, respectively, during the 2015, 2016, and 2017 field seasons. Discrete field sampling of discharge was most frequent and spanned the greatest range in 2015. In Carnivore Creek, discrete measurements were taken adjacent to the hydrological station using a cross-section with a seasonally deployed tag line to measure consistent 1 m widths between observation points across the creek in the same location each year. In Chamberlin Creek, discrete 155 measurements were primarily taken at the site of the 2015 hydrological station, though coordinates varied depending on the location of the instruments (described above).

3.3.2 Data analysis

Barometric pressure measurements from the 850 m a.s.l. meteorological station were used to convert instrument heights

- 160 above the riverbed to stage. Discharge-stage regressions were used to construct continuous hourly discharge for the majority of the 2015 open-channel season in Carnivore and Chamberlin Creeks (Fig. 7a-b). In Carnivore Creek, photographs of water level were imported to image viewing-and-analysis software to estimate 2.6 days of peak stage during a flood on August 3, 2015 (Fig. 7c) and its error margin. The regression used nine photographs selected to capture maximal water-level variability, and stage was established using a point-to-point method to capture temporal variability. In Chamberlin Creek,
- 165 linear relations between stage from the Hobo and TROLL instruments permitted compilation of a seamless discharge record for 2015 (Fig. 7d).

For the 2016 open-channel season, alternative methods were applied due to the lack of velocity data required to compute discharge, assuming consistent discharge-stage relations between seasons (Thurston, 2017). To calculate continuous discharge for Carnivore Creek, stage was first regressed against cross-sectional area for both open-channel seasons separately (Fig. 7e). Stage for 2016 was then adjusted by the mean difference between 2015 and 2016 stage for the same data range for both years (Fig. 7e), to be consistent with 2015 stage by accounting for the shift in instrument positioning between years. The 2015 stage-discharge relation was then used to establish continuous discharge from stage measured in 2016 for that field season (Fig. 7a). The 2015 and 2016 stage data are remarkably consistent between seasons (Fig. 7e), and cross-sectional tag line and instruments were secured in the same locations in 2015 and 2016. However, there is potential for slightly different instrument positions between the two seasons, as well as for bed scour during the August 2015 flood. Therefore, while these data provide a reasonable estimate of 2016 discharge at Carnivore Creek, they do not conform to the standard procedure of obtaining a new rating curve for each season, and are therefore considered approximate.

- 180 The Chamberlin Creek data for 2016 are also approximate due to both the lack of a new rating curve for this season and the unconventional methods used to calculate continuous discharge. The method used for Carnivore Creek could not be applied to Chamberlin Creek because the TROLL and Hobo instruments were secured in different locations between 2015 and 2016. Instead, 2015 discharge was regressed against cross-sectional area (Fig. 7f), and this relation was then used to construct discrete 2016 extrapolated discharges sampled from from 2016 cross-sectional areas. These discharge-stage relations were
- 185 used to calculate continuous discharge for 2016 until a flood event that began on June 20 (Fig. 7g) washed the instruments downstream. Several methods were used to construct stage and discharge following this flood (Fig. 7h-j). These methods included: photographs of river level from time-lapse cameras (46 days of discharge values); a regression of Chamberlin and Carnivore Creek discharges using all available data (3.6 days); and a three-point stage-discharge rating curve sampled downstream of the rating curve applied prior to the flood (8.8 days). When none of the aforementioned alternatives were
- 190 possible, gaps were interpolated, amounting to a total of five gaps that range from 2-19 hours. The majority of the 2016 stage

record (June 20 - August 5, 2016) was estimated for Chamberlin Creek from photographs of water level (Fig. 7h; Thurston, 2017). Water levels were measured using two reference points on a total of 13 photographs, then regressed separately against discharge. The first reference point was suitable for most discharges, but was not accurate after July 16, 2016 when water levels dropped low enough to expose a small bar. The second reference point was suitable for low discharges, but

195

overtopped during high flows. Error was conservatively 10-20 image pixels, where 10 pixels equate to an approximately $0.14 \text{ m}^3 \text{ s}^{-1}$ error margin in either direction from the average discharge of 0.72 m³ s⁻¹. For the peak of the flood event on July 8 at 2:00, error is estimated to be 100 pixels in either direction because water level and control points were obscured (equating to a maximum error range of 7.31 to 49 m³ s⁻¹ for the peak discharge of 21 m³ s⁻¹). The Chamberlin Creek hydrological station was ultimately re-established in a new location, and a new rating curve was used to reconstruct 200 discharge from August 8, 2016 at 18:00 until August 17, 2016 at 13:00 (Fig. 7i). Where no discharge-stage rating curves or photographs were available, the relation between Carnivore Creek and Chamberlin Creek discharge was used (Fig. 7j). The photographic method was favored whenever photographs were available to keep the sub-catchment discharge records independent. Considerable scatter between Carnivore and Chamberlin Creek discharge records is attributed to hydrological

205

Stage-discharge rating curves developed from 2015 and 2016 data were used to convert continuous stage records to discharge for Carnivore Creek for 2017 and 2018, and Chamberlin Creek for 2017. Adjustments were made to account for changes in instrumentation position relative to the channel bed. The 2017 and 2018 data for Carnivore Creek and the 2017 data for Chamberlin Creek are therefore also considered approximate. While the limitations of the discharge data are recognized, they are still valuable indicative records of hydrological conditions in this remote Arctic setting, where few such

210

To estimate the full hydrologic season discharge volumes (Table 1), the continuous Carnivore and Chamberlin Creek time series required extrapolation to include the relatively low late-season flows following removal of instruments. Mean daily discharge for this period was estimated based on the relation between Carnivore/Chamberlin Creeks and the nearby Hula 215 Hula River, which explains almost half the variability in our study creeks in the late season.

datasets exist. Summarized discharge data alongside meteorological data at the 850 m a.s.l. station are shown in Fig. 8.

3.4 Lacustrine data

3.4.1 Limnological data

differences between the sub-catchments (Fig. 7j).

Hourly water-level measurements were taken using Hobo U20L Water Level loggers installed on anchored moorings near 220 the water's surface at two locations in Lake Peters: one in its central basin and one near its outflow (Fortin et al., 2019a). Pressure data were corrected to water depth using barometric pressure measurements from the 850 m a.s.l. meteorological station.

In 2015, a series of TROLL casts were taken to measure temperature, turbidity, and conductivity profiles at stations along a north-south transect throughout Lake Peters (Fortin et al., 2019b). These casts were performed at a varying number of stations on a total of 33 days over the course of the field season.

In 2015, 2016, and 2017, lake temperature and luminous flux data were collected at various water depths on anchored 230 moorings throughout the lake (Fig. 2) (Kaufman et al., 2019c). The moorings were equipped with Hobo pendants and Hobo Water Temp Pro loggers at different water depths to monitor the thermal structure of the lake. Moorings located in the central basin of the lake were deployed from May 2015 until August 2016 (Station 7) and August 2015 until August 2017 (Station 8). A mooring in the distal basin (Station 11) was deployed from May 2015 to August 2015, and a mooring in the proximal basin (Station 3) was deployed from May 2015 until August 2015.

235

3.4.2 Sediment trap data

Throughout 2015-2017, sediment traps were deployed in Lake Peters to measure the rate of deposition and to collect suspended sediments in the lakes (Kaufman et al., 2019d). In 2015, three pairs of static (i.e., non-automated) traps with different aspect ratios (different collection-tube heights but same collection-tube diameters) (Fig. 9a) were deployed from May-August at a central location of Lake Peters to determine the effect of these proportions on sediment collection efficiency. From May-August 2016 and again from August 2016 through August 2017, one static trap was deployed in Lake Peters. This trap consisted of 50 mL centrifuge tubes attached to the mouths of inverted 2 L plastic bottles (beverage

containers) with the bottoms removed (to funnel sediments into the tubes) (Fig. 9b). Each trap comprised two or three replicate tubes/bottles deployed at different depths along an anchored mooring. In addition, an incrementing sediment trap

described by Muzzi and Eadie (2002) was deployed from May 2016 through August 2017, collecting sediments in 23 bottles

245

240

rotating over daily to weekly increments (Fig. 9c).

For all sediment samples, dry sediment mass, daily flux, and annual flux were calculated. For several static trap samples, grain-size data (mean, standard deviation, d50, d90 and percentages of sand, silt, and clay) were determined using a Coulter
LS-320. Samples were pretreated with 30% H₂O₂ and heated overnight at 50°C to remove organic material, and then treated with 10% Na₂CO₃ for 5 hours to remove biogenic silica. Pretreated samples were deflocculated by adding sodium

hexametaphosphate and shaking for 1 hour before performing grain-size analysis. Organic-matter content for some samples was determined using loss-on-ignition analysis.

3.5.1 Bathymetry

Bathymetric data were collected using a Lowrance Elite-5 HDI Combo sonar depth recorder along several transects throughout Lake Peters in August 2015 (Schiefer et al., 2019c). These data were used to create a bathymetric map with ArcGIS 9.1.

260

3.5.2 High-resolution photogrammetry

Airborne photogrammetric data were acquired two times in 2015 (April 23 and July 5), three times in 2016 (April 19, July 11, and August 5), and three times in 2017 (April 28, June 27, and September 3) (Nolan, 2019). These data were used to create digital elevation models (DEMs), with a horizontal resolution of 50-80 cm provided in NAD83(2011) NAVD88 265 Geoid 12B. When conditions permitted (April 23, 2015; July 5, 2015; April 19, 2016; April 28, 2017), imagery of the entire Carnivore Creek watershed was acquired. On all other dates, only the eastern side of the valley, where the catchment glaciers are located, was captured. These data were acquired using a Nikon DSLR attached to a survey grade Global Navigation Satellite System (GNSS) on board a manned aircraft, providing photo-center position to 10 cm or better and thus eliminating the need for ground control. Accuracy within this steep mountain environment was found to exceed 20 cm horizontally and 270 vertically (Nolan and Deslauriers, 2016), without the use of ground control. Data acquisition methods are described in detail in Nolan et al. (2015). These DEMs were used to create difference DEMs that can be used to measure snowpack thickness throughout the entire watershed as well as glacier surface elevation change. The accuracy of these DEM-derived snow thickness measurements has previously been found to be comparable to those acquired using hand-operated probes (Nolan et al., 2015). However, larger errors are expected in rugged mountain topography, as the 50 cm DEMs cannot resolve many 275 small crenulations, likely causing some spatial biasing.

3.6 Geochemical data

A total of 187 water samples were collected from the Lake Peters catchment between 2015 and 2018 and analyzed for isotopes of oxygen (δ¹⁸O) and hydrogen (δD) (‰ VSMOW) (Kaufman et al., 2019e). These data, combined with conductivity measurements, were input to a hydrograph mixing model to estimate the relative contributions of various water sources to Carnivore and Chamberlin Creeks (Ellerbroek, 2018). Sampling intervals varied by location but were approximately every 2-6 days when a field team was present. In one 24-hour period in August 2016, each creek was sampled every 2 hours using a Teledyne ISCO 3700 portable automatic water sampler (ISCO). These ISCO samples from Carnivore and Chamberlin Creeks were also analyzed for major cation and anion geochemistry analysis using a Dionex ICS-3000 ion chromatograph with an analytical precision of ±5 % (Kaufman et al., 2019e). Water samples were also collected from three

unnamed glaciated tributaries in the Carnivore Creek valley and three unnamed non-glacial streams that intermittently drain into Lake Peters. All samples were collected in 10 mL polyethylene bottles rinsed three times with sample water.

290

Winter precipitation samples were collected from multiple locations. Twenty-seven snowpack samples were collected with snow density measurements in April 2016 and May 2017 at a variety of depths from 21 snow cores along an elevational gradient. Samples of glacial melt, glacial ice, and snow drifts were collected over 2015 and 2016. All snow and ice samples were collected in airtight plastic bags and transferred into rinsed 10 mL polyethylene bottles after melting. Rain samples were collected sporadically after storm events from spill off from the roof of G. WIlliam Holmes research station and transferred into rinsed 10 mL polyethylene bottles.

295

Following each field season, water samples were processed using Wavelength-Scanned Cavity Ringdown Spectroscopy. Analytical precision is approximately 0.3 % for δ^{18} O and 0.8 % for δ D (Los Gatos Research, 2018).

4 Dataset applications

4.1 Data example: Tracing an event through the Lake Peters glacier-river-lake system

To examine how precipitation works its way through the Lake Peters catchment system, and to depict a small subset of the available data, multiple datasets are shown for a precipitation event in the latter half of July 2015 (Figs. 10, 11). During this event, the 850 m a.s.l. meteorological station recorded a total rainfall of 22.4 mm between July 17-20 (Fig. 10a). In response, hydrological stations at both Carnivore and Chamberlin Creeks recorded an increase in discharge to Lake Peters, with

- 305 Carnivore Creek discharge reaching far higher values due to its larger catchment (Fig. 2). Discharge then decreased over several weeks, long after the precipitation event concluded, with diurnal fluctuations illustrating the effect of glacier melt (Fig. 10b). Turbidity increased in both creeks, coincident with the beginning of elevated discharge (Fig. 10c). The influx of water raised the water level of Lake Peters, which lagged, likely as a function of the total integration of new water as well as outflow into Lake Schrader (Fig. 10d). This event had several additional effects on the water of Lake Peters: turbidity increased during the event (Fig. 10e), the inflow of water caused a temporary drop in water temperatures closer to the lake
- surface (Fig. 10f), and the amount of luminous flux a few meters below the water's surface dropped (Fig. 10g). Isotopic values were also recorded from rainfall and creekwater at several times during this event (Fig. 10h).

To quantify the spatial characteristics of the sediment pulse entering Lake Peters during this precipitation event, data from 315 TROLL casts taken throughout the lake on multiple days before, during, and after the event were examined (Fig. 11). These data indicate that the spatial pattern of turbidity anomalies throughout Lake Peters is more complex than that captured at a single, proximal station shown in Fig. 10e.

This multifaceted perspective of a precipitation event represents only a small fraction of the total data produced by this field

320 effort, but illustrates both the interconnectedness of processes in the Lake Peters catchment and the potential for these datasets to further our understanding of Arctic weather-glacier-river-lake systems dynamics.

4.2 Modeling applications

- In addition to exploring interactions between components of the catchment, a major goal of acquiring these datasets is to 325 support Earth system modeling efforts in the watershed and region, where such field-based observational data are rare. The datasets are well suited to serve as input data or calibration targets for hydrologic modeling and fluvial sediment transport models. Basin-scale, distributed hydrologic modeling is ongoing, but is limited by the sparse data available. Although meteorological input data were measured at three sites spanning 900 m in elevation, the catchment for Carnivore Creek is large, and precipitation in the southern part of the basin is not well constrained. A hydrological balance was developed, and a 330 hydrograph mixing model, used to quantify the relative proportion of different source waters, was calibrated using the discharge, geochemistry and runoff data (Ellerbroek, 2018). For sediment-flux modelling, discharge, turbidity, and
- A major limitation is the year-to-year variability in these data. Modeling endeavors for the catchment would benefit from 335 continued observations and should be supplemented with comparison from longer-term datasets, perhaps most notably from McCall Glacier (Nolan et al., 2005; Klein et al., 2016), Toolik Lake (Hobbie et al., 1995) and climate reanalysis products (Auger et al., 2018).

suspended sediment concentration datasets were used to develop empirical sediment transport models (Thurston, 2017).

5 Data availability

340 All DOI-referenced datasets described in this manuscript are archived at the National Science Foundation Arctic Data Center at the following overview webpage for the project: <u>https://arcticdata.io/catalog/view/urn:uuid:517b8679-20db-4c89-a29c-6410cbd08afe</u> (Kaufman et al., 2019f). Datasets are available for download (Table 2) as csv files (or tiffs for photogrammetry data), with accompanying metadata including an abstract, key words, methods, spatial and temporal coverage, and personnel information pertinent to each dataset.

345

6 Final remarks

The meteorological, glaciological, fluvial, and lacustrine datasets from Lake Peters and its catchment presented in this manuscript offer a unique and valuable opportunity to study an Arctic glacier-fed lake system. The observational data have contributed to our understanding of individual events as well as intra- and inter-annual variability within this catchment. By

¹¹

350 making these data available, we hope to foster a more detailed understanding of the processes leading to sedimentation in Arctic lake catchments. Furthermore, these data may provide important context for interpretation of lake sediment records from this study region and elsewhere, as well as for hydrological and sedimentological modeling studies.

Supplement

355 No supplements.

Author contributions

E.S., N.P.M., D.F., J.G., M.G.L., M.N., and D.S.K. developed the observational design. E.B., L.L.T., E.S., N.P.M., D.F., J.G., M.G.L., M.N., S.H.A., C.W.B., R.A.E., C.C.R., and D.S.K. led installation, development and/or curation of components of the observations. E.B., L.L.T., E.S., N.P.M., J.G., M.P.E., C.W., A.J.W., and D.S.K. wrote the original manuscript. E.B., L.L.T., E.S., N.P.M., D.F., S.H.A., R.A.E., M.P.E., C.W., and A.J.W. produced figures for the manuscript. E.B., D.F., and D.S.K. curated the datasets at the NSF Arctic Data Center. All authors provided minor edits to the text of the final manuscript.

365 Competing interests

We declare no competing interests.

Acknowledgements

Datasets from the Lake Peters watershed were collected with the help of numerous field assistants, including Zak Armacost,
Mindy Bell, Ashley Brown, Anne Gädeke, Jeff Gutierrez, Rebecca Harris, Stacy Kish, Lisa Koeneman, Anna Liljedahl,
Maryann Ramos, Doug Steen, and Ethan Yackulic. Sedimentary grain-size data were processed with assistance from Daniel
Cameron and Katherine Whitacre. Water isotope analyses were performed with assistance from Jamie Brown at NAU's
Colorado Plateau Stable Isotope Facility, and major cation and anion analyses were performed by Tom Douglas of the U.S.
Army Cold Regions Research and Engineering Laboratory. We thank the U.S. Fish and Wildlife Service - Arctic National
Wildlife Refuge for use of the G. William Holmes research station and for permitting our research; Polar Field Services,
Inc./CH2MHill for support and outfitting while in the field; Dirk Nickisch and Danielle Tirrell of Coyote Air for safely
flying our field teams to and from Lake Peters; LacCore/CSDCO for assistance with processing and archiving of
sedimentary sequences from Lake Peters; and PolarTREC for a productive partnership that contributed greatly to the broader
impacts of this project. This project was funded by NSF awards 1418000, 1418032, and 1418274.

380 References

Auger, J., Birkel, S., Maasch, K., Mayewski, P. and Schuenemann, K.: An ensemble mean and evaluation of third generation global climate reanalysis models. Atmosphere, 9(6), 1-12, doi:10.3390/atmos9060236, 2018.

Benson, C.W.: 16,000 Years of Paleoenvironmental Change from the Lake Peters-Schrader Area, Northeastern Brooks
Range, Alaska, M.S. thesis, Northern Arizona University, Flagstaff, Arizona, USA, AAT 10812107, 2018.

Benson, C.W., Kaufman, D.S., McKay, N.P., Schiefer, E., and Fortin, D.: A 16,000 year-long sedimentary sequence from Lake Peters and Schrader (Neruokpuk Lakes), northeastern Brooks Range, Alaska, Quaternary Res., 1-17, doi:10.1017/qua.2019.43, 2019.

390

Ellerbroek, R.A.: Three Component Hydrograph Separation for the Glaciated Lake Peters Catchment, Arctic Alaska, M.S. thesis, School of Earth and Sustainability, Northern Arizona University, Flagstaff, Arizona, USA, ProQuest ID 2112380481, 2018.

395 Fortin, D., Kaufman, D.S., Schiefer, E., Thurston, L.L., Geck, J., Loso, M.G., McKay, N.P., Liljedahl, A., and Broadman, E.: Lake Peters water level, Arctic National Wildlife Refuge, Alaska, 2015-2017, doi:10.18739/a2kh0dz5j, 2019a.

Fortin, D, Schiefer, E., Thurston, L.L., Kaufman, D.S., Geck, J., Loso, M.G., McKay, N.P., Liljedahl, A., and Broadman, E.:
CTD casts (conductivity, temperature, depth) in Lake Peters, Arctic National Wildlife Refuge, Alaska, 2015,
doi:10.18739/a23j3912w, 2019b.

Geck, J., Loso, M.G., Schiefer, E., Thurston, L.L., McKay, N.P., Kaufman, D.S., Fortin, D., Liljedahl, A., and Broadman, E.: Ablation stake data from Chamberlin Glacier, Arctic National Wildlife Refuge, Alaska, 2016-2017, doi:10.18739/a2gq6r21h, 2019.

405

Hobbie, J.E.: Summer temperatures in Lake Schrader, Alaska, Limnol. Oceanogr., 6, 326-329, doi:10.4319/lo.1961.6.3.0326, 1961.

Hobbie, J.E.: Limnological cycles and primary productivity of two lakes in the Alaskan Arctic, Ph.D. thesis, Department ofZoology, Indiana University, Bloomington, Indiana, USA, 1962.

Hobbie, J.E., Deegan, L.A., Peterson, B.J., Rastetter, E.B., Shaver, G.R., Kling, G.W., O'Brien, W.J., Chapin, F.T., Miller, M.C., Kipphut, G.W. and Bowden, W.B.: Long-term measurements at the arctic LTER site. In Ecological time series (pp. 391-409). Springer, Boston, MA, 1995.

415

Kaufman, D.S., Fortin, D., Schiefer, E., Thurston, L.L., Geck, J., Loso, M.G., McKay, N.P., Liljedahl, A., and Broadman, E.: Meteorological data from the Lake Peters watershed, Arctic National Wildlife Refuge, Alaska, 2015-2018, doi:10.18739/a2v11vk4j, 2019a.

420 Kaufman, D.S., Geck, J., Loso, M.G., Schiefer, E., Thurston, L.L., McKay, N.P., Fortin, D., Liljedahl, A., and Broadman, E.: Meteorological data from Chamberlin Glacier, Arctic National Wildlife Refuge, Alaska, 2016-2017, doi:10.18739/a2bz6178m, 2019b.

Kaufman, D.S., Fortin, D., Schiefer, E., Thurston, L.L., Geck, J., Loso, M.G., McKay, N.P., Liljedahl, A., and Broadman, E.:
Lake Peters water temperature and luminous flux, Alaska, 2015-2017, doi:10.18739/a2fq9q52r, 2019c.

Kaufman, D.S., Fortin, D., Schiefer, E., Thurston, L.L., Geck, J., Loso, M.G., McKay, N.P., Liljedahl, A., and Broadman, E.: Sediment trap data from Lake Peters and Lake Schrader, Arctic National Wildlife Refuge, Alaska, 2015-2017, doi:10.18739/a2q814s0s, 2019d.

430

Kaufman, D.S., Ellerbroek, R.A., Fortin, D., Schiefer, E., Thurston, L.L., Geck, J., Loso, M.G., McKay, N.P., Liljedahl, A., and Broadman, E.: Geochemical and stable isotope composition data from precipitation, runoff, snow and ice collected in Lake Peters watershed, Arctic Wildlife Refuge, Alaska, 2015-2018, doi:10.18739/a2zs2kc8c, 2019e.

- 435 Kaufman, D.S., Fortin, D., Schiefer, E., Thurston, L.L., Geck, J., Loso, M.G., McKay, N.P., Liljedahl, A., Broadman, E., Benson, C. W., Nolan, M., and Ellerbroek, R. A., Collaborative research: Developing a System Model of Arctic Glacial Lake Sedimentation for Investigating Past and Future Climate Change, Arctic Data Center, https://arcticdata.io/catalog/view/urn:uuid:dfleace5-4dd7-4517-a985-e4113c631044, 2019f.
- 440 Klein, E.S., Nolan, M., McConnell, J., Sigl, M., Cherry, J., Young, J. and Welker, J.M.: McCall Glacier record of Arctic climate change: Interpreting a northern Alaska ice core with regional water isotopes. Quaternary Sci. Rev., 131, 274-284, doi:10.1016/j.quascirev.2015.07.030, 2016.

March, J.R.: Synoptic climatology of the eastern Brooks Range, Alaska: a data legacy of the International Geophysical Year,
M.S. thesis, Department of Atmospheric Science, University of Alaska, Fairbanks, Alaska, USA, 2009.

Muzzi, R.W. and Eadie, B.J.: The design and performance of a sequencing sediment trap for lake research. Mar. Technol. Soc. J., 36, 2-28, doi:10.4031/002533202787914025, 2002.

450 Nolan, M., Arendt, A., Rabus, B. and Hinzman, L.: Volume change of McCall glacier, arctic Alaska, USA, 1956–2003. Ann. Glaciol., 42, 409-416, doi:10.3189/172756405781812943, 2005.

Nolan, M., Larsen, C., and Sturm, M.: Mapping snow depth from manned aircraft on landscape scales at centimeter resolution using structure from motion photogrammetry, The Cryosphere, 9, 1445-1463, doi:10.5194/tc-9-1445-2015, 2015.

455

Nolan, M. and DesLauriers, K.: Which are the highest peaks in the US Arctic? Fodar settles the debate, The Cryosphere, 10, 1245-1257, doi:10.5194/tc-10-1245-2016, 2016.

Nolan, M.: High resolution photogrammetric data of Chamberlin Glacier and the Lake Peters watershed, Alaska, 2015-2017,
doi:10.18739/A23F4KN4K, 2019.

Reed, B.: Geology of the Lake Peters area northeastern Brooks Range, Alaska. U.S. Geol. Surv. Bulletin 1236, 132 pp., 1968.


465 Schiefer, E., Thurston, L.L., Kaufman, D.S., Geck, J., Loso, M.G., McKay, N.P., Fortin, D., Liljedahl, A., and Broadman, E.: Carnivore Creek discharge and suspended sediment concentration, Alaska, 2015-2018, doi:10.18739/A27659F8Q, 2019a.

Schiefer, E., Thurston, L.L., McKay, N.P., Kaufman, D.S., Fortin, D., Geck, J., Loso, M.G., Liljedahl, A., and Broadman, E.: Chamberlin Creek discharge and suspended sediment concentration, Alaska, 2015-2017, doi:10.18739/A2BZ61825, 2019b.

470

Schiefer, E., McKay, N.P., Kaufman, D.S., Fortin, D., Geck, J., Loso, M.G., Liljedahl, A., and Broadman, E.: Bathymetric map of Lake Peters, Alaska, 2015, doi:10.18739/a2r785p0g, 2019c.

Thurston, L.L.: Modeling Fine-grained Fluxes for Estimating Sediment Yields and Understanding Hydroclimatic and
 Geomorphic Processes at Lake Peters, Brooks Range, Arctic Alaska, M.S. thesis, Northern Arizona University, Flagstaff,
 Arizona, USA, ProQuest ID 2025947690, 2017.

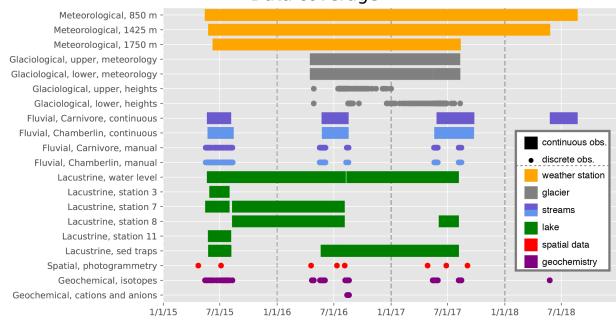

Data coverage

Figure 1. Temporal coverage of data collected in the Lake Peters catchment. Data are either continuous hourly or bi-hourly observations (bars) or discrete observations in time (dots). Data are indicated as available if any variable is present for the given time. Observations and samples from sediment traps are not hourly, but were collected over specific windows of time. January 1st of each year is marked with a dotted line. Data collected from different parts of the Lake Peters catchment are shown with different colors, in roughly the same order as they are discussed in Section 3. See Section 3 for a more detailed description of the data. Some data (Lake Peters TROLL casts and bathymetry) are not represented in this figure.

490

495

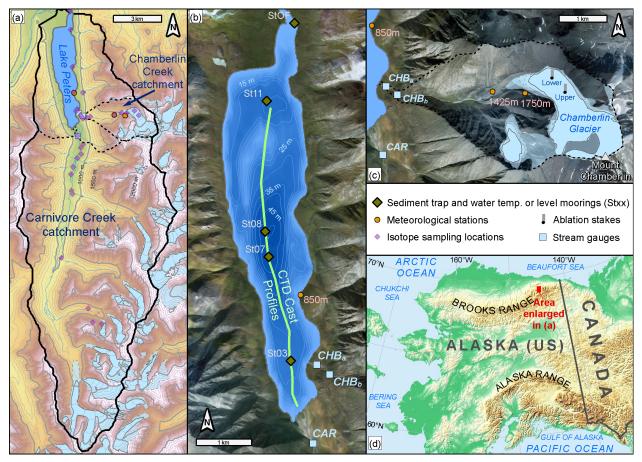


Figure 2. (a) Lake Peters catchment (solid black boundary) and Carnivore and Chamberlin Creek sub-catchments (dashed boundaries) with land-based observational locations. (b) Lake Peters bathymetry and lacustrine observational locations. (c) Chamberlin Creek sub-catchment and Chamberlin Glacier. (d) Brooks Range setting in Alaska and study area location.

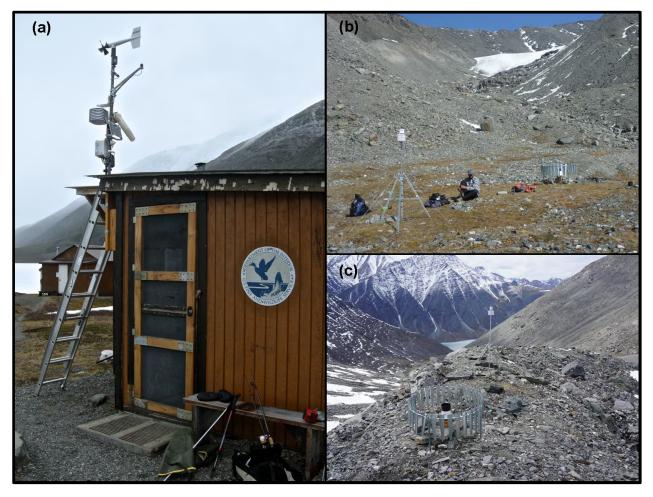


Figure 3. Weather stations at (a) 850, (b) 1425, and (c) 1750 m a.s.l. in the Lake Peters watershed.

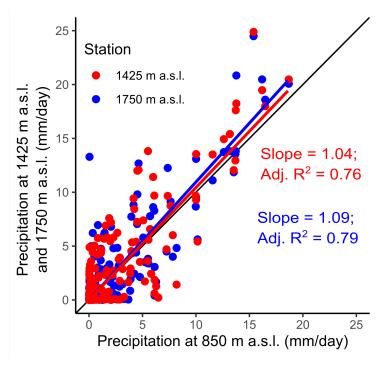



Figure 4. Correlations between daily precipitation at 1425 m a.s.l. (red) and 1750 m a.s.l. (blue) with daily precipitation at 850 m a.s.l. Lines are least-squares regressions. Also shown in black is the 1:1 line.




Figure 5. Examples of (a) ablation stakes (lower site) and (b) weather stations (upper site) installed on Chamberlin Glacier.



565 Figure 6. Stream stage gauges for (a) Carnivore and (b) Chamberlin Creeks. Instrumentation mounted in tubing is obscured by stage gages.

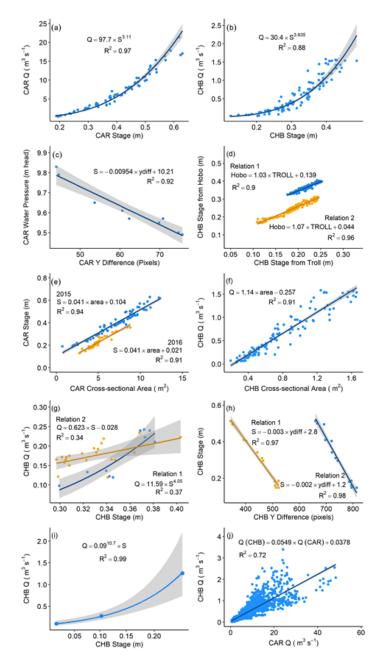


- 570 Figure 7. Regression relations and associated confidence bands used to create continuous discharge (Q) time series throughout the 2015-2018 open-channel seasons in Carnivore (CAR) and Chamberlin (CHB) Creeks. (a) discharge stage (S) relation for CAR (2015); (b) discharge stage relation for CHB (2015); (c) water-pressure (from TROLL) vertical difference (y-diff; shown on photographs) relation for CAR (2015); (d) relations of stage calculated from Hobo U20 water pressure against stage calculated from TROLL 9500 water pressure for CHB (both 2015); (e) stage cross-sectional area linear relation for CAR (2015); (f) discharge stage (from Hobo) power relation for CHB
 575 (f) discharge cross-sectional area linear relation for CHB (2015); (g) discharge stage (from Hobo) power relation for CHB
- (1) discharge cross-sectional area linear relation for CHB (2015); (g) discharge stage (from Hobo) power relation for CHB (2016); (h) Stage vertical difference (y-diff; shown on photographs) linear relations for CHB (both 2016); (i) discharge stage exponential relation for CHB (2016); and (j) Relation of discharge in CHB against discharge in CAR with a 2-hour lag (2015 and 2016). Refer to Thurston (2017) for additional information.

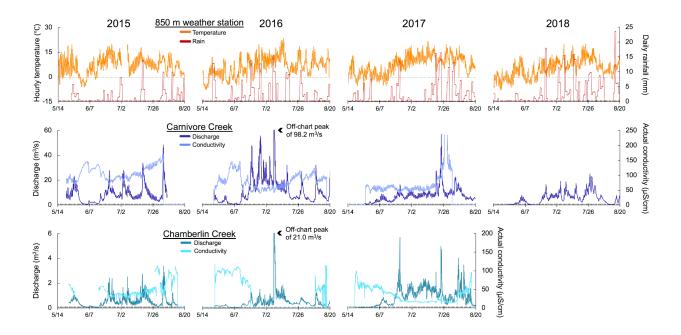

580 Figure 8. Time series of hourly air temperature and rainfall from the 850 m a.s.l. weather station at Lake Peters shown alongside conductivity and discharge for Carnivore and Chamberlin Creeks, 2015-2018. The gray line in the top row indicates 0°C.



Figure 9. Examples of the types of sediment traps installed in Lake Peters: (a) static traps used to investigate the effect of collection-tube aspect ratio, (b) 2L-bottle static traps upon retrieval, and (c) installation of an incrementing trap.

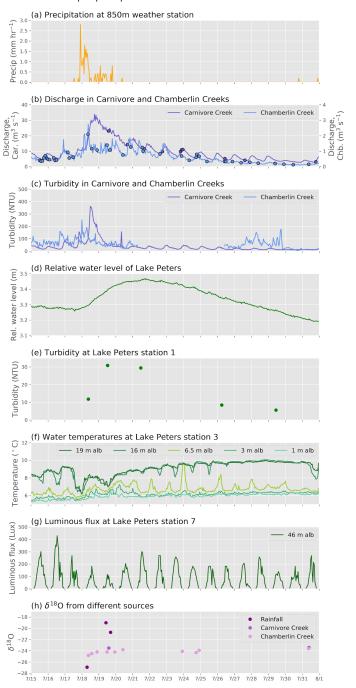

Sample precipitation event in different datasets

Figure 10. An example of a complementary dataset from Lake Peters observatory, tracing the effects of a precipitation event in July 2015. (a) Rainfall at the 850 m a.s.l. station; (b) Carnivore and Chamberlin Creek discharge and (c) turbidity; (d) Lake Peters relative water level, (e) maximum turbidity at Lake Peters Station 1, (f) water temperatures at different heights above lake bottom (a.l.b.) at Lake Peters Station 3, and (g) luminous flux at Lake Peters Station 7; and (h) δ^{18} O at different sites. To complement panel (e), a more detailed sample of turbidity data are shown in Fig. 11.

615

610

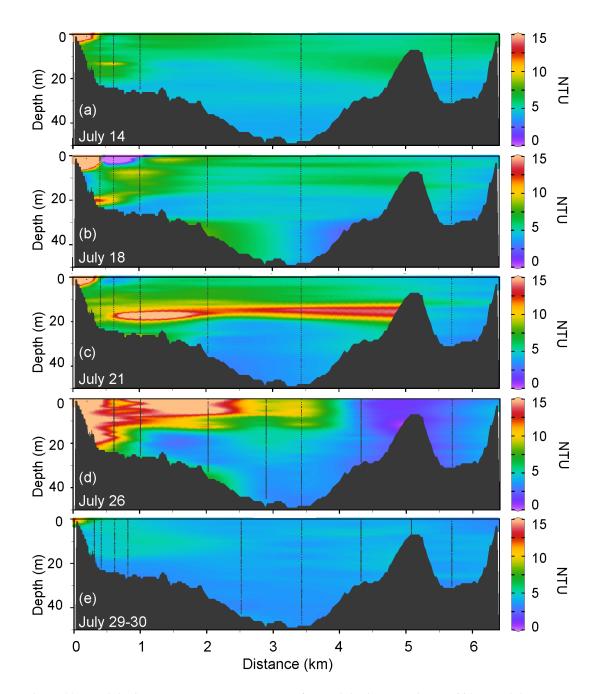


Figure 11. Turbidity in Lake Peters over the course of a precipitation event in July 2015; turbidity data are shown for (a) July 14, (b) July 18, (c) July 21, (d) July 26, and (e) composite data from July 29 and July 30. Black shading indicates lake bathymetry, and black dashed lines indicate locations of TROLL casts. The x-axis indicates north-south distance across the lake from the outflow of Carnivore Creek. Figure created using Ocean Data View (ODV) software.

Summary variable	2015	2016	2017	2018			
Average summer temperature (JJA) at 850m station (°C)	6.9	7.2	7.7	6.3†			
Average winter temperature (DJF) at 850m station (°C)	-	-24.0	-21.6	-17.2			
Total summer (JJA) rainfall at 850m station (mm)	112.8	201.2	207.0	241.2†			
Carnivore Creek summer temperature (JJA) (°C)	5.7*	4.6	5.3	4.0†			
Chamberlin Creek summer temperature (JJA) (°C)	4.3‡	2.6§	4.1	-			
Carnivore Creek total Q (km³)	6.45E-04	8.27E-04	5.78E-04	4.12E-04			
Carnivore total Q # extrapolated days	28	0	0	29			
Chamberlin Creek total Q (km³)	4.19E-05	4.13E-05	6.34E-05	-			
Chamberlin total Q # extrapolated days	16	0	0	-			
Lake Peters ice out	June 21	July 5	July 3	July 3			
*June 1 - August 3 †June 1 - August 22 ‡June 1 - August 14 § June 1 - June 20 and August 8 - August 17							

Table 1: Summary of key meteorological and hydrological variables observed in the Lake Peters watershed. DJF temperatures625include December of the previous year. The number of extrapolated days for full-season discharge (Q) measurements refers to the
number of late-season days for which flow occurred but was not measured by our instruments, and was therefore extrapolated
using methods described in Section 3.3.2.

27

Tables

Dataset	Measured variables	Coordinates	Start date	End date	DOI
850 m a.s.l. meteorological station	barometric pressure (mbar), temperature (°C), relative humidity (%), solar radiation (W/m ²), wind speed (m/s), gust speed (m/s), wind direction (Ø), dew point (°C), ground temp at 2cm and 30cm (°C), precipitation (mm)	69.3046, -145.0342	15-05-13 21:00	18-08-22 15:00	https://doi.org/10.18739/A2V11VK4J
1425 m a.s.l. meteorological station	temperature (°C), relative humidity (%), ground temp at 2 cm and 30 cm (°C), precipitation (mm)	69.29094, -144.96983	15-05-24 16:00	18-05-26 14:00	https://doi.org/10.18739/A2V11VK4J
1750 m a.s.l. meteorological station	temperature (°C), relative humidity (%), ground temp at 2 cm and 3 0cm (°C), precipitation (mm)	69.29043, -144.95265	15-06-08 00:00	17-08-12 11:00	https://doi.org/10.18739/A2V11VK4J
Lower ablation stake	exposed stake height (cm)	69.29312, -144.93814	16-04-27 13:00	17-08-10 13:00	https://doi.org/10.18739/A2GQ6R21H
Upper ablation stake	exposed stake height (cm)	69.29031, -144.93134	16-04-27 17:00	17-01-01 00:00	https://doi.org/10.18739/A2GQ6R21H
Lower ablation stake meteorological station	temperature (°C)	69.29312, -144.93814	16-04-15 5:00	17-08-10 23:00	https://doi.org/10.18739/A2BZ6178M
Upper ablation stake meteorological station	temperature (°C), relative humidity (%)	69.29031, -144.93134	16-04-15 5:00	17-08-10 12:00	https://doi.org/10.18739/A2BZ6178M
Camivore Creek manual data	discharge (m³/s), suspended sediment concentration (mɑ/L)	69.28028, -145.03051	15-05-16 17:02	17-08-14 16:00	https://doi.org/10.18739/A27659F8Q
Chamberlin Creek manual data	discharge (m³/s), suspended sediment concentration (mɑ/L)	2015/2017: 69.2925, -145.0261 2016: 69.2910, -145.0203	15-05-16 17:44	17-08-14 16:50	https://doi.org/10.18739/A2BZ61825
Camivore Creek continuous data	conductivity (µm), temperature (°C), turbidity (NTU), pressure (m), discharae (m³/s)	69.28028, -145.03051	15-05-20 16:00	18-08-22 13:00	https://doi.org/10.18739/A27659F8Q
Chamberlin Creek continuous data	conductivity (µm), temperature (°C), turbidity (NTU), pressure (m), discharae (m³/s)	2015/2017: 69.2925, -145.0261 2016: 69.2910, -145.0203	15-05-22 16:00	17-09-23 23:00	https://doi.org/10.18739/A2BZ61825
Lake level	absolute (uncorrected) pressure (kPa), relative water level (m)	69.30993, -145.04644	15-05-20 16:00	17-08-06 10:00	https://doi.org/10.18739/A2KH0DZ5J
Station 3 mooring	temperature (°C) at 1, 3, 6.5, 16, and 19 meters above lake bottom	69.29336, -145.03813	15-05-28 12:00	15-08-01 8:00	https://doi.org/10.18739/A2FQ9Q52R
Station 7 mooring	temperature (°C) at 1, 3, 28, 44, and 46 meters above lake bottom; light intensity (Lux) at 28, 44, and 46 meters above lake bottom	69.30993, -145.04644	15-05-15 0:00	16-08-05 0:00	https://doi.org/10.18739/A2FQ9Q52R
Station 8 mooring	temperature (°C) at 1, 6, 11, 31, 41, and 48 meters above lake bottom; light intensity (Lux) at 48 meters above lake bottom	69.31496, -145.04766	15-08-09 12:00	17-08-06 9:00	https://doi.org/10.18739/A2FQ9Q52R
Station 11 mooring	temperature (°C) at 0.5, 3, 15, and 25 meters above lake bottom; light intensity (Lux) at 15 and 25 meters above lake bottom	69.33472, -145.04348	15-05-24 0:00	15-08-06 12:00	https://doi.org/10.18739/A2FQ9Q52R
CTD casts	temperature (°C), pressure-inferred depth (m), turbidity (NTU), conductivity ($\mu m)$	Various	15-05-21 15:34	15-08-12 11:24	https://doi.org/10.18739/A23J3912W
Sediment traps	mass (g), daily flux (mg/cm²/day), annual flux (g/cm²/year), organic matter content (%), grain جاعه (ایس)	Various	15-05-25	17-08-06	https://doi.org/10.18739/A2Q814S0S
Bathymetry	easting (UTM Zone 6N), northing (UTM Zone 6N), water depth (m)	Various	15-08	15-08	https://doi.org/10.18739/A2R785P0G
Photogrammetry	high resolution DEM	Various	15-04-23	17-09-03	/https://doi.org/10.18739/A23F4KN4K
Stable isotopes	δ ¹⁸ Ο (‰VSMOW), δD (‰VSMOW) d-excess (‰VSMOW)	Various	15-05-14 11:30	18-05-25 0:00	https://doi.org/10.18739/A2ZS2KC8C
Major cation and anion geochemistry	sulfate (ppm), calcium (ppm), magnesium (ppm), potassium (ppm), sodium (ppm), nitrate (ppm), chloride (ppm)	Various	16-08-12 18:00	16-08-18 20:00	https://doi.org/10.18739/A2ZS2KC8C

Table 2. Observational datasets generated by the Lake Peters observatory instrumentation and archived at the NSF Arctic Data630Center.