

This document provides a response to the comments raised by the two reviewers who have provided interactive comments on manuscript esdd-2020-173 (“Measurements from mobile surface vehicles during LAPSE-RATE”). The reviewer comments included in **black** and author responses are included in **red**.

General comments from the authors: We appreciate the time provided by the two reviewers and the editorial team and have done our best to address the comments provided. Additionally, we have updated references to meet ESSD formatting requirements and include the most up-to-date information. Finally, in review of this manuscript we noticed an error with one of the figures (7d), where for CoMeT-1, vehicle heading had mistakenly been plotted instead of wind direction. Therefore, we have updated that figure, resulting in the removal of the large “spike” at around 140 degrees that was present in the previous version. Direct responses to the reviewer comments are provided below.

Reviewer 1:

Review ESSD-2020-173

LAPSE data nicely organised on Zenodo, easy to access and download files specific to this manuscript.

Thank you for this positive comment. We are also impressed with Zenodo as an archive and will likely use it for publication of future results!

Line 213: “50-foot mast” Reading a tower height in US units here seems a bit strange after description of most measurements on most vehicles in metric units up to this point.

Thank you for pointing this out – we have updated the text to read “15.2 m mast”

Line. 390: “close proximity” Many readers / data users will find the time periods of proximity useful for data intercomparison assessments. As implied by Figure 4 (and perhaps also by Figure 7 but harder to distinguish), vehicle proximity not only of CoMeT-1 to CoMeT-2 but also between NSSL and UNL or among all three could have occurred multiple times per day? I do not see these periods identified in the CoMeT-1 data nor flagged in the NSSL data. User would need to find periods when GPS lat, lon and UTC coincide among two, three or four platforms? These authors will know data quality and utility better than outside reviewers; would an explicit summary of these proximity opportunities represent a useful addition? Eventually, direct intercomparison periods among sUAS and ground-based systems will drive an overall all intercomparison opportunity chart / graphic?

The reviewer is correct that there is no “proximity flag” available in the data that are posted to Zenodo. While we understand the potential usefulness of such a flag, it is also important to understand that these vehicles are not always deployed together and therefore implementing such a flag is not practical from the perspective of the standard processing associated with these systems.

Given that all three vehicle files report GPS position, it should not be too difficult for a user to establish when the vehicles were in “close proximity”. At the recommendation of the reviewer (and, to some extent Reviewer #2), we have added a paragraph that offers an overview of direct comparison data from the time periods where the vehicles were close together (< 300 m apart), and added a figure (figure 9) that provides a direct comparison of the measurements during these times.

Funding for three CoMeT vehicles mentioned in acknowledgements but only two vehicles used in the deployment described here?

Thank you for pointing this out – it was a copy and paste error, and the reference to CoMeT-3 has been removed from the acknowledgments.

Table 2 & Table 3: response time for RM Young propeller-vane anemometer shown in units of “m” in both tables. But both of those tables also use ‘m’ as a length unit, e.g. m/s. Response time of anemometers in ‘m’ = minutes? E.g. 2.7 minutes for speed, 1.3 minutes for direction? That seems too slow? Check these units? Do not use “m” to designate both length and time?

The response "time" of wind sensors for cup and propeller systems is in fact measured in meters, not seconds. It's not a response time so much as a distance constant. Literally the length of fluid flow required to result in a 1/e response to a change in the observed winds. We have updated the entry into the tables (now tables 1 and 2, in response to comments from reviewer 2) to include the comment “distance constant”.

Reviewer 2:

The title of the manuscript is very attractive and this work is also very meaningful. But after reading the entire article, I was still a little disappointed. For articles published in ESSD, the production of data sets and their quality evaluation are the most important. However, the depth of the current version of the article is not enough. The full text looks like a report, with too many lists and simple descriptions, not a research paper. The work is well done, but the organization and presentation of the article is not enough.

Major comments:

1. The observation period (14 and 20 July 2018) of the data is too short. It is difficult to say that this data can have too much contribution to scientific researchers around the world. But the research methods (mobile surface vehicles) are very meaningful.

While we respect the reviewer’s opinion, we disagree with this assessment. There are already published and in-progress studies conducted leveraging the LAPSE-RATE data, including the data collected from these vehicles. It is important to remember that these measurements are part of a bigger campaign that featured over 50 UAS platforms, and a variety of other surface-based remote sensors. The papers that have been prepared include a UAS measurement intercomparison study (Barbieri et al., 2019), advancement of UAS capabilities (Islam et al., 2019), a study to evaluate

the ability of UAS to track coherent atmospheric structures (Nolan et al., 2018), in addition to two in-preparation articles evaluating the influence of assimilated UAS observations on prediction of weather in complex terrain (Jensen et al., 2020a and 2020b), and an in-preparation paper evaluating the structure and intensity of cold-air drainage from the Saguache Canyon (Bailey et al., 2020).

2. The observation items of the data are too conventional, basically meteorological data (temperature, wind speed, temperature, etc.), without special data. The article's comparison of these data is also relatively superficial.

We're not sure what the reviewer means by "special data". We believe that temperature, wind speed, humidity and other standard meteorological quantities represent the backbone of much of our understanding of the atmosphere. We do not believe that ESSD is in place only to support the publication of "special" data, but rather that the publication is meant to support the documentation and publication of all datasets related to Earth Science.

Regarding the comparison of the data, we included Figure 7 to provide some information on how the different measurements compare. We realize that this is not an in-depth comparison, though each of these systems undergoes routine calibrations at their home facilities. Additionally, we have added a second figure (figure 9) from time periods where the different vehicles were in close proximity (< 300 m apart), and added some text describing this figure. Note that we believe that the observations we currently have do not support an in-depth intercomparison between these vehicles (that wasn't the point of this field campaign), and that doing that well would require a new campaign (and a lot of data analysis that extends beyond the reaches of an ESSD article).

3. If there is an introduction about the route setting, the structure of the entire equipment, and the cost, it may provide a more valuable reference for related scientists.

We're not sure that we understand this comment. What is meant by the "route setting"? Is this in reference to determining where the vehicles would be positioned on a given date? If so, we believe that this is captured in section 3 (lines 168-205) and the references provided to offer a broader overview of the LAPSE-RATE campaign (de Boer et al., 2020a and 2020b). Regarding the "structure of the entire equipment and the cost", we believe that section 2 and references therein provide adequate descriptions of the systems. While the cost is not specifically included, we don't necessarily believe that this is relevant for documentation of the collected dataset (primary objective of ESSD), and, frankly doesn't seem to be something that needs to be published. Given the rapid change in equipment and instrumentation pricing, along with the massive differences in vehicle costs, there is no clear way to provide a regionally and temporally accurate cost estimate that could be used in any meaningful way by the reader.

4. Data processing and quality control should not be considered as innovations of this article, but the article uses a larger amount of space. What do you want to express?

ESSD articles, in general, are not the place to publish "innovations". Those are more suitably published in either technology-centric journals (e.g. AMT, J. Tech) or scientific journals (ACP, AMS, AGU, Springer journals). The text provided in the current article is meant to provide the reader with background on the processes employed to collect and process this dataset. We believe

that we have done a reasonable job with offering the reader insight into what calculations are performed, what quality control is applied, and what sensors are used. For many of the applied techniques, we provide references that offer details on the earlier innovations supporting the development and collection of this dataset.

5. The biggest problem with mobile observation maybe its representation of time and space. Has the author elaborated this in the manuscript? How the author chooses the route and the sampling time?

It is true that connecting the temporal and spatial variability observed using the mobile observing platforms can pose challenges. The extent to which these challenges need to be overcome are specific to the scientific questions to be answered and the phenomena to be observed. As an example, the spatial and temporal variability in these observations is actually quite useful for trying to evaluate the physical characteristics and drivers of something like a valley drainage flow. We did not dedicate time in the current manuscript on this topic given that this would require an in depth analysis to understand the considerations for answering a given scientific question of interest, which is broadly beyond the scope of an ESSD publication.

With regard to the selected routes and sampling times for the current dataset, the rationales supporting the deployment locations of each platform were described in Section 3 and the cited publications therein. The times selected were meant to align with scientific objectives of the LAPSE-RATE campaign (e.g. detecting early morning drainage flows, capturing the boundary layer evolution, assessing the initiation and development of convection through the morning into the early afternoon).

6. The introduction of observation items and instruments (Table1-3) can be integrated into a table so that everyone can understand the system more directly.

We're not sure that we understand the comment. If we read it directly, the reviewer is requesting that the information provided in table form be put into a table, which doesn't make sense. Possibly the suggestion is to combine these items into a single table, though the current breakdown is meant to offer individual tables for the three different types of mobile systems deployed during LAPSE-RATE. Given that the NSSL MM and UNL CoMeT systems have identical instrumentation, we have combined tables 2 and 3 into a single table 2. Beyond this, we would prefer to keep the MURC table separate from the other two. We apologize if we misunderstood the reviewer's comment.

In summary, I don't think the current version is suitable for publication on ESSD.

Nevertheless, we appreciate the time provided by the reviewer in commenting on this manuscript. We strongly believe that this article is a good fit for ESSD, and would be happy to hear the editorial staff's opinion on whether additional components should be included prior to publication.

Cited References:

- Barbieri, L.K., S.T. Kral, S.C.C. Bailey, A.E. Frazier, J.D. Jacob, D. Brus, P.B. Chilson, C. Crick, J. Elston, H. Foroutan, J. González-Rocha, B.R. Greene, M.I. Guzman, A.L. Houston, A. Islam, O. Kempainen, E.A. Pillar-Little, J. Reuder, S.D. Ross, M. Sama, D.G. Schmale III, T.J. Schuyler, S. Smith, S. Waugh, A. Doddi, D. Lawrence, C. Dixon, S. Borenstein, and G. de Boer (2019): Intercomparison of small unmanned aircraft system (sUAS) measurements for atmospheric science during the LAPSE-RATE campaign, *Sensors*, **19**, 2179, <https://doi.org/10.3390/s19092179>
- de Boer, G., Diehl, C., Jacob, J., Houston, A., Smith, S.W., Chilson, P., Schmale III, D.G., Intrieri, J., Pinto, J., Elston, J., Brus, D., Kempainen, O., Clark, A., Lawrence, D., Bailey, S.C.C., Sama, M.P., Frazier, A., Crick, C., Natalie, V., Pillar-Little, E.A., Klein, P., Waugh, S., Lundquist, J.K., Barbieri, L., Kral, S.T., Jensen, A.A., Dixon, C., Borenstein, S., Hesselius, D., Human, K., Hall, P., Argrow, B., Thornberry, T., Wright, R. and Kelly, J.T.: Development of community, capabilities and understanding through unmanned aircraft-based atmospheric research: The LAPSE-RATE campaign, *Bull. Amer. Meteor. Soc.*, **101**, E684-E699, <https://doi.org/10.1175/BAMS-D-19-0050.1>, 2020a.
- de Boer, G., Houston, A., Jacob, J., Chilson, P. B., Smith, S. W., Argrow, B., Lawrence, D., Elston, J., Brus, D., Kempainen, O., Klein, P., Lundquist, J. K., Waugh, S., Bailey, S. C. C., Frazier, A., Sama, M. P., Crick, C., Schmale III, D., Pinto, J., Pillar-Little, E. A., Natalie, V., and Jensen, A.: Data Generated During the 2018 LAPSE-RATE Campaign: An Introduction and Overview, *Earth Syst. Sci. Data*, <https://doi.org/10.5194/essd-2020-98>, accepted for publication, 2020b.
- Islam, A., Houston, A.L., Shankar, A. and Detweiler, C.: Design and Evaluation of Sensor Housing for Boundary Layer Profiling Using Multirotors. *Sensors*, **19**, 2481, doi: 10.3390/s19112481, 2019.
- Jensen, A., and co-authors: Assimilation of a coordinated fleet of unmanned aircraft systems observations in complex terrain. Part I: EnKF system design and preliminary assessment, *Mon. Wea. Rev.*, submitted, 2020.
- Nolan, P., J. Pinto, J. Gonzalez-Rocha, A. Jensen, C.N. Vezzi, S.C.C. Bailey, G. de Boer, C. Diehl, R. Laurence III, C.W. Powers, H. Foroutan, S.D. Ross and D.G. Schmale III: Coordinated unmanned aircraft system (UAS) and ground-based weather measurements to predict lagrangian coherent structures (LCSs), *Sensors*, **18**, 4448, <https://doi.org/10.3390/s18124448>

Measurements from mobile surface vehicles during LAPSE-RATE

Gijs de Boer^{1,2}, Sean Waugh³, Alexander Erwin⁴, Steve Borenstein⁵, Cory Dixon^{5*}, Wafa'a Shanti⁴, Adam Houston⁴, Brian Argrow⁵

¹ Cooperative Institute for Research in Environmental Sciences, University of Colorado Boulder, Boulder, Colorado, USA

² NOAA Physical Sciences Laboratory, Boulder Colorado, USA

³ NOAA National Severe Storms Laboratory, Norman, Oklahoma, USA

⁴ University of Nebraska – Lincoln, Lincoln, Nebraska, USA

⁵ Integrated Remote and In Situ Sensing, University of Colorado Boulder, Boulder, Colorado, USA

* Now at Geotech Environmental Equipment, Denver, Colorado, USA

Correspondence to: Gijs de Boer (gijs.deboer@colorado.edu)

Abstract. Between 14 and 20 July 2018, small unmanned aircraft systems (sUAS) were deployed to the San Luis Valley of Colorado (USA) alongside surface-based remote, in-situ sensors, and radiosonde systems as part of the Lower Atmospheric Profiling Studies at Elevation – a Remotely-piloted Aircraft Team Experiment (LAPSE-RATE). The measurements collected as part of LAPSE-RATE targeted quantities related to enhancing our understanding of boundary layer structure, cloud and aerosol properties and surface-atmosphere exchange, and provide detailed information to support model evaluation and improvement work. Additionally, intensive intercomparison between the different unmanned aircraft platforms was completed. The current manuscript describes the observations obtained using three different types of surface-based mobile observing vehicles. These included the University of Colorado Mobile UAS Research Collaboratory (MURC), the National Oceanic and Atmospheric Administration National Severe Storms Laboratory Mobile Mesonet, and two University of Nebraska Combined Mesonet and Tracker (CoMeT) vehicles. Over the one-week campaign, a total of 143 hours of data were collected using this combination of vehicles. The data from these coordinated activities provide detailed perspectives on the spatial variability of atmospheric state parameters (air temperature, humidity, pressure, and wind) throughout the northern half of the San Luis Valley. These data sets have been checked for quality and published to the Zenodo data archive under a specific “community” set up for LAPSE-RATE (<https://zenodo.org/communities/lapse-rate/>) and are accessible at no cost by all registered users. The primary dataset DOIs are 10.5281/zenodo.3814765 (CU MURC measurements; de Boer et al., 2020d), 10.5281/zenodo.3738175 (NSSL MM measurements; Waugh, 2020) and 10.5281/zenodo.3838724 (UNL CoMeT measurements; Houston and Erwin., 2020).

1 Background

35 In July 2018, a collection of atmospheric scientists and engineers from around the globe converged on the San Luis
Valley (SLV) of Colorado (USA) to take part in the LAPSE-RATE (Lower Atmospheric Profiling Studies at Elevation
– a Remotely-piloted Aircraft Team Experiment) field campaign (de Boer et al., 2020a; 2020b). This campaign was
focused on demonstrating the utility of unmanned aircraft systems (UAS) for atmospheric research and collecting
scientifically-interesting data sets to conduct targeted studies on specific topics of interest related to boundary layer
40 processes. Connected to the annual meeting of the International Society for Atmospheric Research using Remotely-
piloted Aircraft (ISARRA, de Boer et al., 2019), LAPSE-RATE included over 100 scientists and engineers, who
together conducted nearly 1300 research flights and captured over 250 flight hours of data using UAS.

Information on the different UAS and profilers deployed during LAPSE-RATE, numerical simulations completed for
45 the campaign, and an overview of the campaign itself is distributed in a range of articles, many of which are associated
with this *Earth System Science Data* special issue and will not be revisited here (de Boer et al., 2020b; de Boer et al.,
2020c; Bell et al., 2020; Pillar-Little et al., 2020; Bailey et al., 2020; Natalie et al., 2020; Islam et al., 2020; Brus et
al., 2020; Pinto et al., 2020). The current paper is focused on describing datasets collected using mobile surface
observing systems during the LAPSE-RATE campaign.

50 The general concept behind mobile surface observing vehicles is to provide a fully-mobile platform from which
accurate observations of atmospheric parameters can be made, thereby offering opportunities to position (and
reposition) in situ surface meteorological instrumentation precisely to capture highly-localized gradients and target
locations that are thought to be critical for development of development of phenomena of interest. To accomplish
55 this, rack- or mast-mounted instrumentation is set up to measure quantities such as pressure, wind speed/direction,
temperature, and relative humidity. In the case of vehicles set up for truly mobile measurements (i.e. measuring while
driving) instruments are mounted far enough away from the vehicle structure to minimize direct influence to the
observations from the vehicle itself. Such mobile mesonet systems have been deployed for atmospheric research for
over two decades and details on the original mobile mesonets can be found in Straka et al. (1996). These systems
60 have generally been used to evaluate atmospheric conditions supporting the development of tornadic supercells (e.g.
Markowski, 1999; Pietrycha and Rasmussen, 2004), though deployments to observe land-falling hurricanes have also
been conducted (e.g. Caban et al., 2019). Additionally, mobile mesonet systems have been used in conjunction with
airborne systems (manned or unmanned) to capture measurements along four-dimensional transects (e.g. Riganti and
Houston 2017).

65 During LAPSE-RATE, atmospheric-observing surface vehicles provided critical insight into gradients in state
variables across the SLV, including information on temperature, pressure, humidity and winds. This includes both
single-site sampling, as well as measurements covering extended transects conducted throughout the northern half of
the SLV. The latter were particularly interesting given that the SLV features widely-varying surface types (ranging
70 from irrigated cropland to dry shrublands), significant topography, and terrain-induced flows. The following section

describes the vehicles deployed and instrumentation that they carried, while section 3 provides an overview of measurement locations and sampling strategies. Section 4 provides details on data processing and quality control, while section 5 offers information on dataset availability.

2 Instrument and Vehicle Descriptions

75 The three mobile surface-based platforms used to collect data during LAPSE-RATE and described in this paper include the Mobile UAS Research Collaboratory (MURC), operated by the University of Colorado Boulder (CU), a mobile mesonet (MM) vehicle operated by the NOAA National Severe Storms Laboratory (NSSL), and a pair of Combined Mesonet and Tracker (CoMeT) vehicles operated by the University of Nebraska Lincoln (UNL). As documented below, these three vehicles provided complementary measurements, including details on atmospheric
80 temperature, pressure, humidity and winds. Each operated in slightly different modes over the duration of the campaign, though all three vehicles were at the same location for limited times.

2.1 CU MURC

The CU MURC (figure 1) is an instrumented van that was added to the Integrated Remote and In-Situ Sensing (IRISS) program vehicle fleet in early 2018. This system was specifically developed to work in tandem with unmanned aircraft
85 operations, serving as a mobile command station and surface measurement facility during field deployments. This centralized operations center provides a platform from which to oversee field teams and provide general situational awareness. The MURC is equipped with two workstations for lighter computing loads, including on-site processing of data, real-time communications with team members and the broader community through web-based systems, and possibly serving as UAS ground stations. Additionally, the MURC carries two servers for more intensive computing
90 tasks, with one dedicated to graphics intensive processes (such as processing of imagery for photogrammetry-centric missions) and the other dedicated to general computing and intensive real-time data processing.

From an observational perspective, the MURC is equipped with a 15 m extendable mast, atop which are mounted several meteorological sensors. This includes a Gill MetPak Pro Base Station that measures barometric pressure, air
95 temperature, and relative humidity, a Gill WindMaster 3D sonic anemometer for 3D wind and fast temperature measurements, and an R.M. Young Wind Monitor (05103) propeller and vane anemometer which provides a redundant horizontal wind measurement and offers real-time situational awareness for nearby unmanned aircraft operators. An overview of the sensors and their projected accuracies is included in Table 1. The MURC is also equipped with a large communications suite that increases the range of UHF/VHF vehicle-to-vehicle radios used
100 during field campaigns, increases cellular bandwidth for data transfer and communications, and improves the ground station to UAS communication link. While mobile, the MURC is set up to operate at a single location at any given time, and does not collect measurements while travelling like other platforms described below. Data collected by the MURC were used to intercompare measurements from the different UAS deployed during LAPSE-RATE. The results of this intercomparison are documented in Barbieri et al., (2019).

105

2.2 NSSL Mobile Mesonet

In addition to the MURC, LAPSE-RATE included a deployment of the NOAA NSSL MM vehicle, a heavily-modified version of the original MM created 25 years ago (Straka et al., 1996). The current generation NSSL MM is built on a Ford F-250 extended cab long bed pickup truck. Instrumentation is located on a rack mounted forward and above the hood of the vehicle, in order to minimize atmospheric disturbances caused by the blunt forward edge of the truck (figure 2). Mounting the equipment rack over the roof of the vehicle (as was done with previous NSSL MM vehicles) was thought to result in observational biases due to the turbulent and accelerated airflow over the vehicle roof and thermal influence of the vehicle engine. The new set up requires the addition of a substantial structure to support the weight and drag of the instrument rack. This structure also allows for installation of a wire mesh hail cage to protect the windshield from hail strikes while operating in the vicinity of severe thunderstorms. In addition to the instrument rack, the MM can carry up to four helium tanks along with a Vaisala MW41 sounding system for mobile radiosonde launches.

For air temperature and relative humidity measurements, the NSSL MM deploys a Vaisala HMP155 sensor. While the HMP155 is highly accurate, the relative humidity sensor can be prone to contamination by atmospheric particles. To reduce this contamination the HMP155 requires integration of a membrane that allows water molecules to pass through while reducing the impact of contaminants. While this practice protects the RH observations from contamination, it also significantly delays the thermal response of the environment inside the membrane. In combination with a relatively slow time constant (testing on previous models such as the HMP35 and HMP45 have revealed time constants on the order of 10 mins (Waugh, 2012)), the impacts of this membrane result in very slow response temperature measurements (hence the designation “slow temp” for the HMP155). To overcome this, a fast responding Campbell Scientific T109SS temperature sensor is also installed on the NSSL MM (T109, aka “fast temp”). The HMP155 cannot be assumed to report a temperature and relative humidity that represents the true environmental conditions, only the conditions inside the membrane. However, while the HMP should not be used for temperature and relative humidity observations directly, dewpoint is conserved across the membrane allowing the HMP to be useful for observing the dewpoint (Richardson et al. 1998). This dewpoint observation is combined with data from the faster T109 temperature sensor to derive a relative humidity value that is representative of the true environmental value (Richardson et al., 1998). The thermodynamic observations are housed in a radiation shield to protect the sensors from direct solar radiation while maintaining adequate airflow from the real environment. This shield, known as the “U-tube”, was developed by NSSL to specifically accomplish this task (Waugh and Frederickson 2010; Houston et al. 2016). For wind measurements, the NSSL MM deploys a standard propeller-vane combination anemometer from RM Young (Wind Monitor 05103) covering a wide range of wind speeds (0-100 ms^{-1}). While the vehicle is stationary, ambient wind direction is derived using the vehicle-relative wind direction and vehicle heading from a KVH C100 magnetic compass. In combination, these allow for computation of the ambient wind vector. While in motion, the vehicle-relative wind vector is subtracted from GPS-obtained vehicle motion to produce the inertial environmental wind vector. The measurements from all of these sensors are logged at 1Hz using a Campbell Scientific

CR6 wifi-enabled data logger. A list of the sensors and their respective measurements, as well as general accuracies and response times are listed in Table 2.

2.3 UNL CoMeT

145 Finally, the UNL deployed two CoMeTs for LAPSE-RATE. These systems are built around Ford Explorers and
feature a forward-mounted suite of meteorological sensors and a dual moonroof (see Figure 3). The CoMeTs measure
air temperature and relative humidity at ~2 m above ground level (AGL) using a Vaisala HMP155A and also include
a fast-response sensor (Campbell Scientific 109SS thermistor) for air temperature at ~2 m AGL (same set up as the
NOAA NSSL MM). Air pressure at ~2.5 m AGL is measured using a Vaisala PTB210, while wind speed and direction
150 are observed using an R.M. Young 05103 propeller-vane anemometer at approximately 3.5 m AGL. The vehicle
heading is tracked using a KVH Industries C-100 fluxgate compass. As on the NSSL MM, the HMP155A and 109SS
thermistor are shielded and aspirated within a U-tube (Waugh and Frederickson 2010; Houston et al. 2016).
Manufacturer specifications for these instruments are provided in Hanft and Houston (2018) and are again listed in
Table 2 of this manuscript. In addition to the measured variables, the CoMeT data loggers (Campbell Scientific CR6)
155 along with a custom Python script, use observed quantities to calculate dewpoint temperature (T_d), mixing ratio (q_v),
potential temperature (θ), equivalent potential temperature (θ_e), virtual potential temperature (θ_v), and wind speed and
direction. The equations used to compute these quantities are provided in section 4.

Deleted: 3

3 Description of measurement locations, deployment strategies and sampling

The vehicles described above covered a significant amount of ground over the course of the campaign. Each played
160 a different role in addressing the primary objectives of the LAPSE-RATE campaign (see de Boer et al., 2020a; 2020b).
These vehicles were used to evaluate the performance of UAS sensors, in addition to intercomparison between
different surface vehicles (see Figure 4). Figure 5 provides an overview of the amount of time each vehicle spent
making atmospheric measurements during the campaign. As shown, sampling primarily occurred in the morning and
early afternoon (local time), with the NSSL MM generally starting the earliest in order to launch an early morning
165 radiosonde (see Bell et al., 2020). Sampling conducted on the afternoon of 14 July and the morning of 20 July by the
CU MURC was in support of platform intercomparison efforts (Barbieri et al., 2019).

The primary role of the CU MURC was to provide daily measurements at a consistent location (Leach Airport) in the
center of the sampling domain. In this role, the MURC acted as a meteorological tower that collected measurements
170 in a similar manner from day to day, providing a baseline for putting other observations collected during the campaign
into context. The only exception to this routine sampling took place on July 19, when all platforms were focused on
cold air drainage out of the smaller valleys on the northern end of the SLV. On July 19, the MURC was positioned a
bit farther to the north, as can be seen in Figure 6f to help evaluate the timing and intensity of density currents flowing
from Saguache (northwest corner of the SLV) and Villa Grove (northeast corner of the SLV). In total, the MURC
175 operated for seven days, capturing a total of 45.5 hours of data.

The NSSL MM filled multiple roles throughout the campaign. One important role included the launching of radiosondes from various locations around the SLV (Bell et al., 2020). This often included early morning radiosondes from Leach Airport. In addition, the NSSL MM was leveraged as a mobile measurement platform to capture information on spatial variability throughout the broader valley. The first of these mobile measurement sorties took place on 15 July and included transects spanning the area between Alamosa, Colorado and Moffatt, Colorado. These transects covered a variety of different surface types, ranging from irrigated cropland to dry desert-like areas on the eastern side of the SLV. On 16-18 July, the NSSL MM focused on the south central portion of the SLV, with much of the measurement time spent at Leach Airport, and the transect between Leach Airport and the city of Alamosa. Finally, on 19 July, the NSSL MM covered area from Alamosa to Saguache in the northwest corner of the SLV. Most of the time on that date was spent sampling the square shown in the northwest part of the SLV in Figure 6f to help understand the spatial variability of the drainage flow exiting the Saguache Valley. In total, the NSSL MM collected a total of 55.4 hours of data, in addition to the measurements from the radiosondes launched.

The two UNL CoMeT vehicles were deployed separately throughout the San Luis Valley during the majority of the LAPSE-RATE campaign. CoMeT-1 was principally focused on coordinated observations with the CU UAS team and involved both stationary data collection based at the Leach Airport and transect data collection across the SLV. CoMeT-2 was principally focused on stationary data collection in coordination with the UNL UAS team based at a site on the eastern margins of the SLV in the northwest corner of the Great Sand Dunes National Park (henceforth referred to as observation site “Gamma”; Islam et al., 2019; 2020). As with the NSSL MM, the CoMeT data collection began on 15 July with CoMeT-1 operating transects based out of Leach Airport and CoMeT-2 collecting stationary observations at Gamma. Similar operations were executed on 16 and 18 July during which time CoMeT-1 performed extended east-west transects to the far eastern portion of the SLV to help understand the role of surface type gradients and sloping terrain on that side of the valley on convection initiation. On 18 July, following operations at Gamma, CoMeT-2 also executed a set of transects along the eastern margins of the irrigated region of the valley in an effort to explore whether surface flow parallel to this margin resulted in a coherent convergence boundary. On 17 July, both CoMeTs operated at the Leach Airport. Finally, on 19 July, both CoMeTs joined the effort to capture the early morning Saguache Valley cold-air drainage, with frequent transects along County Road X between Saguache and County Road 55. Over the course of the campaign, CoMeT-1 collected 50.4 hours of data and CoMeT-2 collected 50.3 hours of data.

Figure 7 provides a statistical overview of data collected by these three platforms over the duration of the LAPSE-RATE campaign. Included are normalized probability distributions of measured quantities, including temperature, relative humidity, air pressure, wind speed, wind direction and, for the NSSL MM and UNL CoMeT datasets, the difference between the fast and slow temperature sensors. For all of these distributions, data were averaged to a moving 1-minute equal weighted window. The distributions illustrate differences that are likely largely the result of instrument and platform location. For example, it is important to remember that while the NSSL MM and UNL CoMeT instruments were located close to (<3 m) the ground, the CU MURC data were collected atop a 15.2 m mast.

Deleted: 50

Deleted: -foot

Therefore, it is not surprising that the CU MURC pressure measurements are found to be slightly lower than those measured by the other two platforms. Similarly, the CU MURC temperature and RH distributions lack the extremes, with measurements from the top of the mast likely missing the coldest temperatures in the early morning, and the warmest temperatures in the afternoon. Also attributable to this altitude difference is the slight but noticeable increase in wind speeds and counterclockwise shift in wind direction from the near surface environment to the height of the mast. Finally, for both the NSSL MM and the UNL CoMeT data, the slow temperature sensor inside of the membrane (HMP155) was shown to have a warm bias relative to the fast sensor (T109 SS), and the UNL CoMeT difference distribution is shown to have an extended tail towards positive values. The mean difference (fast minus slow) of the NSSL MM temperature sensors was -0.328 C, while the mean difference of the UNL CoMeT temperature sensors was -0.398 C.

Figure 8 provides additional insight into the temporal variability of the recorded variables, both in terms of diurnal cycle and over the extent of the LAPSE-RATE campaign, based on measurements obtained by the CU MURC. The upper left-hand panel shows that, as expected, temperatures were generally coldest in the early morning, with a gradual but notable warming over the course of the day. Along with this, relative humidity levels were generally highest in the morning and decreasing significantly over the course of the day. Interestingly, the middle of the week did feature one day (17 July) where the MURC was sampling later into the afternoon, and temperatures were recorded dropping during that time period, decreasing from around 26 C in the mid-afternoon to below 20 C by the end of sampling around 1700 MDT. The upper right-hand panel provides insight into the variability occurring over the course of the field campaign. The earliest days (07/14-07/16) were consistently warm and relatively humid. The atmosphere became drier later in the campaign, with relative humidity values peaking at around 70% on 19 July, despite temperatures that were slightly cooler than from those recorded on 17 and 18 July, when relative humidity levels climbed above 90% in the early morning hours. In general, afternoons were illustrated to fall between 25-27 C, and mornings between 10-15 C (largely depending on the start time of sampling for a given date). Wind speed and direction measurements are shown in the bottom panel of Figure 8 and demonstrate that winds were generally quite light throughout the week, with values between 0-6 $m s^{-1}$. July 14, 15 and 17 did see an intensification of winds in the afternoon, generally associated with convective systems developing over the valley and surrounding mountain peaks. Wind directions were generally from the south and east. With the stronger winds resulting in a more northerly and westerly component. The only sampling period with solidly westerly winds was the morning of 20 July.

4 Data processing and quality control

4.1 CU MURC

Data available from the CU MURC have been processed in various ways to average the data, remove outliers, and correct the wind measurements from the sonic anemometer for platform pitch and roll. All data were averaged across a moving 1-second window. Any data points falling inside of the 1-second window were included in averaging, though no filter was implemented to ensure any particular number of samples within a given 1-second averaging window. Time periods where no data were collected are included as "NaN". Screening for outliers was completed

using the Matlab *filloutliers* function, which detects and replaces outliers using a linear interpolation between points not deemed to be outliers. In the current application, outliers were defined as points falling more than three local standard deviations outside of a moving mean window encompassing 10 seconds worth of data. Note that this technique was applied to the measured zonal and meridional wind components only, and not to the wind speed and direction included in the dataset that are calculated using the components, given that such averages are not possible on the vector values.

Rotation of the CU MURC sonic anemometer data was completed using a standard three axis rotation (Tropea et al., 2007), where the updated wind coordinates are calculated as follows:

$$\begin{bmatrix} u_f \\ v_f \\ w_f \end{bmatrix} = \mathbf{A} \begin{bmatrix} u_m \\ v_m \\ w_m \end{bmatrix}$$

Here, u_m , v_m and w_m are the measured instantaneous velocity components as measured by the sonic anemometer, \mathbf{A} is the rotation matrix, and u_f , v_f and w_f are the final velocity components. \mathbf{A} can be approximated by combining multiple rotations to align the coordinate system using measured Euler angles. In this case, we assume:

$$\mathbf{A} = \mathbf{T} \cdot \mathbf{S} \cdot \mathbf{R}$$

where:

$$\mathbf{T} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \psi & \sin \psi \\ 0 & -\sin \psi & \cos \psi \end{bmatrix} \quad \mathbf{S} = \begin{bmatrix} \cos \varphi & 0 & \sin \varphi \\ 0 & 1 & 0 \\ -\sin \varphi & 0 & \cos \varphi \end{bmatrix} \quad \mathbf{R} = \begin{bmatrix} \cos \theta & \sin \theta & 0 \\ -\sin \theta & \cos \theta & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

and ψ , φ , and θ are the roll, pitch and yaw rotation angles, respectively, as measured by the CU MURC operators.

Note that these angles were only measured once after parking the vehicle and do not vary in time in between vehicle movements. Therefore, any swaying of the vehicle as a result of people getting in and out, wind, or for other reasons may impact the wind measurements from the sonic anemometer and may not be accounted for. Note that the rotations are applied in yaw, pitch, roll order, meaning that we step through the rotation as follows:

$$\begin{aligned} u_1 &= u_m \cos \theta + v_m \sin \theta \\ v_1 &= -u_m \sin \theta + v_m \cos \theta \\ w_1 &= w_m \end{aligned}$$

$$\begin{aligned} u_2 &= u_1 \cos \varphi + w_1 \sin \varphi \\ v_2 &= v_1 \\ w_2 &= -u_1 \sin \varphi + w_1 \cos \varphi \end{aligned}$$

$$\begin{aligned} u_f &= u_2 \\ v_f &= v_2 \cos \psi + w_2 \sin \psi \\ w_f &= -v_2 \sin \psi + w_2 \cos \psi \end{aligned}$$

280 Note that these corrections are only applied to the wind measurements from the sonic anemometer. The influence of
slight offsets in pitch and roll are negligible for the R.M. Young propeller-based wind instrument as the propeller
follows a cosine response. For LAPSE-RATE, the sensor pitch and roll angles varied between -1.7 and 2.35 degrees
and -2.21 and 3.48 degrees, respectively. These angles correspond to a maximum error of 0.2%, well below the
uncertainty of the instrument. The sensor was aligned with magnetic north on a daily basis.

285

4.2 NSSL MM

For the NSSL MM's, a majority of the data processing and variable calculation is done in real time on the CR6 data
logger. Most of the observations do not require much in the way of modification, the exception to that are derived
ambient winds, vehicle heading, and the environmental RH. This is an advantage of the CR6 datalogging system as
290 the onboard computing power is enough to handle the calculations in real time, making data display and recording
easier.

For the derived winds, the measured wind speed and direction directly off the anemometer is a combination of the
vehicle motion vector and the ambient wind vector (this combined vector is the vehicle relative vector), which need
295 to be separated. To obtain the ambient wind vector, the vehicle motion must be subtracted from the vehicle relative
vector in a process similar to that outlined in Section 4.1 for the CU MURC, though not as complex as the wind
monitor on the NSSL MM is only two dimensional. The vehicle motion obtained from the onboard GPS and broken
into N-S and E-W components. The apparent wind vectors as measured by the anemometer directly is also broken
into components, but is first added to the vehicle heading to obtain a true directional vector rather than a vehicle
300 relative vector. The apparent wind components are then subtracted from the vehicle motion components to obtain the
ambient wind components. The final step of the process involves converting the ambient components back into vector
form, which requires a tedious series of manual computations to determine the quadrant relative angle and its true
meteorological heading. The vector wind speed is found simply with:

$$wind_speed = \sqrt{X^2 + Y^2},$$

305 where X and Y are the ambient wind components for the U and V directions respectively. For the vector wind direction,
the components must be examined to determine where on the meteorological coordinate system they lie and manually
assembled in the correct direction. This is due to the fact that traditional use of sin, cos, and tangent (and their inverse
functions) are referenced to a mathematical coordinate system which is reversed and 90° offset from the
meteorological coordinate system. To determine the wind direction, an offset to either 90° or 270° is found by taking
310 the ATAN(ABS(Y/X)). This value is then added or subtracted from the appropriate reference angle depending on the
quadrant. For example, if Y and X were both +15 ms⁻¹, then ATAN(ABS(Y/X)) = 45°. Since both Y and X are positive
values, the resulting angle should be in the first quadrant, or between 0° and 90°, thus the ATAN value is subtracted
from the 90° reference angle, obtaining an environmental wind direction of 45°. A more detailed description of this
process is forthcoming in a future manuscript. Note that if the vehicle is not moving, this component based approach
315 is not needed and the wind direction can be found by simply rotating the observed winds by the vehicle heading while
stationary.

320 The vehicle heading is also corrected in real time for cases where the vehicle is not moving. In these situations, the heading of the vehicle is obtained via a magnetic compass which provides the magnetic bearing. This is used in cases where the vehicle motion is less than 1 ms⁻¹. The magnetic heading differs from true north by an offset which is dependent on the coordinates of the observation location, called the magnetic declination angle. This angle is provided along with the GPS coordinates in real time, and is used to correct the magnetic heading.

325 While the NSSL MM measures temperature and humidity, it does so with a set of sensors behind a protective membrane that significantly delays the response time as described in Section 2B. With this filter in place, the measured RH is lagged behind the true environmental RH and must be rederived. This process follows that of Richardson et al. (1998) where:

$$\begin{aligned} \text{Derived}_{RH} &= \frac{e}{e_s} * 100 \\ e &= 6.1365 * \text{EXP}\left(\frac{17.502 * TdC}{240.97 + TdC}\right) \\ e_s &= 6.1365 * \text{EXP}\left(\frac{17.502 * Tfast}{240.97 + Tfast}\right) \end{aligned}$$

330 where Tfast and TdC (the calculated dewpoint from the HMP155) are in Celsius. The calculation for dewpoint is done with a built in CR6 function for dewpoint, which uses Tetens' equation and the vapor pressure (Campbell Scientific, 2020).

335 As a final step to the process, after the data is collected and archived, each data set is run through a QC procedure where the individual data files from a single operations period are combined, and a set of QC flags applied. The intent of these flags are not to remove data, but rather flag data that is potentially suspicious and should be examined manually. There are four QC flags, representing: panel temperature excess, vehicle stationary periods, excessive changes to vehicle motion, and a general sanity check. More specific details of the QC flags are contained in the readme files that accompany the data, however a brief description is presented here. The panel temperature flag identifies areas where the internal temperature of the CR6 datalogger changes by a significant amount. This identifies periods where the logger may be having inconsistency issues or power supply problems, which manifest themselves in the internal temperature monitoring first. The second QC flag is meant to identify periods where the vehicle is stationary, which could increase the potential for bias in the observations, while the third flag looks for sharp changes to the speed or direction. The latter flag is meant to identify areas where there could be a discrepancy between the vehicle heading and the observed winds, such as in a sharp turn. The final QC flag simply examines all the observations for values that are well outside the normal operating range.

350 4.3 UNL CoMeTs

As mentioned in Section 2, the CoMeT data loggers and Python scripts are used to calculate key quantities of interest in real-time. These quantities include corrected/fast relative humidity, water vapor mixing ratio, dew point temperature, the potential temperature (θ), virtual potential temperature (θ_v), and equivalent potential temperature (θ_e).

355

For both CoMeT-1 and CoMeT-2, relative humidity is adjusted to the fast temperature following Richardson et al. (1998) and Houston et al. (2016): vapor pressure is calculated using slow temperature and relative humidity, saturation vapor pressure is calculated using fast temperature, and the ratio of the two is used to calculate the corrected/fast relative humidity. In CoMeT-1, the calculations are done in the Python script using the following:

360

$$e_s = 6.112 \exp \left[\frac{17.67 \cdot T_s}{243.5 + T_s} \right]$$

from Wexler (1976) and Bolton (1980) where e_s is either vapor pressure or saturation vapor pressure and T_s is dew point temperature (for vapor pressure) or fast temperature (for saturation vapor pressure). Dew point temperature is calculated using

365

$$T_d = \frac{257.14\gamma}{18.678 - \gamma}$$

$$\gamma = \ln(0.01 \cdot RH_s) + T_{slow} \frac{18.678 - T_{slow}/234.5}{257.14 + T_{slow}}$$

Where RH_s is the uncorrected (slow) relative humidity and T_{slow} is the slow temperature. In contrast to CoMeT-1, the calculation of dew point temperature, vapor pressure, and saturation vapor pressure are done within the logger, and slightly different expressions are used. For dew point temperature:

370

$$T_d = \frac{-5420}{\ln \left(\frac{p \cdot q_v}{62.2 \cdot 2.53 \times 10^7} \right)}$$

$$T_d = \frac{A_3 \ln \left(\frac{e}{A_2} \right)}{A_2 - \ln \left(\frac{e}{A_1} \right)}$$

is used, where $A_1 = 0.61078$, $A_2 = 17.558$, and $A_3 = 241.88$. The expression used in the logger for (saturation) vapor pressure is from Lowe (1977):

375

$$e_s = B_0 + B_1 T + B_2 T^2 + B_3 T^3 + B_4 T^4 + B_5 T^5 + B_6 T^6$$

where, $B_0 = 6.107799961$, $B_1 = 4.436518521 \times 10^{-1}$, $B_2 = 1.428945805 \times 10^{-2}$, $B_3 = 2.650648471 \times 10^{-4}$, $B_4 = 3.031240396 \times 10^{-6}$, $B_5 = 2.034080948 \times 10^{-8}$, and $B_6 = 6.136820929 \times 10^{-11}$.

Water vapor mixing ratio is calculated using

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

$$q_v = 62.2 \frac{e}{p}$$

and dew point temperature and vapor pressure as described above. Potential temperature for both CoMeTs is calculated using

$$\theta = T_{fast} \left(\frac{10^5}{p} \right)^{R_d / C_{pd}}$$

Virtual potential temperature is calculated using

$$\theta_v = \theta (1 + 0.61 q_v)$$

Equivalent potential temperature is calculated in both CoMeTs following Bolton (1980):

$$\theta_e = T_m \exp \left[\left(\frac{3376}{T_{LCL}} - 2.54 \right) q_v (1 + 0.81 q_v) \right]$$

$$T_m = \theta \left(\frac{T_{fast} + 273.15}{\theta} \right)^{0.286 q_v}$$

$$T_{LCL} = 55 + \frac{2840}{3.5 \ln(T_{fast} + 273.15) - \ln(e) - 4.805}$$

$$e = 0.01 \cdot RH \cdot e_s \quad q_v = 62.2 \frac{e}{p} \quad e_s = 6.112 \cdot 10^7 \frac{[17.67(T - 273.15)]^{243.5 + (T - 273.15)}}{243.5 + (T - 273.15)} \quad T_{LCL} = 55 + \frac{2840}{3.5 \ln(T) - \ln(e) - 4.805}$$

$$T_d = \frac{257.14 \gamma}{18.678 - \gamma} \quad \gamma = \ln(0.01 \cdot RH) \left(\frac{18.678 - T}{234.5} + \frac{T}{257.14 + T} \right)$$

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

Field Code Changed

390 Due to a hole in the pressure tube underneath the CoMeT-2 vehicle, it was found to have erroneously low air pressure measurements when the vehicle was in motion during LAPSE-RATE. To correct this error, observations from times when CoMeT-1 and CoMeT-2 were in motion and in close proximity were used to evaluate the level of inaccuracy of the CoMeT-2 measurement. Here “close proximity” was defined as any observations within 25 meters of the same point, measured within 90 seconds of one another. The observations with the smallest distance between them were used, and duplicates were removed such that an observation from either vehicle was not used twice. The pressure difference and CoMeT-2 anemometer speed were then aligned with those from CoMeT-1 using a 2nd order polynomial. Anemometer speed was used instead of vehicle speed because vehicle speed was often a multiple of five, which made it difficult to compute an accurate fit. The polynomial fit was used to calculate a pressure correction for all CoMeT-2 data obtained when the vehicle was in motion and the anemometer speed was greater than 10 m/s. Other variables calculated using pressure (e.g. T_d , q_v , θ , θ_e , and θ_v) were recalculated using the corrected pressure.

395

400

Evaluation of data collected during the 14 July intercomparison along with an intercomparison conducted on 19 July revealed an approximately constant bias in slow temperature in the CoMeT-1 data. The magnitude of this bias was approximated through minimization of the root mean square error across the intercomparison data sets and analysis of the adjusted time series. The result was a -0.6 K correction applied to all CoMeT-1 slow temperature data.

405

410 Figure 9 illustrates comparisons between measurements from all of the mobile systems leveraged to produce this dataset. Using the GPS position, time periods where individual vehicles were within 300 m of one another were selected for this comparison. Each panel represents a comparison of the datapoints, interpolated to a common 1-second time grid, during these close-encounters. Note that the times do not necessarily match from one inter-platform comparison to the next (i.e. the times change from column to column, but are the same from one row to the next within a given column). General agreement is shown between the different platforms, with some notable (but predictable) differences. First, the CU MURC pressure is shown to be systematically lower than the pressure measured by the other vehicles, which, as discussed above is consistent with the fact that the CU MURC pressure measurements were
415 collected on from the top of the 15.2 m mast. As also discussed previously in relation to figure 7, this elevation difference additionally results in the MURC temperatures being slightly cooler than those observed at the surface, and the relative humidities being slightly higher. Again, wind speeds are also shown to be ever-so-slightly higher at the CU MURC mast height than at the surface. There is quite a bit of scatter in the wind direction comparison, particularly for those time periods with very light winds, though the majority of the points still fall close to the one-to-one line. A
420 primary exception to this is for time periods when the wind was northerly, resulting in clusters of points in the upper left and lower right hand quadrants of the figures. For days with higher wind speeds, a tighter clustering around the one-to-one line is noticeable. Ultimately, this figure illustrates good consistency between the platforms, offering confidence to data users who plan to leverage a combination of these datasets.

Deleted:

Deleted:

5 Data Availability and File Structure

425 The data files from the LAPSE-RATE project are generally being archived under a LAPSE-RATE community established at the Zenodo data archive (<https://zenodo.org/communities/lapse-rate/>). From here, LAPSE-RATE observations are available for public download and use. Contributors were encouraged to provide files in NetCDF format, with self-describing metadata provided to the user inside the NetCDF file. To make it possible for scientists to cite LAPSE-RATE data in their publications, the organizers of the campaign recognized the value of Digital Object
430 Identifiers (DOIs). DOIs were automatically generated by the Zenodo archive at the data version and product level. Data from the different sources described above are posted as individual datastreams on the archive, with each of the platforms described in the previous section having their own DOI. It is important to note that each platform may have several different levels of data available. Therefore, data products with different levels of processing and quality control may be provided with separate DOIs. This means the files and data described in this publication are spread
435 across a variety of DOIs, and that additional DOIs could be created in the future that include LAPSE-RATE data, as additional data products are developed.

As of the writing of this manuscript, the CU MURC dataset (de Boer et al., 2020d) is available at Zenodo.org (<https://zenodo.org/record/3814765#.XrSRdS-z1TY>) under DOI (<http://doi.org/10.5281/zenodo.3814765>). Data
440 from the NSSL MM includes two versions (Waugh, 2020). The original version contained files with incorrect quality control (QC) flags. While the core data are correct, the QC flags can be useful for determining specific areas of interest

or problems. After identifying this issue, the files were reprocessed to include the correct QC flags and were uploaded
445 to the archive as version 2. Users should use version 2, which is available at Zenodo.org
(<https://zenodo.org/record/3738175#.XrNLkC-z1TY>) under DOI 10.5281/zenodo.37175. Finally, the UNL CoMeT
datasets (Houston and Erwin, 2020) also include two versions, and users are encouraged to use version 2 which
includes corrected GPS data for the vehicle locations. These data are also available at Zenodo.org
(<https://zenodo.org/record/3838724#.XvOMGi2z1TZ>) under DOI 10.5281/zenodo.3838724.

450 6 Summary

This manuscript provides an overview of data collected by three types of mobile surface systems during the 2018
LAPSE-RATE campaign. These included the University of Colorado MURC, the NOAA National Severe Storms
Laboratory Mobile Mesonet, and two University of Nebraska CoMeT vehicles. In combination, these vehicles
455 collected over 140 hours of meteorological data in the San Luis Valley of Colorado between 14-20 July, 2018. Data
from these vehicles are available for public download from zenodo.org, and the previous sections document processing
conducted on this dataset before publication, as well as information on the expected accuracy of the sensors deployed
on these systems. The primary focus of the LAPSE-RATE campaign was to collect data from a fleet of unmanned
aerial vehicles and surface in-situ and remote-sensing systems, and to combine those data with high-resolution
numerical simulations to gain understanding on boundary layer processes and phenomena. The primary measurement
460 objectives of the vehicles discussed in the current manuscript are shared above, along with the locations of operation
of each throughout the campaign.

Author Contributions. GB planned the LAPSE-RATE field campaign, constructed this manuscript, and conducted
465 data processing of the CU MURC data. S.B., C.D. and B.A. contributed to the collection of the MURC data and were
deployed to the field during LAPSE-RATE. A.E., W.S. and A.H. contributed to the collection of the UNL CoMeT
data, processed and quality controlled these data, and are the primary points of contact for this dataset. They
additionally helped with the writing of this manuscript. S.W. was solely responsible for collection of the NSSL MM
data and subsequent quality control of the resulting dataset. Additionally, he contributed to the writing of this
470 manuscript.

Competing Interests. The authors claim no competing interests.

Acknowledgments. General support for salary and overhead associated with the collection of these datasets was
475 provided by the NOAA Physical Sciences Division and the University of Colorado's Integrated Remote and In-Situ
Sensing (IRISS) grand challenge project. We would additionally like to recognize financial support for student
participation and travel from the National Science Foundation (NSF AGS 1807199) and the US Department of Energy
(DE-SC0018985). General support for the LAPSE-RATE campaign was provided by the International Society for
Atmospheric Research using Remotely-piloted Aircraft (ISARRA). CoMeT-1 was funded through a grant from the

Deleted: e

Air Force Office of Scientific Research Defense University Research Instrumentation Program (FA2386-14-1-3010). CoMeT-2 was funded through an equipment allocation included in the NSF Research Infrastructure Improvement Program: Track-2 Focused EPSCoR Collaborations award (OIA-1539070). Funding for the NSSL MM and travel was provided for through internal NSSL funds, with sounding expendables donated by Oklahoma State University.

References

- Bailey, S. C. C., Sama, M. P., Canter, C. A., Pampolini, L. F., Lippay, Z. S., Schuyler, T. J., Hamilton, J. D., MacPhee, S. B., Rowe, I. S., Sanders, C. D., Smith, V. G., Vezzi, C. N., Wight, H. M., Hoagg, J. B., Guzman, M. I., and Smith, S. W.: University of Kentucky measurements of wind, temperature, pressure and humidity in support of LAPSE-RATE using multisite fixed-wing and rotorcraft unmanned aerial systems, *Earth Syst. Sci. Data*, **12**, 1759–1773, <https://doi.org/10.5194/essd-12-1759-2020>, 2020.
- Barbieri, L., Kral, S.T., Bailey, S.C.C., Frazier, A.E., Jacob, J.D., Reuder, J., Brus, D., Chilson, P.B., Crick, C., Detweiler, C., Doddi, A., Elston, J., Foroutan, H., González-Rocha, J., Greene, B.R., Guzman, M.I., Houston, A.L., Islam, A., Kemppinen, O., Lawrence, D., Pillar-Little, E.A., Ross, S.D., Sama, M.P., Schmale, D.G., Schuyler, T.J., Shankar, A., Smith, S.W., Waugh, S., Dixon, C., Borenstein, S., de Boer, G. Intercomparison of Small Unmanned Aircraft System (sUAS) Measurements for Atmospheric Science during the LAPSE-RATE Campaign. *Sensors*, **19**, 2179, doi:10.3390/s19092179, 2019.
- Bell, T.M., Klein, P.M., Lundquist J.K. and Waugh, S.: Remote sensing and radiosonde datasets collected in the San Luis Valley during the LAPSE-RATE campaign. *Earth Sys. Sci. Data*, in review, 2020.
- Brus, D., Gustafsson, J., Kempinen, O., de Boer, G., and Hirsikko, A.: Atmospheric aerosol, gases and meteorological parameters measured during the LAPSE-RATE campaign, *Earth Syst. Sci. Data Discuss.*, <https://doi.org/10.5194/essd-2020-251>, in review, 2020.
- Campbell Scientific: CR Basic Help – CR Basic Editor. Accessed May 16th, 2020, <https://help.campbellsci.com/crbasic/cr6/>, 2020.
- de Boer, G., Argrow, B., Cassano, J., Cione, J., Frew, E., Lawrence, D., Wick, G. and Wolff, C.: Advancing unmanned aerial capabilities for atmospheric research, *Bull. Amer. Meteor. Soc.*, **100**, ES105-ES108, <https://doi.org/10.1175/BAMS-D-18-0254.1>, 2019.
- de Boer, G., Diehl, C., Jacob, J., Houston, A., Smith, S.W., Chilson, P., Schmale III, D.G., Intrieri, J., Pinto, J., Elston, J., Brus, D., Kemppinen, O., Clark, A., Lawrence, D., Bailey, S.C.C., Sama, M.P., Frazier, A., Crick, C., Natalie, V., Pillar-Little, E.A., Klein, P., Waugh, S., Lundquist, J.K., Barbieri, L., Kral, S.T., Jensen, A.A., Dixon, C., Borenstein, S., Hesselius, D., Human, K., Hall, P., Argrow, B., Thornberry, T., Wright, R. and Kelly, J.T.: Development of community, capabilities and understanding through unmanned aircraft-based atmospheric research: The LAPSE-RATE campaign, *Bull. Amer. Meteor. Soc.*, **101**, E684-E699, <https://doi.org/10.1175/BAMS-D-19-0050.1>, 2020a.
- de Boer, G., Houston, A., Jacob, J., Chilson, P. B., Smith, S. W., Argrow, B., Lawrence, D., Elston, J., Brus, D., Kemppinen, O., Klein, P., Lundquist, J. K., Waugh, S., Bailey, S. C. C., Frazier, A., Sama, M. P., Crick, C.,

Deleted: CoMeT-3 was funded through an equipment allocation included in the NSF TORUS award (AGS-1824649).

Deleted: Bailey, S.C.C., M. Sama, C. Canter, L. F. Pampolini, Z. Lippay, Z., T.J. Schuyler, J. Hamilton, S. MacPhee, I. Rowe, C. Sanders, V. Smith, C. Vezzi, H. Wight, J. Hoagg, M. Guzman, and S.W. Smith, 2020: University of Kentucky measurements of wind, temperature, pressure and humidity in support of LAPSE-RATE using multi-site fixed-wing and rotorcraft UAS, *Earth Sys. Sci. Data*, in review.

Deleted: Barbieri, L., S. T. Kral, S. C. C. Bailey, A. E. Frazier, J. D. Jacob, J. Reuder, D. Brus, P. B. Chilson, C. Crick, C. Detweiler, A. Doddi, J. Elston, H. Foroutan, J. Gonzalez-Rocha, B. R. Greene, M. I. Guzman, A. L. Houston, A. Islam, O. Kemppinen, D. Lawrence, E. A. Pillar-Little, S. D. Ross, M. Sama, D. G. Schmale III, T. J. Schuyler, A. Shankar, S. W. Smith, S. Waugh, S. Borenstein, C. Dixon, G. de Boer, 2019: Small Unmanned Aircraft Systems (sUAS) in Atmospheric Science: Measurement Intercomparison for LAPSE-RATE. *Sensors*, **19**, 2179, doi: 10.3390/s19092179.

Deleted: Bell, T.M., P.M. Klein, J.K. Lundquist and S. Waugh, 2020b: Remote sensing and radiosonde datasets collected in the San Luis Valley during the LAPSE-RATE campaign, *Earth Sys. Sci. Data*, in preparation.

Formatted: Font: Font color: Text 1, English (US)

Formatted: Justified, Indent: Left: 0", Hanging: 0.25", Line spacing: 1.5 lines

Deleted: Brus, D. J. Gustafsson, O. Kemppinen, G. de Boer and A. Hirsikko, 2020: Dataset of atmospheric aerosol, gases and meteorological parameters collected during LAPSE-RATE campaign, *Earth Sys. Sci. Data*, in preparation.

Formatted: Justified

Deleted: c, 2020

Formatted: Font: (Default) Times New Roman, 10 pt

Deleted: .

Formatted: Font: (Default) Times New Roman, 10 pt

Deleted: de Boer, G., B. Argrow, J. Cassano, J. Cione, E. Frew, D. Lawrence, G. Wick and C. Wolff, 2019: Advancing unmanned aerial capabilities for atmospheric research, *Bull. Amer. Meteor. Soc.*, **0**, 1-4.

Formatted: Spanish

Formatted: Justified, Indent: Left: 0", Hanging: 0.25", Line spacing: 1.5 lines

Formatted: Font: (Default) Times New Roman, 10 pt

Deleted: de Boer, G., C. Diehl, J. Jacob, A. Houston, S.W. Smith, P. Chilson, D.G. Schmale III, J. Intrieri, J. Pinto, J. Elston, D. Brus, O. Kemppinen, A. Clark, D. Lawrence, S.C.C. Bailey, M.P. Sama, A. Frazier, C. Crick, V. Natalie, E. Pillar-Little, P. Klein, S. Waugh, J.K. Lundquist, L. ... [1]

Formatted: Font: Times New Roman, 10 pt, Spanish

Schmale III, D., Pinto, J., Pillar-Little, E. A., Natalie, V., and Jensen, A.: Data Generated During the 2018 LAPSE-RATE Campaign: An Introduction and Overview, *Earth Syst. Sci. Data*, <https://doi.org/10.5194/essd-2020-98>, accepted for publication, 2020b.

575 de Boer, G., Dixon, C., Borenstein, S., Lawrence, D.A., Elston, J., Hesselius, D., Stachura, M., Laurence III, R., Swenson, S., Choate, C.M., Doddi, A., Sesnic, A., Glasheen, K., Laouar, Z., Quimby, F., Frew, E. and Argrow, B.M.: UAS-based observations of the lower atmosphere during LAPSE-RATE: University of Colorado and Black Swift Technologies contributions, *Earth Syst. Sci. Data*, in preparation, 2020c.

de Boer, G., Borenstein, S., Dixon, C. and Argrow, B.: University of Colorado MURC Observations from LAPSE-RATE [Data set]. Zenodo. <http://doi.org/10.5281/zenodo.3814765>, 2020d.

580 Fernández-Cabán, P.L., Alford, A.A., Bell, M.J., Biggerstaff, M.I., Carrie, G.D., Hirth, B., Kosiba, K., Phillips, B.M., Schroeder, J.L., Waugh, S.M., Williford, E., Wurman, J. and Masters, F.J.: Observing Hurricane Harvey's Eyewall at Landfall. *Bull. Amer. Meteor. Soc.*, **100**, 759–775, <https://doi.org/10.1175/BAMS-D-17-0237.1>, 2019.

Hanft, W. and Houston, A. L.: An observational and modeling study of mesoscale air masses with high theta-e. *Monthly Weather Review*, **146**, 2503-2524. doi: 10.1175/MWR-D-17-0389, 2018.

585 Houston, A. L., Laurence III, R. J., Nichols, T. W., Waugh, S., Argrow, B. and Ziegler, C. L.: Intercomparison of unmanned aircraft-borne and mobile mesonet atmospheric sensors. *J. Atmos. and Ocean. Tech.*, **33**, 1569-1582, doi: 10.1175/JTECH-D-15-0178.1, 2016.

Houston, A. and Erwin, A.: University of Nebraska-Lincoln Mobile Mesonet files from LAPSE-RATE [Data set]. Zenodo. <http://doi.org/10.5281/zenodo.3709611>, 2020.

590 Islam, A., Shankar, A., Houston, A.L., and Detweiler, C.: University of Nebraska UAS profiling during LAPSE-RATE. *Earth Syst. Sci. Data*, in preparation, 2020.

Islam, A., Houston, A.L., Shankar, A. and Detweiler, C.: Design and Evaluation of Sensor Housing for Boundary Layer Profiling Using Multirotors. *Sensors*, **19**, 2481, doi: 10.3390/s19112481, 2019.

Jacob, J., Chilson, P., Houston, A. L., and Smith, S.: Considerations for Atmospheric Measurements with Small Unmanned Aircraft Systems as part of the CLOUD-MAP Flight Campaign. *Atmosphere*, **9**, 252, doi: 10.3390/atmos9070252, 2018.

595 Markowski, P.M.: Mobile Mesonet Observations on 3 May 1999, *Wea. Forecast.*, **17**, 430–444, [https://doi.org/10.1175/1520-0434\(2002\)017<0430:MMOOM>2.0.CO;2](https://doi.org/10.1175/1520-0434(2002)017<0430:MMOOM>2.0.CO;2), 2002.

Natalie, V., Avery, A., Hemingway, B., Frazier, A., Crick, C. and Jacob, J.: Kinematic and thermodynamic atmospheric boundary layer observations in the San Luis Valley, CO via unmanned aircraft systems during the LAPSE-RATE field campaign, *Earth Syst. Sci. Data*, in preparation, 2020.

600 Pietrycha, A.E. and Rasmussen, E.N.: Finescale Surface Observations of the Dryline: A Mobile Mesonet Perspective. *Wea. Forecasting*, **19**, 1075–1088, <https://doi.org/10.1175/819.1>, 2004.

Pillar-Little, E. A., Greene, B. R., Lappin, F. M., Bell, T. M., Segales, A. R., de Azevedo, G. B. H., Doyle, W., Kanneganti, S. T., Tripp, D. D., and Chilson, P. B.: Observations of the thermodynamic and kinematic state of the atmospheric boundary layer over the San Luis Valley, CO using remotely piloted aircraft systems during the

605

Formatted ... [2]

Deleted: de Boer, G., A. Houston, J. Jacob, P.B. Chilson, S.W. Smith, B. Argrow, D. Lawrence, J. Elston, D. Brus, O. Kemppinen, P. Klein, J.K. Lundquist, S. Waugh, S.C.C. Bailey, A. Frazier, M.P. Sama, C. Crick, D. Schmale III, J. Pinto, E.A. Pillar-Little, V. Natalie and A. Jensen, 2020b: Data generated during the 2018 LAPSE-RATE campaign: An introduction and overview, *Earth Syst. Sci. Data*, in review.

Deleted: de Boer, G., C. Dixon, S. Borenstein, D.A. Lawrence, J. Elston, D. Hesselius, M. Stachura, R. Laurence III, C.M. Choate, A. Doddi, A. Sesnic, K. Glasheen, Z. Laouar, F. Quimby, E. Frew and B.M. Argrow, 2020c: UAS-based observations of the lower atmosphere during LAPSE-RATE: University of Colorado and Black Swift Technologies contributions, *Earth Syst. Sci. Data*, in preparation.

Formatted: Norwegian Bokmål

Deleted: S.

Formatted: Norwegian Bokmål

Deleted: C. ...ixon, C. and B. ...rgrow, B.2020 ... [3]

Deleted: A.A. ...lford, A.A., M.J. ...ell, M.J., M.I. Biggerstaff, M.I., G.D. ...arrie, G.D., B. ...irth, B., K. Kosiba, K., B.M. ...hillips, B.M., J.L. ...chroeder, J.L., ... [4]

Moved down [1]: A. L.

Moved (insertion) [1]

Deleted: 2018... An observational and modeling study. [5]

Moved down [2]: R. J.

Moved (insertion) [2]

Deleted:

Moved down [3]: T. W.

Moved (insertion) [3]

Deleted: ...S. ...augh, S., B. ... [6]

Moved down [4]: C. L.

Moved (insertion) [4]

Deleted: 2016... Intercomparison of unmanned aircraft... [7]

Deleted: A. ...rwin, A. 2020 ... [8]

Deleted: Islam, A., A. Shankar, A. L. Houston, C. Detweiler... [9]

Formatted: Font: Font color: Text 1,

Formatted: Indent: Hanging: 0.25"

Deleted: Islam, A., A.L. Houston, A. Shankar, C. ... [10]

Deleted: P.

Moved down [5]: A. L.

Moved (insertion) [5]

Deleted: ... and S. ...mith, S.2018... Considerations for [11]

Deleted: , 2002... Mobile Mesonet Observations on 3 May [12]

Deleted: Natalie, V., Avery, A., Hemingway, B., Frazier [13]

LAPSE-RATE field campaign. *Earth Syst. Sci. Data Discuss.*, <https://doi.org/10.5194/essd-2020-194>, in review, 2020.

775 Pinto, J. O., Jensen, A. A., Jiménez, P. A., Hertnecky, T., Muñoz-Esparza, D., Dumont, A., and Steiner, M.: Realtime WRF LES Simulations to Support UAS Flight Planning and Operations During 2018 LAPSE-RATE, *Earth Syst. Sci. Data Discuss.*, <https://doi.org/10.5194/essd-2020-242>, in review, 2020.

Rasmussen, E. N., Straka, J. M., Davies-Jones, R., Doswell III, C. A., Carr, F. H., Eilts, M. D. and MacGorman, D. R.: Verification of the Origins of Rotation in Tornadoes Experiment: VORTEX. *Bull. Amer. Meteor. Soc.*, **75**, 995–1006, [https://doi.org/10.1175/1520-0477\(1994\)075<0995:VOTOOR>2.0.CO;2](https://doi.org/10.1175/1520-0477(1994)075<0995:VOTOOR>2.0.CO;2), 1994.

780 Richardson, S. J., Frederickson, S. E., Brock, F. V. and Brotzge, J. A.: Combination temperature and relative humidity probes: Avoiding large air temperature errors and associated relative humidity errors. Preprints, 10th Symp. On Meteorological Observations and Instrumentation, Phoenix, AZ, Amer. Meteor. Soc., 278–283, 1998.

Riganti, C.J. and Houston, A.L.: Rear-Flank Outflow Dynamics and Thermodynamics in the 10 June 2010 Last Chance, Colorado, Supercell. *Mon. Wea. Rev.*, **145**, 2487–2504, <https://doi.org/10.1175/MWR-D-16-0128.1>, 2017.

785 Straka, J. M., Rasmussen, E. N. and Fredrickson, S. E.: A mobile mesonet for finescale meteorological observations. *J. Atmos. Oceanic Technol.*, **13**, 921–936, [https://doi.org/10.1175/1520-0426\(1996\)013<0921:AMMFFM>2.0.CO;2](https://doi.org/10.1175/1520-0426(1996)013<0921:AMMFFM>2.0.CO;2), 1996.

Tropea, C., Yarin, A.L. and Foss, J.F. (Ed.). *Springer Handbook of Experimental Fluid Mechanics*, Berlin, Springer, <https://doi.org/10.1007/978-3-540-30299-5>, 2007.

790 Waugh, S.: The “U-tube”: An improved aspirate temperature system for mobile meteorological observations, especially in severe weather. MS Thesis, Univ. of Oklahoma, 87 pp., 2012.

Waugh, S. and Frederickson, S. E.: An improved aspirated temperature system for mobile meteorological observations, especially in severe weather. 25th Conf. on Severe Local Storms, Denver, CO, Amer. Meteor. Soc., P 5.2. [Available online at https://ams.confex.com/ams/25SLS/techprogram/paper_176205.htm]. 2010.

795 Waugh, S.: National Severe Storms Laboratory Mobile Mesonet data files from Lapse-Rate [Data set]. Zenodo. <http://doi.org/10.5281/zenodo.3738175>, 2020.

- Deleted: Pillar-Little, E. A., B. R. Greene, A. R. Segales [4]
- Moved down [6]: J. M.
- Moved down [7]: C. A.
- Deleted:
- Moved down [8]: F. H.
- Moved down [9]: D. R.
- Moved (insertion) [6]
- Moved (insertion) [8]
- Deleted: Pinto, J.O., A. Jensen, P. Jimenez, T. Hertnecky [9]
- Deleted: . R.
- Moved (insertion) [7]
- Deleted: . M. D.
- Moved (insertion) [9]
- Deleted: 1994... Verification of the Origins of Rotation [8]
- Moved down [10]: S. E.
- Moved (insertion) [10]
- Deleted:
- Moved down [11]: F. V.
- Moved (insertion) [11]
- Deleted:
- Moved down [12]: J. A.
- Moved (insertion) [12]
- Deleted: 1998... Combination temperature and relative [17]
- Deleted: A.L. ...ouston, A.L. 2017 ... [18]
- Formatted ... [19]
- Formatted ... [20]
- Field Code Changed ... [21]
- Formatted ... [22]
- Moved down [13]: E. N.
- Moved down [14]: S. E.
- Moved (insertion) [13]
- Moved (insertion) [14]
- Deleted:
- Deleted: 1996... A mobile mesonet for finescale ... [23]
- Formatted ... [24]
- Deleted: A.L. ...arin, A.L. ...nd J.F. ...oss, J.F. (Ed.): [25]
- Deleted: , 2012... The “U-tube”: An improved aspirate [26]
- Deleted: ,
- Moved down [15]: S. E.
- Moved (insertion) [15]
- Deleted: . 2010
- Formatted ... [27]
- Deleted: , 2020... National Severe Storms Laboratory.. [28]

Table 1: Sensor specifications for the CU MURC

Instrument Name	Observation	Range, Accuracy	Response time
Gill MetPak Pro	Air Temperature	-35-+70°C, ~±0.1°C	Not listed
	Relative Humidity	0-100%, ±0.8% at 23 °C	Not listed
	Barometric Pressure	600-1100 hPa, ±0.5 hPa	Not listed
	Wind Speed	0-60 m/s, ± 2 % at 12 m/s	Not listed
	Wind Direction	0-359°, ± 3° at 12 m/s	Not listed
Gill WindMaster 3D Sonic Anemometer	Wind Speed	0-50 m/s, <1.5% RMS at 12 m/s	Not listed
	Wind Direction	0-359°, ± 2° at 12 m/s	Not listed
	Sonic Temperature	-40-+70°C, < ± 0.5% at 20 °C	Not listed
RM Young Wind Monitor 05103	Wind speed	0-100 m/s, ± 0.3 m/s	2.7 m [<u>distance constant</u>]

Table 2: Sensor specifications for the NSSL MM and UNL CoMeT vehicles

Instrument Name	Observation	Range, Accuracy	Response time
Vaisala HMP155A	Air Temperature (slow)	-80-+60°C, ~±0.1°C	Not listed
	Relative Humidity	0-100%, ±1%	63% in 20s
Campbell Scientific T109SS	Air Temperature (fast)	-40-+70°C, ±0.6°	7.5 s w/ 3m/s flow
RM Young Wind Monitor 05103	Wind speed	0-100 m/s, ± 0.3 m/s	2.7 m [distance constant]
	Wind Direction	0-360°, ± 3°	1.3 m [distance constant]
Vaisala PTB210	Barometric Pressure	500-1100 mb, ±0.15 mb	n/a
KVH C100 Fluxgate	Magnetic Heading	0-360°, ±0.16°	n/a
Garmin 19X HVS	Lat/Lon/Alt/Heading/Speed	n/a	n/a

930

Deleted:Page Break.....
 Table 3: Sensor specifications for the UNL CoMeT vehicles
 Deleted: Instrument Name ... [29]



935

Figure 1: The CU MURC vehicle, with mast extended (left), as deployed during LAPSE-RATE. The right hand panels show the instrument cluster mounted on the top of the MURC mast (top) and the MURC real-time data display (bottom).



940

Figure 2: The NSSL MM as deployed during the LAPSE-RATE project. The trailer is the University of Oklahoma CLAMPS system (see Bell et al., 2020 in this special issue).




945


Figure 3: The UNL CoMeT vehicles, as deployed during LAPSE-RATE.



950 **Figure 4:** The NSSL MM and UNL CoMeT deployed side-by-side for an on-site intercomparison. The CU MURC was also located on site, but out of the photograph, and a CU TTwistor UAS (see de Boer et al., 2020c, in this special issue) flies in the background.

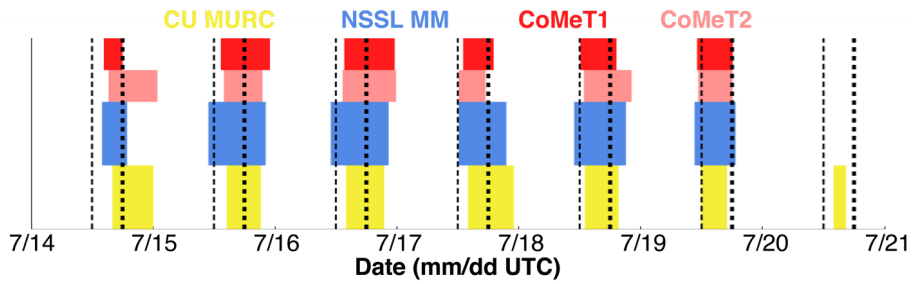

955 **Figure 5:** Illustration of the uptime for the mobile surface vehicles deployed during LAPSE-RATE. Shown is the uptime for the CU MURC (yellow), the NSSL MM (blue) and the UNL CoMeTs (red and pink). The thin dashed black lines indicate 0600 local time (Mountain Daylight Time), while the bold dashed black lines represent 1200 local time for each day.

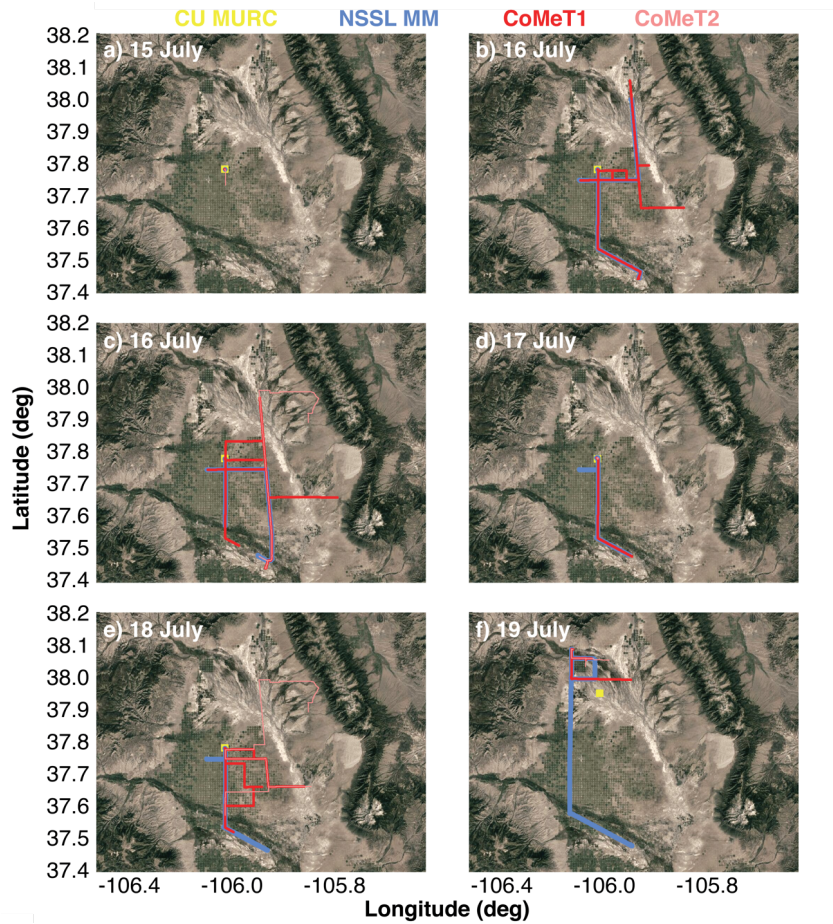

960

Figure 6: Position data for the different platforms over the length of the campaign, broken down on a day-by-day basis. The CU MURC positions are indicated by the yellow square, while the NSSL mobile mesonet (blue) and UNL CoMeTs (red and pink) mobile datasets are shown by the lines. Background maps are from © Google through their API.

965

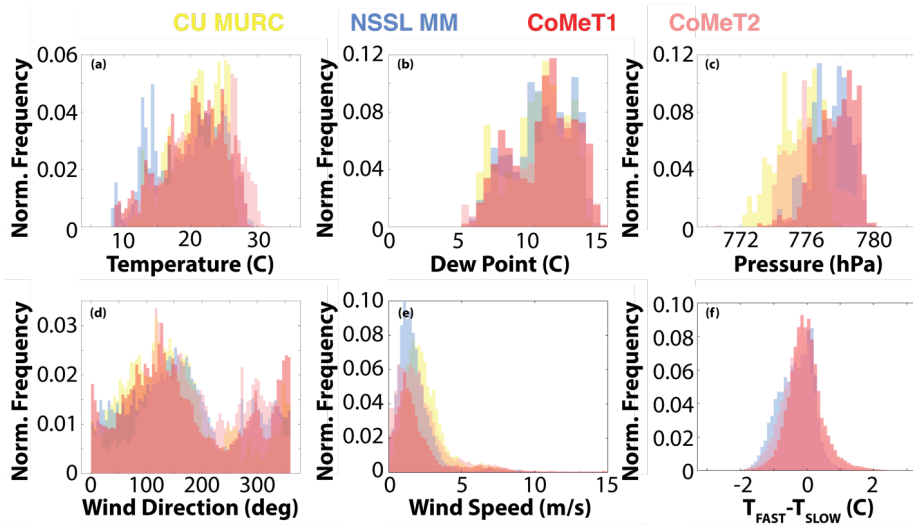


Figure 7: Distributions of 1-minute averages of data collected by the three platforms. Included are (a-f) distributions of air temperature, dew point temperature, pressure, wind direction, wind speed, and the difference between the fast and slow temperature sensors (where applicable). For all figures, CU MURC data are represented in yellow, NSSL MM data are represented in blue, and UNL CoMeT data are represented in red and pink.

970

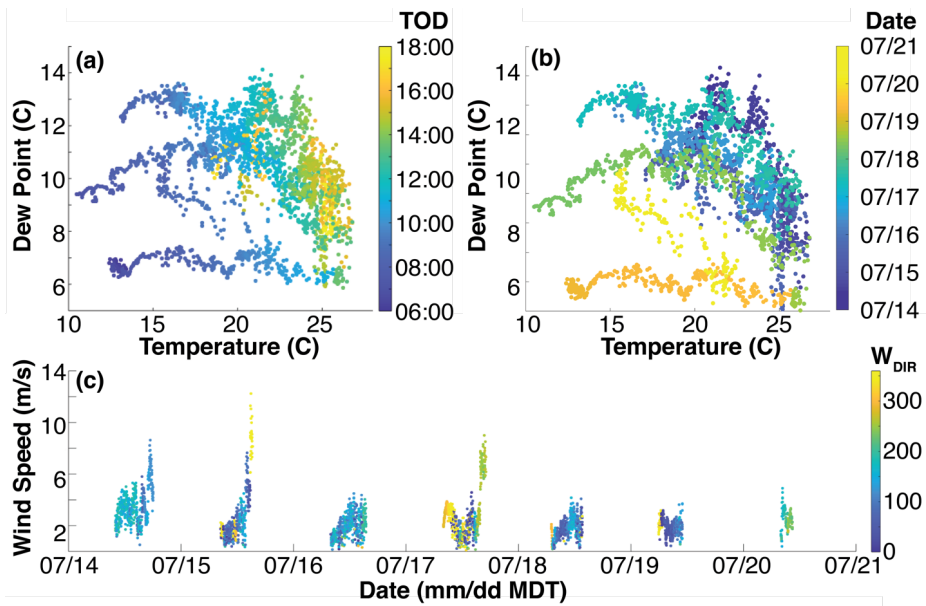


Figure 8: Panels illustrating the temporal variability of the temperature (a,b), dew point temperature (a,b) and wind data (c) collected by the CU MURC. Panel a shows diurnal variability, while panel b shows the variability by date.

975

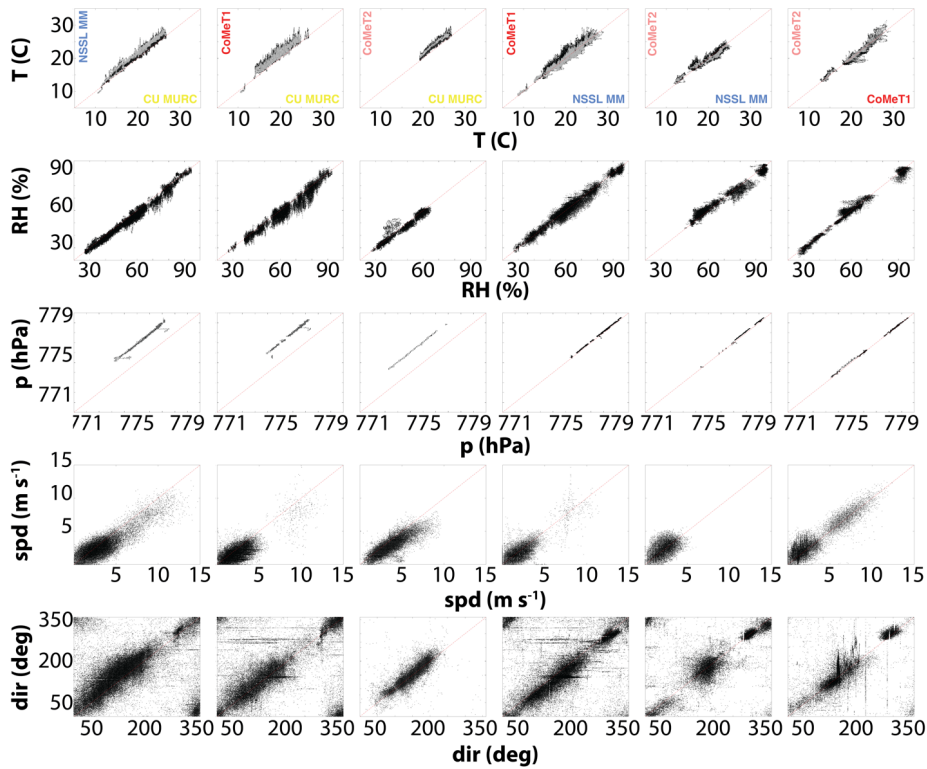


Figure 9: Vehicle-to-vehicle comparisons for time periods when vehicles were within 300 m of one another. Variables evaluated include (top to bottom) temperature (C), relative humidity (%), pressure (hPa), wind speed ($m s^{-1}$) and wind direction (deg). The top row includes labels to indicate which platform is on which axis, and these orientations are maintained through each column. For the temperature comparisons (top row), both the slow (dark dots) and fast (lighter dots) temperature sensors are evaluated.

980

Formatted: Superscript

▲ Page 15: [1] Deleted Gijs de Boer 10/27/20 11:41:00 AM

▼ Page 16: [2] Formatted Gijs de Boer 10/27/20 11:43:00 AM

Font: Times New Roman, 10 pt, Spanish

▲ Page 16: [2] Formatted Gijs de Boer 10/27/20 11:43:00 AM

Font: Times New Roman, 10 pt, Spanish

▲ Page 16: [3] Deleted Gijs de Boer 10/27/20 11:44:00 AM

▲ Page 16: [3] Deleted Gijs de Boer 10/27/20 11:44:00 AM

▲ Page 16: [3] Deleted Gijs de Boer 10/27/20 11:44:00 AM

▲ Page 16: [4] Deleted Gijs de Boer 10/27/20 12:25:00 PM

▲ Page 16: [4] Deleted Gijs de Boer 10/27/20 12:25:00 PM

▲ Page 16: [4] Deleted Gijs de Boer 10/27/20 12:25:00 PM

▲ Page 16: [4] Deleted Gijs de Boer 10/27/20 12:25:00 PM

▲ Page 16: [4] Deleted Gijs de Boer 10/27/20 12:25:00 PM

▲ Page 16: [4] Deleted Gijs de Boer 10/27/20 12:25:00 PM

▲ Page 16: [4] Deleted Gijs de Boer 10/27/20 12:25:00 PM

▲ Page 16: [4] Deleted Gijs de Boer 10/27/20 12:25:00 PM

▲ Page 16: [4] Deleted Gijs de Boer 10/27/20 12:25:00 PM

▲ Page 16: [4] Deleted Gijs de Boer 10/27/20 12:25:00 PM

▲ Page 16: [4] Deleted Gijs de Boer 10/27/20 12:25:00 PM

Page 16: [4] Deleted	Gijs de Boer	10/27/20 12:25:00 PM
Page 16: [4] Deleted	Gijs de Boer	10/27/20 12:25:00 PM
Page 16: [4] Deleted	Gijs de Boer	10/27/20 12:25:00 PM
Page 16: [5] Deleted	Gijs de Boer	10/27/20 11:50:00 AM
Page 16: [5] Deleted	Gijs de Boer	10/27/20 11:50:00 AM
Page 16: [6] Deleted	Gijs de Boer	10/27/20 11:50:00 AM
Page 16: [6] Deleted	Gijs de Boer	10/27/20 11:50:00 AM
Page 16: [6] Deleted	Gijs de Boer	10/27/20 11:50:00 AM
Page 16: [7] Deleted	Gijs de Boer	10/27/20 11:50:00 AM
Page 16: [7] Deleted	Gijs de Boer	10/27/20 11:50:00 AM
Page 16: [8] Deleted	Gijs de Boer	10/27/20 12:27:00 PM
Page 16: [8] Deleted	Gijs de Boer	10/27/20 12:27:00 PM
Page 16: [9] Deleted	Gijs de Boer	10/27/20 11:45:00 AM
Page 16: [10] Deleted	Gijs de Boer	10/27/20 12:29:00 PM
Page 16: [11] Deleted	Gijs de Boer	10/27/20 12:34:00 PM
Page 16: [11] Deleted	Gijs de Boer	10/27/20 12:34:00 PM
Page 16: [11] Deleted	Gijs de Boer	10/27/20 12:34:00 PM
Page 16: [11] Deleted	Gijs de Boer	10/27/20 12:34:00 PM

▼
▲
Page 16: [12] Deleted Gijs de Boer 10/27/20 12:35:00 PM

▼
▲
Page 16: [12] Deleted Gijs de Boer 10/27/20 12:35:00 PM

▼
▲
Page 16: [13] Deleted Gijs de Boer 10/27/20 11:45:00 AM

▼
▲
Page 16: [13] Deleted Gijs de Boer 10/27/20 11:45:00 AM

▼
▲
Page 16: [13] Deleted Gijs de Boer 10/27/20 11:45:00 AM

▼
▲
Page 17: [14] Deleted Gijs de Boer 10/27/20 11:46:00 AM

▼
▲
Page 17: [15] Deleted Gijs de Boer 10/27/20 11:46:00 AM

▼
▲
Page 17: [16] Deleted Gijs de Boer 10/27/20 12:38:00 PM

▼
▲
Page 17: [16] Deleted Gijs de Boer 10/27/20 12:38:00 PM

▼
▲
Page 17: [17] Deleted Gijs de Boer 10/27/20 12:39:00 PM

▼
▲
Page 17: [17] Deleted Gijs de Boer 10/27/20 12:39:00 PM

▼
▲
Page 17: [18] Deleted Gijs de Boer 10/27/20 12:39:00 PM

▼
▲
Page 17: [18] Deleted Gijs de Boer 10/27/20 12:39:00 PM

▼
▲
Page 17: [19] Formatted Gijs de Boer 10/28/20 2:29:00 PM

Swedish

▼
▲
Page 17: [20] Formatted Gijs de Boer 10/27/20 12:39:00 PM

Swedish

▼
▲
Page 17: [21] Change Unknown

Field Code Changed

▼
▲
Page 17: [22] Formatted Gijs de Boer 10/27/20 12:39:00 PM

Swedish

▼
▲
Page 17: [22] Formatted Gijs de Boer 10/27/20 12:39:00 PM

Swedish

▼
▲
Page 17: [23] Deleted Gijs de Boer 10/27/20 12:39:00 PM

▲ Page 17: [23] Deleted Gijs de Boer 10/27/20 12:39:00 PM ▼

▲ Page 17: [24] Formatted Gijs de Boer 10/28/20 2:30:00 PM
English (US)

▲ Page 17: [25] Deleted Gijs de Boer 10/27/20 12:40:00 PM ✕

▲ Page 17: [25] Deleted Gijs de Boer 10/27/20 12:40:00 PM ✕

▲ Page 17: [25] Deleted Gijs de Boer 10/27/20 12:40:00 PM ✕

▲ Page 17: [25] Deleted Gijs de Boer 10/27/20 12:40:00 PM ✕

▲ Page 17: [25] Deleted Gijs de Boer 10/27/20 12:40:00 PM ✕

▲ Page 17: [26] Deleted Gijs de Boer 10/27/20 12:40:00 PM ▼

▲ Page 17: [26] Deleted Gijs de Boer 10/27/20 12:40:00 PM ▼

▲ Page 17: [27] Formatted Gijs de Boer 10/27/20 12:41:00 PM
Space After: 0 pt, Line spacing: 1.5 lines

▲ Page 17: [28] Deleted Gijs de Boer 10/27/20 12:41:00 PM ▼

▲ Page 17: [28] Deleted Gijs de Boer 10/27/20 12:41:00 PM ▼

▲ Page 19: [29] Deleted Gijs de Boer 11/2/20 8:56:00 AM ▲