

Anonymous Referee #2

This manuscript details a set of ground-based and in situ measurements use to quantify the atmospheric state of the San Luis Valley, Colorado, in July 2018. The described measurements correspond with a series flights of remotely piloted aircraft systems (RPAS) that were conducted as part of the LAPSE-RATE campaign. The goal is for this data record, which is based in traditional sampling techniques, to provide a point of validation for the measurements made from newer RPAS platforms. The scope and relevance of the data set are in line with the goals of ESSD. The description of the instrument operations is sufficient, and the data record is properly documented. I suggest several comments and edits of the manuscript be considered before publication.

The authors thank the reviewer for their comments. Each comment is addressed individually below.

Specific comments:

(1) Improving the level and specificity of the writing will allow the manuscript to more efficiently convey the information being discussed by the authors. A few examples of writing quality issues are listed below (and more are mentioned in the minor comment portion of this review):

- P1 L15 What are examples of traditional meteorological techniques used to sample/profile the ABL?

A couple examples have been added to the text

- P2 L34-36 “While the primary focus of the LAPSE-RATE field campaign was showcasing the benefit that RPAS observations can have on filling the data gap, these observations must be collected alongside existing and commonly used instruments in order to demonstrate any advanced quality of RPAS observations.” There are many sentences written in an indirect manner which make, in my view, it difficult to understand this paper. As an example, the quoted sentence could be rewritten as: Observations made from RPAS need to be validated against accepted standards to be scientifically useful.

This suggestion has been added to the text. We also took care to eliminate other indirect sentences throughout the text

- P2 L30-31 “This paper focuses on data collected by these remote sensors and radiosondes, since they all collect vertical profiles of the atmosphere.” This

sentence seems unnecessary and all that needs to be said is: “The paper is structured as follows...” and then go into the list of sections the reader will encounter while reading. Nowhere in the text are the collection dates of data given. The reader must look at the figures to infer this information (7/15-7/20?).

The dates have been added on P2 L28

(2) The introduction does a good job of describing current limitations of remote sensing techniques and why these result in gaps in various data records. However, the introduction would be more compelling if it did a better job addressing how RPAS are currently, or in the future might be, used to fill in the data gaps left by various remote sensors. For example, the authors state that remote sensing observations have drawbacks including “limited range and operating conditions restrictions” but never suggest or discuss a practical approach to how RPAS might actually help to mitigate these problems. It seems that many of the conditions that restrict use of remote sensors, like rain, would also impact RPAS operation. That is, if RPASs are being advertised for their ability to gather data when traditional remote sensors cannot, a discussion (or an example) of the feasibility of RPAS to address these gaps in the data record is warranted.

We included an example of how Doppler lidars do not perform well in light rain. However, RPAS can be specifically designed to perform in these conditions

(3) Including a concise overview of all of the data products provided is highly recommended. This could be in the form of a table or figure. For example, in Section 4.2 the authors described products that can be derived from the CU DL measurements, but it is not clear if they actually provide these higher-level products in the uploaded files.

A table with the major meteorological variables produced by each instrument/retrieval has been added to the text to summarize the data products available in the discussed datasets.

(4) I am not sure what utility Figures 1-3 & 5 add to the manuscript. This document is fairly long and so removing these figures and their descriptions could be a way to make it shorter. If you do leave Figure 1 in the paper, it might be best to add annotations specifying the instruments that are referenced in the text of the manuscript.

The photos were included to give readers a sense of the terrain at each site. We removed a couple of the photos due to redundancy. Additionally, a plan view of the

Moffat School was added to Fig. 1 to show the deployment area and annotations were added indicating the instruments.

(5) Is a description of the calibration procedures of the CLAMPS sensors and the CUDLs relevant? Lidar systems are not my expertise, so I am not sure of norms, but typically documenting/noting calibration procedures is useful when detailing remote sensing data.

For LAPSE-RATE, the Doppler lidars from CLAMPS and CU were not calibrated. They are routinely compared to other measurements when not deployed. The CLAMPS MWR did have a LN2 calibration before the campaign. This information has been included in the text

(6) It might be best to move Figure 4, the map with instrument locations, to the start of Section 2. It is here when a knowledge of the geographic locations of the instruments become relevant to understanding what is going on with the study setup.

We elected to keep Figure 4 in the same area. While we do begin to mention locations, it is only to distinguish the difference between the CU DL names and we make reference to the appropriate sections for more information.

Minor comments:

- P1 L3 & P2 L26 Is LASP-RATE the official name of this project? Perhaps reconsider the use of the word “dubbed” which implies the name is informal.

This has been addressed

- P1 L20-22 Can you be more specific about what kind/type of measurements are impacted by rain when making this comment. A reference here would strengthen the argument.

An example has been added to the text to address this

- P2 L34-36 This sentence reads awkwardly

This has been addressed

- P3 L62-63 “However, the wind measurements from this campaign should be used carefully as the trailer was not optimally sited for environmental wind speed and direction measurements due to the close proximity to the Moffat School (see

Fig. 1).” Figure 1 does not show the Moffat School, so it is unclear what the reader is supposed to see in this figure in the context of this comment.

A plan view of the school that shows the area in the photo has been added to this figure to highlight the proximity of CLAMPS and the CU DL

- P4 L69 What was the motivation for co-locating the two CU DLs at the airport?

This has been explained in the text. The colocation was to insure the instruments were operating as expected when compared to each other. For example, during the colocation period, a time offset was identified and corrected in one of the DLs.

- P4 L71 Specify the lidar system you are describing when opening a paragraph.

This has been addressed

- P4 L71 Is it line-of-sight wind velocity?

Yes, this has been addressed

- P4 L72 “...a temporal resolution of about 1 Hz along...” Is the sampling rate of the lidar system documented or have a standard?

Citations have been added to papers that document this

- P4 L73-75 This sentence might read more clearly if the term “DBS” is introduced at the start of this paragraph. It appears to be the topic at hand.

This has been addressed

- P5 L87-92 Why not just put this paragraph, which is only describing information relevant to radiosondes, into Section 2.4?

This suggestion has been implemented

- P5 L95 What are the “other shortcomings” of radiosondes? Can a reference be provided that details these limitations?

More details on the shortcomings of radiosondes has been added to this section

- P6 L127 “...more significant influence on the air temperature as the sensor is heated...” If the distinction between true and measure air temperature is made in line, this comment would be easier to parse when reading for the first time.

This has been addressed

- P9 L167 Maybe list here what variables are retrieved?

A table with the major meteorological variables produced by each instrument/retrieval has been added to the text to summarize the data products.

- P10 L169 A more detail description of the retrieval would be good so the reader under-stands why the iterative approach is necessary.

More detail about AERloe has been included in the text

- P10 L176 What’s an approximate lower bound for the resolution for the AERI data for the maximum heights at which RPAS fly?

UAS were permitted to fly up to ~910 m AGL (3000 ft). At these heights, the AERI retrieval has a resolution of ~100 m. This has been included in the text

- P10 L189 DBS was already defined in Section 2.2. Perhaps the Lundquist et al., 2015 reference should be included in the earlier section when DBS first comes up.

This reference has been included earlier as suggested

- P10 L195-197 What specific variables are included by the authors in the data files? A Summary of the LASP-RATE campaign, including sampling statistics for all of the instruments, and derived quantities provided, would go a long way to making this manuscript more useable.

A table with the major meteorological variables produced by each instrument/retrieval has been added to the text to summarize the data products.

- P11 L221-223 More detail is needed about the point-to-point GPS location method used for measuring wind speed. Is the acceleration of the balloon

considered? Or is it assumed that the balloon accelerates instantaneously to the speed of any air that it is in? The details of this method are not described but they need to be.

Details on the point-to-point GPS calculation have been added to the text here.

- P12 L228-229 I do not see the colored lines representing temperature measured by the radiosondes in Figure 6a.

Admittedly, they were difficult to see. The figure and caption has been slightly reworked to make the radiosondes more visible by 1) choosing a different colormap and 2) adding arrows to the x-axis to indicate a radiosonde launch time.

- P12 L237 Over what period of time did the radiosonde launches take place?

The time period depended on the mission objective for the day. These objectives are described in deBoer et al. (2020)

Remote sensing and radiosonde datasets collected in the San Luis Valley during the LAPSE-RATE campaign

Tyler M. Bell^{1,2}, Petra M. Klein^{1,2}, Julie K. Lundquist^{3,4}, and Sean Waugh⁵

¹University of Oklahoma School of Meteorology, Norman, Oklahoma

²University of Oklahoma Center for Autonomous Sensing and Sampling, Norman, Oklahoma

³Department of Atmospheric and Oceanic Sciences, University of Colorado Boulder, Boulder, Colorado

⁴National Renewable Energy Laboratory, Golden, Colorado

⁵NOAA/OAR/National Severe Storms Laboratory, Norman, Oklahoma

Correspondence: Tyler Bell (tyler.bell@ou.edu)

Abstract. In July 2018, the International Society for Atmospheric Research using Remotely-piloted Aircraft (ISARRA) hosted a flight week to showcase the role remotely-piloted aircraft systems (RPAS) can have in filling the atmospheric data gap. This campaign was ~~dubbed~~-called Lower Atmospheric Process Studies at Elevation - A Remotely-piloted Aircraft Team Experiment (LAPSE-RATE). In support of this campaign, ground-based remote and in-situ systems were also
5 deployed for the campaign. The University of Oklahoma deployed the Collaborative Lower Atmospheric Mobile Profiling System (CLAMPS), the University of Colorado deployed two Doppler wind lidars, and the National Severe Storms
~~Lab~~-Laboratory deployed a Mobile Mesonet with the ability to launch radiosondes. This paper focuses on the data products from these instruments that result in profiles of the atmospheric state. The data are publicly available in the Zenodo
LAPSE-RATE community portal (<https://zenodo.org/communities/lapse-rate/>). The profile data discussed are available at
10 <https://doi.org/10.5281/zenodo.3780623> (Bell and Klein, 2020), <https://doi.org/10.5281/zenodo.3780593> (Bell et al., 2020b),
<https://doi.org/10.5281/zenodo.3727224> (Bell et al., 2020a), <https://doi.org/10.5281/zenodo.3738175> (Waugh, 2020b), <https://doi.org/10.5281/zenodo.3720444> (Waugh, 2020a), and <https://doi.org/10.5281/zenodo.3698228> (Lundquist et al., 2020).

1 Introduction

The atmospheric boundary layer (ABL) is undersampled by traditional meteorological sampling techniques (~~National Research Council, 20~~
15 One suggested solution to filling the existing spatial and temporal data gap is utilizing ground based remote sensors, specifically ground-based profilers (Hoff and Hardesty, 2012). Ground-based systems like Doppler wind lidars (DL), the Atmospheric
Emitted Radiance Interferometers (AERI), and microwave radiometers (MWR) can fill in observational gaps that occur with
traditional weather observations, such as radiosondes and meteorological towers. While useful, these remote sensing observations still suffer from certain drawbacks, including limited range and operating condition restrictions. For example, many
20 remote sensing devices do not perform well or have dramatically reduced information content in even light rain. These restrictions limit the availability of continuous data and leave data gaps unfilled.

In an effort to address these unresolved data gaps and utilize new and growing technology, remotely piloted aircraft systems (RPAS) have become increasingly popular for profiling the ABL. RPAS are able to operate in some conditions where ground-based remote systems struggle. For example, even light rain contaminates the wind velocities measured by Doppler lidars due to the droplet fall speeds. However, RPAS can be designed to be water resistant and fly in light rain while collecting measurements. In order to demonstrate the effectiveness of RPAS in ABL observation, the International Society for Atmospheric Research using Remotely piloted Aircraft (ISARRA) organized a field campaign ~~dubbed~~ called Lower Atmospheric Process Studies at Elevation – A Remotely-Piloted Aircraft Team Experiment (LAPSE-RATE) in the San Luis Valley in south-central Colorado ~~(de Boer et al., 2020a; ?).~~ (de Boer et al., 2020a, b) from July 15, 2018 to July 20, 2018. In support of this campaign, the University of Oklahoma (OU), the NOAA National Severe Storms ~~Lab~~ Laboratory (NSSL), and the University of Colorado (CU) deployed remote sensors and launched radiosondes to supplement and enhance the data collected by RPAS deployed in the valley.

~~This paper focuses on data collected by these remote sensors and radiosondes, since they all collect vertical profiles of the atmosphere.~~ The paper is structured as follows: Section 2 describes the platforms deployed by OU, NSSL, and CU, Section 3 describes the locations of the various platforms, Section 4 describes the post processing applied to the data, and Section 5 shows sample data from each system.

2 Platforms

While the primary focus of the LAPSE-RATE field campaign was showcasing the ~~benefit that RPAS observations can have on filling the data gap, these observations must be collected alongside existing and commonly used instruments in order to demonstrate any advanced quality of observations collected by RPAS, state of the art ground-based remote sensors were also deployed to complement the~~ RPAS observations. ~~A mobile boundary layer profiling system was deployed by OU~~ OU deployed a mobile profiling system in Moffat, CO that ~~contained~~ contains a scanning DL, an AERI, a MWR, and a Vaisala sounding system ~~provided by NSSL~~. These three remote sensing instruments allowed to continuously monitor the evolution of the thermodynamic and dynamic state of the boundary layer near the OU deployment site and the observations provide a reference data set for the RPAS measurements. Co-located with this OU deployment site, the University of Colorado deployed a profiling DL, as well as another DL at a second location, in order to further document the wind profiles at high vertical resolution in the lowest 200 meters. To obtain reliable ground observations and additional radiosonde profiles over a wide area, an NSSL Mobile Mesonet was used. Details on each of these observational platforms follow.

2.1 CLAMPS

OU deployed the Collaborative Lower Atmospheric Mobile Profiling System (CLAMPS) during LAPSE-RATE (Fig. 1), which contains a suite of instruments that collect high resolution boundary layer profiles of temperature, moisture, wind speed, and wind direction. While CLAMPS has been well documented in Wagner et al. (2019), a brief description is provided here. CLAMPS contains a Halo Photonics Streamline scanning DL (Päschke et al., 2015), a HATPRO microwave ra-



Figure 1. This photo shows the CLAMPS facility (white trailer) and the CU DPLR2 (foreground on the concrete pad) deployment location next to the Moffat [Consolidated School](#). [The red box on the satellite view shows where CLAMPS and DPLR2 were deployed in relation to the school building](#). Note, due to the proximity of the CLAMPS trailer to the building, the wind speed and wind direction from the meteorological station on the back of CLAMPS should be used cautiously. [Satellite imagery ©Google Maps](#)

diometer (Rose et al., 2005), and an [Atmospheric Emitted Radiance Interferometer \(AERI, Knuteson et al., 2004a, b\)](#) [AERI](#) (Knuteson et al., 2004a, b). The Doppler lidar is used to measure wind speed and direction while the AERI and MWR are used in a joint retrieval to obtain temperature and humidity profiles. These instruments are housed in a modified commercial trailer which has been specifically outfitted to integrate the three profiling instruments, allowing CLAMPS to be easily deployed. One of these modifications included the ability to carry and store helium tanks, which when combined with a Vaisala MW41 radiosonde sounding system, allows the launch of weather balloons to measure the vertical profile of the atmosphere (Section 2.4).

For LAPSE-RATE, the OU DL scan strategy consisted of a 24-point plan position indicator (PPI) scan at 70 degree elevation angle, a 6-point PPI at 45 degrees, and a vertical stare. The PPIs were processed to provide horizontal wind speed and direction. The 24-point scan was chosen to try to improve the least-squares fit in complex terrain while the 6-point scan was processed live and used as a situational awareness tool for RPAS flights. The sequence ran every 5 minutes with the stare filling in the remaining time after the two PPI scans.

Finally, as part of the MWR, CLAMPS has a Vaisala WXT536 Multi-Parameter Weather Sensor mounted at a height of approximately 3 m on the back of the trailer. This weather station records air temperature, humidity, pressure, rainfall and wind.

However, the wind measurements from this campaign should be used ~~carefully with caution~~ as the trailer was not optimally
sited for environmental wind speed and direction measurements due to the close proximity to the Moffat Consolidated School
70 (see Fig. 1).

Details about the processing techniques used for CLAMPS data can be found in Section 4.

2.2 CU DLs Doppler Lidars

In addition to the OU scanning DL, there were two profiling DLs deployed during the campaign. CU deployed a Leo-
sphere/NRG Version 1 Windcube at both the Moffat School site (Section 3.1, co-located with CLAMPS, Fig. 1) and at the
75 Saguache Airport (Section 3.2). Hereafter, the Windcube at Moffat will be referred to as DPLR2, while the Windcube at
Saguache will be referred to as DPLR1. The CU DLs were colocated at the Saguache airport for several hours from 14 July
00:04 UTC to 21:44 UTC, at which point DPLR2 was moved to the Moffat School. The colocation allowed intercomparison
between the instruments to confirm they were operating as expected.

~~This type of lidar (Aitken et al., 2012b; Rhodes and Lundquist, 2013; Bodini et al., 2019). The Doppler Beam Swinging (DBS)
80 technique provides an assessment of the winds every 4 seconds (Lundquist et al., 2015). For the DBS technique, the Version 1
Windcube (Aitken et al., 2012a; Rhodes and Lundquist, 2013; Bodini et al., 2019) measures line-of-sight wind velocity along
the four cardinal directions with a nominal elevation angle of 62 degrees and a temporal resolution of about 1 Hz along each
beam direction (Aitken et al., 2012a; Rhodes and Lundquist, 2013; Bodini et al., 2018), assuming horizontal homogeneity in
the measurement volume (Lundquist et al., 2015). The ~~Doppler Beam Swinging (DBS) technique thus provides an assessment
85 of the winds every 4 seconds.~~ The measurements are taken every 20 m from 40 to 220 m a.g.l. AGL~~

More info about the Windcube processing can be found in Section 4.

2.3 **Mobile Mesonet**

While many of the details and specifics regarding the NSSL Mobile Mesonet (MM) are covered in the Mobile Surface Ob-
servations paper in this special issue (de Boer et al., 2020c), a brief description is included here for completeness. The MM
90 concept was first introduced during the original Verification of the Origins of Rotation in Tornadoes (VORTEX) experiment
as a method of obtaining surface observations of temperature, humidity, wind speed and direction, and pressure (Straka et al.,
1996).

The MM vehicle, a 2018 Ford F-250 for the LAPSE-RATE project (Fig. 2), utilizes a suite of instruments mounted on a
removable equipment rack that is attached to the vehicle above the hood. This rack is mounted at a height above the roof line of
95 the cab, such that the observations collected by the rack are as far forward and above the vehicle itself as practically possible.
This is done in order to ensure that the observations are as free from influence due to the vehicle itself as possible.



Figure 2. The NSSL Mobile Mesonet during the LAPSE-RATE. Photo credit Dr. Sean Waugh, NOAA/NSSL

2.4 Radiosondes

In addition to the surface observations provided by the MM equipment rack, ~~A~~a Vaisala MW41 sounding system is also installed, similar to the OU CLAMPS trailer. This addition gives the MM the ability to launch radiosondes from any location
100 in a matter of minutes, and continue moving once the balloon is in the air. This advantage gives the MM the ability to launch radiosondes in rapid succession in a variety of spatial locations, which was advantageous during LAPSE-RATE due to multiple deployment locations for the RPAS teams. The bed of the F-250 holds 4 "T" tanks of helium (nominal 9.3 m³ per tank), which equates to roughly 32 potential soundings.

2.5 Radiosondes

105 ~~A~~As previously mentioned, numerous weather balloons were launched by both the OU CLAMPS and NSSL MM deployment teams(~~Fig. ??~~). ~~Despite its~~. Weather balloons have a limited spatial profile and other, a variable ascent path (not completely vertical), fixed sampling rates, relatively long full profile times, and logistically are difficult to create high spatio-temporal observations. However despite these shortcomings, radiosondes remain the most common method of obtaining vertical profiles of temperature, humidity, wind speed and direction, and pressure. These observations are gathered routinely across the entire
110 globe for weather forecast model initialization, and are also frequently used to cross compare RPAS observations. While there are a number of manufacturers available with a variety of radiosondes to choose from, the LAPSE-RATE campaign deployed

Vaisala RS92-SGP radiosondes with a Vaisala MW41 receiver. The MW41 receiver was designed for use with the newer model RS41 radiosonde, but is backwards compatible with the RS92. A large supply of the slightly older RS92-SGP radiosondes was available for use during the project, hence the choice of the RS92 over the RS41. Furthermore, some of the RPAS involved with the LAPSE-RATE project used sensor configurations directly from the RS92, making this version a more suitable tool for comparison.

Measurement	Range	Accuracy	Resolution
Temperature	+60 to -90 C	0.2 C	0.1 C
Humidity	0 to 100%	5%	1%
Pressure	1080 to 3 hPa	1 hPa	0.1 hPa

Table 1. RS92-SGP specifications according to the manufacturer.

The RS92-SGP is a 400 MHz radiosonde with dual RH capacitors. The -SGP designation indicates that the radiosonde contains an internal pressure sensor as well as an on-board GPS unit. This is useful for direct observations of pressure rather than assuming a standard atmosphere. General specifications for the RS92-SGP are included in Table 1. Prior to flight, the radiosonde must be prepped for launch. This process involves connecting the RS92-SGP to the GC25 ground check station which allows the user to set the transmission frequency. The GC25 checks the temperature sensor of the radiosonde against an internal sensor to identify bad sensors prior to launch. Though the radiosondes are shipped in sealed bags with desiccant, the RH capacitors are sensitive to aerosols and other contaminants that attach to the capacitor and can significantly bias RH observations. To remove these contaminants, the RH sensors are heated to "bake off" any foreign particles and ensure clean sensors prior to flight, maximizing accuracy of the RH profile. This is also checked against an internal desiccant chamber that should read a physical humidity of zero. If there are deviations from zero humidity, this indicates that either one or both of the RH sensors are bad, or that the desiccant in the GC25 needs to be changed. This ground check process is repeated for each radiosonde immediately prior to launch to ensure reliability and repeatably between profiles.

During flight, measurements are collected at a rate of 1 Hz and transmitted to the ground receiving station on the frequency selected. Line of sight must be maintained with the radiosonde in order to receive the data. This was a non-issue during LAPSE-RATE as the mountain valley had very little in the way of vertical winds and no significant weather patterns were in play across the region in the upper atmosphere during the flight week. As the radiosonde ascends, the point to point GPS observations are collected and filtered to produce horizontal winds.

~~A radiosonde launch at Moffat School by Tyler Bell with the CLAMPS trailer. Photo credit Dr. Sean Waugh, NOAA/NSSL.~~

For the RH observations, measurements are taken from a single RH chip while the other is heated for a period of approximately 10 seconds. This sensor is then allowed to cool, and the observations switched to the second sensor while the first is heated. This process is repeated throughout the entire flight. As the radiosonde ascends, particularly through the boundary layer, the RH capacitors will encounter aerosols and other contaminants that can bias the RH observations similar to those removed prior to launch by the GC25. The alternative heating process removes these contaminants continuously during data

140 collection and also eliminates sensor icing on the RH sensors. As the radiosonde ascends, solar radiative forcing becomes a more significant influence on the observed air temperature as the sensor is heated due to sunlight. To remove this effect, an offset is applied by the MW41 software to the observed temperature to correct for the solar heating. This correction is applied based on location and time of day to take into account solar angle.

3 Measurement Locations

145 A plan view of the San Luis Valley of Colorado is included in the introduction paper to this special issue ([?, see Fig. 1](#)) ([de Boer et al., 2020b](#)). A simplified map with locations relevant to this paper is shown in Fig. 3. In addition to fixed locations, the launch points of all the radiosondes launched by the MM are shown. While the majority of the NSSL MM radiosondes were launched at Leach Airfield, some mobile radiosondes were launched near the Saguache Municipal Airport near the end of the flight campaign. This was done in support of a move to make RPAS observations by a few teams on a more mobile scale. The fixed locations
150 are discussed in more detail in the following sections.

3.1 Moffat Consolidated School

During LAPSE-RATE, CLAMPS and DPLR2 were deployed at the Moffat Consolidated School in Moffat, CO. The location of Moffat in the valley was advantageous as it was centered between the mountain ranges to the east and west. CLAMPS and the CU DL could therefore act to provide data on the background flow and thermodynamics while the RPAS scattered throughout
155 the valley were able to provide hyper-local observations more sensitive to the varying boundary layer conditions affected by the terrain. Additionally, the Moffat site could fulfill the power requirements of CLAMPS and to provide a flat place to deploy the trailer. Finally, the school staff were extremely accommodating in allowing access to their internet connection which allowed for improved communications with other teams and data retrieval.

3.2 Saguache Municipal Airport

160 DPLR1 was deployed at the Saguache Municipal Airport in the northwest corner of the valley. The airport is located at the mouth of a small valley leading down out of the mountains, which provides an ideal location for sampling drainage flow induced by the terrain. The Automated Weather Observing System (AWOS) at the airport (K04V) often observes this nocturnal drainage flow, which is one of the phenomena targeted for observation by RPAS. DPLR1 was co-located with weather observing RPAS from OU (Pillar-Little et al., 2020).

165 3.3 Leach Airfield

Leach Airfield served as a central focus point to many of the operations scattered throughout the valley during the flight week. Being centrally located, it provided a relatively stable set of kinematic and thermodynamic conditions with minimal direct influence of terrain induced flow, and is located over a portion of the valley that is exceptionally flat. With these conditions, the airfield served as a "proving ground" of sorts for the RPAS to conduct calibration flights against other RPAS (Barbieri

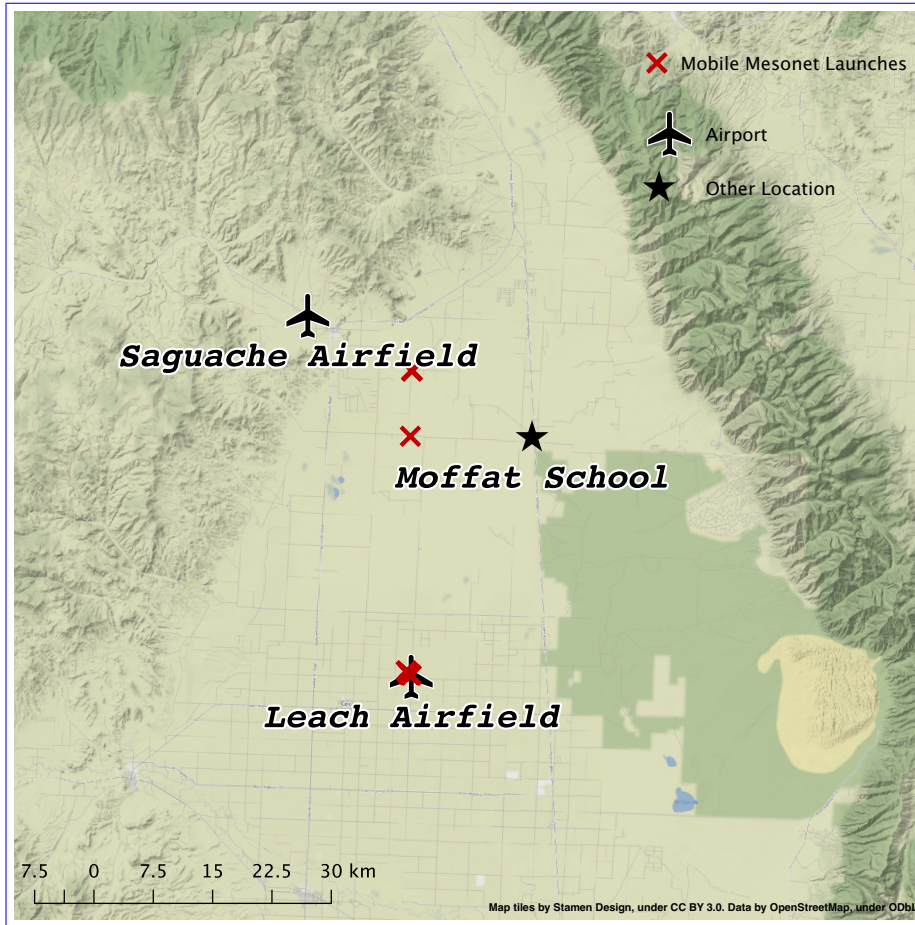


Figure 3. Sounding locations for the NSSL Mobile vehicle (red X's) and locations of profiling systems during LAPSE-RATE. The OU CLAMPS trailer performed all of their soundings at the Moffat School site. ©OpenStreetMap contributors 2020. Distributed under a [Creative Commons BY-SA License](https://creativecommons.org/licenses/by-sa/4.0/)

170 et al., 2019), the MURC vehicle from CU (de Boer et al., 2020b), the surface observations from the NSSL MM, and various radiosonde launches by the NSSL MM. During the flight week, teams were allowed complete access to the field surrounding the runway at Leach Airfield which was largely non-irrigated (though nearby fields were), with short patchy grass and dirt as is evident in Fig. 4.

4 Data Processing

175 Each of the data sets presented in this article are the result of careful processing and quality control (QC) to ensure that the data are as free from error and as easy to interpret as possible. This process produces a series of data levels from raw data to some final product that incorporates error and bias correction and QC processes. The general guidelines for the file structure are



Figure 4. A radiosonde launch at Leach [Airport Airfield](#) by Dr. Sean Waugh. Photo credit Dr. Sean Waugh, NOAA/NSSL.

<u>System</u>	<u>Instrument/Retrieval</u>	<u>Meteorological Variables</u>
<u>CLAMPS</u>	<u>AERIOe</u>	<u>Temperature, water vapor mixing ratio, liquid water path, 1-sigma uncertainty</u>
	<u>Halo Streamline Scanning Doppler Lidar</u>	<u>Horizontal wind speed, horizontal wind direction, vertical wind speed</u>
	<u>HATPRO MWR</u>	<u>Brightness Temperature, liquid water path, surface temperature, surface relative humidity, surface pressure, rain rate</u>
<u>CU DL</u>	<u>WindCube v1</u>	<u>Zonal wind speed, meridional wind speed, vertical wind speed</u>
<u>NSSL MM</u>	<u>Vaisala MW41 Radiosonde</u>	<u>Temperature, relative humidity, horizontal wind speed, horizontal wind direction, atmospheric pressure</u>

discussed in [de Boer et al. \(2020b\)](#). Presented here are the specific processing steps and QC flags applied to the data collected by the systems described in Section 2.

180 4.1 CLAMPS

The AERI and MWR in CLAMPS were combined in a joint thermodynamic retrieval using the AERI Optimal Estimation technique (AERIOe, Turner and Löhnert, 2014; Turner and Blumberg, 2018). Specifically, AERIOe Version 2.8 was used. This retrieval is ~~an iterative retrieval and requires a~~ [a physical iterative retrieval that attempts to convert radiance and brightness](#)

temperature observations to temperature and moisture profiles. However, the retrieval is an ill-posed problem; there are many possible solutions. Thus, this retrieval requires a prior and first guess in order to operate successfully. The prior dataset used ~~to create the first guess~~ was produced from radiosondes launched from the National Weather Service in Boulder, Colorado. This is not an ideal prior, as the climatological conditions in Boulder do not fully represent the conditions in the San Luis Valley. Due to this, additional data were also included in the AERIOe retrieval to try and further constrain the solution. These included: surface temperature and relative humidity from the CLAMPS Vaisala WXT-530, radiosondes launched from CLAMPS (used to constrain above 3 km), and the CLAMPS Doppler lidar backscatter (used to detect cloud base). ~~The AERI~~ Although the MWR was calibrated at the beginning of the campaign, the brightness temperatures input into AERIOe from the MWR were bias corrected using the co-located radiosondes. The AERIOe data were processed at 15 minute resolution to match the cadence of the co-located WxUAS profiles (Pillar-Little et al., 2020). The vertical resolution decreases exponentially with height, starting at 10s of meters at the surface and decreasing to approximately 100 m at 1 km AGL.

195 The AERIOe files are provided in netCDF format. Each file contains thermodynamic variables (temperature, water vapor mixing ratio, etc). Additionally, some radiative products are also included in the netCDF file (e.g liquid-water path, liquid water effective radius). All retrieved variables have a 1-sigma uncertainty that is produced by the algorithm. For more information on the retrieval itself, see Turner and Löhnert (2014) and Turner and Blumberg (2018) for an overview.

The Doppler lidar PPI scan files were post processed using the Velocity Azimuth Display (VAD) technique (Browning and 200 Wexler, 1968). In order to minimize the impact of spatial heterogeneities, only the 70 degree PPI scan was used to calculate the VAD. The VAD technique produces estimates of the horizontal wind speed and direction. The Doppler lidar data are provided in three different netCDF files: one containing the stare data (DLFP), one containing the PPI data (DLPPI), and the last containing the processed VAD data (DLVAD). These files are provided in netCDF format.

4.2 CU DL

205 The CU DL data are provided in netCDF format. The file contains measurements of the wind at 1 s temporal resolution at 10 heights, ranging from 40 m to 220 m. The estimates of zonal (u), meridional (v), and vertical (w) winds rely on the ~~Doppler Beam Swinging (DBS)~~ DBS technique (Lundquist et al., 2015), assuming horizontal homogeneity over the measurement volume. Each beam has a carrier-to-noise ratio (CNR) value returned for each measurement height, and all data with CNR values less than -27 dB are neglected.

210 These DLs were co-located at Saguache from 2018-07-14 00:04 UTC to 2018-07-14 21:44 UTC. When correlating data from this time period, it was discovered that the timestamp on DPLR2 was approximately 20 minutes ahead of DPLR1. This offset error has been corrected in the netCDF files. More information about the processing as well as validation can be found in Rhodes and Lundquist (2013) and Lundquist et al. (2015). In addition to measurements of winds and derived quantities like turbulence intensity and turbulence kinetic energy, these lidar data allow estimation of the turbulence dissipation rate (Bodini et al., 2019).

4.3 Radiosondes

The MW41 sounding system automatically produces a series of files that contain the relevant profile information as well as information regarding the time of launch, radiosonde used, launch location, etc. These files contain the raw (i.e. uncorrected) pressure, temperature, and humidity data, the raw GPS coordinates of each data record, and the Vaisala proprietary filtered products. Rather than tracking multiple files for each deployment, the files are first collected and combined into a single large data record. Timing information is included in each file which makes aligning data points straightforward. The first main record of this combined file is the surface conditions that were input by the user during operations, while the entirety of the ascent portion of the sounding is contained in the records that follow (the sounding is terminated when the descent portion of the profile begins following the balloon burst).

In addition to the sounding records themselves, a number of profile based parameters are also calculated and included for reference (Table 2). Furthermore a quality control flag of logic value 0 (false) or 1 (true) indicates if the sounding reached a minimum profile height of 300 mb. These parameters are common to radiosonde data presentation and are well known/documented. For more information on the specifics of these parameters, readers are encouraged to reference the AMS Glossary (http://glossary.ametsoc.org/wiki/Main_Page).

Frequency	Serial Number	Sfc-500 m LR
0-1 km LR	0-3 km LR	700-500 mb LR
sfc-500 m WS	0-1 km WS	Bunkers U
Bunkers V	Critical Angle	Sfc-500 m SRH
0-1 km SRH	0-3 km SRH	CAPE*
CIN*	LCL*	LFC*
EL*	DCAPE*	0-3 km CAPE*
0-3 km CIN*	SCP*	STP*
	Effective SRH*	

Table 2. A list of sounding parameters that are calculated and available in the radiosonde files. Variables marked with an asterisk were calculated for surface based, most unstable, and the lowest 100 mb mixed parcels. "LR" denotes "lapse rate", while "WS" denotes "wind shear".

Regarding the full data records themselves, there are a number of groups of variables that deserve direct discussion. The "filtered" data in the file contains the Vaisala specific filters mentioned previously. The wind algorithm filter is meant to remove the pendulum oscillations that are common with balloon launched devices and generally smooth the data. It should be noted that this wind algorithm is proprietary, and as such the derived winds from the automated MW41 sounding system are somewhat of a "black box" and should be treated with caution. This data group also contains the solar radiation corrected temperature as mentioned earlier. The Vaisala filtered U and V and u and v wind components and a computed mixing ratio are also contained here.

As a counter-part to the "filtered" data section, there is a "raw" data section which contains unprocessed information directly off the radiosonde. This includes the raw point-to-point GPS coordinates and the uncorrected pressure, humidity, and temper-

ature data. This information can be useful in specific situations or if attempting to work with data without the proprietary filter applied. This section also includes manually derived winds from the raw GPS coordinates. This was done using point-to-point differences between successive GPS locations with no smoothing or filtering of any kind to provide a clean wind record that could be filtered by the end user. This process inherently averages any accelerations of the balloon over a given 1-second period as it is only looking at the horizontal motion between two successive points. Additionally it is also assumed that the balloon is moving entirely with the wind and has no deviant motion of its own. Therefore taking the distance travelled by the balloon in a known period of time, the horizontal winds may be calculated at that point in space and time.

245 5 Sample Data

In this section, sample data is shown from each profiling ~~platforms~~ platform discussed in Section 2. Fig. 5 showcases data from the Moffat site where radiosondes, CLAMPS, and a CU DL were co-located for the experiment. This provides opportunity to see how the various platforms compare in space and time as well as quality and availability.

Fig. 5a shows data from both the CLAMPS AERIOe temperature retrieval and the temperature recorded from the co-located radiosonde launches, which are the colored lines overlaid on top. The grey areas indicate one of two things: either the retrieval did not converge or it was raining during this period, and thus there is no valid data. During the campaign, very short-lived rain showers would often form sporadically throughout the day, hence the short periods of data drops.

Wind speed and direction from the CLAMPS DL is shown in Fig. 5b. Similar to Fig. 5a, grey areas in this figure show when rain was present. In addition, grey areas could signify that a good VAD fit was not achieved. The latter most often happens during strong daytime heating, where strong updrafts were common. A detailed intercomparison of the CLAMPS facility data, the Moffat radiosonde data, and data from the colocated weather sensing RPAS can be found in Bell et al. (2019, accepted).

5.1 Radiosondes

In total, there were 25 radiosonde launches from the NSSL MM, with 20 of those from Leach Airfield and 5 from near Saguache. The time and location of the radiosonde launch depended on the specific mission goals that day (e.g. morning transition, drainage flow, convection). A full description of the science goals for each day is provided in de Boer et al. (2020b). Rather than show all available data sets, a focus of available data from the final day of the project near Saguache is presented. All 5 soundings rose entirely through the troposphere, with an average maximum altitude of 21 km AGL. The simplest way to visualize a single sounding, is using programs such as SHARPPy (Blumberg et al., 2017) or MetPy (May et al., 2008 - 2020). Fig. 6 show an example Skew-T diagram created using MetPy.

The sounding shows a dry profile through a depth of nearly 7 km AGL before high level clouds were encountered. Near the surface, a super adiabatic layer exists marking the sharp inversion immediately above the somewhat moist nocturnal mountain boundary layer. Sharp inversions such as this were common during flight week, particularly with the calm winds in the lowest 1 km. Many of the launches saw very weak or non-existent wind profiles until the radiosonde rose above the rim of the mountains surrounding the valley.

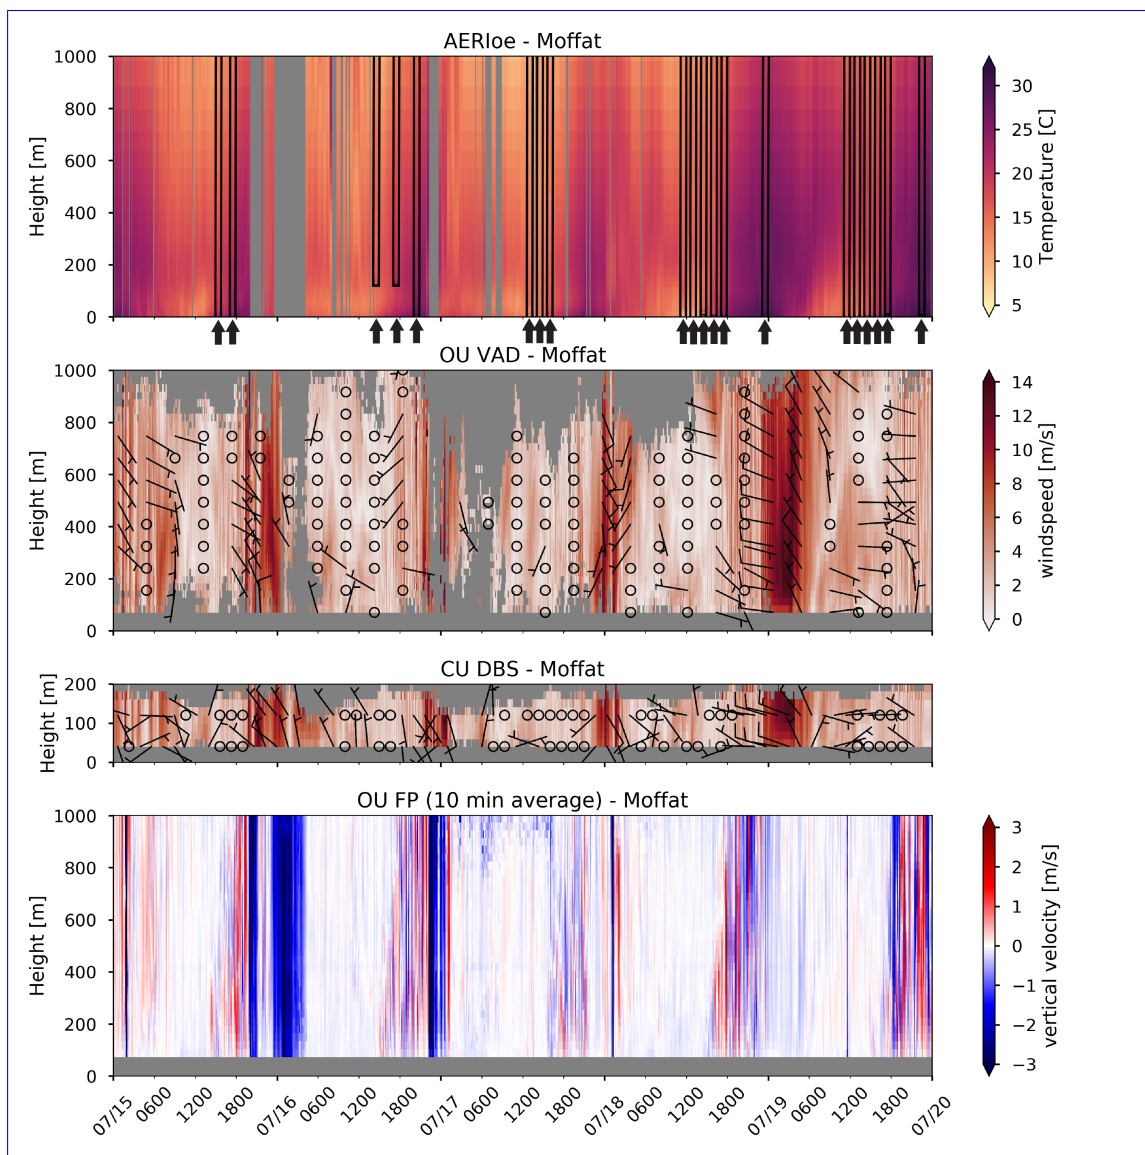


Figure 5. Time-height figures of temperature from the AERIoe retrievals (a), wind speed and direction from the CLAMPS VAD (b), wind speed and direction from the CU DBS scan (c), and 10 minute averages of the vertical velocity measured from the CLAMPS vertical stare (d) from the full LAPSE-RATE campaign. All of these data were recorded at the Moffat site. [Radiosonde data is overlaid and outlined in black on top of the AERIoe retrievals in \(a\). The launch time of each radiosonde in indicated with a black arrow.](#)

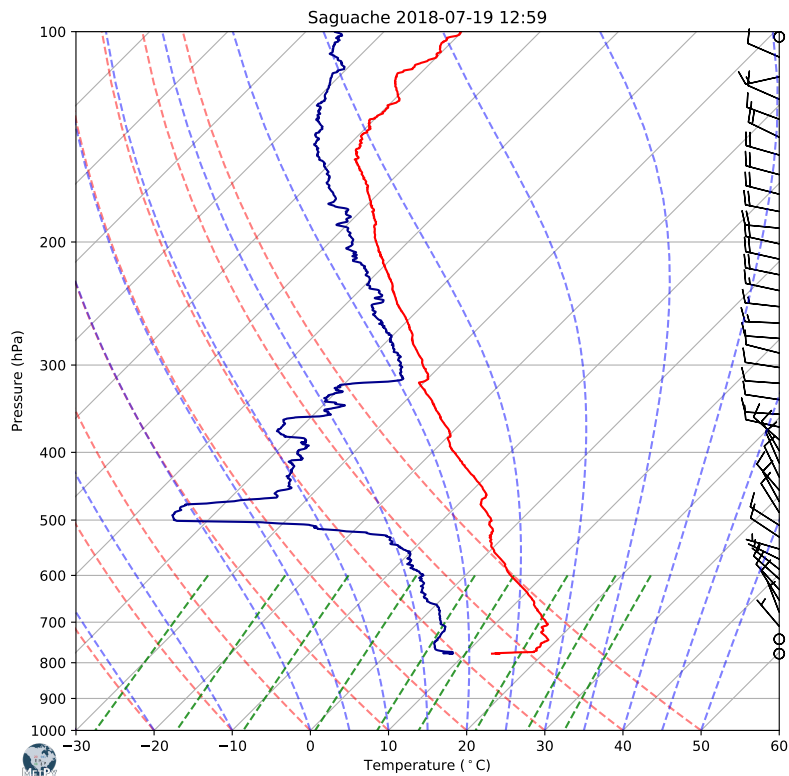


Figure 6. Sounding launched from near Saguache, CO at 1259 UTC. Image created using MetPy (May et al., 2008 - 2020).

270 In addition to examining individual soundings, which can be useful for more direct comparisons with RPAS, we can also look
 at deployment days in a more holistic sense through a time series analysis (Fig. 7). Examining the data in this way highlights
 the stably stratified layers near the surface in the early morning hours with the mountain boundary layer. Starting around 1500
 UTC, as the sun rises over the valley the radiosondes were able to capture the transition to the deeper, more convective daytime
 boundary layer. Similar profiles and time history plots can be made using RPAS data to compare the ability of an RPAS to
 275 reproduce observed profiles obtained from standard instruments.

6 Summary

In order to fulfill the need for more observations of the ABL, a large group of scientists deployed multiple types of boundary-
 layer profiling systems in the San Luis Valley in southern Colorado to evaluate the current capabilities of these systems. These
 instruments include weather sensing RPAS, ground-based remote sensors, and radiosondes. While a large part of the campaign

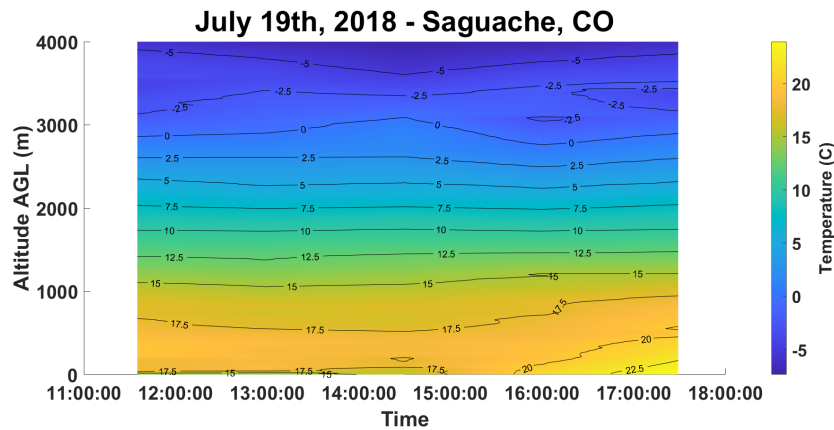


Figure 7. Time series of air temperature from 5 radiosondes launched near Saguache. Sounding times were 1135, 1259, 1430, 1600, and 1729 UTC. Temperature values between sounding times are interpolated.

280 was devoted to using weather sensing RPAS, the more established remote sensors and radiosondes provided the background
state of the atmosphere and augmented the RPAS observations. Radiosondes were launched from the NSSL MM around
the valley depending on the weather conditions being studied. Additionally, radiosondes were launched from the CLAMPS
system at the Moffat Site, which was centrally located in the valley. Finally, CU deployed two Doppler lidars in the valley:
one at the Moffat site and one at the Saguache municipal airport. This paper gives an overview of all these instruments, the
285 conditions they sampled, and a brief description of the file formats.

7 Data availability

The data in this paper are all publicly available on the data hosting website Zenodo. The references for each dataset are as
follows: CLAMPS Doppler lidar (<https://doi.org/10.5281/zenodo.3780623>; Bell and Klein, 2020), CLAMPS MWR and surface
observations (<https://doi.org/10.5281/zenodo.3780593>; Bell et al., 2020b), AERIoe retrievals (<https://doi.org/10.5281/zenodo.3727224>;
290 3727224; Bell et al., 2020a), Mobile Mesonet radiosonde (<https://doi.org/10.5281/zenodo.3738175>; Waugh, 2020b), CLAMPS
radiosondes (<https://doi.org/10.5281/zenodo.3720444>; Waugh, 2020a), and CU Doppler lidar (<https://doi.org/10.5281/zenodo.3698228>;
Lundquist et al., 2020).

Competing interests. The authors declare no competing interests.

Acknowledgements. The authors would like to thank the communities in the San Luis Valley for their hospitality during the experiment.
295 Specifically, we would like to thank the teachers and administration of the Moffat Consolidated School for allowing use of their facility for

powering CLAMPS and DPLR2. We also acknowledge the efforts of Camden Plunkett and Patrick Murphy in deploying and maintaining the CU lidars. Additionally, we would like to acknowledge NSF AGS 1807199 and DOE DE-SC0018985 for student travel support to ISARRA for TMB and NSF AGS-1554055 (CAREER) for support for JKL. Funding for the NSSL MM and travel was provided for through internal NSSL funds, with sounding expendables donated by Oklahoma State University. The CLAMPS deployment was supported by the National Mesonet program with funding through Earth Networks, Inc. [This work was authored \(in part\) by the National Renewable Energy Laboratory, operated by Alliance for Sustainable Energy, LLC, for the U.S. Department of Energy \(DOE\) under contract no. DE-AC36-08GO28308. Funding was provided by the U.S. Department of Energy Office of Energy Efficiency and Renewable Energy Wind Energy Technologies Office. The views expressed in the article do not necessarily represent the views of the DOE or the US Government. The US Government retains and the publisher, by accepting the article for publication, acknowledges that the US Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do so, for US Government purposes.](#)

References

- Aitken, M. L., Rhodes, M. E., and Lundquist, J. K.: Performance of a Wind-Profiling Lidar in the Region of Wind Turbine Rotor Disks, *Journal of Atmospheric and Oceanic Technology*, 29, 347–355, <https://doi.org/10.1175/JTECH-D-11-00033.1>, 2012a.
- Aitken, M. L., Rhodes, M. E., and Lundquist, J. K.: Performance of a Wind-Profiling Lidar in the Region of Wind Turbine Rotor Disks, *Journal of Atmospheric and Oceanic Technology*, 29, 347–355, <https://doi.org/10.1175/JTECH-D-11-00033.1>, <https://journals.ametsoc.org/doi/10.1175/JTECH-D-11-00033.1>, 2012b.
- 310 Barbieri, L., Kral, S. T., Bailey, S. C. C., Frazier, A. E., Jacob, J. D., Reuder, J., Brus, D., Chilson, P. B., Crick, C., Detweiler, C., Doddi, A., Elston, J., Foroutan, H., González-Rocha, J., Greene, B. R., Guzman, M. I., Houston, A. L., Islam, A., Kemppinen, O., Lawrence, D., Pillar-Little, E. A., Ross, S. D., Sama, M. P., Schmale, D. G., Schuyler, T. J., Shankar, A., Smith, S. W., Waugh, S., Dixon, C., Borenstein, S., and de Boer, G.: Intercomparison of Small Unmanned Aircraft System (sUAS) Measurements for Atmospheric Science during the LAPSE-RATE Campaign, *Sensors*, 19, <https://doi.org/10.3390/s19092179>, <https://www.mdpi.com/1424-8220/19/9/2179>, 2019.
- 315 Bell, T. and Klein, P.: OU/NSSL CLAMPS Doppler Lidar Data from LAPSE-RATE, <https://doi.org/10.5281/zenodo.3780623>, 2020.
- Bell, T., Klein, P., and Turner, D.: OU/NSSL CLAMPS AERIoe Temperature and Water Vapor Profile Data from LAPSE-RATE, <https://doi.org/10.5281/zenodo.3727224>, 2020a.
- 320 Bell, T., Klein, P., and Turner, D.: OU/NSSL CLAMPS Microwave Radiometer and Surface Meteorological Data from LAPSE-RATE, <https://doi.org/10.5281/zenodo.3780593>, 2020b.
- Bell, T. M., Greene, B. R., Klein, P. M., Carney, M. B., and Chilson, P. B.: Confronting the Boundary Layer Data Gap: Evaluating New and Existing Methodologies of Probing the Lower Atmosphere, *Atmospheric Measurement Techniques Discussions*, 2019, 1–23, <https://doi.org/10.5194/amt-2019-453>, <https://www.atmos-meas-tech-discuss.net/amt-2019-453/>, 2019.
- 325 Blumberg, W. G., Halbert, K. T., Supinie, T. A., Marsh, P. T., Thompson, R. L., and Hart, J. A.: SHARPPy: An Open-Source Sounding Analysis Toolkit for the Atmospheric Sciences, *Bulletin of the American Meteorological Society*, 98, 1625–1636, <https://doi.org/10.1175/BAMS-D-15-00309.1>, 2017.
- Bodini, N., Lundquist, J. K., and Newsom, R. K.: Estimation of Turbulence Dissipation Rate and Its Variability from Sonic Anemometer and Wind Doppler Lidar during the XPIA Field Campaign, *Atmospheric Measurement Techniques*, 11, 4291–4308, <https://doi.org/10.5194/amt-11-4291-2018>, 2018.
- 330 Bodini, N., Lundquist, J. K., Krishnamurthy, R., Pekour, M., Berg, L. K., and Choukulkar, A.: Spatial and temporal variability of turbulence dissipation rate in complex terrain, *Atmospheric Chemistry and Physics*, 19, 4367–4382, <https://doi.org/https://doi.org/10.5194/acp-19-4367-2019>, <https://www.atmos-chem-phys.net/19/4367/2019/>, 2019.
- Browning, K. A. and Wexler, R.: The Determination of Kinematic Properties of a Wind Field Using Doppler Radar, *Journal of Applied Meteorology*, 7, 105–113, [https://doi.org/10.1175/1520-0450\(1968\)007<0105:TDOKPO>2.0.CO;2](https://doi.org/10.1175/1520-0450(1968)007<0105:TDOKPO>2.0.CO;2), 1968.
- 335 de Boer, G., Diehl, C., Jacob, J., Houston, A., Smith, S. W., Chilson, P., Schmale, D. G., Intrieri, J., Pinto, J., Elston, J., Brus, D., Kemppinen, O., Clark, A., Lawrence, D., Bailey, S. C. C., Sama, M. P., Frazier, A., Crick, C., Natalie, V., Pillar-Little, E., Klein, P., Waugh, S., Lundquist, J. K., Barbieri, L., Kral, S. T., Jensen, A. A., Dixon, C., Borenstein, S., Hesselius, D., Human, K., Hall, P., Argrow, B., Thornberry, T., Wright, R., and Kelly, J. T.: Development of Community, Capabilities, and Understanding through Unmanned Aircraft-Based Atmospheric Research: The LAPSE-RATE Campaign, *Bulletin of the American Meteorological Society*, 101, E684–E699, <https://doi.org/10.1175/BAMS-D-19-0050.1>, 2020a.
- 340

- de Boer, G., Houston, A., Jacob, J., Chilson, P. B., Smith, S. W., Argrow, B., Lawrence, D., Elston, J., Brus, D., Kempainen, O., Klein, P., Lundquist, J. K., Waugh, S., Bailey, S. C. C., Frazier, A., Sama, M. P., Crick, C., Schmale III, D., Pinto, J., Pillar-Little, E. A., Natalie, V., and Jensen, A.: Data Generated during the 2018 LAPSE-RATE Campaign: An Introduction and Overview, *Earth System Science Data*, 12, 3357–3366, <https://doi.org/10.5194/essd-12-3357-2020>, 2020b.
- de Boer, G., Waugh, S., Erwin, A., Borenstein, S., Dixon, C., Shanti, W., Houston, A., and Argrow, B.: Measurements from Mobile Surface Vehicles during LAPSE-RATE, pp. 1–28, <https://doi.org/10.5194/essd-2020-173>, 2020c.
- Hoff, R. M. and Hardesty, R. M.: Thermodynamic Profiling Technologies Workshop Report to the National Science Foundation and the National Weather Service, Tech. rep., National Center for Atmospheric Research, 2012.
- Knuteson, R. O., Revercomb, H. E., Best, F. A., Ciganovich, N. C., Dedecker, R. G., Dirx, T. P., Ellington, S. C., Feltz, W. F., Garcia, R. K., Howell, H. B., Smith, W. L., Short, J. F., and Tobin, D. C.: Atmospheric Emitted Radiance Interferometer. Part I: Instrument Design, *Journal of Atmospheric and Oceanic Technology*, 21, 1763–1776, 2004a.
- Knuteson, R. O., Revercomb, H. E., Best, F. A., Ciganovich, N. C., Dedecker, R. G., Dirx, T. P., Ellington, S. C., Feltz, W. F., Garcia, R. K., Howell, H. B., Smith, W. L., Short, J. F., and Tobin, D. C.: Atmospheric Emitted Radiance Interferometer. Part II: Instrument Performance, *Journal of Atmospheric and Oceanic Technology*, 21, 1777–1789, 2004b.
- Lundquist, J. K., Churchfield, M. J., Lee, S., and Clifton, A.: Quantifying error of lidar and sodar Doppler beam swinging measurements of wind turbine wakes using computational fluid dynamics, *Atmospheric Measurement Techniques*, 8, 907–920, 2015.
- Lundquist, J. K., Murphy, P., and Plunkett, C.: LAPSE-RATE ground-based Doppler lidar datasets from Univ Colorado Boulder, <https://doi.org/10.5281/zenodo.3698228>, <https://doi.org/10.5281/zenodo.3698228>, Funding supported by the US National Science Foundation under grant AGS-1554055., 2020.
- May, R. M., Arms, S. C., Marsh, P., Bruning, E., Leeman, J. R., Goebbert, K., Thielen, J. E., and Bruick, Z. S.: MetPy: A Python Package for Meteorological Data, <https://doi.org/10.5065/D6WW7G29>, <https://github.com/Unidata/MetPy>, 2008 - 2020.
- National Academies of Sciences, E. and Medicine: Thriving on Our Changing Planet: A Decadal Strategy for Earth Observation from Space, The National Academies Press, Washington, DC, 2018.
- National Research Council: Observing Weather and Climate from the Ground Up: A Nationwide Network of Networks, The National Academies Press, Washington, DC, 2009.
- Päschke, E., Leinweber, R., and Lehmann, V.: An assessment of the performance of a 1.5 μm Doppler lidar for operational vertical wind profiling based on a 1-year trial, *Atmospheric Measurement Techniques*, 8, 2251–2266, <https://doi.org/10.5194/amt-8-2251-2015>, 2015.
- Pillar-Little, E. A., Greene, B. R., Lappin, F. M., Bell, T. M., Segales, A. R., de Azevedo, G. B. H., Doyle, W., Kanneganti, S. T., Tripp, D. D., and Chilson, P. B.: Observations of the Thermodynamic and Kinematic State of the Atmospheric Boundary Layer over the San Luis Valley, CO Using Remotely Piloted Aircraft Systems during the LAPSE-RATE Field Campaign, *Earth System Science Data Discussions*, pp. 1–17, <https://doi.org/10.5194/essd-2020-194>, 2020.
- Rhodes, M. E. and Lundquist, J. K.: The Effect of Wind-Turbine Wakes on Summertime US Midwest Atmospheric Wind Profiles as Observed with Ground-Based Doppler Lidar, *Boundary-Layer Meteorology*, 149, 85–103, <https://doi.org/10.1007/s10546-013-9834-x>, 2013.
- Rose, T., Crewell, S., Löhnert, U., and Simmer, C.: A network suitable microwave radiometer for operational monitoring of the cloudy atmosphere, *Atmospheric Research*, 75, 183, 200, <https://doi.org/https://doi.org/10.1002/we.1978>, 2005.
- Straka, J. M., Rasmussen, E. N., and Fredrickson, S. E.: A Mobile Mesonet for Finescale Meteorological Observations, *Journal of Atmospheric and Oceanic Technology*, 13, 921,936, 1996.

- Turner, D. D. and Blumberg, W. G.: Improvements to the AERIoe Thermodynamic Profile Retrieval Algorithm, *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, pp. 1–16, 2018.
- 380
- Turner, D. D. and Löhnert, U.: Information Content and Uncertainties in Thermodynamic Profiles and Liquid Cloud Properties Retrieved from the Ground-Based Atmospheric Emitted Radiance Interferometer (AERI), *Journal of Applied Meteorology and Climatology*, 53, 752–771, 2014.
- Wagner, T. J., Klein, P. M., and Turner, D. D.: A New Generation of Ground-Based Mobile Platforms for Active and Passive Profiling of the
- 385
- Boundary Layer, *Bulletin of the American Meteorological Society*, 100, 137–153, 2019.
- Waugh, S.: National Severe Storms Laboratory Mobile Soundings during Lapse-Rate (CLAMPS trailer), <https://doi.org/10.5281/zenodo.3720444>, <https://doi.org/10.5281/zenodo.3720444>, 2020a.
- Waugh, S.: National Severe Storms Laboratory Mobile Mesonet data files from Lapse-Rate, <https://doi.org/10.5281/zenodo.3738175>, <https://doi.org/10.5281/zenodo.3738175>, 2020b.