

Rainfall erosivity mapping over mainland China based on high density hourly rainfall records

Tianyu Yue¹, Shuiqing Yin¹, Yun Xie¹, Bofu Yu², Baoyuan Liu¹

¹State Key Laboratory of Earth Surface Processes and Resource Ecology, Faculty of Geographical Science, Beijing Normal University, Beijing, 100875, China

²Australian Rivers Institute, School of Engineering and Built Environment, Griffith University, Nathan, Queensland, QLD 4111, Australia

Correspondence to: Shuiqing Yin (yinshuiqing@bnu.edu.cn)

Abstract. Rainfall erosivity ~~quantifies~~represents the effect of rainfall and runoff on the average rate of soil loss. Maps of rainfall erosivity are ~~needed~~necessary for soil erosion assessment ~~using~~based on the Universal Soil Loss Equation (USLE) and its successors. To improve ~~currently available~~ erosivity maps ~~that are currently available~~based on ~~daily rainfall data from 774 stations for mainland China~~, hourly and daily rainfall data from 2,381 stations for the period 1951-2018 were ~~used~~collected to generate the R-factor and ~~the~~ 1-in-10-year EI₃₀ maps ~~for mainland China~~ (available at <https://dx.doi.org/10.12275/bnu.clicia.rainfallerosivity.CN.001>; Yue et al., 2020). Rainfall data at 1-min intervals from 62 stations, of which 18 ~~had a record length >~~with more 29 years ~~of data~~, were used to ~~compute~~calculate the 'true' rainfall erosivity ~~ies~~ against which ~~as the most accurate true values at present to evaluate the accuracy of~~ the new R-factor and 1-in-10-year EI₃₀ maps ~~were assessed to quantify~~show as well as the improvement ~~over the existing~~from the ~~current~~ maps ~~based~~ through cross-validation. The results showed that: (1) ~~old~~current maps underestimated erosivity for most of the south-eastern part of China and overestimated for most of the western region; (2) the ~~new~~ R-factor map generated in this study had a median absolute relative error of 16% for the western region, ~~compared to 162% for old maps~~, and 18% for the rest of China. ~~And~~ the ~~new~~ 1-in-10-year EI₃₀ map had a median absolute relative error of 14% ~~for the central and eastern regions of China,~~ ~~excluding~~except for the western region ~~for which no evaluation was made because of~~due to data limitations, ~~compared to 21% for old maps~~; (3) ~~comparing with the current maps, the improvement in~~ the R-factor map ~~was improved~~ occurred mainly ~~for~~in the western region, ~~and the median absolute relative error was reduced 162% to 16%~~, because of an increase in the number of stations from 87 to 150 and ~~an increased~~ temporal resolution from daily to hourly data. ~~The map of 1 in 10 year EI₃₀ in this study improved the accuracy from 20.6% to 13.5% for the middle and east of China~~; (4) the benefit of increased station density for erosivity mapping is limited ~~when once~~ the station density reached about 1 station per 10,000 km².

1 Introduction

30 Soil erosion has been the major threat to soil health, soil and river ecosystem services in many regions of the world (FAO, 2019b). Soil erosion has on-site impacts, such as the reduction of soil and water, the loss of soil nutrients, the decrease of land quality and food production, as well as off-site impacts, such as excessive sedimentation and water pollution.

Soil erosion models are tools to evaluate the rate of soil loss and can provide policymakers useful information for taking measures in soil and water conservation. The Universal Soil Loss Equation (USLE; Wischmeier and Smith, 1965, 1978) and the Revised USLE (RUSLE; Renard, 1997; USDA-ARS, 2013) have been widely used to estimate soil erosion in at least 109
35 countries over the past 40 years (Alewell et al., 2019). Rainfall erosivity is one of the factors in the USLE and RUSLE to represent the potential ability of rainfall and runoff to affect soil erosion.

In the USLE, erosivity of a rainfall event is identified as the EI value, also denoted as EI₃₀, which is the product of the total storm energy (E) and the maximum 30-min intensity (I₃₀) (Wischmeier, 1959). The erosivity factor (R-factor) in the USLE is the average mean annual total EI values of all erosive events. To recognize interannual rainfall variability, rainfall data of long
40 periods are required (Wischmeier and Smith, 1978). In the original isoerodent map generated by Wischmeier and Smith (1965), stations with rainfall data of at least 22 years were used.

To use the USLE, two additional input parameters are required. One is the seasonal distribution of the R-factor. To compute ~~acquire~~ the soil erodibility factor (K_s-factor) and cover-management factor (C_s-factor), ~~the~~ seasonal distribution of EI (monthly, Wischmeier and Smith, 1965; or half-month percentage of EI, Renard, 1997, Wischmeier and Smith, 1978) is ~~were~~
45 needed. In addition ~~The other is the~~ 1-in-10-year storm EI value (also called “10-yr EI” in Renard (1997)) is needed to compute the support practice factor (P_s-factor) for the contour farming (Renard, et al. 1997).

Kinetic energy generated by raindrops can be calculated based on raindrop disdrometer data and estimated based on breakpoint or hyetograph data via KE-I equations, while I₃₀ is expected to be prepared using breakpoint or hyetograph data with an observed interval ≤ 30 min. In the original study of event rainfall erosivity, the recording-rain-gauge chart was used
50 (Wischmeier and Smith, 1958). However, these data were usually in shortage not only in the length but also in the spatial coverage.

Methods to estimate rainfall erosivity based on more readily available data have been developed widely, such as daily (Angulomartínez and Beguería, 2009; Bagarello and D’Asaro, 1994; Capolongo et al., 2008; Haith and Merrill, 1987; Richardson et al., 1983; Selker et al., 1990; Sheridan et al., 1989; Xie et al., 2016; Yu et al., 1996; Yu and Rosewell, 1996a;
55 Zhang et al., 2002), monthly (Arnoldus, 1977; Ferro et al., 1991; Renard and Freimund, 1994), and annual rainfall (Bonilla and Vidal, 2011; Ferrari et al., 2005; Lee and Heo, 2011; Yu and Rosewell, 1996b). Yin et al. (2015) evaluated a number of empirical models to estimate the R-factor using rainfall data of temporal resolutions from daily to average annual, and showed that the most accurate prediction was based on data at the highest temporal resolution.

Once values of the erosivity factor is obtained with site observations, spatial interpolation methods can be used to estimate
60 rainfall erosivity for sites without rainfall data based on surrounding sites to produce the erosivity maps or isoerodent maps.

Local values of erosivity can be taken from these maps (Wischmeier and Smith, 1978). Rainfall erosivity maps can also be meaningful in various fields such as soil erosion, sediment yield, environment and ecology. In the original version of the USLE, 181 stations with breakpoint data plus 1,700 stations with annual averaged precipitation, 1-in-2-year 1-h rainfall amount and 1-in-2-year 24-h amount were used to generate the erosivity map for the eastern part of the US (Wischmeier and Smith, 1965).

65 In the successor of the USLE (Wischmeier and Smith, 1978), the erosivity map for the western part of the US were generated based on 1-in-2-year, 6-h rainfall amount data (P) using the equation of $R=27.38P^{2.17}$. In Revised USLE (RUSLE), (Renard, (1997) released the erosivity map using the same data as Wischmeier and Smith (1965) for the eastern part, and 60-min rainfall data at 790 stations for the western part in the US. In RUSLE2, monthly erosivity maps based on 15-min data from 3,700 stations were generated (USDA-ARS, 2013). Erosivity maps based on spatial interpolation have been widely produced around

70 the world (Borrelli et al., 2016; Klik et al., 2015; Liu et al., 2013; Lu and Yu, 2002; Oliveira et al., 2012; Panagos et al., 2015, 2016, 2017; Qin et al., 2016; Sadeghi et al., 2017; Yin et al., 2019; Riquetti et al., 2020; Silva et al., 2020).

Recently, Food and Agriculture Organization (FAO) proposed to produce a Global Soil Erosion Map (GSEMap) which encouraged scientists from all over the world to generate their own national level maps making the most of the country knowledge, locally available methods and input data (FAO, 2019a). Rainfall erosivity maps for China were reviewed and

75 relevant information on how they were generated are presented in Table 1, which shows that current R-factor maps for mainland China typically used readily-available daily rainfall data from about 500-800 stations (e.g., Zhang et al, 2003; Liu et al., 2013; Qin et al., 2016; Yin et al., 2019; Liu et al., 2020), which were recorded by simple rain gauges. However, daily rainfall data are not enough to derive sub-daily intensities, which reduced the accuracy of estimated rainfall erosivity (Yin et al., 2015). One-minute data are the finest resolution data measured by automatic tipping bucket rain gauges we can obtain up

80 to now, therefore they are one of the best datasets for deriving precipitation intensity and estimating rainfall erosivity. However, 62 stations with 1-min data collected were inadequate for the spatial interpolation of rainfall erosivity over mainland China. Hourly data was believed to reflect the variation of precipitation intensity better than daily data, which can be used to improve the estimation of at-site rainfall erosivity with precipitation observations. In addition, the increase of station density for the interpolation can better describe the spatial variation of rainfall erosivity and improve the estimation of rainfall erosivity for

85 areas without observations together with the improvement of interpolation models and procedures.

Therefore more than 2,000 stations of hourly and daily data were collected, together with the 62 stations of 1-min data: (a) to develop high-~~quality~~precision maps of the R-factor and 1-in-10-year EI_{30} over the mainland China; (b) to quantify the improvement of the new erosivity maps using precipitation data in a higher temporal resolution and from more weather stations, density and better interpolation techniques ~~method~~ compared to those used to generate the best erosivity ~~current~~ maps that are currently available ~~(- The study of (Yin et al., 2019), was chosen to represent the latest study~~ ~~data had set to estimate generate the R factor and 1 in 10 year EI_{30} and related maps.~~ New R-factor and 1-in-10-year EI_{30} maps were produced in this study may improve the estimation of the soil loss in mainland China. The meaning and rationale of the study is to: (1) present and share high-precision maps of the R-factor and 1-in-10-year EI_{30} over the mainland China with related earth system science communities; (2) provide some insights in the improvement of rainfall erosivity maps for other regions over the world.

90

Table 1: Studies on the mapping of R-factor for or involving China

Study Area	Period	Temporal resolution of precipitation data	No. of stations for the study area	Interpolation method	Reference
China	1956-1984	Multi-year average of annual, maximum daily and maximum hourly	125	Unknown	Wang et al., 1996
	1971-1998	Daily	564	Ordinary Kriging	Zhang et al., 2003
	1960-2009	Daily	590	Ordinary Kriging	Liu et al., 2013
	1951-2010	Daily	756	Universal co-kriging with the aid of the elevation	Qin et al., 2016
	1961-2016	Daily	774	Ordinary Kriging	Yin et al., 2019*
Global	1989-2010	Annual average	Gridded (0.5°×0.5°)	—	Naipal et al., 2015
	1998-2012 (in China)	Hourly and sub-hourly	3,625 (387 in China)	Gaussian Process Regression	Panagos et al., 2017
	1980-2017	Daily	30,000+ (~800 in China)	Thin-plate spline smoothing	Liu et al., 2020

*Map of event 1-in-10-year EI₃₀ in China was also generated.

2 Data and methods

2.1 Data

2.1.1 Rainfall data at stations

Rainfall data at three temporal resolutions were obtained at the daily, hourly and 1-min intervals. ~~hourly, daily and 1-min.~~ Daily rainfall data from 2,381 meteorological stations over mainland China (Fig.1) over the period of 1951-2014 was measured with simple rain gauges. The data were collected and quality controlled by the National Meteorological Information Center of China Meteorological Administration. ~~Daily~~The data were collected all year around at these stations. An effective year of the ~~daily data was defined as a year when there was no missing data for one or more months in the year, and a missing month was defined as a month when there were more than 6 missing days in the month. The missing records in the effective years were input as zero. Based on this definition, and the number of effective years ranged from 18 to 54 years. Most of the stations (88%) have data of more than 50 years. An effective year of the daily data was defined as there is no missing month in the year, and a missing month was defined as there are more than 6 missing days in the month. The missing records in the effective years were input as zero value.~~ Hourly data were used to generate maps of R factor and 1 in 10 year EI₃₀. The evaluation of the effect of station density and interpolation methods on generated maps was based on the erosivity calculated with hourly data. Daily rainfall data were used to adjust the erosivity estimated by hourly data when its record length was short. Data at 1 min interval were used in two ways. One was to calculate the R factor as true values to evaluate the effect of temporal resolution on erosivity estimation along in comparison to the hourly and the daily rainfall data. The other is to develop an exponential model for

115 **estimating R factor with the mean annual precipitation. The coefficient of the exponential model was used for adjusting the R-**
factor values based on hourly data with short lengths.

Rainfall data at 1-hour intervals Hourly rainfall data from the same 2,381 meteorological stations with daily data over mainland
China (Fig. 1) were collected by siphon rain gauges or tipping bucket rain gauges and also quality controlled by the National
120 Meteorological Information Center of China Meteorological Administration. The period of record for hourly the data was from
1951 to 2018. The start year of the data varied because data collection commenced in different years. Observation was suspended
in the snowy season, which resulted in some missing months in winter for station in the northern part of China. There were 932
(39%) stations with data for the whole year, 550 (23%) stations from April to October and 421 (18%) stations from May to
September.

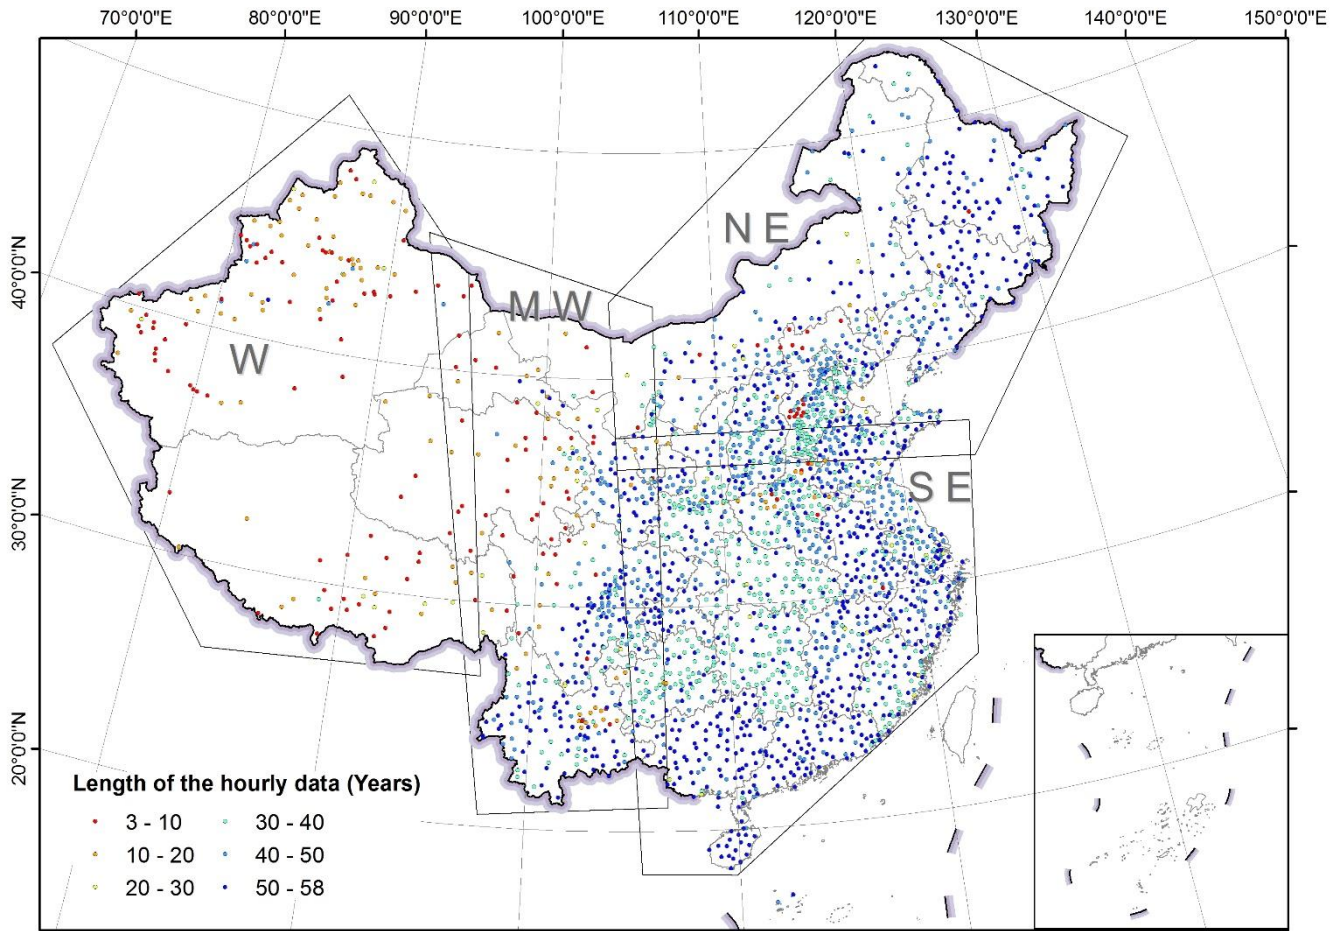


Figure 1: Spatial distribution of stations with daily and hourly rainfall data and the length of the hourly data. Western, Mid-western, Northeastern and Southeastern regions were abbreviated as W, MW, NE and SE, respectively.

The missing data were handled according to the following criteria: (a) a day with more than 4 missing hours was defined as a missing day; (b) a month with more than 6 missing days was defined as a missing month; (c) a year with any missing month in its wet-season was defined as a missing year. The wet-season for stations north of 32 °N was from May to September, and for those south of 32 °N was from April to October. Missing years were removed and missing hours in the remaining effective years were input in two categories: (a) the missing period is followed by a non-zero record, which recorded the accumulated rainfall amount in the missing period based on data notes; (b) the missing period is followed by zero. In the first case, each missing hour and the following non-zero hour were assigned the averagemean value of the non-zero record in these hours. For the second case, the missing hours were input as zero value.

~~The daily data were obtained for the same 2,381 stations over the period of 1951–2014 (Fig. 1), and precipitation was measured with simple rain gauges. The data were also collected and quality controlled by the National Meteorological Information Center of China Meteorological Administration. Daily data were collected all year around and the number of effective years ranged from 18 to 54 years. Most of the stations (88%) have data of more than 50 years. An effective year of the daily data was defined as there is no missing month in the year, and a missing month was defined as there are more than 6 missing days in the month. The missing records in the effective years were input as zero value.~~

Data at 1-min intervals were collected from 62 stations in mainland China (Fig. 2; and were used in Yue et al., 2020). Data from station No. 1–18 have effective years of 29–40 and cover the period of 1961(1971)–2000. Data from stations No. 19–62 have effective years of 2–12 and cover the period of 2005–2016. The missing data in the effective years were assumed to be zero.

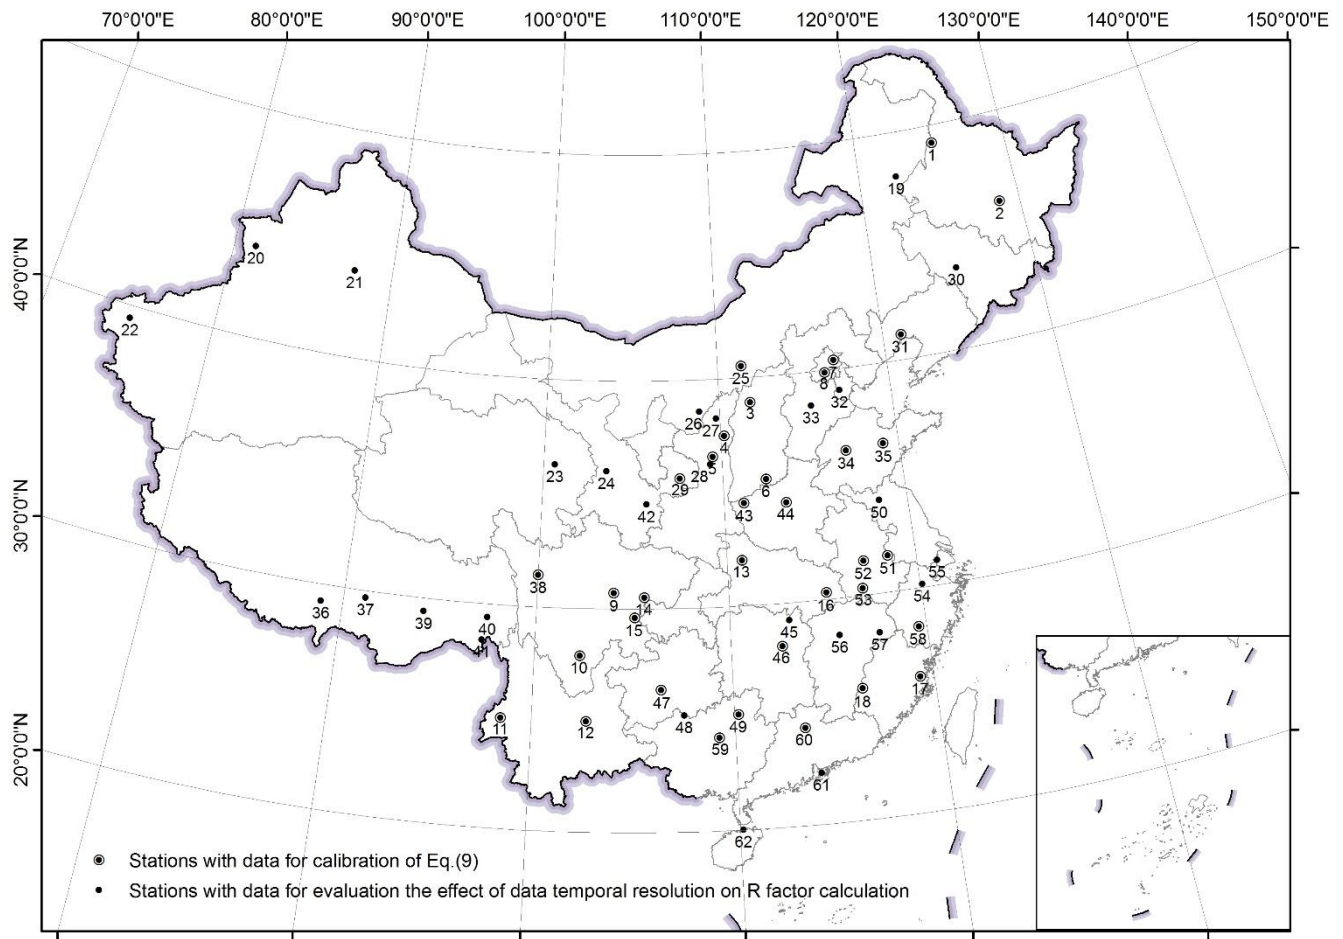


Figure 2: Spatial distribution of the stations with 1-min rainfall data

2.1.2 Published r-Rainfall erosivity maps for over China

The existing current rainfall erosivity maps were collected and compared with the maps generated in this study. The current national R-factor map and 1-in-10-year EI_{30} map are with the latest data from the previous study used based on daily rainfall data only over the period from 1961 to 2016 from 774 stations in over China (Yin et al., 2019). Another The R-factor map from Panagos et al. (2017) shown in the discussion section part of this study (Fig. 12) was based on from the global rainfall erosivity dataset published by Joint Research Centre - European Soil Data Centre (ESDAC; Panagos et al., 2017).

2.2 Calculation of rainfall erosivity using 1-min, hourly and daily data

One-minute and hourly data were first separated into rainfall-storm events. A continuous period of ≥ 6 hours of no-precipitation was used to regarded as the separation of two rainfall storms (Wischmeier and Smith, 1978). Storms with the amount of ≥ 12 mm were defined as erosive events (Xie et al., 2000), and were used to calculate the rainfall erosivity factors.

The R-factor was calculated using Eq. (1-3; USDA-ARS, 2013):

$$R = \frac{1}{N} \sum_{i=1}^N \sum_{j=1}^m (EI_{30})_{ij} \quad (1)$$

$$E = \sum_{r=1}^l (e_r \cdot P_r) \quad (2)$$

$$e_r = 0.29[1 - 0.72 \exp(-0.082i_r)] \quad (3)$$

where EI_{30} (event rainfall erosivity, $\text{MJ mm ha}^{-1} \text{h}^{-1}$) was the product of the total storm energy E (MJ ha^{-1}) and the maximum 30-min intensity I_{30} (mm h^{-1}); $i=1, 2, \dots, N$, where means there are N is the number of effective years, and $j=1, 2, \dots, m$ means there are m erosive rainfall storm events in the i^{th} year. For each storm event, the whole rainfall process was divided into l time intervals periods depending on according to the temporal resolution of rainfall the data. The total storm energy E was the sum of the energy for each time interval period r , which was the unit energy e_r (energy per mm of rainfall, $\text{MJ ha}^{-1} \text{mm}^{-1}$) multiplied by the rainfall amount P_r (mm) for each time interval. And i_r was the intensity (mm h^{-1}) of the r^{th} interval period. I_{30} (mm h^{-1}) was the maximum intensity over 30 consecutive minutes for each storm event. of the continuous 30-min rainfall intensity for 1-min data. But For hourly data whose minimum interval of the records was 1 hour, the I_{30} was assumed to be the same as replaced by the maximum 1-hour intensity.

The 1-in-10-year EI_{30} with 1-min or hourly data was obtained by fitting calibrating the generalized extreme value (GEV) distribution (GEV), and the parameters of the model were estimated using L-moments method (Hosking, 1990). The GEV distribution is a family of probability distributions of Gumbel, Fréchet and Weibull, and can be denoted as $G(\mu, \sigma, \xi)$ with parameters μ (location), σ (scale), and ξ (shape) (Coles, 2001):

$$G(x) = \exp \left\{ - \left[1 + \xi \left(\frac{x-\mu}{\sigma} \right) \right]^{-1/\xi} \right\} \{x: 1 + \xi(x-\mu)/\sigma > 0\} \quad (4)$$

where x was the annual maximum storm EI_{30} ($\text{MJ mm ha}^{-1} \text{h}^{-1}$), $-\infty < \mu < \infty$, $\sigma > 0$ and $-\infty < \xi < \infty$. The extreme quantiles of the annual maximum EI_{30} (X_p) can be were then obtained by inverting Eq. (4):

$$X_p = \begin{cases} \mu - \frac{\sigma}{\xi} [1 - \{-\log(1-p)\}^{-\xi}], & \text{for } \xi \neq 0 \\ \mu - \sigma \log\{-\log(1-p)\}, & \text{for } \xi = 0 \end{cases} \quad (5)$$

where $G(X_p) = 1 - p$. The 1-in-10-year EI_{30} , was the value of X_p when p was 1/10.

Parameter values for the GEV distribution were estimated using the L-moments method (Hosking, 1990).

Since hourly data aggregation of 1-min data and temporal variation in rainfall intensity is reduced, erosivity factor values computed with hourly data would be underestimated. Therefore, the R-factor and 1-in-10-year EI_{30} values computed with hourly data need to be adjusted by multiplying conversion factors of 1.871 and 1.489 (SI units), which were fitted by 1-min rainfall data from 62 stations over mainland China (Yue et al., 2020).

Erosivity factors from daily data were also obtained as described in Section 2.3. The R-factor using daily data was the mean annual total daily erosivity. Daily rainfall erosivity was obtained by the following equation developed by Xie et al. (2016):

$$R_{\text{daily}} = \alpha P_{\text{daily}}^{1.7265} \quad (6)$$

where P_{daily} was the daily precipitation ($\geq 10\text{mm}$), parameter α was 0.3937 in the warm season (May to September), and 0.3101 in the cold season (October to April).

190 The 1-in-10-year EI_{30} using daily data was the 1-in-10-year daily erosivity adjusted with a conversion factor of 1.17 based on 1-min data from 18 stations in China (Yin et al., 2019). And the 1-in-10-year daily erosivity was obtained by calibrating the GEV distribution parameters as Eq. (4-5) and the x in the functions was replaced by the annual maximum daily erosivity.

2.3.2 Rainfall erosivity for individual the stations

195 Hourly data from 2,381 stations were used to produce the R-factor and the 1-in-10-year EI_{30} maps. Hourly rainfall data were first separated into rainfall storms. A continuous period of ≥ 6 hours of non precipitation was regarded as the separation of two rainfall storms (Wischmeier and Smith, 1978). Storms with the amount of ≥ 12 mm were defined as erosive events (Xie et al., 2000), and were used to calculate the rainfall erosivity factors.

Event rainfall erosivity EI_{30} ($\text{MJ mm ha}^{-1}\text{h}^{-1}$) was the product of the total storm energy E (MJ ha^{-1}) and the maximum 30-min intensity I_{30} (mm h^{-1}). The maximum 1-hour intensity H_{60} (mm h^{-1}) was obtained in this study:

$$200 \quad EH_{60} = E \cdot H_{60}, \quad (1)$$

$$E = \sum_{r=1}^l (e_r \cdot P_r), \quad (2)$$

$$e_r = 0.29[1 - 0.72 \exp(-0.082i_r)], \quad (3)$$

where $r=1, 2, \dots, l$ means that a storm could be divided into l periods or a storm lasted for l hours, e_r the unit energy (energy per mm of rainfall, $\text{MJ ha}^{-1}\text{mm}^{-1}$), P_r the amount (mm), and i_r the intensity (mm h^{-1}) of the r^{th} hour (USDA ARS, 2013).

205 The R-factor (R_{hour} , $\text{MJ mm ha}^{-1}\text{h}^{-1}\text{a}^{-1}$) was the mean annual rainfall erosivity and was obtained by multiplying the R factor from hourly data (R_h) and the conversion factor of 1.871 (Yue et al., 2020):

$$R_h = \frac{1}{N} \sum_{i=1}^N \sum_{j=1}^m (EH_{60})_{ij}, \quad (4)$$

$$R_{hour} = 1.871 \cdot R_h, \quad (5)$$

210 where $i=1, 2, \dots, N$ means there are N effective years, and $j=1, 2, \dots, m$ means there are m erosive rainfall storms in the i^{th} year.

The 1 in 10 year EI_{30} was obtained by calibrating the generalized extreme value (GEV) distribution, and the parameters of the model were estimated using L-moments method (Hosking, 1990). The GEV distribution is a family of probability distributions of Gumbel, Fréchet and Weibull, and can be denoted as $G(\mu, \sigma, \xi)$ with parameters μ (location), σ (scale), and ξ (shape) (Coles, 2001):

$$215 \quad G(x) = \exp\left\{-\left[1 + \xi\left(\frac{x-\mu}{\sigma}\right)\right]^{-1/\xi}\right\} \{x: 1 + \xi(x-\mu)/\sigma > 0\}, \quad (6)$$

where x was the annual maximum storm EI_{30} ($\text{MJ mm ha}^{-1}\text{h}^{-1}$), $-\infty < \mu < \infty$, $\sigma > 0$ and $-\infty < \xi < \infty$. The extreme quantiles of the annual maximum EI_{30} (X_p) were then obtained by inverting Eq. (6):

$$X_p = \begin{cases} \mu - \frac{\sigma}{\xi} [1 - \{-\log(1-p)\}^{-\xi}], & \text{for } \xi \neq 0 \\ \mu - \sigma \log\{-\log(1-p)\}, & \text{for } \xi = 0 \end{cases}, \quad (7)$$

where $G(X_p) = 1 - p$. The 1 in 10-year EI_{30} was the value of X_p when p was 1/10. The computed 1 in 10-year EI_{30} using hourly rainfall data was then multiplied by the conversion factor of 1.489 (Yue et al., 2020).

Due to the annual variability of rainfall erosivity, stations with less than 22 effective years should be excluded (Wischmeier and Smith, 1978). However, 133 out of 150 stations in western China have limited effective years, with 133 out of 150 stations having less than 22 effective years (Fig. 1). Once these stations with less than 22 effective years are removed, the western stations would be too sparse, which would reduce the interpolation accuracy of the rainfall erosivity map. To fill the gap due to the insufficient number of years, daily rainfall data observed by simple rainfall gauges with (usually have longer periods of record) of the same stations were used to adjust erosivity values based on hourly data at the same station.

When the effective years of hourly data were not less than those of daily data for 871 out of 2,381 station, no adjustment of the R-factor was made. The calculation of the R-factor considered the following two cases: (1) The effective years of hourly data were no less than those of daily data (871 out of 2,381 stations); (2) For the remaining 1,510 stations, the effective years of hourly data were less than those of daily data (1,510 out of 2,381 stations). In the first case, the R-factor was calculated directly by hourly data with Eq. (1-5). In the second case, the R-factor was firstly calculated by hourly data with Eq. (1-5) from hourly data was; then adjusted by a relationship between the mean annual rainfall and the R-factor computed with calculated by hourly and daily data as follows (Zhu and Yu, 2015):

$$R_{h_adj} = R_{hour} \left(\frac{P_d}{P_h} \right)^{1.481}, \quad (87)$$

where R_{h_adj} was the adjusted R-factor, R_{hour} was the estimated R-factor using hourly rainfall data with Eq. (1-5), P_d was the mean annual precipitation of longer period (period of the daily data), and P_h was the mean annual precipitation of shorter period (period of the hourly data).

The exponent value of 1.481 was estimated based on a power relationship between the mean annual precipitation and the R-factor, and the latter was determined using 1-min and daily rainfall data of 35 stations in China (Fig. 2). All the daily and 1-min data shared common periods of record of more than 10 years.

$$R_{min} = 0.156 \cdot P_m^{1.481}, \quad (98)$$

where R_{min} was the R-factor ($MJ \text{ mm ha}^{-1} \text{ h}^{-1} \text{ a}^{-1}$), and P_m was the mean annual precipitation (mm) using 1-min data. The coefficient of determination (R^2) was 0.776 for Eq. 9(8).

R-factor based on 1-min rainfall data was calculated using Eq. (10-11):

$$R_{min} = \frac{1}{N} \sum_{i=1}^N \sum_{j=1}^m (EI_{30})_{ij}, \quad (10)$$

$$EI_{30} = E \cdot I_{30}, \quad (11)$$

where I_{30} was the maximum continuous 30-min intensity. Total storm energy (E) was obtained using methods from RUSLE2 as Eq. (2-3) with a time increment of 1 min.

Calculation of the 1-in-10-year EI_{30} for the stations was adjusted in a similar fashion. No adjustment is needed also considered two cases: (1) for 89% of the stations where the effective years of the hourly data were not less than 22 years (89% of the stations), and the 1 in 10-year EI_{30} was estimated by hourly data with Eqs. (6-7); (2) For the remaining 11% of the station,

The effective years of the hourly data were less than 22 years, but those of the daily data were no less than 22 years (11%), the 1-in-10-year EI₃₀ was estimated ~~with~~by daily data as follows. Firstly, daily rainfall erosivity was obtained by the following equation developed by Xie et al. (2016):

$$R_{daily} = \alpha P_{daily}^{1.7265}, \quad (12)$$

where P_{daily} was the daily precipitation (≥ 10 mm), parameter α was 0.3937 in the warm season (May to September), and 0.3101 in the cold season (October to April). Secondly, the 1 in 10 year daily erosivity was obtained by calibrating the GEV distribution parameters as Eq. (6-7) and the x in the functions was replaced by the annual maximum daily erosivity. Finally, the 1 in 10 year daily erosivity from daily data was multiplied by a conversion factor of 1.17 to correct the 1 in 10 year daily erosivity to approximate the actual event 1 in 10 year EI₃₀ from 1 min data (Yin et al., 2019).

The record length was 22 to 29 years for 16 (0.7%) stations, 30 to 39 years for 44 (1.8%) stations, 40 to 49 years for 216 stations (9.1%) stations, more than 50 years for 2,105 (88.4%) stations when these adjustments were made.

2.4.3 Spatial interpolation and cross validation

~~Since there is a good correlation between erosivity factor and the mean annual precipitation,~~ The erosivity maps were obtained using the method of Universal Kriging with the annual rainfall as a co-variable. The mean annual average rainfall was computed using daily rainfall data ~~of the stations~~ and was firstly interpolated using Ordinary Kriging, and interpolated mean annual rainfall was then used ~~the results were used to interpolate the R-factor value using to conduct~~ Universal Kriging. Both the mean annual precipitation and the erosivity factors were interpolated first for each of the four regions separately (Fig. 1; Li et al., 2014), and then combined to obtain annual precipitation and erosivity maps over China. Buffer areas were used to avoid ~~the discontinuity along in-region the~~ boundary areas (following Li et al. (2014)).

To evaluate the efficiency of interpolation models, a leave-one-out cross-validation method was applied to each region. Symmetric mean absolute percentage error (sMAPE) and Nash-Sutcliffe ~~model efficiency~~ coefficient of efficiency (NSE) were used for the assessment:

$$sMAPE = \frac{1}{n} \sum_{i=1}^n \left| \frac{F_i - A_i}{(F_i + A_i)/2} \right| \times 100\%, \quad (139)$$

$$NSE = 1 - \frac{\sum_{i=1}^n (F_i - A_i)^2}{\sum_{i=1}^n (A_i - \bar{A})^2}, \quad (1410)$$

where n was the number of stations, F_i was the estimated/predicted value through Universal Kriging for at the position of the i^{th} station using data from surrounding stations, A_i was the observed value at the i^{th} station.

(check if we need A_i bar in equation 10)

280 2.54 The evaluation of the improvement on the accuracy assessment of the erosivity maps

~~Current erosivity mapping at the national scale in mainland China usually uses daily rainfall data from about 500-800 stations. The R-factor and 1-in-10-year EI₃₀ maps of Yin et al. (2019) were taken as references to evaluate the improvement in the accuracy of the erosivity maps generated in this study. To compare-evaluate the accuracy of the new erosivity maps-of this study and those of Yin et al. (2019), true-erosivity factors using 1-min data were assumed as the “true” values to calculate~~
285 ~~relative errors since they are most accurate. For the R-factor, values using 1-min data and Eq. (10-11) for 62 stations were used to evaluate the improvement of R-factor. For 1-in-10-year EI₃₀, 1-min data for 18 stations (No.1-18; Fig. 2) of the 62 stations with more than 22 years were used. The cross-validation results for-values- these stations from the interpolation of the two erosivity maps were compared with-to the true-values calculated-withfrom 1-min data to calculate relative errors-for these stations. SinceConsidering that the absolute-values-of relative error tends to be-would-be high for stations with smaller R-factor~~
290 ~~values, the overall relative error for erosivity-of-the-entire maps was represented-withexpressed-as the median-of-the absolute value of the relative error for all the stations.~~

2.6 The evaluation of the improvement of the maps comparing with the current maps


~~Current erosivity mapping at the national scale in mainland China usually uses daily rainfall data from about 500-800 stations. The R-factor and 1-in-10-year EI₃₀ maps of Yin et al. (2019) were taken as references to evaluate the improvement in the accuracy of the erosivity maps generated in this study. Their relative errors were also obtained with 1-min data as described~~
295 ~~above.~~

~~NewThe~~ erosivity maps in this study followed-used a different-procedure that is different from-as-in Yin et al. (2019) mainly in three areas: (1) temporal resolution (hourly vs. daily); (2) number of stations (2,381 stations vs. 744 stations); (3) interpolation method (Universal Kriging vs. Ordinary Kriging).

300 To evaluate the effect of the temporal resolution on ~~the-calculated~~ R-factor and 1-in-10-year EI₃₀, ~~data from the same set of stations were used, and the only difference was that in temporal resolution. Hourly and daily rainfall data with the same period as the 1-min data at the 62 stations were used to calculate-~~ R-factors ~~and 1-in-10-year EI₃₀ from hourly data were respectively based on Eq. (1-5), those from daily rainfall data were based on Eq. (12), and those from 1-min data were based on Eq. (10-11). The 1 in 10 year EI₃₀ were all calculated by calibrating GEV distribution using Eq. (6-7).~~ Erosivity factors
305 from 1-min data ~~can-beare~~ regarded as the ~~true-most accurate~~ values. The relative errors ~~of erosivity factors from daily and hourly data were~~was computed for evaluating accuracy.

To evaluate the effect of station density, ~~maps were compared with the only difference in the number of stations. Hourly data from 744 stations (used-the same set of stations in~~ Yin et al. (2019)) and from 2,381 stations (used in this study) were used to generate two separate erosivity maps. R-factor and 1-in-10-year EI₃₀ values were compared using leave-one-out cross
310 validation method region by region. The sMAPE was calculated for accuracy assessment.

To evaluate the effect of interpolation methods, maps were compared with the only difference in interpolation methods. Ordinary Kriging and Universal Kriging with the mean annual rainfall as the co-variable were applied for the R-factor and 1-in-10-year EI₃₀ computed using hourly data from 2,381 stations. Both interpolation methods were applied to each of four different regions as shown in Fig. 1 and leave-one-out cross validation results were compared. The sMAPE was calculated to
315 evaluate the accuracy of interpolated values.
The framework of this study is shown in Fig. 3.

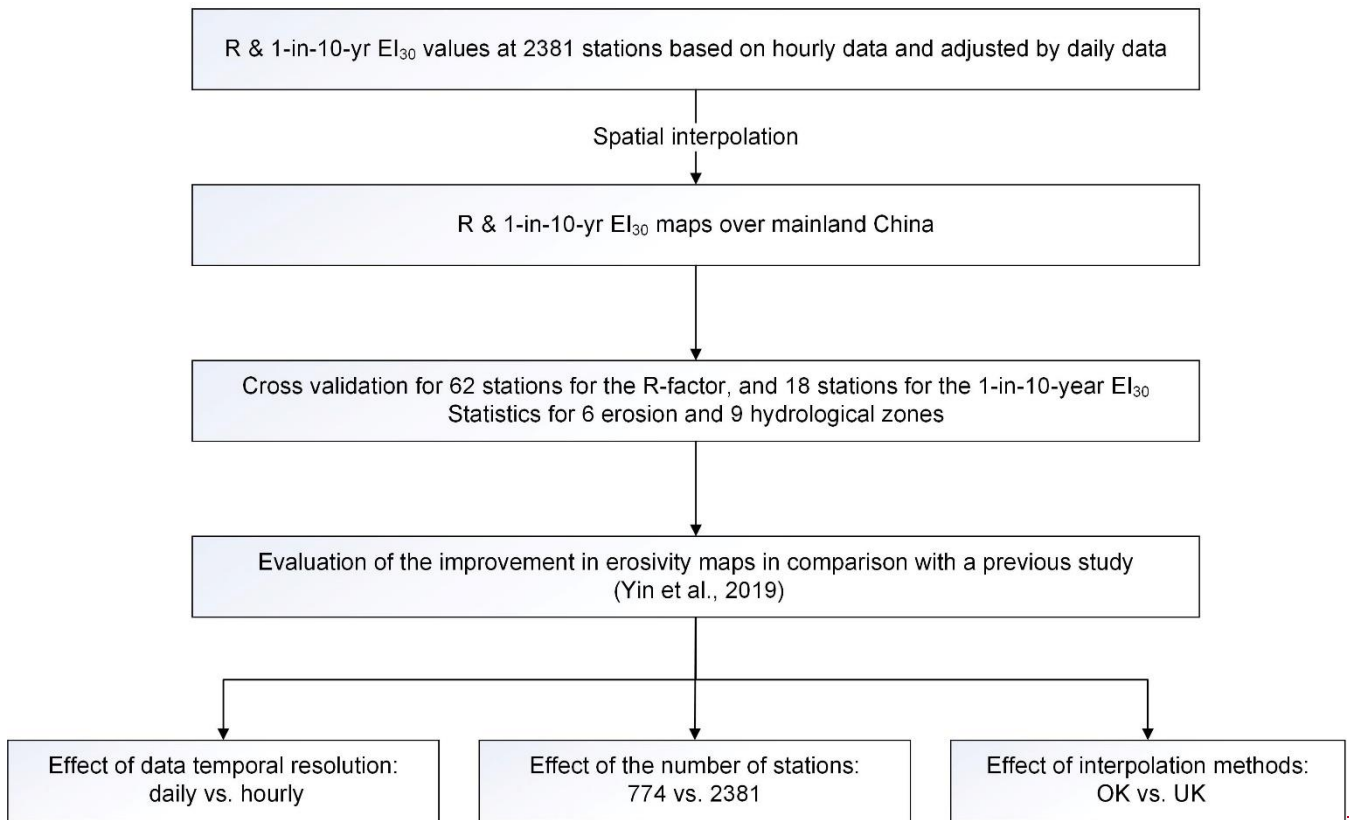

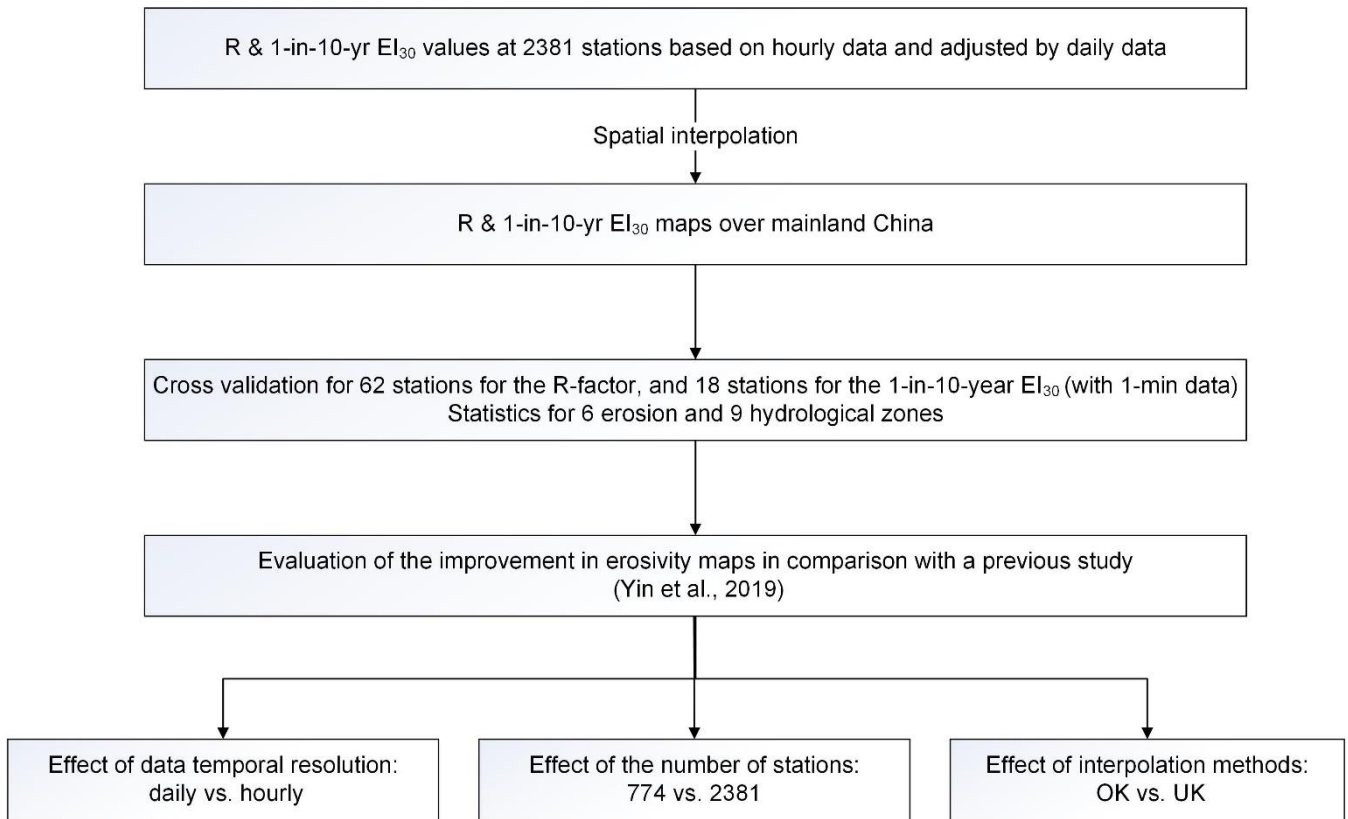


Figure 33: Framework of this study

320

3 Results





3.1 Accuracy evaluation on erosivity maps


325 ~~Taking~~With erosivity maps (~~R-factor and 1-in-10-year EI₃₀~~) generated by ~~from~~ Yin et al. (2019) as references, this study shows ~~a certain~~ improvement in ~~the~~ accuracy ~~of estimated R-factor and 1-in-10-year EI₃₀~~ (Fig. 4; Table 2). ~~The spatial distribution of~~ ~~the absolute relative errors of the maps from this study is shown in Fig.6.~~

~~For~~†The R-factor, ~~the~~ values in the map of Yin et al. (2019) were underestimated where the R-factor was relatively high, and overestimated where the R-factor was relatively low. The improvement was particularly noticeable for western China ($R < 1,000 \text{ MJ mm ha}^{-1} \text{ h}^{-1} \text{ a}^{-1}$) and the southeastern coastal region ($R > 10,000 \text{ MJ mm ha}^{-1} \text{ h}^{-1} \text{ a}^{-1}$).


330 Relative errors ~~of erosivity factors at the stations of~~ ~~from~~ the two maps ~~at the 62 stations~~ are shown in Fig. 5 (a) and (b). Those with the relative error of more than 100% were all in the Western (W) or Mid-western (MW) region. ~~There was no obvious difference between the median values (also the average values) of~~†The absolute relative error- for the R-factor in this study and Yin et al. (2019) ~~was no more than 19% for~~† Mid-western (MW), Northeastern (NE) and Southeastern (SE) regions

(Table 2). However, there are some extremely high relative error values in Yin's map which were found to be located in the MW region (Fig. 5(a)). The median values of the absolute relative error in the R-factor in Western (W) region were 16.2% and 161.6%, respectively for this study and Yin et al. (2019), ~~which indicated an improvement of 145.4%~~. For 1-in-10-year EI₃₀, the median values of the absolute relative error were 13.5% for this study and 20.6% for Yin et al. (2019), indicating a smaller improvement ~~of 7.1%~~ in the mid-western and eastern regions compared to the improved in the R-factor values (Table 2, (Fig. 5(b)). The relative errors of the 1-in-10-year EI₃₀ in this study concentrated in the range of -10% ~ +10%, whereas those in Yin et al. (2019) concentrated in the range of -25% ~ -15% and +15% ~ +25% (Fig. 5(c)). The western region was excluded ~~in the evaluation of the 1-in-10-year EI₃₀ map because the record length of the didn't cover the western region where there were no 1-min data was too short to estimate 1-in-10-year event erosivity with enough effective years to estimate the return level. The spatial distribution of the absolute relative errors of the maps from this study is shown in Fig. 6.~~

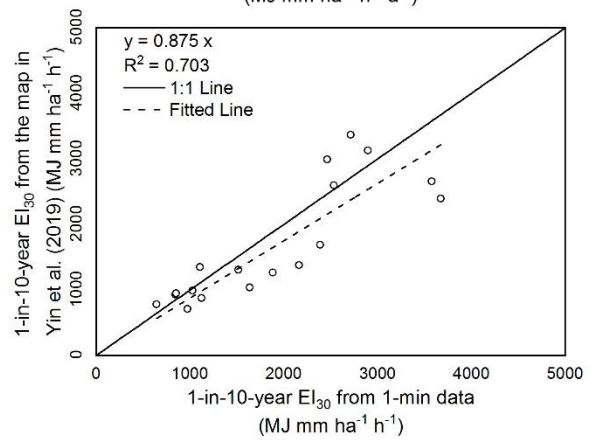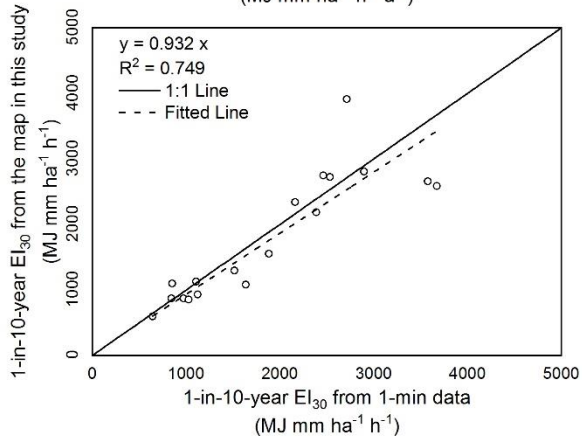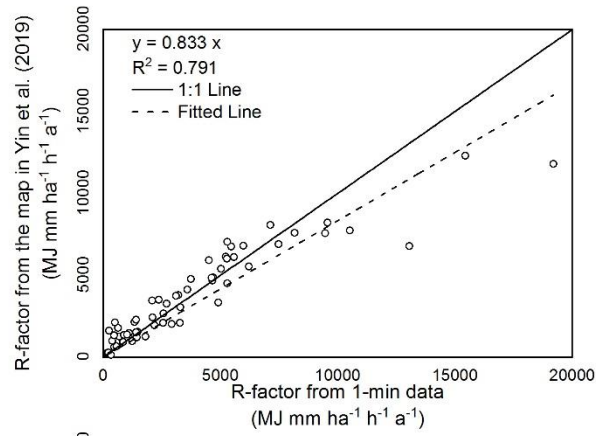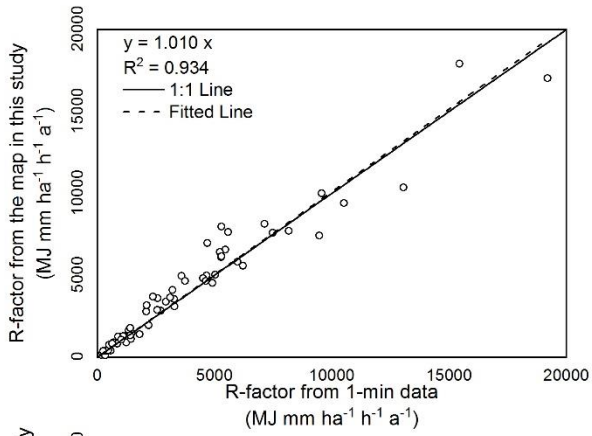

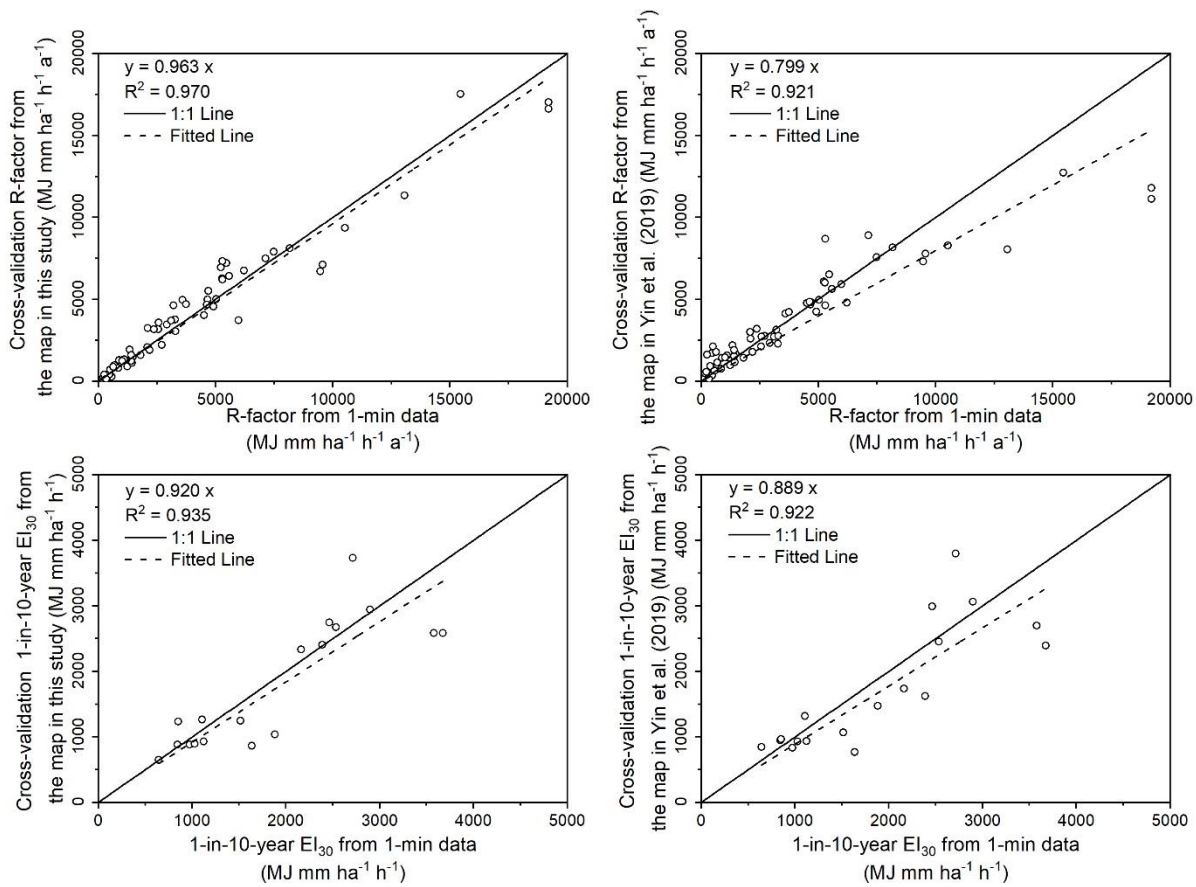

345 **Figure 4: Comparison of the R-factors and 1-in-10-year EI₃₀ extracted of the cross-validation values at the station of from the maps and the true-values from 1-min data.** The graphs on the left were the evaluation of the maps generated in this study, and those on the right were the evaluation of the maps generated by Yin et al. (2019)

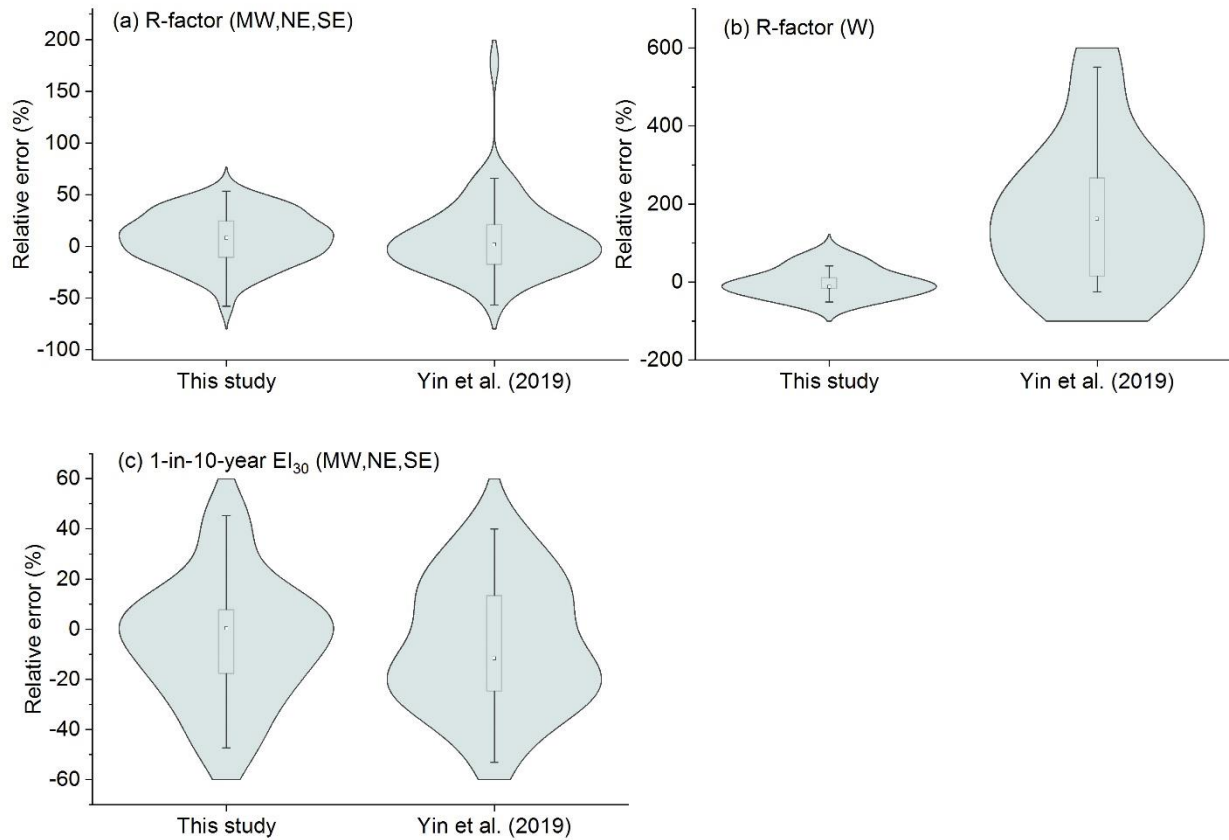

350 **Figure 5: The relative errors of the R-factor (a for region MW, NE, SE; b for region W) and 1-in-10-year EI₃₀ (c for region ME, NE, SE) maps**

Table 2: The statistical characteristics of the absolute relative errors of the erosivity factors from the maps

	R-factor				1-in-10-year EI ₃₀	
	MW, NE, SE		W		MW, NE, SE	
	This study	Yin et al. (2019)	This study	Yin et al. (2019)	This study	Yin et al. (2019)
25th percentile	9.3%	8.8%	11.4%	23.1%	5.1%	13.0%
Median	17.8%	18.1%	16.2%	161.6%	13.5%	20.6%
75th percentile	32.8%	34.4%	45.9%	292.3%	31.6%	31.3%
Mean	21.0%	24.7%	28.7%	184.8%	18.6%	22.3%

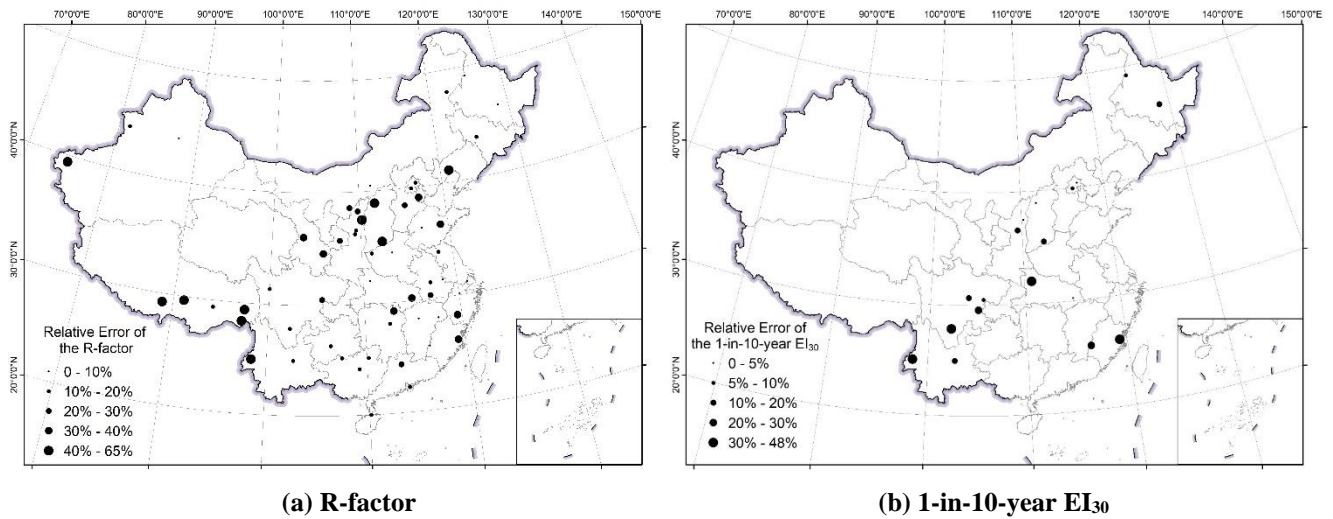



Figure 66: Spatial distribution of the absolute relative errors in the map of R-factor for 62 stations (a) and in the map of 1-in-10-year EI₃₀ for 18 stations (b) with 1-min observation data.

3.2 Erosivity maps and ~~improvement over the differences comparing with the previous studies~~

360 The R-factor generally decreased from the southeastern part to the northwestern part of China (Fig. 7a), ranging from 0 to 25,300 MJ mm ha⁻¹ h⁻¹ a⁻¹. The map of 1-in-10-year EI₃₀ shows a similar spatial pattern ~~as with~~ that of the R-factor (Fig. 7b), ranging from 0 to 11,246 MJ mm ha⁻¹ h⁻¹. Zero R-factor value is found at Turpan, Xinjiang Uygur Autonomous Region Province, where the mean annual rainfall is only 7.8 mm. The maximum of the R-factor (more than 20,000 MJ mm ha⁻¹ h⁻¹ a⁻¹) is ~~found located~~ in the southern part of the Guangxi and Guangdong provinces, along the South China Sea, where the mean

365 annual rainfall is more than 2,500 mm.

In addition to the overall trend, some local scale characteristics could be identified ~~in the maps~~. ~~For Taking~~ the R-factor map ~~as an example~~, in the western region, the wetter region in northwestern China was located in the west of Dzungaria Basin and along the Tianshan Mountain, which ~~has been could be~~ captured on the map. Some statistical characteristics of the new maps of the erosivity factors are shown in Table 3 based ~~for on~~ soil erosion and hydrological zoning ~~sing schemes in China~~ (Fig. 8).

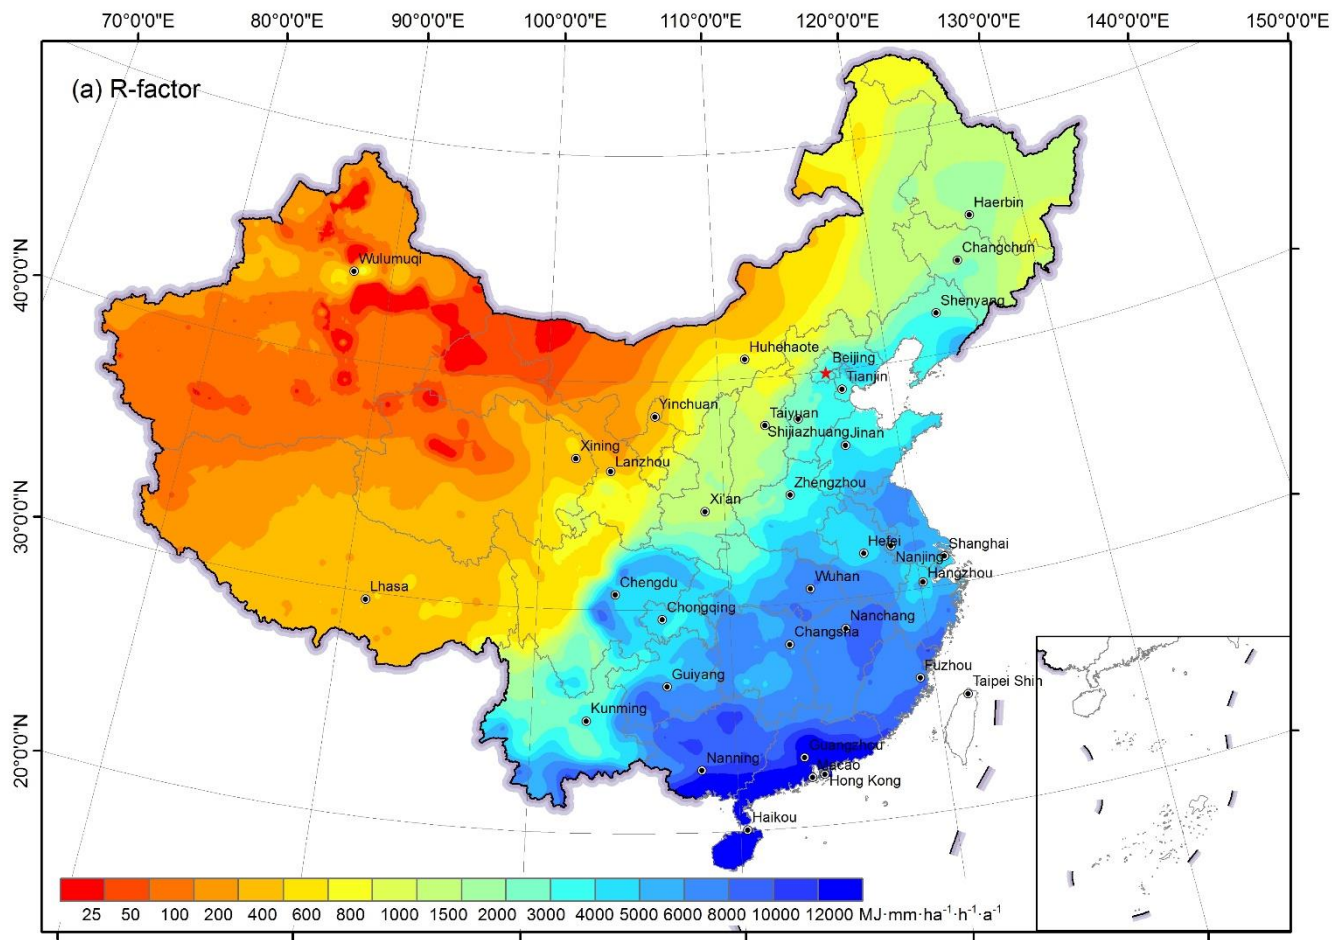

370

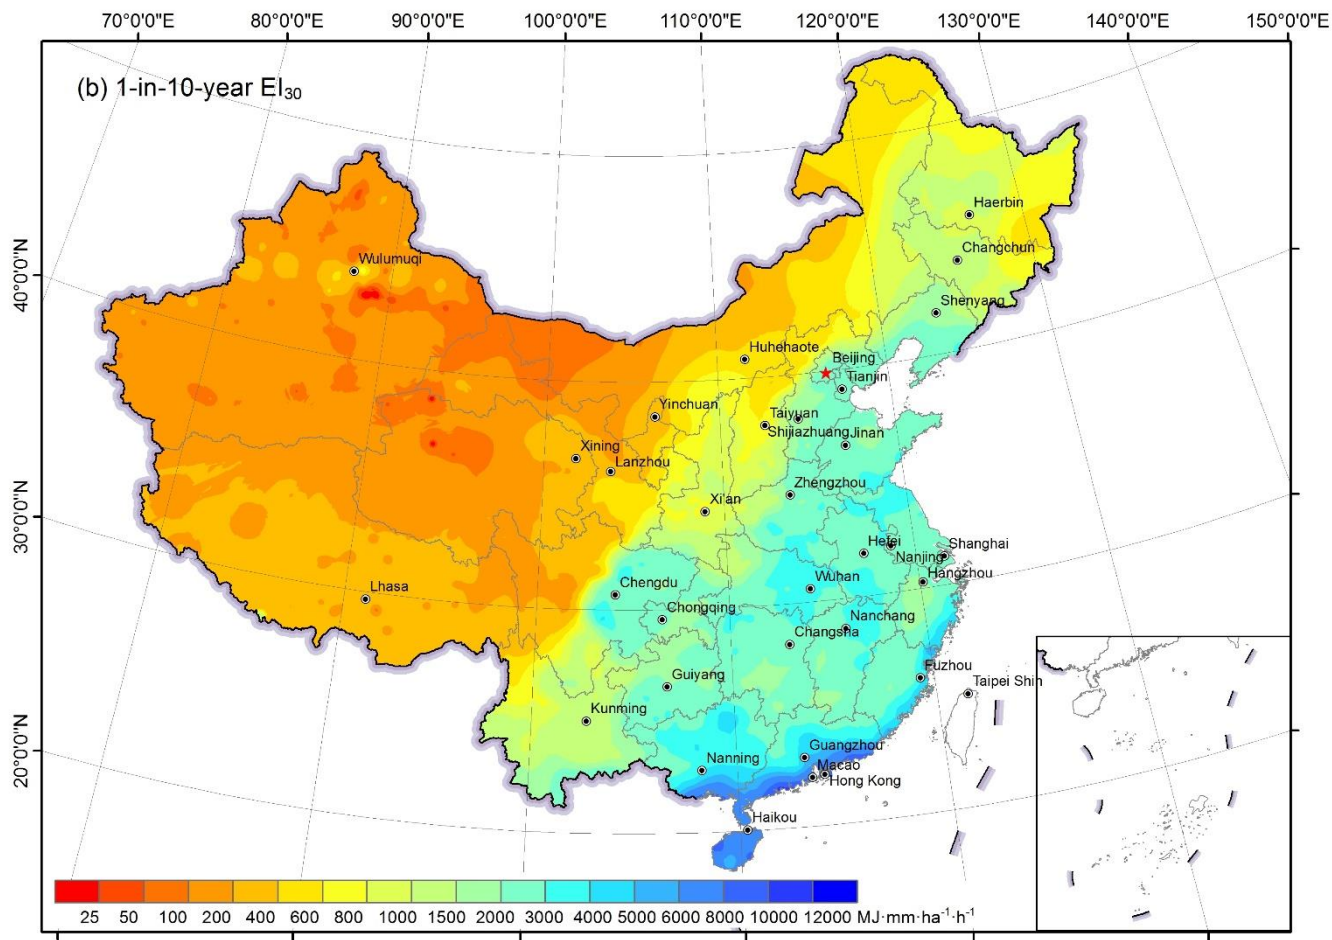


Figure 7: R-factor(a) and 1-in-10-year EI_{30} (b) over mainland China based on hourly data from 2381 stations



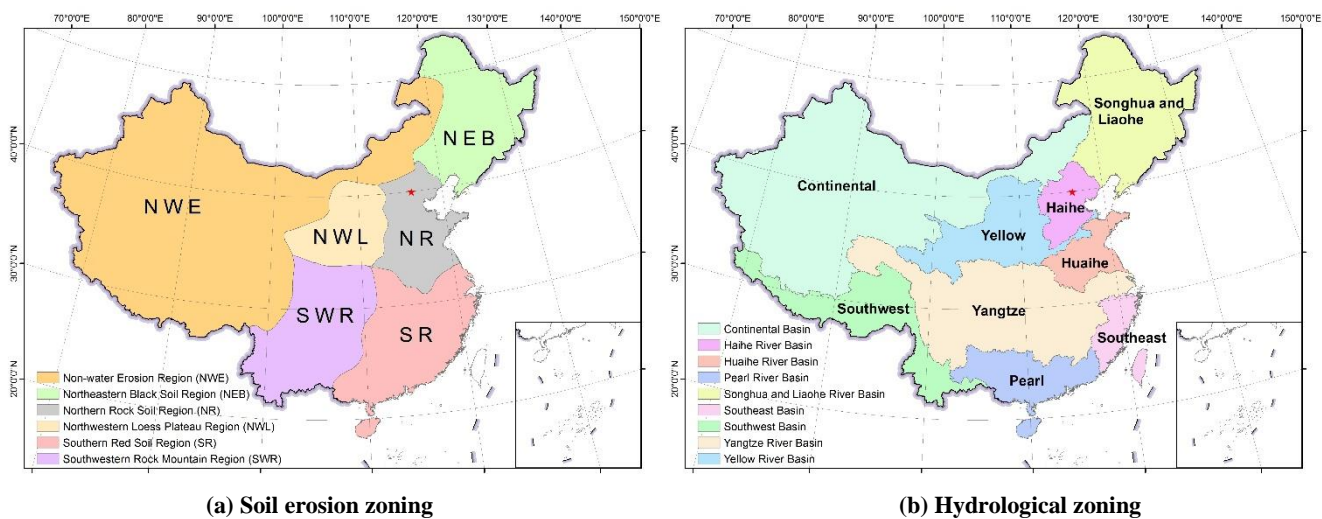


Table 3: Statistical characteristics of R-factor and 1-in-10-year EI₃₀ in soil erosion and hydrological zonings

Factors	Zones	Mean	Std.	5th-percentile	25th-percentile	50th-percentile	75th-percentile	95th-percentile
R-factor (MJ mm ha ⁻¹ h ⁻¹ a ⁻¹)	Mainland China	2200	3147	47	147	645	3503	8208
	NWE	208	192	30	70	144	276	614
	NWL	896	431	263	549	875	1239	1562
	NR	3637	1443	935	2780	3747	4577	5946
	NEB	1483	766	671	1041	1311	1611	3284
	SWR	4226	2079	841	2610	4324	5503	8060
	SR	8294	3370	4918	6140	7311	9141	16544
	Continental	138	130	25	62	92	174	424
	Haihe	2437	1169	719	1218	2717	3489	4042
	Huaihe	4744	948	3197	4062	4653	5466	6310
	SongLiao	1405	765	623	952	1235	1553	3220
	Yellow	920	754	214	402	749	1205	2199
	Yangtze	3933	2535	215	1355	4508	6052	7666
	Southwest	1318	2043	132	265	316	940	5998
	Southeast	7069	1292	4964	6014	7192	7916	9110
Pearl	10280	3967	4450	7697	9354	12731	17591	
1-in-10-year EI ₃₀ (MJ mm ha ⁻¹ h ⁻¹)	Mainland China	1040	1259	99	166	435	1766	3206
	NWE	189	101	84	125	165	220	415
	NWL	635	254	226	438	635	825	1031
	NR	2199	770	556	1860	2422	2717	3123
	NEB	948	449	444	669	867	1044	2055
	SWR	1706	766	439	1098	1689	2308	2952
	SR	3273	1418	1953	2375	2846	3512	6814
	Continental	164	84	80	114	140	193	363
	Haihe	1595	794	459	718	1773	2350	2626
	Huaihe	2706	394	1999	2465	2723	2957	3337
	SongLiao	902	453	422	604	823	1026	1974
	Yellow	627	472	182	293	525	813	1430
	Yangtze	1706	1039	167	711	1959	2551	3194
	Southwest	496	533	184	212	232	389	1701
	Southeast	2814	881	1781	2160	2550	3262	4570
Pearl	3846	1822	1564	2604	3320	4698	7512	

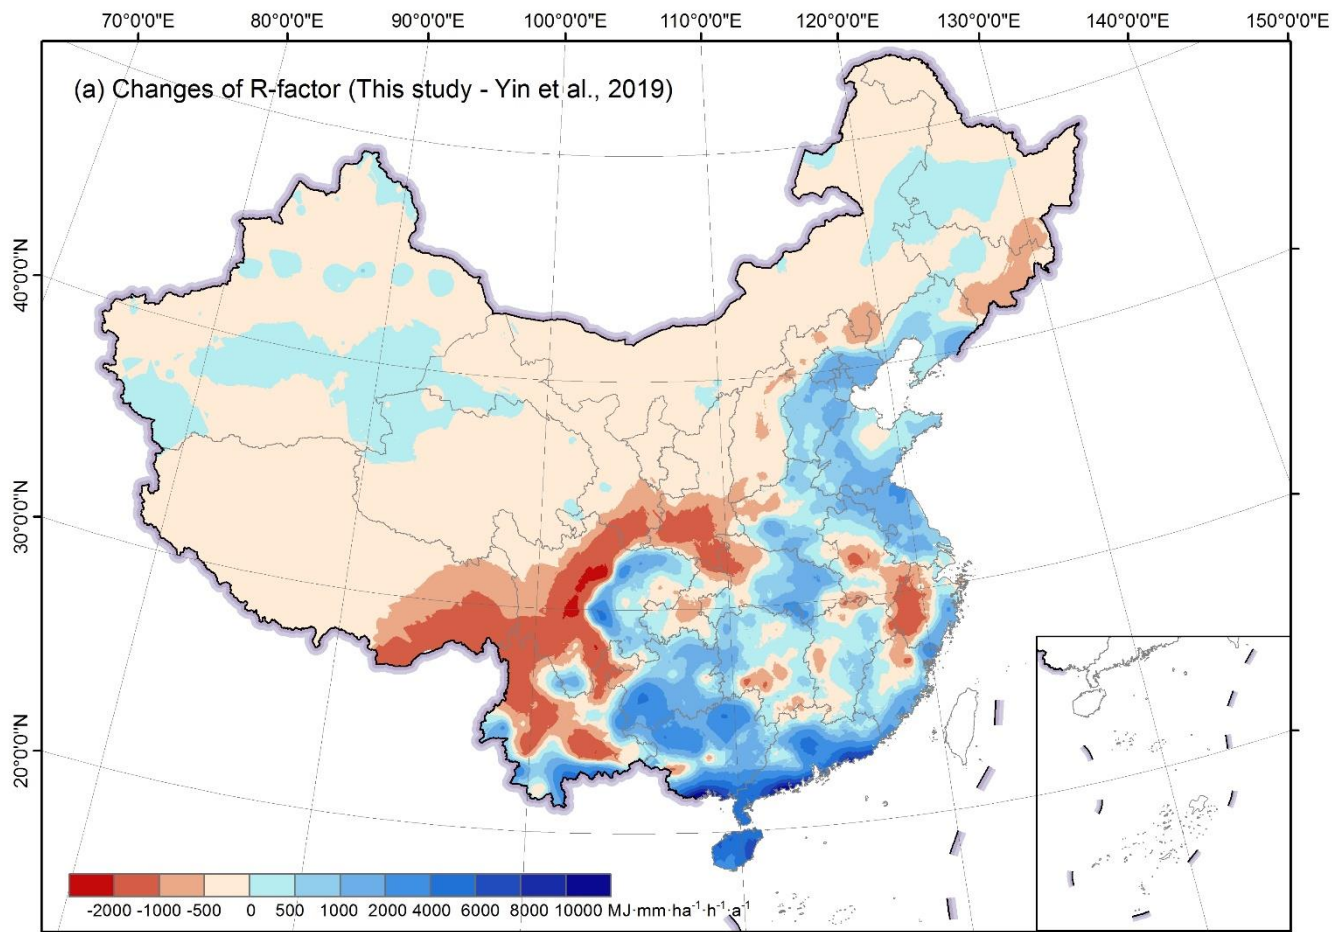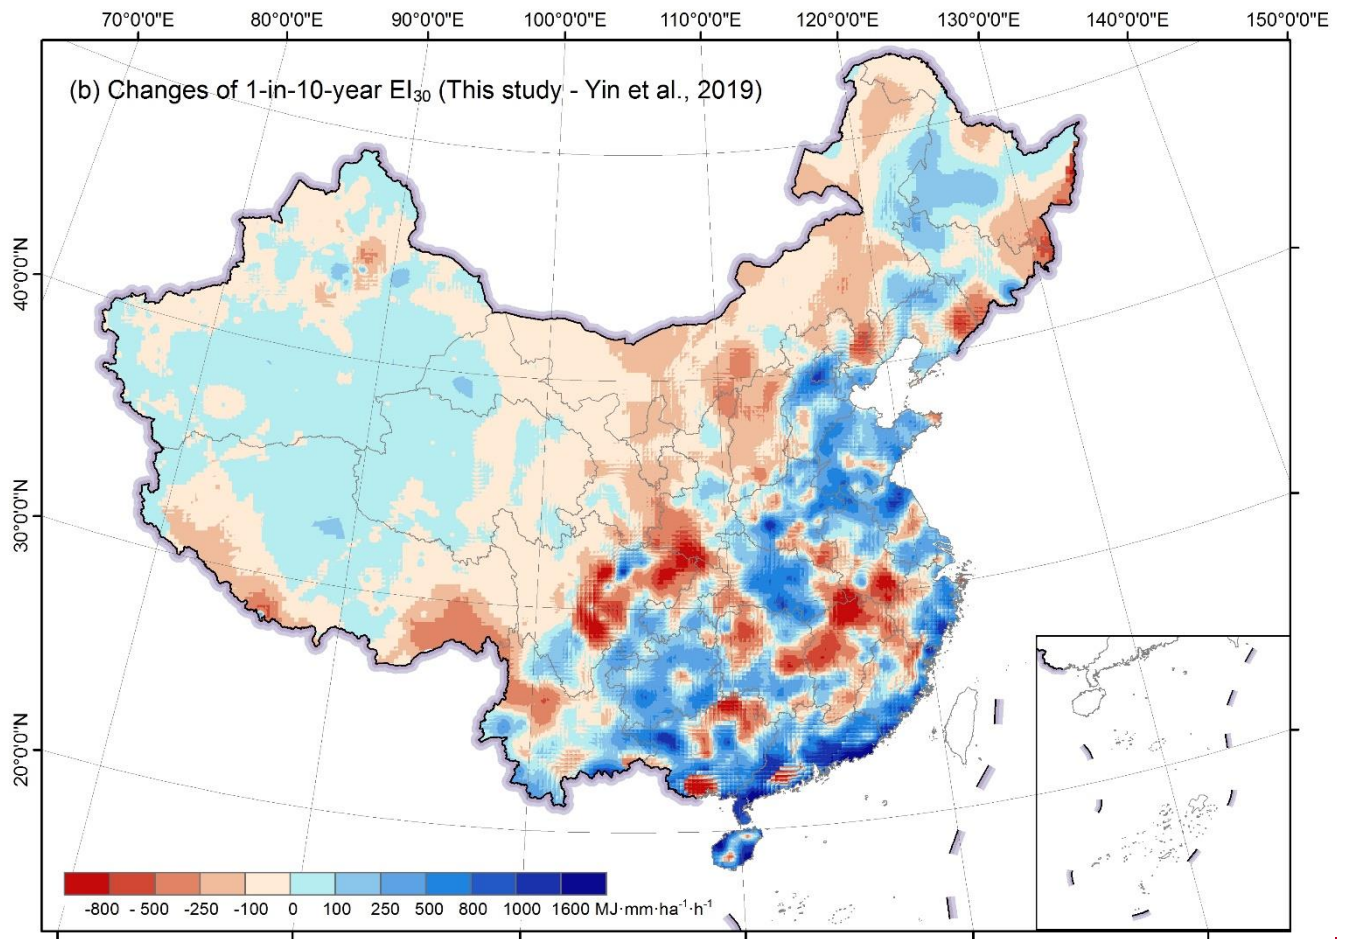

380



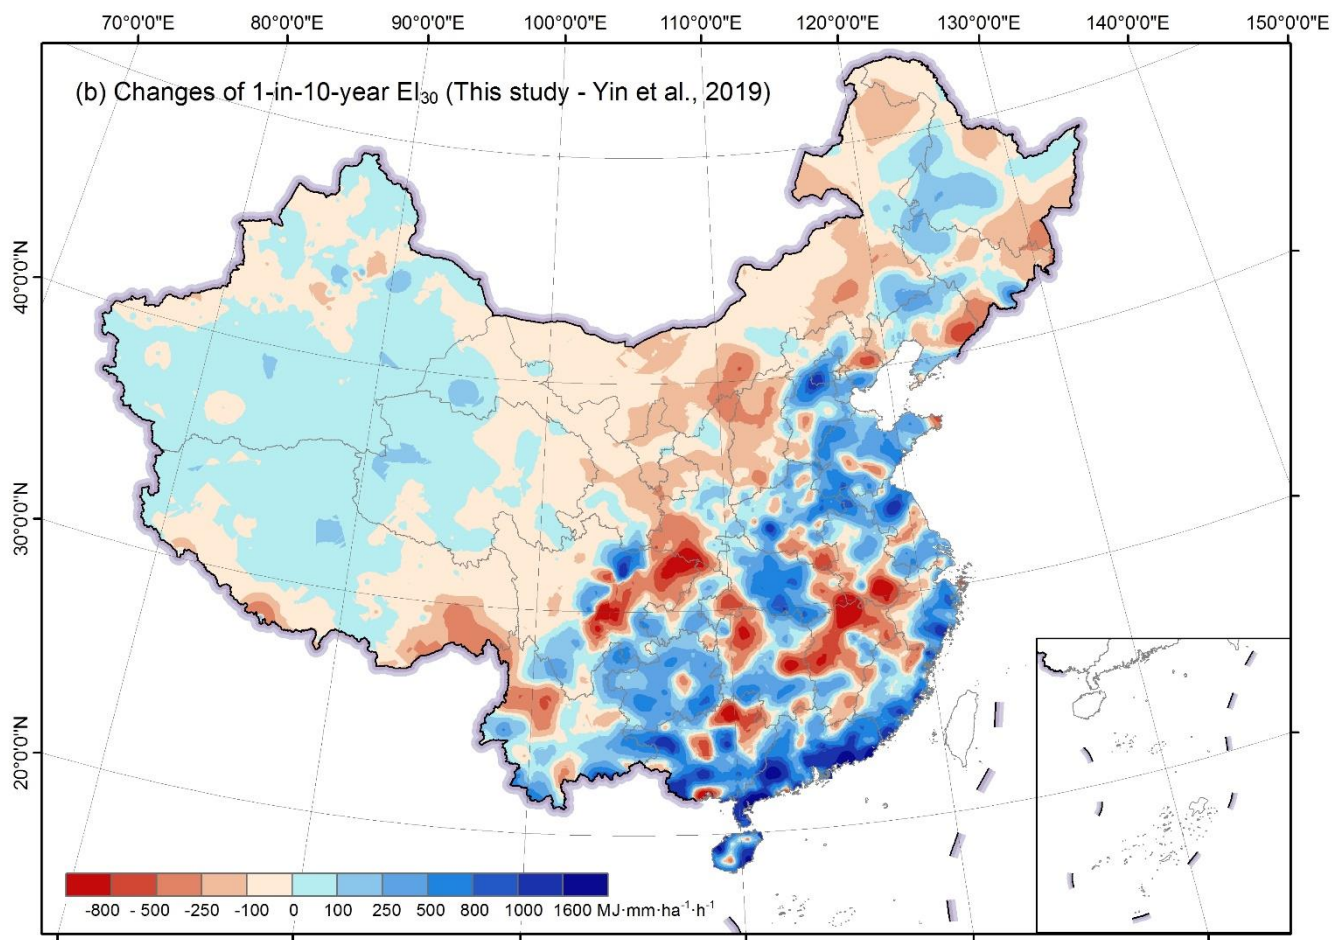


Figure 9: Differences of the R-factor(a) and the 1-in-10-year EI₃₀(b) comparing with the previous study

Comparing with the maps ~~in from~~ Yin et al. (2019), the new maps can be quite different at some local areas (Fig. 9a and 9b).


385 The R-factor in the new map was higher for most of the southeastern ~~region~~area, and lower for most of the middle and western ~~regions~~areas, especially for the southwestern area (Fig. 9a). ~~While the map of 1-in-10-year-event EI₃₀ map shows~~ ~~as demonstrated~~ similar pattern ~~as with~~ that of R-factor, ~~and overestimation in~~ whereas with more negative values in some eastern ~~mountainous areas~~. Yin et al. (2019) seems to be more pronounced for some hilly regions in south-eastern China (Fig. 9b).

3.3 Evaluation on the improvement of the erosivity maps

390 3.3.1 Effect of data temporal resolution

Figure 10 shows that the R-factor estimated from daily data (Eq. 426) is underestimated when the R value is higher than 10,000 MJ mm ha⁻¹ h⁻¹ a⁻¹, and slightly overestimated when the value is lower than 2,000 MJ mm ha⁻¹ h⁻¹ a⁻¹. The model using hourly data improved the accuracy by about 11.1% (median value of the relative error) compared to that from daily data (Fig. 10).

Estimated 1-in-10-year EI_{30} would be underestimated using hourly and daily data, and the underestimation is greater if daily data were used (Fig. 10). Unlike the R-factor, the 1-in-10-year EI_{30} was not noticeably improved with an increase in the temporal resolution from daily to hourly data, probably due to the fact that the 1-in-10-year EI_{30} values estimated using daily data in Yin et al. (2019) had already been multiplied by a conversion factor of 1.17 to correct the 1-in-10-year daily erosivity to approximate the ~~true~~ 1-in-10-year EI_{30} from 1-min data.

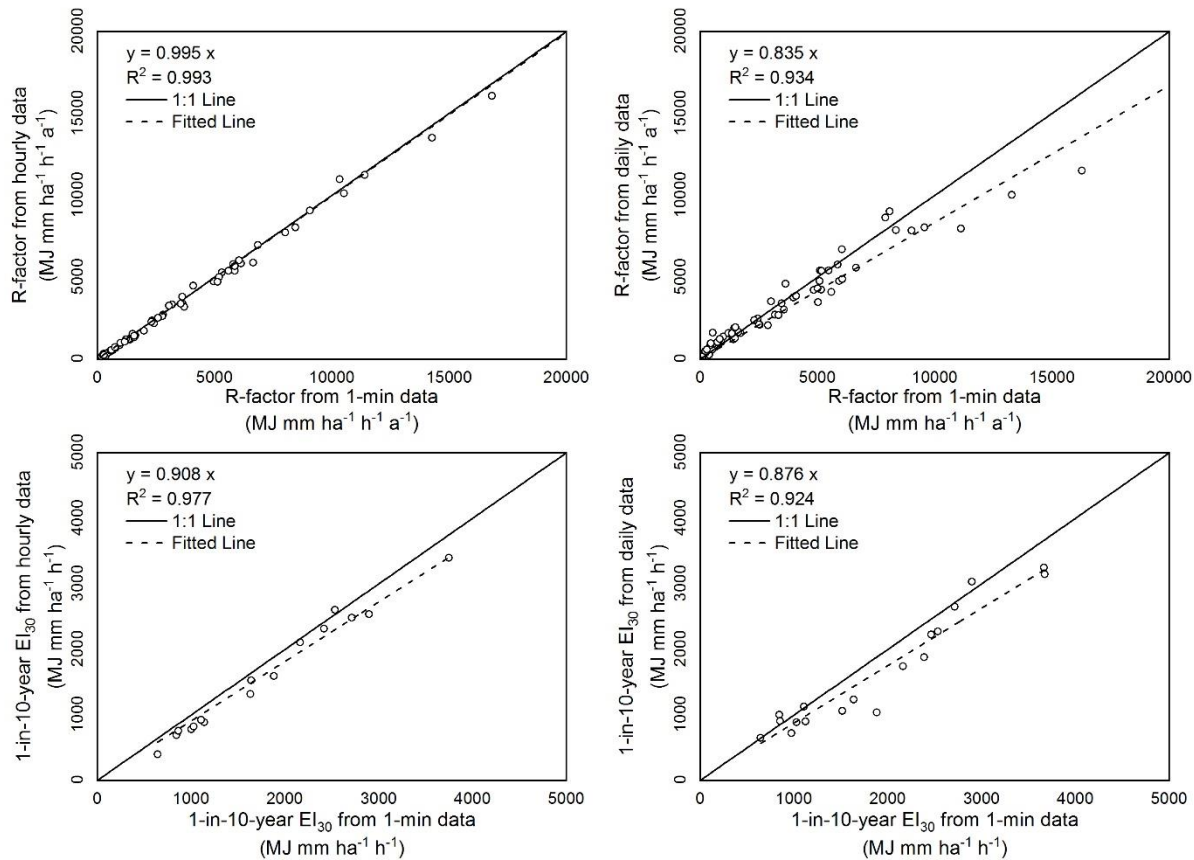

400 **Figure 10: Comparison of the R-factor (upper) and 1-in-10-year EI_{30} (lower) estimated from hourly (left) and daily (right) rainfall data at the stations**

3.3.2 Effect of the station density


Interpolation for the Western (W) region had the lowest NSE value compared to other regions, which may be caused by the low station density (Fig. 1) and the lower spatial correlation of rainfall. The fitted semivariogram for the R-factor in the Western region had a range of 35 km, whereas the ranges for Mid-western (MW), Northeastern (NE) and Southeastern (SE) regions were 288, 261 and 1,235 km, respectively.

A comparison of cross-validation between the two maps with different station densities shows that the interpolation with denser stations can improve the accuracy by 2.6% ~ 15.4% for the R-factor based on the sMAPE index, and by 1.4% ~ 31.8% for 1-in-10-year EI₃₀ (Table 4) when the station density increased. The NSE can increase by 0.016 to 0.109 for R-factor. For the 1-in-10-year EI₃₀, the NSE decreased by 0.001 to 0.096 for in region Western (W), Mid-western (MW) and Southeastern (SE) regions, and increased by 0.038 for in the region Northeastern (NE) region.

For the R-factor, in the region Western (W) region, the station density doubled (increased from 36, 600 to 21,200 km² per station), and the accuracy improved by 15.4%, whereas the sMAPE of 53.3% was still high with this increase in station density. In the region Mid-western (MW) region, the station density tripled (from 13,900 to 4,800 km² 1 station) and the accuracy was improved by 11.1% based on the sMAPE index from 30.7% to 19.6%. In region Northeastern (NE) and Southeastern (SE) regions, the station density tripled and quadrupled, respectively, and the accuracy increased about 2.5%. For 1-in-10-year EI₃₀, the improvement for the 1 in 10 year EI₃₀ was even more (by 31.8% in the region Western (W) region and 19.6% in the region Mid-western (MW) region). The improvement was mainly in western regions, and the station density in the eastern China before the increase is enough to describe the spatial variation of the R-factor and the 1-in-10-year EI₃₀. It can be inferred that when there were less than about 10,000 km² per station, the increasing of the site density has little impact on the improvement of the interpolation (Fig. 11).

Table 4: Comparison of cross-validation results for erosivity maps interpolated based on data from 774 and 2381 stations

Region	No. of the stations	Density of the stations (10 ³ km ² 1 station)	R-factor		1-in-10-year EI ₃₀	
			sMAPE	NSE	sMAPE	NSE
W	87	36.6	68.7%	0.489	63.7%	0.389
	150	21.2	53.3%	0.599	31.8%	0.293
MW	161	13.9	30.7%	0.938	44.0%	0.887
	471	4.8	19.6%	0.951	24.5%	0.886
NE	214	11.0	12.4%	0.946	17.0%	0.857
	690	3.4	9.7%	0.962	14.9%	0.895
SE	389	6.6	10.9%	0.942	15.5%	0.844
	1362	1.9	8.3%	0.959	14.0%	0.824

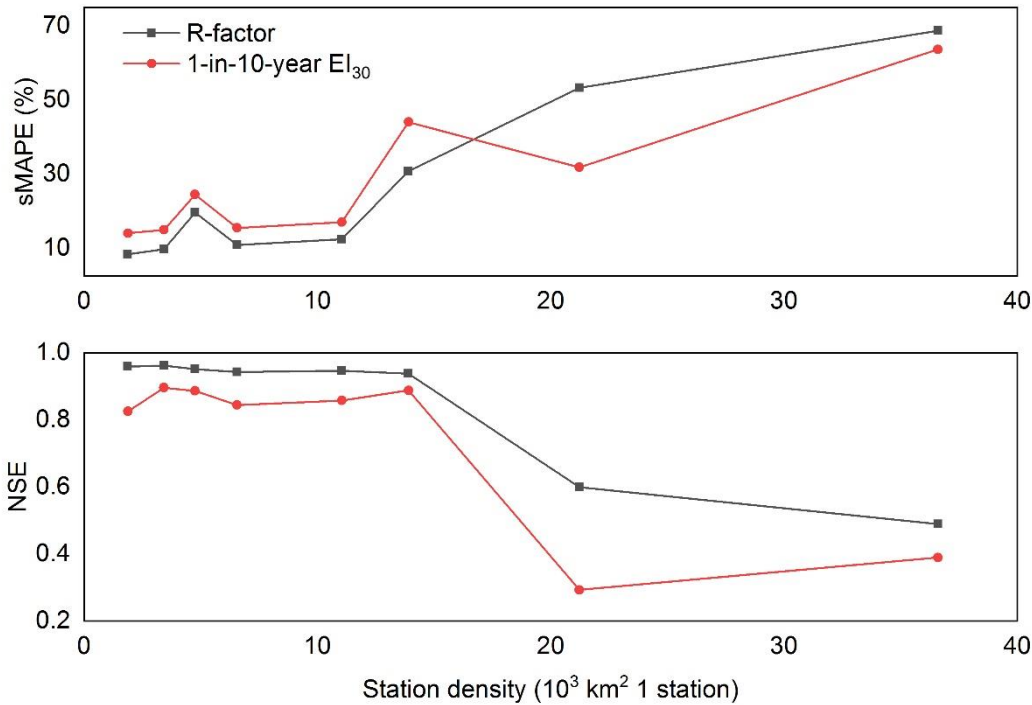

425 **Figure 11: Improvement of the interpolation with the increase of station density. Data were from the 774 and 2381 stations in the 4 different regions**

3.3.3 Effect of the interpolation method

430 For the R-factor, cross-validation of Ordinary Kriging and Universal Kriging with the mean annual rainfall as the co-variable (Table 5) shows that UK improved the interpolation accuracy by 2.3%-9.0% (sMAPE) compared to OK. In the western Western (W) region, the NSE increased from 0.285(OK) to 0.599(UK). Therefore, it is better to use UK instead of OK when generating the R-factor map, especially in western China where station density was low. For the 1-in-10-year EI₃₀, UK improved the accuracy by 0.4%-9.7% (sMAPE). In theregion Western (W) region, the accuracy improved by 9.7% and the NSE increased from 0.094(OK) to 0.293(UK).

Table 5: Cross-validation results of interpolation of R-factor and 10-year EI₃₀ using OK and UK

Region	Interpolation method	R-factor		1-in-10-year EI ₃₀	
		sMAPE	NSE	sMAPE	NSE
W	OK	62.3%	0.285	41.5%	0.094
	UK	53.3%	0.599	31.8%	0.293
MW	OK	24.8%	0.861	24.9%	0.838
	UK	19.6%	0.951	24.5%	0.886
NE	OK	12.0%	0.926	16.5%	0.865

Region	Interpolation method	R-factor		1-in-10-year EI ₃₀	
		sMAPE	NSE	sMAPE	NSE
	UK	9.7%	0.962	14.9%	0.895
SE	OK	11.2%	0.911	14.8%	0.844
	UK	8.3%	0.959	14.0%	0.824


4 Discussion

435 This study has produced quality R-factor and 1-in-10-year EI₃₀ maps with hourly data from 2,381 stations over mainland China, which are shown to be a noticeable improvement over the maps that are currently available for China (Yin et al., 2019; Table 1). The improvement of the R-factor map over previously published R-factor maps can be attributed to~~contributed to~~ the increase in the temporal resolution from daily to hourly data, whereas that of 1-in-10-year EI₃₀ map to the increase of the station density in comparison with those of Yin et al. (2019). There are mainly two reasons for this. First, 1-in-10-year event EI₃₀ values estimated from the daily data had already been adjusted to those from the 1-min data by multiplying a conversion factor of 1.17 (Yin et al., 2019), which resulted in no obvious improvement from the daily data to hourly data. Second, the 1-in-10-year event EI₃₀ associated with extreme rainfall event intrinsically has a high spatial variability in comparison to the R-factor~~annual average rainfall erosivity~~ as shown in Table 4. The accuracy of spatially interpolated rainfall erosivity was more sensitive to the station density when the station density is low. Hence the improvement of the map of the 1-in-10-year EI₃₀ was mainly a result of~~contributed to~~ the increase of the station density, especially for the western~~Western (W)~~ and the mid~~Mid~~-western (MW) regions with a low~~sparse~~ station density.

~~The uncertainty of the results from this study mainly comes from the following aspects: (a) KE-I model for estimating Kinetic Energy (KE) from the instant precipitation Intensity (I). KE-I model used in this study is from RUSLE2 (USDA ARS, 2013) and raindrop disdrometer observation data need to be collected to calibrate the KE-I model in future. (b) The estimation of the erosivity factors from hourly data (Eq. (5)). The conversion factors were developed based on 1-min rainfall data from 62 stations (Fig. 2). Hourly data brings information loss in the estimation of instant precipitation intensity comparing with breakpoint data. (c) The adjustment of the R-factor from the stations with less effective years (Eq. (8)). This is based on a power function (Eq. (9)) of the mean annual precipitation and rainfall erosivity using 1-min and daily rainfall data of 35 stations. The degree of uncertainty mainly depends on the variation of annual rainfall erosivity. (d) Station distribution and density. In western China, the stations were sparse and unevenly distributed, which affect the interpolation accuracy. (e) Spatial interpolation model (Universal Kriging in this study) and the interpolation procedures (the division of regions before the interpolation and the mergence of regions after the interpolation).~~

Comparison with maps from a recent international study was also attempted. Panagos et al. (2017) developed a Global Rainfall Erosivity Database with hourly and sub-hourly rainfall data from 3,625 stations over 63 countries, which has provided a good data base~~basis~~ for the comparison of rainfall erosivity among different regions in the world. In their study, hourly~~rainfall~~ data at 60-min interval from 387 stations in~~across~~ China were used. Figure 12 shows that the R-factor for China extracted from

Panagos et al. (2017) is systematically underestimated by about 30% for most areas in China, whereas overestimated in the Tibetan Plateau (cf. Fig. 7a). The reason for the underestimation may be that the R-factor calculated from ~~hourly 60-min interval~~ data applied a conversion factor (CF_{30}) that was developed from the values estimated by 60-min data to those by 30-min data in Panagos et al. (2015), rather than ~~using an adjustment factor based on-to those by~~ breakpoint data (CF_{bp}) or 1-min data (CF_1), which were used in ~~the~~ USLE (Wischmeier and Smith, 1965, 1978), RUSLE (Renard, 1997) and this study. Previous research ~~has~~ ~~ve~~ ~~show~~ ~~ne~~ ~~d~~ the difference between CF_{30} and CF_{bp} (CF_1) can result in an underestimation of R-factor by about 20% (Auerswald et al., 2015; Yue et al., 2020). Table 6 shows that the relative error of the map from Panagos et al. (2017) could reduce by about 6.2% after multiplying by a conversion factor of 1.253, which was calibrated by Yue et al. (2020) for converting the R-factor from 30-min data to 1-min data. ~~(Because the cross-validation values from the map of Panagos et al. (2017) were not available, the values extracted from the maps were used instead to compare with the true values from 1-min data at the 62 stations).~~ ~~Erosivity values based on T~~ ~~the adjusted maps are~~ still generally underestimated. The reason ~~could~~ ~~may~~ be that the equation for estimating the storm energy (E) ~~from rainfall intensity~~ used in Panagos et al. (2017) was from ~~the~~ RUSLE (Renard, 1997), ~~and the equation is known to cause~~ ~~which have been reported an~~ underestimation of the storm energy up to 10% in previous studies (McGregor et al., 1995; Yin et al., 2017). Because of this, the equation for estimating the storm energy (E) in RUSLE (Renard, 1997) was then modified in RUSLE2 (USDA-ARS, 2013), which was adopted in this study. The R-factor in the Tibetan Plateau varies from 0 to 12,326 MJ mm ha⁻¹ h⁻¹ a⁻¹ in Panagos et al. (2017), and from 5 to 4,442 MJ mm ha⁻¹ h⁻¹ a⁻¹ in this study. The former was derived from a Gaussian Process Regression (GPR) model and a number of monthly climate variables from the WorldClim database, such as the mean monthly precipitation, mean minimum, average and maximum monthly temperature. The GPR model was calibrated using the site-specific R-factor values and these climate variables, which may not applicable for sites at high altitude, as none of the observation sites was located in the Tibetan Plateau region. The GPR model might be the main reason for the overestimation of the R-factor in the Tibetan Plateau where the R-factor was expected to be underestimated just like any other regions.

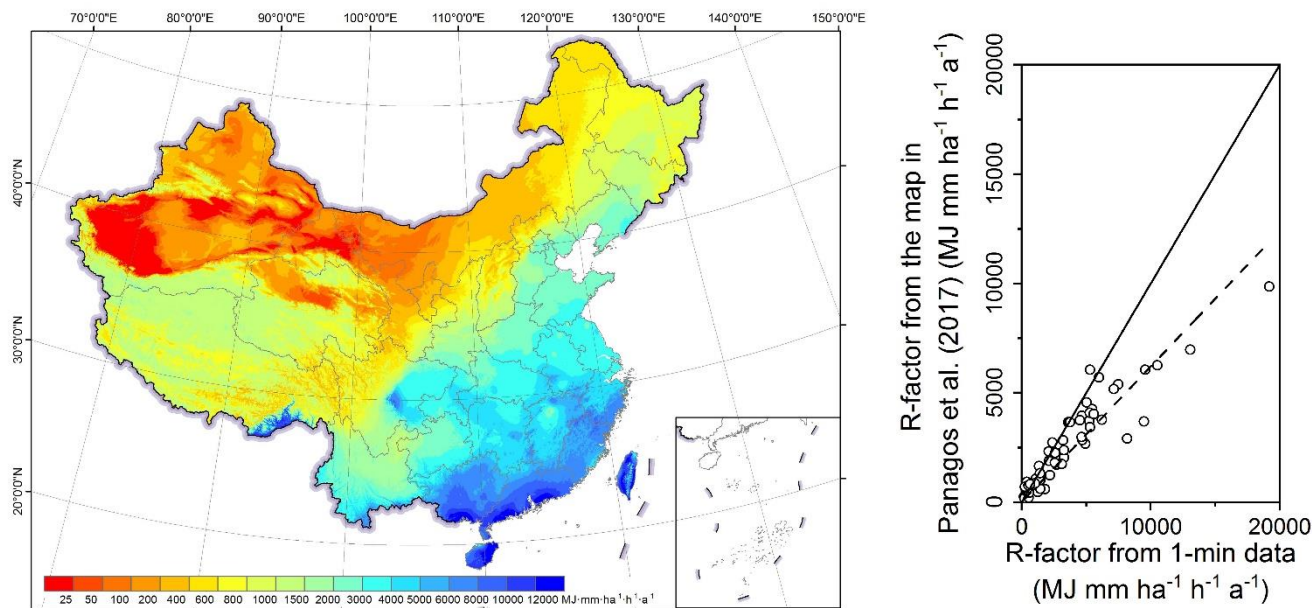

485 **Figure 12: R-factor map for China extracted from Panagos et al. (2017) and the evaluation of the map based on 62 stations with 1-min data.**

490 **Table 6: Comparison of the statistical characteristics of the relative errors of the R-factor extracted from the map generated in this study and extracted from Panagos et al. (2017) (original and adjusted). The adjusted map of Panagos et al. (2017) was the original map multiplying by a conversion factors of 1.253, which was calibrated by Yue et al. (2020) for converting the R-factor from 30-min data to 1-min data.**

	This study	Panagos et al. (2017)	Panagos et al. (2017) adjusted
25 th percentile	7.1%	14.8%	10.4%
Median	16.1%	28.3%	22.1%
75 th percentile	28.0%	40.5%	43.2%
Mean	20.1%	33.8%	33.1%

495 Although this study provides improved erosivity maps in comparison with previous studies, errors remain inevitably. The uncertainty of the estimated R-factor and 1-in-10-year erosivity values results from this study mainly comes from the following sources aspects: First, (a) -KE-I model for estimating Kinetic Energy (KE) from the instant precipitation Intensity (I). KE-I model used in this study is from RUSLE2 (USDA-ARS, 2013) and raindrop disdrometer observation data need to be collected to calibrate the KE-I relationship model in future. (b) The Second, estimation of the erosivity factors was based on from hourly data, and (Eq. (5)). The conversion factors were developed based on 1-min rainfall data from 62 stations (Fig. 2). Hourly data brings information loss in the estimation of instant precipitation intensity comparing with breakpoint data. Third, (c). The adjustment of the R-factor for from the stations with a small number of less effective years (Eq. (87)). This was based on a power function relationship (Eq. (98)) between of the mean annual precipitation and rainfall erosivity using 1-min and daily

500

rainfall data of 35 stations. The magnitude of uncertainty mainly depends on the variation of annual rainfall erosivity. Station distribution and density. In western China, the stations were sparsely and unevenly distributed, which affect the interpolation accuracy. Finally, spatial interpolation technique (Universal Kriging in this study) and the interpolation procedures, i.e. (the division of regions before the interpolation and the merge of regions after the interpolation). These five sources of uncertainty need to be addressed for any further improvement in erosivity estimation in China.

5 Conclusions

This study has generated the R-factor and 1-in-10-year EI_{30} maps using hourly and daily rainfall data for the period from 1951 to 2018 from 2,381 stations over mainland China. The improvement in the accuracy of these erosivity maps over what are currently available was evaluated against the current maps (maps from Yin et al. (2019) were taken as references) in terms of temporal resolution of the rainfall data, the station density, and the interpolation method. The following conclusions can be drawn from this study as follows:

(1) Comparing with the current maps for the 62 reference sites, the mean absolute error in the R-factor map generated in this study was reduced from 18.1% to 17.8% in the mid-western and eastern regions, 161.6% to 16.2% in the western region, and for the 1-in-10-year EI_{30} map improved the accuracy from 20.6% to 13.5% in the mid-western and eastern regions.

(2) The R-factor and the 1-in-10-year EI_{30} increased from the northwestern to the southeastern China. The R-factor varies from 0 to 25,300 $MJ\ mm\ ha^{-1}\ h^{-1}\ a^{-1}$, and the 1-in-10-year EI_{30} was from 0 to 11,246 $MJ\ mm\ ha^{-1}\ h^{-1}$. Comparing with the previous current maps, the R-factor and 1-in-10-year event EI_{30} in the new maps were larger for most of the southeastern area, and smaller for most of the middle and western areas.

(3) The improvement of the R-factor map can be mainly attributed to the increase in the temporal resolution from daily to hourly, whereas that of 1-in-10-year EI_{30} map to the increase of station density. The increased station density has led to mainly improved R-factor and 1-in-10-year EI_{30} maps for the accuracy in the western regions for both the R factor and 1-in-10-year EI_{30} . The benefit from an increased station density is limited once the station density reached 1 station per 10,000 km^2 . As for the interpolation method, Universal Kriging with the mean annual rainfall as the co-variable performed better than Ordinary Kriging for all regions, especially for the western regions.

Data availability

The Rainfall erosivity maps (R-factor and 1-in-10-year EI_{30}) are available at: <https://dx.doi.org/10.12275/bnu.clicia.rainfallerosivity.CN.001> (Yue et al., 2020)

Competing interests

The authors declare that they have no conflict of interest.

Acknowledgments

This work was supported by National Key R&D Program (no.2018YFC0507006) and the National Natural Science Foundation of China (no. 41877068). We also would like to thank the high-performance computing support from the Center for Geodata and Analysis, Faculty of Geographical Science, Beijing Normal University [<https://gda.bnu.edu.cn/>]

References

- Alewell, C., Borelli, P., Meusburger, K. and Panagos, P.: Using the USLE: Chances, challenges and limitations of soil erosion modelling, *Int. soil water Conserv. Res.*, 7(3), 203–225, doi:10.1016/j.iswcr.2019.05.004, 2019.
- 540 Angulomart ínez, M. and Beguer á, S.: Estimating rainfall erosivity from daily precipitation records: a comparison among methods using data from the Ebro Basin (NE Spain), *J. Hydrol.*, 379(1–2), 111–121, 2009.
- Arnoldus, H. M. J.: Methodology used to determine the maximum potential average annual soil loss due to sheet and rill erosion in Morocco, *FAO Soils Bull.*, 1977.
- Auerswald, K., Fiener, P., Gomez, J. A., Govers, G., Quinton, J. N. and Strauss, P.: Comment on “Rainfall erosivity in Europe” by Panagos et al. (*Sci. Total Environ.*, 511, 801–814, 2015), *Sci. Total Environ.*, 532, 849–852, 2015.
- 545 Bagarello, V. and D’Asaro, F.: Estimating single storm erosion index, *Trans. ASAE*, 37(3), 785–791, 1994.
- Bonilla, C. A. and Vidal, K. L.: Rainfall erosivity in central Chile, *J. Hydrol.*, 410(1–2), 126–133, 2011.
- Borrelli, P., Diodato, N. and Panagos, P.: Rainfall erosivity in Italy: a national scale spatiotemporal assessment, *Int. J. Digit. Earth*, 2016.
- 550 Capolongo, D., Diodato, N., Mannaerts, Cm., Piccarreta, M. and Strobl, R. O.: Analyzing temporal changes in climate erosivity using a simplified rainfall erosivity model in Basilicata (southern Italy), *J. Hydrol.*, 356(1–2), 119–130, 2008.
- Coles, S. G.: *An introduction to statistical modeling of extreme values.* - springer, 2001.
- FAO: Outcome document of the Global Symposium on Soil Erosion, Rome. [online] Available from: <http://www.fao.org/3/ca5697en/ca5697en.pdf>, 2019a.
- 555 FAO: Soil erosion: the greatest challenge to sustainable soil management, Rome. [online] Available from: <http://www.fao.org/3/ca4395en/ca4395en.pdf>, 2019b.
- Ferrari, R., Pasqui, M., Bottai, L., Esposito, S. and Di Giuseppe, E.: Assessment of soil erosion estimate based on a high temporal resolution rainfall dataset, in *Proc. 7th European Conference on Applications of Meteorology (ECAM)*, Utrecht, Netherlands, pp. 12–16., 2005.
- 560 Ferro, V., Giordano, G. and Iovino, M.: Isoerosivity and erosion risk map for Sicily, *Hydrol. Sci. J.*, 36(6), 549–564, 1991.

- Haith, D. A. and Merrill, D. E.: Evaluation of a daily rainfall erosivity model, *Trans. ASAE*, 30(1), 90–93, 1987.
- Hosking, J. R. M.: L-Moments: Analysis and Estimation of Distributions Using Linear Combinations of Order Statistics, *J. R. Stat. Soc.*, 52(1), 105–124, 1990.
- Klik, A., Haas, K., Dvorackova, A. and Fuller, I. C.: Spatial and temporal distribution of rainfall erosivity in New Zealand, *Soil Res.*, 40(6), 887–901, 2015.
- 565 Lee, J.-H. and Heo, J.-H.: Evaluation of estimation methods for rainfall erosivity based on annual precipitation in Korea, *J. Hydrol.*, 409(1–2), 30–48, 2011.
- Liu, B., Tao, H. and Song, C.: Temporal and spatial variations of rainfall erosivity in China during 1960 to 2009, *Geogr. Res.*, 32(2), 245–256, 2013.
- 570 Liu, Y., Zhao, W., Liu, Y. and Pereira, P.: Global rainfall erosivity changes between 1980 and 2017 based on an erosivity model using daily precipitation data, *Catena*, 194, 104768, 2020.
- Lu, H. and Yu, B.: Spatial and seasonal distribution of rainfall erosivity in Australia, *Soil Res.*, 40(6), 887–901, 2002.
- McGregor, K. C., Bingner, R. L., Bowie, A. J. and Foster, G. R.: Erosivity index values for northern Mississippi, *Trans. ASAE*, 38(4), 1039–1047, 1995.
- 575 Naipal, V., Reick, C. H., Pongratz, J. and Van Oost, K.: Improving the global applicability of the RUSLE model-adjustment of the topographical and rainfall erosivity factors, *Geosci. Model Dev.*, 8, 2893–2913, 2015.
- Oliveira, P. T. S., Rodrigues, D. B. B., Sobrinho, T. A., Carvalho, D. F. De and Panachuki, E.: Spatial variability of the rainfall erosive potential in the State of Mato Grosso do Sul, Brazil, *Eng. Agrícola*, 32(1), 69–79, 2012.
- Panagos, P., Ballabio, C., Borrelli, P., Meusburger, K., Klik, A., Rousseva, S., Tadić, M. P., Michaelides, S. and
- 580 Hrabalová M.: Rainfall erosivity in Europe, *Sci. Total Environ.*, 511, 801–814, 2015.
- Panagos, P., Ballabio, C., Borrelli, P. and Meusburger, K.: Spatio-temporal analysis of rainfall erosivity and erosivity density in Greece, *Catena*, 137, 161–172, 2016.
- Panagos, P., Borrelli, P., Meusburger, K., Yu, B., Klik, A., Lim, K. J., Yang, J. E., Ni, J., Miao, C. and Chattopadhyay, N.: Global rainfall erosivity assessment based on high-temporal resolution rainfall records, *Sci. Rep.*, 7(1), 4175, 2017.
- 585 Porto, P.: Exploring the effect of different time resolutions to calculate the rainfall erosivity factor R_{in} in Calabria, southern Italy, *Hydrol. Process.*, 30(10), 1551–1562, doi:10.1002/hyp.10737, 2016.
- Qin, W., Guo, Q., Zuo, C., Shan, Z., Ma, L. and Sun, G.: Spatial distribution and temporal trends of rainfall erosivity in mainland China for 1951–2010, *Catena*, 147, 177–186, 2016.
- Ramos, M. C. and Durán, B.: Assessment of rainfall erosivity and its spatial and temporal variabilities: Case study of the
- 590 Penedès area (NE Spain), *Catena*, 123, 135–147, 2014.
- Renard, K. G.: Predicting soil erosion by water: a guide to conservation planning with the Revised Universal Soil Loss Equation (RUSLE), United States Government Printing., 1997.
- Renard, K. G. and Freimund, J. R.: Using monthly precipitation data to estimate the R-factor in the revised USLE, 1994.

- Richardson, C. W., Foster, G. R. and Wright, D. A.: Estimation of erosion index from daily rainfall amount, *Trans. ASAE*, 595 26(1), 153–156, 1983.
- Riquetti, N. B., Beskow, S. and Viola, M. R.: Rainfall erosivity in South America: Current patterns and future perspectives, *Sci. Total Environ.*, 724, 138315, doi:10.1016/j.scitotenv.2020.138315, 2020.
- Sadeghi, S. H., Zabihi, M., Vafakhah, M. and Hazbavi, Z.: Spatiotemporal mapping of rainfall erosivity index for different return periods in Iran, *Nat. Hazards*, 87(1), 35–56, 2017.
- 600 Selker, J. S., Haith, D. A. and Reynolds, J. E.: Calibration and testing of a daily rainfall erosivity model, , 33(5), 1612, 1990.
- Sheridan, J. M., Davis, F. M., Hester, M. L. and Knisel, W. G.: Seasonal distribution of rainfall erosivity in peninsular Florida, *Trans. ASAE*, 32(5), 1555–1560, 1989.
- Silva, R. M., Santos, C., Silva, J., Silva, A. M. and Neto, R.: Spatial distribution and estimation of rainfall trends and erosivity in the Epitácio Pessoa reservoir catchment, Paraíba, Brazil, *Nat. Hazards J. Int. Soc. Prev. Mitig. Nat. Hazards*, 102, 605 doi:10.1007/s11069-020-03926-9, 2020.
- Tao, L. I., Zheng, X., Dai, Y., Yang, C., Chen, Z., Zhang, S. and Guocan, W. U.: Mapping Near-surface Air Temperature, Pressure, Relative Humidity and Wind Speed over Mainland China with High Spatiotemporal Resolution, *Adv. Atmos. Sci.*, 031(5), 1127–1135, 2014.
- USDA-ARS: Science documentation: Revised Universal Soil Loss Equation Version 2 (RUSLE2), USDA-Agricultural 610 Research Service, Washington, D.C., 2013.
- Wang, W., Jiao, J., Hao, X., Zhang, Xiankui and Lu, X.: Distribution of rainfall erosivity R value in China, *J. Soil Eros. Soil Conserv.*, (1), 1, 1996.
- Wischmeier, W. H.: A Rainfall Erosion Index for a Universal Soil-Loss Equation 1, *Proc Soil Sci. Soc. Am.*, 23(3), 246–249, 1959.
- 615 Wischmeier, W. H. and Smith, D. D.: Rainfall energy and its relationship to soil loss, *Trans.am.geophys.union*, 39(2), 285–291, 1958.
- Wischmeier, W. H. and Smith, D. D.: Predicting rainfall-erosion losses from cropland east of the Rocky Mountains: Guide for selection of practices for soil and water conservation, US Department of Agriculture., 1965.
- Wischmeier, W. H. and Smith, D. D.: Predicting rainfall erosion losses: a guide to conservation planning, Department of 620 Agriculture, Science and Education Administration., 1978.
- Xie, Y., Liu, B. Y. and Zhang, W. B.: Study on standard of erosive rainfall, *J. soil water Conserv.*, 14(4), 6–11, 2000.
- Xie, Y., Yin, S. Q., Liu, B. Y., Nearing, M. A. and Zhao, Y.: Models for estimating daily rainfall erosivity in China, *J. Hydrol.*, 535, 547–558, 2016.
- Yang, X. and Yu, B.: Modelling and mapping rainfall erosivity in New South Wales, Australia, *Soil Res.*, 53(2), 178–189, 625 2015.
- Yin, S., Xie, Y., Liu, B. and Nearing, M. A.: Rainfall erosivity estimation based on rainfall data collected over a range of temporal resolutions., *Hydrol. Earth Syst. Sci. Discuss.*, 12(5), 2015.

- Yin, S., Nearing, M. A., Borrelli, P. and Xue, X.: Rainfall Erosivity: An Overview of Methodologies and Applications, *Vadose Zo. J.*, 16(12), 2017.
- 630 Yin, S., Xue, X., Yue, T., Xie, Y. and Gao, G.: Spatiotemporal distribution and return period of rainfall erosivity in China (in Chinese), *Trans. Chinese Soc. Agric. Eng.*, 2019.
- Yu, B. and Rosewell, C. J.: Rainfall erosivity estimation using daily rainfall amounts for South Australia, *Soil Res.*, 34(5), 721–733, 1996a.
- Yu, B. and Rosewell, C. J.: Technical notes: a robust estimator of the R-factor for the universal soil loss equation, *Trans. ASAE*, 39(2), 559–561, 1996b.
- 635 Yu, B., Rosewell, C. J., Yu, B. and Rosewell, C. J.: An assessment of a daily rainfall erosivity model for New South Wales, *Aust. J. Soil Res.*, 34(1), 139–152, 1996.
- Yue, T., Xie, Y., Yin, S., Yu, B., Miao, C. and Wang, W.: Effect of time resolution of rainfall measurements on the erosivity factor in the USLE in China, *Int. soil water Conserv. Res.*, doi:<https://doi.org/10.1016/j.iswcr.2020.06.001>, 2020.
- 640 Zhang, W., Xie, Y. and Liu, B.: Spatial distribution of rainfall erosivity in China, *J. Mt. ence*, 21(1), 33–40, 2003.
- Zhang, W. B., Xie, Y. and Liu, B. Y.: Rainfall Erosivity Estimation Using Daily Rainfall Amounts, *Sci. Geogr. Sin.*, (6), 53–56, 2002.
- Zhu, Z. and Yu, B.: Validation of Rainfall Erosivity Estimators for Mainland China, *Trans. ASABE*, 58(1), 61–71, 2015.