



The Aerosol Characterization from Polarimeter and Lidar (ACEPOL) airborne field campaign

Kirk Knobelspiesse¹, Henrique M. J. Barbosa², Christine Bradley³, Carol Bruegge³, Brian Cairns⁴, Gao Chen⁵, Jacek Chowdhary^{4,6}, Anthony Cook⁵, Antonio Di Noia⁷, Bastiaan van Dierenhoven^{4,6}, David J. Diner³, Richard Ferrare⁵, Guangliang Fu⁸, Meng Gao^{1,9}, Michael Garay³, Johnathan Hair⁵, David Harper⁵, Gerard van Harten³, Otto Hasekamp⁸, Mark Helmlinger³, Chris Hostetler⁵, Olga Kalashnikova³, Andrew Kupchock¹, Karla Longo De Freitas¹, Hal Maring¹⁰, J. Vanderlei Martins¹¹, Brent McBride¹¹, Matthew McGill¹, Ken Norlin¹², Anin Puthukkudy¹¹, Brian Rheingans³, Jeroen Rietjens⁸, Felix C. Seidel³, Arlindo da Silva¹, Martijn Smit⁸, Snorre Stamnes⁵, Qian Tan¹³, Sebastian Val³, Andrzej Wasilewski⁴, Feng Xu¹⁴, Xiaoguang Xu¹¹, John Yorks¹

¹NASA Goddard Space Flight Center, Greenbelt, MD, USA

²University of São Paulo, São Paulo, Brazil

³Jet Propulsion Laboratory, California Institute of Technology, Pasadena, CA, USA

⁴NASA Goddard Institute for Space Studies, New York, NY, USA

15 ⁵NASA Langley Research Center, Hampton, VA, USA

⁶Columbia University, New York, NY, USA

⁷University of Leicester, Leicestershire, United Kingdom

⁸SRON Netherlands Institute for Space Research, Utrecht, Netherlands

⁹Science Systems and Applications, Inc., Greenbelt, MD, USA

20 ¹⁰NASA Headquarters, Washington, DC, USA

¹¹University of Maryland, Baltimore County, Baltimore, MD, USA

¹²NASA Armstrong Flight Research Center, Edwards, CA, USA

¹³NASA Ames Research Center, Moffett Field, CA, USA

¹⁴University of Oklahoma, Norman, OK, USA

25 *Correspondence to:* Kirk Knobelspiesse (kirk.knobelspiesse@nasa.gov)

Abstract.

In the fall of 2017, an airborne field campaign was conducted from the NASA Armstrong Flight Research Center in Palmdale, California to advance the remote sensing of aerosols and clouds with Multi-angle Polarimeters (MAP) and Lidars. The Aerosol Characterization from Polarimeter and Lidar (ACEPOL) campaign was jointly sponsored by NASA and the
30 Netherlands Institute for Space Research (SRON). Six instruments were deployed on the ER-2 high altitude aircraft. Four were MAPs: the Airborne Hyper Angular Rainbow Polarimeter (AirHARP), the Airborne Multiangle SpectroPolarimetric Imager (AirMSPI), the Airborne Spectrometer for Planetary EXploration (SPEX Airborne) and the Research Scanning Polarimeter (RSP). The remainder were Lidars, including the Cloud Physics Lidar (CPL) and the High Spectral Resolution Lidar 2 (HSRL2). The southern California base of ACEPOL enabled observation of a wide variety of scene types, including
35 urban, desert, forest, coastal ocean and agricultural areas, with clear, cloudy, polluted and pristine atmospheric conditions. Flights were performed in coordination with satellite overpasses and ground based observations, including the Groundbased Multiangle SpectroPolarimetric Imager (GroundMSPI), sun photometers, and a surface reflectance spectrometer.



ACEPOL is a resource for remote sensing communities as they prepare for the next generation of spaceborne MAP and lidar missions. Data are appropriate for algorithm development and testing, instrument intercomparison, and investigations of active and passive instrument data fusion. They are freely available to the public, at 10.5067/SUBORBITAL/ACEPOL2017/DATA001 (ACEPOL Science Team, 2017). This paper describes ACEPOL for potential data users, and also provides an outline of requirements for future field missions with similar objectives.

1 Introduction

Aerosols, clouds, and their interactions are the largest source of uncertainty in estimates of the radiative forcing of the Earth. Reducing this uncertainty requires global observations to act as constraints for studies of the role of aerosols and clouds in a changing climate (Boucher et al., 2013). While existing passive orbital sensors show observational skill, they are limited in their consistency and under-determined for retrieval of the relevant geophysical parameters (Mishchenko et al., 2004). For this reason, the 2007 Decadal Survey of the National Research Council recommended to the National Aeronautics and Space Administration (NASA) the creation of the Aerosol-Cloud-Ecosystems (ACE) Mission, with the stated goal to reduce climate forcing uncertainty of aerosol-cloud interactions, and to better understand ocean ecosystem carbon dioxide uptake (NRC, 2007). This recommendation led to the ACE pre-formulation mission study (da Silva, et al, 2019). This study (2008-2018) was devoted to technological and scientific developments to address aerosol-cloud climate forcing uncertainty along with improved observations of ocean color to better characterize ocean biology. Designs for an ocean color instrument were enhancements of previous ocean color satellite instruments. These prototypes were, in part, developed and tested by deploying airborne instruments on high altitude aircraft. Thus, airborne field campaigns were a key component of the ACE pre-formulation study.

ACEPOL was one of several field campaigns supported by ACE, with the specific objective of testing lidar and Multi-angle Polarimeter (MAP) instruments in a variety of conditions. Such instruments reduce aerosol and cloud climate forcing uncertainties by accurately determining aerosol and cloud optical and microphysical properties and vertical distribution. They are, however, diverse in their measurement characteristics, retrieval approaches, and capability (Weitkamp, 2006, Kokhanovsky et al., 2015, Dubovik et al., 2019). Six of these instruments were installed on the ER-2 aircraft, which, because of its capability for high altitude, long range flights, provides an ideal platform for exploring measurement concepts of relevance to ACE. Two were Lidars: the Cloud Physics Lidar (CPL) and the High Spectral Resolution Lidar 2 (HSRL2), while the remaining four instruments were MAPs: the Airborne Hyper Angular Rainbow Polarimeter (AirHARP), the Airborne Multiangle SpectroPolarimetric Imager (AirMSPI), the Airborne Spectrometer for Planetary EXploration (SPEX Airborne) and the Research Scanning Polarimeter (RSP). See Table 1 for a summary of the characteristics of these instruments, and Section 3 for more detail.



70

In addition to supporting ACE, an ACEPOL objective was to provide a calibration reference for the Cloud-Aerosol Lidar with Orthogonal Polarization (CALIOP) instrument on the Cloud-Aerosol Lidar and Infrared Pathfinder Satellite Observations (CALIPSO) mission (Winker et al., 2009). This was performed with coordinated flights along the satellite ground track at the time of overpass. A coordinated under flight of the Cloud-Aerosol Transport System (CATS) orbital lidar were also conducted. The third sponsor of the ACEPOL field campaign was the Netherlands Institute for Space Research (SRON), partly funded through the NWO/NSO project ACEPOL (ALW-GO/16-09), to further advance aerosol measurement capabilities from space and the technological development of the SPEX Airborne instrument in particular.

75

80

ACEPOL consisted of nine flights from the Armstrong Flight Research Center (AFRC) in Palmdale, California in October and November of 2017. AFRC is the home base of the ER-2 aircraft and has excellent supporting facilities. Furthermore, it is within range of a variety of types of scenes, from oceans off the California coast, urban areas in Los Angeles, intensive agriculture in the California central valley, forests in the Sierra Nevada mountains and the high desert in California, Nevada and Arizona. Aerosol and clouds within these regions are similarly varied. An additional benefit is the accessibility of many ground validation sites, in particular the aerosol observations of the Aerosol Robotic Network (AERONET, Holben et al., 1998), and desert salt pans such as Rosamond Dry Lake for which comprehensive surface reflectance characterization allows vicarious calibration of airborne sensors. Figure 1 is a pilot's photograph from the cockpit of the ER-2, which illustrates the unique, high altitude vantage point of at aircraft. It is, perhaps, the closest an airborne instrument can get to a space deployment. Figure 2 and Figure 3 show the ER-2 on the ground with a portion of the ACEPOL team, and the ACEPOL emblem, respectively. The latter indicates the position of the remote sensing instruments onboard the aircraft, with two on the fuselage, and two in each wing pod.

85

90

Consistent with NASA's policy on data collection and availability, ACEPOL data are publicly available (see Section 3.4). The purpose of this article is to document the conditions under which these data were collected to aid their use by the scientific community, and to describe initial efforts by the ACEPOL team to analyze and compare results. As such, Section 2 describes the ACEPOL measurement objectives, while Section 3 covers instrument specifics. Section 4 chronicles the field deployment, and identifies successful observations of targets described in Section 2. Section 5 discusses the value of ACEPOL for various current and planned missions, while Section 6 concludes.

95

2 Objectives

100

The overall objectives of the ACEPOL field campaign, as is described below, were to either test new observations systems, develop new algorithms, or validate orbital observations. For that reason, a wide range of observation conditions were desired. All flights started and ended in Southern California, enabling flights over urban, rural, mountainous, desert, coastal



and deep ocean regions in a variety of atmospheric conditions. To better organize flight planning, the ACEPOL measurement objectives were condensed into a list of prioritized targets, as described in Table 2. Most of the highest priority targets were observed successfully, although conditions precluded observation of uniform marine stratocumulus cloud decks (target 1c), and most cases of high aerosol loads.

The value of ACEPOL observations exceeds these initial objectives. For example, polarimetric observations of land surfaces may be useful for assessment of Bidirectional Reflectance Distribution Function (BRDF) and Bidirectional Polarization Distribution Function (BPDF) models, and observations over the ocean can be used to help develop ocean remote sensing algorithms (see Section 5.4 for more details on the latter).

2.1 The Aerosol Cloud Ecosystems (ACE) mission study

ACE preformulation study activities included defining mission requirements, advancing algorithms and instrument technical readiness by convening science workshops, developing mission design white papers, and supporting new or augmenting otherwise planned field campaigns (see <https://acemission.gsfc.nasa.gov>). Technological development and scientific utilization of three classes of instruments were supported by the ACE study. These instruments included: cloud and precipitation Radars, atmospheric profiling aerosol and cloud lidars, and MAPs. Lidars and MAPs are the most relevant for aerosol remote sensing and were deployed in early 2013 for the Polarimeter Definition Experiment (PODEX) (Diner et al., 2013, Alexandrov et al., 2015, Van Harten et al., 2018, Knobelspiesse et al., 2019) and in ACEPOL during the Fall of 2017. Both ACEPOL and PODEX used the high-altitude ER-2 aircraft based at AFRC. ACEPOL can, therefore, be considered a successor to PODEX with a larger collection of more mature instruments, notably the SPEX Airborne and AirHARP polarimeters. ACEPOL offers an opportunity to also intercompare single instrument and synergistic algorithms involving lidars and MAPs.

2.2 Cloud-Aerosol Lidar and Infrared Pathfinder Satellite Observations (CALIPSO) mission validation

Airborne measurements of particulate backscatter and extinction have been important for assessing CALIOP 532 nm (Powell et al., 2009; Rogers et al., 2011) and 1064 nm (Vaughan et al., 2010; 2019) level 1 attenuated backscatter profiles, level 2 AOD retrievals (Rogers et al., 2014), aerosol classification methodology (Burton et al., 2013), cirrus cloud properties (Yorks et al., 2011), and combined active (CALIOP) passive (Moderate Resolution Imaging Spectroradiometer, MODIS) retrievals of aerosol extinction profiles (Burton et al, 2010). Using airborne measurements to evaluate CALIOP aerosol backscatter measurements avoids uncertainties caused by systematic errors, spatial inhomogeneities, and distortions associated with using ground based lidar measurements for such validation (Gimmestad et al., 2017). Consequently, ACEPOL also collected measurements under the CALIOP on flights conducted on October 26th, November 7th and 9th, and under the CATS sensor on the 19th of October.



2.3 Netherlands Institute for Space Research (SRON) studies

135 The ACEPOL campaign served several SRON objectives related to the improvement of MAP instrument performance and
aerosol retrievals and investigation of algorithm development for aerosol retrievals using both polarimeter and lidar
measurements. Specifically, the SPEX Airborne instrument deployed during ACEPOL is a prototype of the SPEXone
instrument that is contributed to the upcoming NASA PACE mission, due to be launched in late 2022. Validation of the
SPEX airborne level-1 data products (radiance and Degree of Linear Polarization, DoLP) during ACEPOL serve to identify
possible improvements to be implemented in the SPEXone instrument for the PACE mission. They also provide a test data
140 set for level-2 algorithm development for SPEXone on PACE. ACEPOL funding from the Netherlands partly came from
SRON, and partly from the Netherlands Space Office (NSO).

3 Observations

3.1 Polarimeters

145 3.1.1 The Airborne Hyper Angular Rainbow Polarimeter (AirHARP)

AirHARP is a wide field-of-view imaging polarimeter designed characterization of cloud and aerosol optical properties.
AirHARP is an amplitude-splitting polarimeter: light entering the front lens is decomposed into three orthogonal linear
polarization states (0, 45, and 90°) by a modified three-way Phillips prism. Each polarization state is imaged by a unique
detector array, so the first three parameters of the Stokes vector (I, Q, and, U) are retrieved at pixel by combining co-located
150 information from all three detectors. Stripe filters on the detectors define 120 distinct along track viewing angles across the
four HARP wavelengths (spectral widths): 440 (14), 550 (12), 670 (18), and 870 (38) nm, across a total swath of $\pm 57^\circ$
($\pm 47^\circ$) along-track (cross-track). 60 of these angles are at 670nm, specifically designed for studying the structure of the
polarized cloudbow. The high angular resolution (roughly 2°) enables AirHARP to measure the cloudbow structure at all
individual pixels. The remaining three wavelengths have 20 angles each for characterization of aerosols. Figure 4a shows an
155 illustration of the sampling scheme applied by the HARP polarimeters, where each along track viewing angle of the
instrument produces a full pushbroom image. The figure also shows an example of data collected during the ACEPOL
campaign, its second deployment. The instrument's maiden field campaign was the Lake Michigan Ozone Study (LMOS) in
2017 (McBride et al., 2019 in preparation). For ACEPOL, AirHARP collected data over defined targets, as the processing
speed of the onboard data acquisition system precluded continuous data collection.

160

AirHARP is an aircraft demonstration for the HARP CubeSat instrument, a standalone satellite that to be launched soon
from the International Space Station (ISS) for a year-long mission. A third member of the HARP family is the HARP2



sensor, which will provide global coverage two days, as part of NASA's Plankton-Aerosol-Cloud-ocean Ecosystem (PACE) mission due to launch in 2022 (Werdell et al., 2019).

165

AirHARP Level 0 ACEPOL data are corrected, reconstructed, geolocated, and calibrated in the Hyper-Angular Image Processing Pipeline (HIPPI) Level-1B algorithm. These data products are gridded to a horizontal resolution of 2000 pixels per latitude degree and packaged into HDF5 files for distribution in ACEPOL data archive. A Level 2 aerosol retrieval algorithm has been implemented using the Generalized Retrieval for Aerosol and Surface Properties (GRASP) scheme (Dubovik et al. 2011, Puthukkudy et. al 2020). Figure 4 (d) shows the aerosol optical depth map retrieved using AirHARP measurements and GRASP inversion algorithm for a smoke scene in Figure 4 (c). Cloud droplet size distribution retrievals are implemented using a traditional parametric fit to Mie scattering curves for liquid water droplets (McBride et al. 2019). Retrievals of ice cloud characteristics, aerosols above clouds, ocean and surface reflectance properties, and atmospheric correction are also important potential uses of HARP data.

170

175 3.1.2 The Airborne Multiangle SpectroPolarimetric Imager (AirMSPI)

The Airborne Multiangle SpectroPolarimetric Imager (AirMSPI, Diner et al., 2013b) is pushbroom imaging camera used for the characterization of atmospheric aerosols and clouds. In addition to radiometric channels, AirMSPI employs photoelastic modulators (PEMs) to enable accurate measurements of the degree and angle of linear polarization (Diner et al., 2010; van Harten et al. 2018). These polarimetric data help discriminate between different aerosol particle types, which is crucial to improving our understanding on climate and air quality. The instrument flies aboard NASA's high-altitude ER-2 aircraft, and acquires Earth imagery with ~10 m spatial resolution across a 9km wide swath. Radiance data are obtained at 355, 380, 445, 470, 555, 660, 865, 935 nm. The polarimetric channels at 470, 660, and 865 nm report both radiances and the linear polarization Stokes components Q and U. AirMSPI is a precursor to the future Multi-Angle Imager for Aerosols (MAIA) satellite instrument (see Section 6.3), which will be used to improve our understanding of the health risks associated with airborne particulate matter.

180

185

The AirMSPI camera is mounted on a motorized single-axis gimbal to enable multiple views of a science target from different along-track view angles. The number of views and specific set of angles for each observing sequence is programmable prior to flight. While approaching the target in a straight and level flight line, the pilot presses one of three buttons to start the corresponding multi-angle acquisition sequence. Figure 5 shows example imagery of the sequences used during the ACEPOL campaign. All 3 modes begin and end with views of the onboard dark target and polarization validator light source.

190

AirMSPI observed a total of 24 targets in the 9-angle step-and-pseudostare mode, 32 targets in the 15-angle mode, and 209 continuous sweep images. AirMSPI L1B2 geolocated radiometric and polarimetric data and quicklooks are available as

195



noted in Section 3.4. For a further analysis, and comparison with other MAPs and Lidars during ACEPOL, see Fu et al, 2019.

3.1.3 The Research Scanning Polarimeter (RSP)

A pair of RSP instruments (denoted RSP1 and RSP2; the latter was used in ACEPOL) have been deployed on more than 25
200 field missions in the last 20 years. The RSP is an airborne multi-angle and multi-spectral polarimeter that continuously scans
in the aircraft along-track direction. During a complete scanner rotation, a total of 205 samples, each with a 0.8° (14 mrad)
field of view, are collected. The 205 samples include: 152 views between 60° forward and aft of the normal to its baseplate;
10 samples viewing an internal dark reference and 43 samples through an earth viewing polarization scrambler. Samples are
obtained by a rotating polarization compensated mirror assembly with six bore-sighted telescopes, to simultaneously obtain
205 Stokes parameters 9 spectral bands. Each telescope uses a Wollaston prism to split the incoming intensity into two spatially
separated orthogonally polarized components, which are then further split and passed through dichroic filters, defined by the
spectral bandpass: (full width half maximum bandwidths in parentheses) 410.3 (30), 469.1 (20), 555.0 (20), 670.0 (20),
863.5 (20), 960.0 (20), 1593.5 (60), 1880.0 (90) and 2263.5 (120)nm. On the ER-2, the un-vignetted viewing angle range is
from 65° aft to 45° forward, for a total of 120 samples. The single nadir ground pixel size from an altitude of 20 km is 280
210 m, and successive pixels partially overlap.

RSP2 was calibrated in the Airborne Sensor Facility at NASA Ames Research Center before and after ACEPOL. Radiometric calibration was stable to within roughly 1% for all bands, except for 410.3 nm, where a 4% decrease in radiometric throughput was observed (polarimetric calibration was stable to within $\sim 0.1\%$). Data processing to level 1b
215 (calibrated and geolocated at-sensor measurements) consists of dark subtraction for each scan and application of calibration coefficients to generate Stokes parameters, together with the geolocation of each viewing angle sample. Processing from level 1b to level 1c consists of collocating the different viewing angles about a defined altitude, either at the ground, or at cloud top if a cloud is present. The latter requires cloud identification and a cloud top height estimate (Sinclair et al. 2017). Level 2 processing of cloudy scenes is split between water and ice clouds. Water cloud retrievals include cloud optical depth
220 and standard bi-spectral droplet size estimates (Platnick et al. 2017), as well as both parametric (Alexandrov et al. 2012a) and non-parametric (Alexandrov et al. 2012b) droplet size distribution estimates that use polarization (Alexandrov et al. 2018). Most clouds observed during ACEPOL were low level water clouds, but when ice clouds were detected, cloud optical depth, particle size and particle shape/roughness retrievals (Van Diedenhoven et al. 2012, 2013; Van Diedenhoven 2018) were retrieved. Level 2 processing for aerosol retrievals uses the Microphysical Aerosol Properties from Polarimetry
225 (MAPP) algorithm (Stamnes et al. 2018). The MAPP land surface model consists of a Fresnel reflectance with shadowing for the polarized reflectance (Waquet et al. 2009) together with a RossThick (Ross, 1981, Roujean et al. 1992) LiSparse (Li and Strahler, 1992) kernel model (Wanner et al. 1995), similar to that used for operational processing of MODIS land



surface products (Schaaf et al., 2002). RSP was operational for all ACEPOL flights and data are available at the ACEPOL data archive. Example RSP observations of a liquid phase cloud are shown in Figure 6.

230 3.1.4 The Airborne Spectrometer for Planetary EXploration (SPEX Airborne)

The SPEX airborne instrument (Smit et al., 2019) employs the spectral modulation technique (Snik et al, 2009), in which the degree and angle of linear polarization are encoded in a modulation of the radiance spectrum as a function of wavelength. This modulation is achieved by placing a set of dedicated optical components (quarter wave retarder, multiple order retarder) in front of the telescope. The resulting two light beams that contain a modulation pattern as a function of wavelength (out of phase with each other) that enter a spectrometer and are focussed on a detector. Radiance measurements are obtained between 400-800 nm at the spectral resolution of the spectrometer (~2 nm), while for DoLP the spectral resolution is determined by the modulation period, which is conservatively estimated at 10 nm at 400 nm and 40 nm at 800 nm.

An example of a SPEX airborne radiance and DoLP measurement obtained during ACEPOL is shown in Figure 7.

240

SPEX airborne has nine viewports that are projected on one detector, at angles (+/-57°, +/-42°, +/-28°, +/-14° and 0°). The SPEX airborne cross-track swath is 6°. The data processing from level-0 (detector counts) to level-1b (calibrated and geolocated radiance and DoLP values) consists of the following steps: Dark image subtraction, spectral extraction and line-of-sight annotation, wavelength annotation, spectral alignment of the 2 modulated spectra, radiometric correction, demodulation, and geolocation. Next, data of the different viewports are all aggregated on the same spatial grid, yielding the level 1C data product, currently computed at 1x1 km² spatial resolution.

245

For level-2 processing (Fu et al., 2019), the SPEX airborne team has focused on aerosol retrievals, building further on the SRON aerosol retrieval algorithm previously used for POLDER-3 processing (Hasekamp et al., 2011, Lacagnina et al., 2016;2017) and groundSPEX (van Harten et al, 2014; di Noia et al, 2014). The algorithm has been extended from a bi-modal retrieval scheme to a multi-mode retrieval scheme for an arbitrary number of modes (Fu and Hasekamp, 2018). For processing ACEPOL data, a setup with 5 modes has been used, where for each mode the aerosol column number is retrieved corresponding to a set of fine- and coarse mode spectrally varying refractive indices, the fraction of spherical particles (Dubovik et al, 2006), and the aerosol layer height. SPEX airborne data have been processed using 16 discrete wavelengths between 450 and 750 nm. Wavelengths less than 450 nm and greater than 750 nm are excluded because of lower data quality. SPEX airborne was operational for all ACEPOL flights, and data are available at the ACEPOL data archive.

255



3.2 Lidars

3.2.1 The Cloud Physics Lidar (CPL)

The Cloud Physics Lidar (CPL) is a nadir-pointing, multi-wavelength (355, 532, 1064 nm) elastic backscatter lidar that
260 measures vertical profiles of cloud and aerosol properties (McGill et al. 2002). CPL has participated in numerous field
campaigns since its first deployment in 2000 on the ER-2, often in tandem with the other remote sensing instruments
involved in ACEPOL. Raw CPL data is calibrated by normalizing the 355, 532 and 1064 nm signal to the Rayleigh
(molecular) backscatter between 15 and 18 km, creating vertical profiles of the total attenuated backscatter (McGill et al.,
2007). CPL data products retrieved from the calibrated backscatter include vertical profiles of depolarization ratio,
265 particulate backscatter coefficient, and particulate extinction coefficients, as well as layer properties such as top/base
altitudes, aerosol type, and optical depth (Yorks et al., 2011a; Hlavka et al., 2012).

CPL data products, with vertical resolution of 30 m and 1 sec frequencies (~200 m horizontal resolution), enable a wide-
range of applications including the analysis of cloud properties (McGill et al., 2004; Bucholtz et al., 2010; Yorks et al., 2011;
270 Alexandrov et al., 2015), as well as aerosol and dust properties (McGill et al., 2003; Nowottnick et al., 2011; Wu et al.,
2016). CPL data from ACEPOL are fully processed and data products available at the ACEPOL data repository. However,
an electronics controller failed in the CPL laser during the second flight of the campaign. The cause of this failure was not
immediately apparent, and there was no time to take the instrument out of service during the ACEPOL campaign. Thus, the
ACEPOL CPL data products after the first flight are non-standard, as they required more averaging, sometimes as much as
275 10 sec (2 km horizontal), and removal of some data at specific wavelengths due to poor quality.

3.2.2 The High Spectral Resolution Lidar (HSRL-2)

HSRL-2 is the second generation airborne High Spectral Resolution Lidar developed at NASA Langley Research Center.
Like the first generation HSRL-1 (Hair et al., 2008), HSRL-2 independently measures aerosol backscatter and extinction
(532 nm) using the HSRL technique, aerosol backscatter (1064 nm) using the standard backscatter technique (Müller et al.,
280 Sawamura et al), and aerosol depolarization at both wavelengths. HSRL-2 adds measurements of aerosol backscatter and
depolarization at 355 nm using the HSRL technique as well as measurements of aerosol depolarization at 355 nm. These
HSRL-2 measurements are used to compute AOD as well as the aerosol extinction/backscatter ratio ('lidar ratio') at 355 and
532 nm. Rogers et al. (2009) evaluated the HSRL extinction coefficient profiles and found that the HSRL extinction profiles
are within the systematic errors of airborne in situ measurements at visible wavelengths. Derived products include, first,
285 estimates of planetary boundary layer heights which use the vertically resolved profile measurements of aerosol backscatter
to derive aerosol mixed layer heights during the daytime (Scarino et al., 2014). Second, aerosol classification, which uses an
algorithm to interpret the information about aerosol physical properties indicated by the HSRL-2 aerosol intensive
parameters to qualitatively infer aerosol type (Burton et al., 2012). HSRL-2 measurements have also been used to retrieve



height-resolved parameters such as aerosol effective radius and concentrations (number, surface, volume) (Müller et al.
290 (2014), Sawamura et al., 2017).

HSRL-2 has been deployed on various NASA aircraft for both NASA and DOE field missions (Berg et al., 2016; Sawamura
et al., 2017; Burton et al., 2018). During ACEPOL, HSRL-2 operated autonomously from the NASA ER-2 aircraft. When
operated from the ER-2, the nominal HSRL-2 aerosol backscatter profiles are reported at a vertical resolution of 15 m and a
295 horizontal/temporal resolution of 1-2 km (10 seconds). Aerosol depolarization ratios at all three wavelengths are reported at
the same resolutions. For ACEPOL, aerosol extinction, AOD, and lidar ratio from the HSRL methodology are not available
in some cases, particularly when the aerosol loading was small. In these cases, the aerosol extinction at 355 nm and 532 nm
is derived using the aerosol backscatter and an assumed lidar ratio of 40 *sr* and reported at the backscatter resolution. In other
cases where the HSRL method is available for extinction products, they are reported at 150 m vertical resolution and at
300 temporal resolution of 60s generally and 10s within smoke plumes. Calibrated aerosol backscatter derived using the HSRL
method is available in all cases. Problems with the ER-2 coolenol pump and a circuit breaker caused HSRL-2 data gaps on
the October 27 flight and loss of HSRL-2 data on the November 1 flight.

3.3 Ground observations

Ground based observations are valuable in that they can be used to validate or calibrate aircraft instrument measurements, or
305 provide context for those observations. While not part of the ACEPOL field campaign, ground sites of two instrument
networks served as targets for overflights. These networks (the Aerosol Robotic Network, or AERONET, and air quality
monitors of the California Air Resources Board, or CARB) host their data in separate archives that are not under direct
control of ACEPOL participants. A third effort, also ground based, involved deployment of radiometric and atmospheric
measurement at Rosamond Dry Lake. The collection of these data were funded by ACEPOL and are archived at the
310 locations in Table 3.

3.3.1 Aerosol Robotic Network (AERONET) sites

The Aerosol Robotic Network (AERONET, Holben et al, 1998) is a system of sun photometers used to produce global
measurements of AOD, inversion products, and precipitable water. This NASA product provides data recorded every 15
minutes utilizing many spectral bands, and are available at the AERONET archive (aeronet.gsfc.nasa.gov). During
315 ACEPOL, the Modesto, Fresno-2, CalTech, and Bakersfield sites in California were operational, and were routinely targeted.
Additional AERONET sites that were targeted during the campaign are the USGS Flagstaff site in Arizona and the USC
SeaPrism site. The latter is part of a sub-network designated AERONET-Ocean Color (AERONET-OC). This network
comprises enhanced instruments that have the ability to determine water-leaving radiance in addition to aerosol optical
properties (Zibordi et al, 2009).



320 3.3.2 California Air Resources Board (CARB) sites

Air particulates are measured by the California Air Resources Board (CARB) throughout the state. A majority of CARB sites report PM_{2.5} (particulate matter with a diameter of less than 2.5 microns) and PM₁₀ (particulate matter with a diameter of less than 10 microns), as determined by a variety of measurements, including particle counting and mass spectrometry. Gaseous criteria air pollutants that are regulated in California and at the national level are also measured and reported to ensure compliance with U.S. Environmental Protection Agency (U.S. EPA) air quality standards, and are stored at the CARB archive (<https://www.arb.ca.gov/adam/index.html>).

In addition to CARB total PM monitors, several speciated EPA PM monitors are located in California's San Joaquin Valley (SJV) including Modesto, Fresno, Visalia, and Bakersfield. The speciated PM monitors in Modesto, Fresno and Bakersfield are collocated with AERONET instruments making these sites very useful for determining connections between near-surface PM loading and atmospheric aerosols. Modesto, Fresno, and Bakersfield sites were regularly targeted throughout the campaign.

3.3.3 Rosamond Dry Lake ground instrumentation

Ground measurements made in support of ACEPOL vicarious calibration were performed on October 25, 2017, at Rosamond Dry Lake (34.858704° N, 118.07638° W). This included measurements of surface reflectance and total column optical depth at the time of overflight, roughly 18:00 UTC. Data were processed at JPL and are hosted in the ACEPOL archive. Results of these measurements are shown in Figure 8 and Figure 9. AOD was measured by two Microtops and a Reagan sunphotometer. The Microtops are handheld instruments, with spectral bands at 440, 675, 870, 938, and 1020 nm. The Reagan sunphotometer, built at the University of Arizona, is an auto-tracking sunphotometer, with channels at 370, 400, 440, 520, 620, 670, 780, 870, 940, and 1030 nm. The instrument was calibrated via the Langley method by taking early morning data the day before the ER-2 overflight. Surface reflectance was measured by the Analytical Spectral Devices (ASD) FieldSpec 4 instrument. This measures from 350 to 2500 nm with 1 nm samples with resolution at 3 nm (VIS, NIR) and 10 nm (SWIR). Data were taken over a 500x500 m area, along with spectra of a Spectralon 100% diffuse reflectance standard. To report radiances, the Spectralon data are interpolated at the target sample times, and corrected for Spectralon bi-directional reflectance. The ratio of the target to interpolated Spectralon data provides a per-sample reflectance, which are then averaged to provide a site average.

Operating alongside the vicarious calibration instrumentation was the Ground-based Multiangle SpectroPolarimetric Imager (GroundMSPI) instrument (see Fig. 8). The specifications of the GroundMSPI camera are similar to AirMSPI (see Section 3.1.2), including the 8 spectral bands within 355-935 nm, with 470, 660, and 865 nm being polarimetric. The camera is mounted ~1m from the ground on a motorized altazimuth tripod. GroundMSPI performed continuous elevation scans at



different azimuths to image the surface as well as the clear sky. The surface observations provide a direct measurement of the polarized bidirectional reflectance distribution function (p-BRDF), including potential spectral variance, whereas the sky radiance and polarization data serve as input for aerosol retrievals, either independently or combined with the airborne sensors. On November 7, 2017, GroundMSPI performed sky scans at the Fresno AERONET station during ER2 and Cloud-Aerosol Lidar and Infrared Pathfinder Satellite Observations (CALIPSO) overpasses. GroundMSPI L1B2 rectified and co-registered radiometric and polarimetric data and quicklooks are available as noted in Section 3.4.

3.4 Data availability

The primary repository for ACEPOL data is the NASA Atmospheric Science Data Center (ASDC), at the Langley Research Center. AirMSPI and GroundMSPI data are stored separately at the ASDC, while AERONET data are located at their own archive. Air quality from California are stored at the CARB website. AJAX data are available by request to the PI, Dr. Laura Iraci at NASA ARC. The DOI for the primary database is: 10.5067/SUBORBITAL/ACEPOL2017/DATA001 (ACEPOL Science Team, 2017), while for AirMSPI it is 10.5067/AIRCRAFT/AIRMSPI/ACEPOL/RADIANCE/ELLIPSOID_V006 and 10.5067/AIRCRAFT/AIRMSPI/ACEPOL/RADIANCE/TERRAIN_V006 (ACEPOL AirMSPI Science Team, 2017). GroundMSPI data are at 10.5067/GROUND/GROUNDMSPI/ACEPOL/RADIANCE_v009 (GroundMSPI Science Team, 2017). Table 3 lists further details of these archives.

4 Deployment

4.1 Flight planning

Daily flight planning was informed by weather and aerosol forecasts from NASA's Global Modeling and Assimilation Office (GMAO, <https://gmao.gsfc.nasa.gov>) and the European Center for Mid-Range Weather Forecast (ECMWF, <http://ecmwf.int>), satellite imagery from several geostationary and polar orbiting satellites (e.g., GOES-16, MODIS, VIIRS), and fire weather outlooks from NOAA's Storm Prediction Center (https://www.spc.noaa.gov/products/fire_wx). Flight plans were drafted based on forecast information and adjusted in real-time to account for the rapid changes in fire and weather conditions. See Table 4 for detailed information about each flight. This table lists relevant information about each flight, including observed targets, instrument status, and coordinated observations with satellite, ground or other aircraft observations. Local time at AFRC is UTC-08:00. Scenes of particular interest are highlighted in bold. The "Moving Lines" flight planning tool (LeBlanc, 2018) was used to prepare for all flights, along with weather forecasting support of the NASA Global Modeling and Assimilation Office (GMAO).

4.2 Aircraft operations

All airborne sensors were deployed together on the NASA Lockheed Earth Resources (ER-2) aircraft, based at the NASA AFRC in Palmdale, California. The ER-2 is a high-altitude aircraft, capable of flying up to roughly 21km (68,000 feet),



above most of the Earth's atmosphere. Flights were contained within the continental United States and offshore, primarily in California, Nevada and Arizona. The aircraft altitude, range, and the variety of conditions within that range made the ER-2 deployment from AFRC an excellent orbital analogue platform.

385

Figure 10 Flight tracks for the ACEPOL field campaign is a graphical illustration of ACEPOL flight tracks. Details on the characteristics of each flight are in Table 4. Generally, atmospheric conditions during ACEPOL were clear, with very low aerosol loads, and few clouds. The range of the ER-2 helped compensate for these somewhat unusual conditions, providing for cloud observations in northern California or offshore, and deployments east over Arizona to overfly prescribed forest fire burns near the Grand Canyon in Arizona.

390

One of the priorities of ACEPOL was coordinated overflights of ground sites to validate or constrain observations by the remote sensing instruments. AERONET sun photometers were overflown on all days except the test flights on October 19th and November 3rd. Often, these overflights were planned so that the aircraft heading was close to the Solar Principal Plane (SPP), which maximizes the scattering angle range of MAP observations in order to increase the measured information. The AERONET-OC site "USC_SEAPRISM", located on an oil platform off Newport Beach, California, was of particular interest because of the capability for concurrent ocean and atmosphere measurements. This site was targeted on multiple days. Since CARB particulate matter monitoring sites are often co-located with AERONET sites (especially in the California Central Valley), these were frequently monitored as well.

395

400

On the last ACEPOL flight (November 9th), there was a serendipitous overflight of a (lower altitude) flight by an Alpha Jet stationed at the NASA Ames Research Center (ARC) as part of the Alpha Jet Atmospheric Experiment (AJAX) flight series (Hamill et al, 2016). The Alpha Jet was instrumented with a wing pod sampling gas concentrations of CO₂, CH₄, H₂O, O₃ and HCHO, plus 3D wind speeds, temperature and pressure, and proceeded the ER-2 by about one hour in an area of the eastern Sierra Nevada Mountains.

405

4.3 Example scene

ACEPOL brings together four multi-angle polarimeters and two lidars which have disparate observation characteristics. An example of this is shown in Figure 11. This scene, an overflight of prescribed burns near the Grand Canyon on October 27, 2017, was observed by all instruments, although CPL and RSP data are omitted from this figure for clarity. Aerosol Backscatter in the lidar data (HSRL shown, CPL omitted) show smoke in the process of either being lofted by surface topography or trapped by that topography. Large scale AirHARP data indicate the horizontal extent of the smoke plume, while high spatial resolution AirMSPI data demonstrate fine scale spatial variability. Continuous sampling polarimeters (SPEX Airborne, shown, RSP, omitted) capture the atmospheric state for the entire flight. All instruments can be used to further derive the aerosol optical properties to varying degrees of success, depending on observation information content and

410



415 retrieval algorithm design. Because of the overlapping nature of such observations, these scenes provide a test of retrieval
capability. They can also be used to investigate algorithms that incorporate data from multiple instruments.

5 Value for future missions

5.1 Aerosol, Cloud, Convection and Precipitation (ACCP) mission study

ACEPOL was designed to evaluate instrument designs under consideration for the ACE mission study, which had scientific
420 goals that are still relevant today. As evidence, the 2017 Decadal Survey of the National Academies of Sciences,
Engineering, and Medicine (National Academies of Sciences, Engineering, and Medicine, 2018) identified targeted
observables (“Aerosols” and “Clouds, Convection & Precipitation”). In response, NASA is now conducting the Aerosol,
Cloud, Convection and Precipitation (ACCP) pre-formulation study (<https://science.nasa.gov/earth-science/decadal-accp>).
Spaceborne versions of the airborne lidar and polarimeters that participated in ACEPOL are under consideration for ACCP.
425 Hence, ACEPOL data play an important role in ACCP activities.

5.2 Hyper Angular Rainbow Polarimeter (HARP) CubeSat

AirHARP provides an excellent proxy dataset for the development of HARP CubeSat algorithms. The two instruments are
nearly identical, although AirHARP experienced temperature, vibrational, and humidified conditions on aircraft that are not
present in space. Like AirHARP, the HARP CubeSat does not have an on-board calibrator, so many of the correction
430 techniques used on the AirHARP data will carry over to the CubeSat data. However, by pointing the spacecraft, the HARP
CubeSat sensor is capable of lunar, limb, and deep space views, as well as coverage over a larger variety of surfaces, which
may improve post-processing and vicarious data calibrations.

The synergy between AirHARP and other ACEPOL instruments provides excellent opportunities to study design and
435 sampling, with relevance to HARP Cubesat. Because of altitude and bandwidth limitations, the instruments have different
spatial resolutions. For AirHARP, it is much smaller (roughly 55m at nadir) than it will be from HARP CubeSat (about 4km
at nadir). AirHARP retrievals can be used to study small-scale variabilities in a cloud field or smoke plume. These features
will be much less resolved in HARP CubeSat data, which is better suited for intercomparisons with MODIS and other
satellite instruments. As technology demonstration, the amount of data collected by HARP CubeSat is severely constrained
440 by spacecraft storage and downlink capabilities allowing for a single scene per day. This limitation is not present in future
versions of the HARP payload, such as HARP2 on PACE.

5.3 Multi-Angle Imager for Aerosols (MAIA)

NASA selected the Multi-Angle Imager for Aerosols (MAIA) investigation (Diner et al., 2018) as part of the third Earth
Venture Instrument (EVI-3) solicitation. MAIA’s primary objective is to assess the impacts of different types of airborne



445 particulate matter (PM) on human health, where “type” refers to the proportions of aerosols having different sizes, shapes,
and compositions. The satellite instrument contains a pushbroom multispectral and polarimetric camera mounted on a two-
axis gimbal. Along-track pointing (up to $\pm 60^\circ$) enables multiangle observations over a discrete set of globally distributed
target areas, while cross-track pointing provides the camera with a wide cross-track field of regard ($\pm 45^\circ$), permitting
frequent revisits of the designated targets. MAIA makes use of the same dual-PEM polarimetric imaging approach as
450 AirMSPI and extends the spectral range into the shortwave infrared (SWIR). The camera includes 14 spectral bands in the
ultraviolet (UV), visible/near-infrared (VNIR), and SWIR, of which 3 are polarimetric (442, 645, and 1040 nm). Channels
near the O₂ A-band (749, 762.5 nm) are included to explore sensitivity to aerosol layer (and cloud) height. Launch into a
740-km sun-synchronous, ascending node orbit with 10:30 am equator-crossing time is planned for mid-2022 aboard the
General Atomics Orbital Test Bed-2 spacecraft. MAIA measurements will be used to retrieve total and AOD and column
455 effective aerosol optical and microphysical properties at 1-km spatial resolution, using an optimal estimation algorithm (Xu
et al., 2017). A geostatistical regression modeling framework will be used to transform column aerosol optical and
microphysical properties to speciated, near-surface PM concentrations. During ACEPOL, AirMSPI collected imagery over
speciated PM and AERONET sites, while HSRL2 obtained independent data regarding aerosol types and their vertical
distributions, making the campaign a valuable source of information for testing and validation of MAIA algorithms.

460 **5.4 Plankton, Aerosol, Cloud, ocean Ecosystem (PACE) mission**

The NASA PACE mission, due to be launched in late 2022, will contain three instruments. The primary instrument is the
Ocean Color Imager (OCI), a UV-VIS spectrometer designed for Ocean Color remote sensing applications. OCI also has
channels in the SWIR, and will also perform retrievals of aerosol, cloud, and land surface geophysical properties. The PACE
payload will also contain two, contributed, MAPs. Airborne prototypes of these instruments, with similar characteristics,
465 were flown as part of ACEPOL. AirHARP is the airborne prototype of PACE/HARP2, while SPEX Airborne is the
prototype of PACE/SPEXone (Werdell et al, 2019, Hasekamp et al., 2019). For these reasons, ACEPOL data provide a
valuable resource for the development of remote sensing strategies for PACE, by acting as a proxy for the MAPs on PACE.
The spectrometer characteristics of SPEX Airborne can also serve as a proxy for OCI UV-VIS spectrometer, while the
SWIR channels on RSP (with some exceptions) can stand in for those on OCI. Furthermore, the characteristics of other
470 MAPs deployed during ACEPOL can be used to understand the impact of PACE design decisions. Additionally, coincident
observation by other instruments, namely the CPL and HSRL2 lidars, can be used to validate assessed retrievals. Studies of
these observations in the context of PACE are active and underway (e.g. Smit et al., 2019, Fu et al, 2019).

5.5 Upcoming SPEX Airborne deployments

As part of the EU-Horizon 2020 project SCARBO (Space Carbon Observatory) SPEX airborne will participate in an
475 airborne campaign in May 2020, flying together with two instruments that measure CO₂. The goal is to use aerosol
measurements from SPEX airborne to improve CO₂ retrievals from MAMAP and NanoCarb. The flights will depart from



Toulouse and will cover (parts of) France, Spain, Italy and Germany. The aircraft for the SCARBO campaign will be a Falcon that will fly between 2 and 10 km altitude.

6 Conclusions

480 The ACEPOL field campaign explored techniques for remote sensing of aerosol and cloud optical properties using a variety of MAP and lidar designs. These co-located observations, gathered in a diversity of conditions, are a valuable resource for algorithm development, instrument design, and other studies, and are archived in publicly available databases. Furthermore, the coordination and teamwork demonstrated during this successful field campaign can serve as a model for future campaigns, especially those that have multiple objectives, instrument teams and funding institutions.

485 7 Acronyms and units

ABI	Advanced Baseline Imager
ACCP	Aerosol, Cloud, Convection and Precipitation
ACEPOL	Aerosol Characterization from Polarimeter and Lidar
AERONET	Aerosol Robotic Network
490 AERONET-OC	Aerosol Robotic Network – Ocean Color
AFRC	NASA Armstrong Flight Research Center
AirHARP	Airborne Hyper Angular Rainbow Polarimeter
AirMSPI	Airborne Multiangle SpectroPolarimetric Imager
AJAX	Alpha Jet Atmospheric Experiment
495 AOD	Aerosol Optical Depth
ARC	NASA Ames Research Center
ASD-AC	Airborne Science Data for Atmospheric Composition
ASDC	Atmospheric Science Data Center (at NASA Langley Research Center)
BPDF	Bidirectional Polarization Distribution Function
500 BRDF	Bidirectional Reflectance Distribution Function
CALIOP	Cloud-Aerosol Lidar with Orthogonal Polarization
CALIPSO	Cloud-Aerosol Lidar and Infrared Pathfinder Satellite Observations
CARB	California Air Resources Board
CATS	Cloud-Aerosol Transport System
505 CPL	Cloud Physics Lidar



	DISCOVER-AQ	Deriving Information on Surface Conditions from COlumn and VERTically Resolved Observations Relevant to Air Quality
	DOE	Department of Energy
	DoLP	Degree of Linear Polarization (unitless)
510	ECMWF	European Center for Mid-Range Weather Forecast
	EPA	U.S. Environmental Protection Agency
	ER-2	Lockheed Earth Resources 2 (aircraft)
	EVI	Earth Venture Instrument
	GroundMSPI	Groundbased Multiangle SpectroPolarimetric Imager
515	GMAO	Global Modeling and Assimilation Office
	GOES-16	Geostationary Operational Environmental Satellite – 16
	GRASP	Generalized Retrieval for Aerosol and Surface Properties
	HARP2	Hyper Angular Rainbow Polarimeter – 2 (contribution to PACE mission)
	HIPP	Hyper-Angular Image Processing Pipeline
520	HSRL2	High Spectral Resolution Lidar 2
	LaRC	NASA Langley Research Center
	LMOS	Lake Michigan Ozone Study
	MAIA	Multi-angle Imager for Aerosols
	MAP	Multi-angle Polarimeter
525	MAPP	Microphysical Aerosol Properties from Polarimetry (RSP algorithm)
	MISR	Multi-angle Imaging SpectroRadiometer
	MODIS	Moderate Resolution Imaging Spectroradiometer
	NASA	National Aeronautics and Space Administration
	NIR	Near infrared
530	NIST	National Institute of Standards and Technology
	NSO	Netherlands Space Office
	ORACLES	ObseRvations of Aerosols above CLouds and their intEractionS
	P-3	Lockheed P-3 Orion (aircraft)
	PACE	Plankton, Aerosol, Cloud, ocean Ecosystem
535	PM	Particulate Matter
	PODEX	Polarimeter Definition Experiment
	RSP	Research Scanning Polarimeter
	SCARBO	Space Carbon Observatory
	SeaBASS	SeaWiFS Bio-optical Archive and Storage System



540	SJV	San Joaquin Valley
	SPEX Airborne	Airborne Spectrometer for Planetary Exploration
	SPEXone	Spectrometer for Planetary Exploration (contribution to PACE mission)
	SPP	Solar Principal Plane
	sr	Steradian
545	SRON	Netherlands Institute for Space Research
	SWIR	Shortwave Infrared
	TCAP	Two Column Aerosol Project
	VIIRS	Visible Infrared Imaging Radiometer Suite
	VIS	Visible (wavelengths)

550 **8 Acknowledgements**

Funding for the ACEPOL field campaign came from NASA (ACE and CALIPSO missions) and SRON. See Sections 2 for more details.

The ACEPOL field campaign would not have been possible without the professionalism and energy of the ER-2 pilots and
555 ground crew, and the overall support at the NASA Armstrong Flight Research Center.

Research at the Jet Propulsion Laboratory, California Institute of Technology was carried out under a contract with the National Aeronautics and Space Administration.

560 We thank the United States Forest Service, in particular Jason Clawson and David Hercher, for providing information about planned prescribed burns in the Kaibab National Forest.

The Principal Investigator for the USC_SEAPRISM AERONET-OC site is Curtiss O. Davis of Oregon State University. The site manager is Matthew Ragan of the University of Southern California.

565

Figure 11 was visualized using Google Earth.

References



- ACEPOL Science Team: Aerosol Characterization from Polarimeter and Lidar Campaign, NASA Langley Atmospheric
570 Science Data Center DAAC, doi:10.5067/SUBORBITAL/ACEPOL2017/DATA001, 2017.
- AirMSPI Science Team: Aerosol Characterization from Polarimeter and Lidar Campaign, AirMSPI instrument ellipsoid
mapped data, NASA Langley Atmospheric Science Data Center DAAC, doi:
10.5067/AIRCRAFT/AIRMSPI/ACEPOL/RADIANCE/ELLIPSOID_V006, 2017.
- AirMSPI Science Team: Aerosol Characterization from Polarimeter and Lidar Campaign, AirMSPI instrument terrain
575 mapped data, NASA Langley Atmospheric Science Data Center DAAC, doi:
10.5067/AIRCRAFT/AIRMSPI/ACEPOL/RADIANCE/TERRAIN_V006, 2017.
- GroundMSPI Science Team: Aerosol Characterization from Polarimeter and Lidar Campaign, GroundMSPI instrument data,
NASA Langley Atmospheric Science Data Center DAAC, doi: 10.5067/GROUND/GROUNDMSPI/ACEPOL/RADIANCE_v009,
2017.
- 580 Alexandrov, M.D., B. Cairns, C. Emde, A.S. Ackerman, and B. van Diedenhoven, 2012a. Accuracy assessments of cloud
droplet size retrievals from polarized reflectance measurements by the research scanning polarimeter. *Remote Sens.
Environ.*, 125, 92-111, doi:10.1016/j.rse.2012.07.012.
- Alexandrov, M.D., B. Cairns, and M.I. Mishchenko, 2012b. Rainbow Fourier transform. *J. Quant. Spectrosc. Radiat.
Transfer*, 113, 2521-2535, doi:10.1016/j.jqsrt.2012.03.025.
- 585 Alexandrov, M.D., Cairns, B., Wasilewski, A.P., Ackerman, A.S., McGill, M.J., Yorks, J.E., Hlavka, D.L., Platnick, S.E.,
Arnold, G.T., Van Diedenhoven, B. and Chowdhary, J., 2015. Liquid water cloud properties during the Polarimeter
Definition Experiment (PODEX). *Remote Sensing of Environment*, 169, pp.20-36.
- Alexandrov, M.D., B. Cairns, K. Sinclair, A.P. Wasilewski, L. Ziemba, E. Crosbie, R. Moore, J. Hair, A.J. Scarino, Y. Hu,
S. Stamnes, M.A. Shook, and G. Chen, 2018. Retrievals of cloud droplet size from the research scanning polarimeter data:
590 Validation using in situ measurements. *Remote Sens. Environ.*, 210, 76-95, doi:10.1016/j.rse.2018.03.005.
- Berg, L.K., Fast, J.D., Barnard, J.C., Burton, S.P., Cairns, B., Chand, D., Comstock, J.M., Dunagan, S., Ferrare, R.A., Flynn,
C.J. and Hair, J.W., 2016. The Two-Column Aerosol Project: Phase I—Overview and impact of elevated aerosol layers on
aerosol optical depth. *Journal of Geophysical Research: Atmospheres*, 121(1), pp.336-361.
- Boucher, O., D. Randall, P. Artaxo, C. Bretherton, G. Feingold, P. Forster, V.-M. Kerminen, Y. Kondo, H. Liao, U.
595 Lohmann, P. Rasch, S.K. Satheesh, S. Sherwood, B. Stevens and X.Y. Zhang, 2013: Clouds and Aerosols. In: *Climate
Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the
Intergovernmental Panel on Climate Change* [Stocker, T.F., D. Qin, G.-K. Plattner, M. Tignor, S.K. Allen, J. Boschung, A.
Nauels, Y. Xia, V. Bex and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York,
NY, USA.
- 600 Bucholtz, A., Hlavka, D.L., McGill, M.J., Schmidt, K.S., Pilewskie, P., Davis, S.M., Reid, E.A. and Walker, A.L., 2010.
Directly measured heating rates of a tropical subvisible cirrus cloud. *Journal of Geophysical Research:
Atmospheres*, 115(D10).



- Burton, S.P., Ferrare, R.A., Hostetler, C.A., Hair, J.W., Kittaka, C., Vaughan, M.A., Obland, M.D., Rogers, R.R., Cook, A.L., Harper, D.B. and Remer, L.A., 2010. Using airborne high spectral resolution lidar data to evaluate combined active plus passive retrievals of aerosol extinction profiles. *Journal of Geophysical Research: Atmospheres*, 115(D4).
- 605 Burton, S.P., Ferrare, R.A., Hostetler, C.A., Hair, J.W., Rogers, R.R., Obland, M.D., Butler, C.F., Cook, A.L., Harper, D.B. and Froyd, K.D., 2012. Aerosol classification using airborne High Spectral Resolution Lidar measurements—methodology and examples. *Atmospheric Measurement Techniques*, 5(1), pp.73-98.
- Burton, S.P., Ferrare, R.A., Vaughan, M.A., Omar, A.H., Rogers, R.R., Hostetler, C.A. and Hair, J.W., 2013. Aerosol classification from airborne HSRL and comparisons with the CALIPSO vertical feature mask. *Atmospheric Measurement Techniques*, 6(5), pp.1397-1412.
- 610 Burton, S.P., Hostetler, C.A., Cook, A.L., Hair, J.W., Seaman, S.T., Scola, S., Harper, D.B., Smith, J.A., Fenn, M.A., Ferrare, R.A. and Saide, P.E., 2018. Calibration of a high spectral resolution lidar using a Michelson interferometer, with data examples from ORACLES. *Applied optics*, 57(21), pp.6061-6075.
- 615 da Silva, AM, H Maring, F Seidel, M Behrenfeld, R Ferrare, G Mace, R Swap, B Cairns, D Diner, L Callahan, C Hostetler, R Kahn, K Knobelspiesse, R Marchand, JV Martins, D Starr, M McGill, DJ Posselt, S Tanelli, N Meskhidze, JE Yorks, G van Harten, and F Xu, 2019: Aerosol, Cloud, Ecosystems (ACE) Final Report. Available from <https://acemission.gsfc.nasa.gov/>
- Di Noia, A., Hasekamp, O. P., van Harten, G., Rietjens, J. H. H., Smit, J. M., Snik, F., Henzing, J. S., de Boer, J., Keller, C. U., and Volten, H.: Use of neural networks in ground-based aerosol retrievals from multi-angle spectropolarimetric observations, *Atmospheric Measurement Techniques*, 8, 281–299, <https://www.atmos-meas-tech.net/8/281/2015/>, 2015.
- 620 Diner D.J., Boland, S. W., Brauer, M., Bruegge, C., Burke, K.A., Chipman, R., Di Girolamo, L., Garay, M.J., Hasheminassab, S., Hyer, E., Jerrett, M., Jovanovic, V., Kalashnikova, O.V., Liu, Y., Lyapustin, A.I., Martin, R.V., Nastan, A., Ostro, B.D., Ritz, R., Schwartz, J., Wang, J., and Xu, F., 2018. Advances in multiangle satellite remote sensing of speciated airborne particulate matter and association with adverse health effects: from MISR to MAIA. *J. Appl. Remote Sens.* 12, 042603.
- 625 Diner, D.J., Davis, A., Hancock, B., Geier, S., Rheingans, B., Jovanovic, V., Bull, M., Rider, D.M., Chipman, R.A., Mahler, A., and McClain, S.C., 2010. First results from a dual photoelastic modulator-based polarimetric camera. *Appl. Opt.* 49, 2929-2946.
- 630 Diner, D.J., Garay, M.J., Kalashnikova, O.V., Rheingans, B.E., Geier, S., Bull, M.A., Jovanovic, V.M., Xu, F., Bruegge, C.J., Davis, A. and Crabtree, K., 2013a. Airborne multiangle spectropolarimetric imager (AirMSPI) observations over California during NASA's polarimeter definition experiment (PODEX). In *Polarization Science and Remote Sensing VI* (Vol. 8873, p. 88730B). International Society for Optics and Photonics.
- Diner, D.J., Xu, F., Garay, M.J., Martonchik, J.V., Rheingans, B.E., Geier, S., Davis, A., Hancock, B.R., Jovanovic, V.M., 635 Bull, M.A., Capraro, K., Chipman, R.A., and McClain, S.C., 2013b. The Airborne Multiangle SpectroPolarimetric Imager (AirMSPI): a new tool for aerosol and cloud remote sensing. *Atmos. Meas. Tech.* 6, 2007-2013.



- Dubovik, O., Herman, M., Holdak, A., Lapyonok, T., Tanré, D., Deuzé, J. L., Ducos, F., Sinyuk, A., and Lopatin, A., 2011. Statistically optimized inversion algorithm for enhanced retrieval of aerosol properties from spectral multi-angle polarimetric satellite observations, *Atmos. Meas. Tech.*, 4, 975–1018, <https://doi.org/10.5194/amt-4-975-2011>.
- 640 Dubovik, O., Z. Li, M. I. Mishchenko, D. Tanré, Y. Karol, B. Bojkov, B. Cairns, D. J. Diner, W. R. Espinosa, P. Goloub, X. Gu, O. Hasekamp, J. Hong, W. Hou, K. D. Knobelspiesse, J. Landgraf, L. Li, P. Litvinov, Y. Liu, A. Lopatin, T. Marbach, H. Maring, V. Martins, Y. Meijer, G. Milinevsky, S. Mukai, F. Parol, Y. Qiao, L. Remer, J. Rietjens, I. Sano, P. Stammes, S. Stammes, X. Sun, P. Tabary, L. D. Travis, F. Waquet, F. Xu, C. Yan, and D. Yin. 2019. "Polarimetric remote sensing of atmospheric aerosols: Instruments, methodologies, results, and perspectives." *Journal of Quantitative Spectroscopy and Radiative Transfer*, 224: 474-511 [10.1016/j.jqsrt.2018.11.024]
- 645 Fu, G. and Hasekamp, O.: Retrieval of aerosol microphysical and optical properties over land using a multimode approach, *Atmospheric Measurement Techniques*, 11, 6627–6650, <https://doi.org/10.5194/amt-11-6627-2018>, 2018.
- Fu, G., Hasekamp, O., Rietjens, J., Smit, M., Di Noia, A., Cairns, B., Wasilewski, A., Diner, D., Xu, F., Knobelspiesse, K., Gao, M., da Silva, A., Burton, S., Hostetler, C., Hair, J., and Ferrare, R.: Aerosol retrievals from the ACEPOL Campaign, *Atmos. Meas. Tech. Discuss.*, <https://doi.org/10.5194/amt-2019-287>, in review, 2019.
- 650 Gimmestad, G., Forrister, H., Grigas, T. and O’Dowd, C., 2017. Comparisons of aerosol backscatter using satellite and ground lidars: implications for calibrating and validating spaceborne lidar. *Scientific reports*, 7, p.42337.
- Hair, J.W., Hostetler, C.A., Cook, A.L., Harper, D.B., Ferrare, R.A., Mack, T.L., Welch, W., Izquierdo, L.R. and Hovis, F.E., 2008. Airborne high spectral resolution lidar for profiling aerosol optical properties. *Applied optics*, 47(36), pp.6734-6752.
- 655 Hamill, P., Iraci, L.T., Yates, E.L., Gore, W., Bui, T.P., Tanaka, T. and Loewenstein, M., 2016. A new instrumented airborne platform for atmospheric research. *Bulletin of the American Meteorological Society*, 97(3), pp.397-404.
- Hasekamp, O. P., Litvinov, P., and Butz, A.: Aerosol properties over the ocean from PARASOL multiangle photopolarimetric measurements, *J. Geophys. Res.*, 116, D14 204+, <https://doi.org/10.1029/2010jd015469>, 2011.
- 660 Hasekamp et al. (2019), Aerosol measurements by SPEXone on the NASA PACE mission: Expected retrieval capabilities. *J. Quant. Spectrosc. Radiat. Transfer*, 227, 170–184, <https://doi.org/10.1016/j.jqsrt.2019.02.006>.
- Holben, B.N., Eck, T.F., Slutsker, I., Tanre, D., Buis, J.P., Setzer, A., Vermote, E., Reagan, J.A., Kaufman, Y.J., Nakajima, T. and Lavenu, F., 1998. AERONET—A federated instrument network and data archive for aerosol characterization. *Remote sensing of environment*, 66(1), pp.1-16.
- 665 Hlavka, D.L., Yorks, J.E., Young, S.A., Vaughan, M.A., Kuehn, R.E., McGill, M.J. and Rodier, S.D., 2012. Airborne validation of cirrus cloud properties derived from CALIPSO lidar measurements: Optical properties. *Journal of Geophysical Research: Atmospheres*, 117(D9).
- Kokhanovsky, A.A., Davis, A.B., Cairns, B., Dubovik, O., Hasekamp, O.P., Sano, I., Mukai, S., Rozanov, V.V., Litvinov, P., Lapyonok, T., Kolomiets, I.S., Y.A. Oberemok, S. Savenkov, W. Martin, A. Wasilewski, A. Di Noia, F.A. Stap, J.



- 670 Rietjens, F. Xu, V. Natraj, M. Duan, T. Cheng, and R. Munro, 2015. Space-based remote sensing of atmospheric aerosols: The multi-angle spectro-polarimetric frontier. *Earth-science reviews*, 145, pp.85-116.
- Knobelspiesse, K., Tan, Q., Bruegge, C., Cairns, B., Chowdhary, J., van Diedenhoven, B., Diner, D., Ferrare, R., van Harten, G., Jovanovic, V. and Ottaviani, M., 2019. Intercomparison of airborne multi-angle polarimeter observations from the Polarimeter Definition Experiment. *Applied optics*, 58(3), pp.650-669.
- 675 Lacagnina, C., Hasekamp, O. P., Bian, H., Curci, G., Myhre, G., van Noije, T., Schulz, M., Skeie, R. B., Takemura, T., and Zhang, K.: Aerosol single-scattering albedo over the global oceans: Comparing PARASOL retrievals with AERONET, OMI, and AeroCom models estimates, *Journal of Geophysical Research (Atmospheres)*, 120, 9814–9836, <https://doi.org/10.1002/2015jd023501>, 2015.
- Lacagnina, C., Hasekamp, O. P., and Torres, O.: Direct radiative effect of aerosols based on PARASOL and OMI satellite
680 observations, *Journal of Geophysical Research (Atmospheres)*, 122, 2366–2388, <https://doi.org/10.1002/2016jd025706>, 2017.
- LeBlanc, S., 2018. samuelleblanc/fp: Moving Lines: NASA airborne research flight planning tool release (Version v1.21). Zenodo. <http://doi.org/10.5281/zenodo.1478126>
- Li, X., and A. H. Strahler, 1992. Geometric-optical bidirectional reflectance modeling of the discrete crown vegetation
685 canopy: Effect of crown shape and mutual shadowing, *IEEE Trans. Geosci. Remote Sens.*, 30, 276–292.
- McBride, B., Martins, J.M, Barbosa, H.M.J., Birmingham, W., and Remer, L.A., 2019. Spatial distribution of cloud droplet size properties from Airborne Hyper-Angular Rainbow Polarimeter (AirHARP) measurements. *Atmospheric Measurement Techniques Discussions*. doi.org/10.5194/amt-2019-380.
- McGill, M., Hlavka, D., Hart, W., Scott, V.S., Spinhirne, J. and Schmid, B., 2002. Cloud physics lidar: Instrument
690 description and initial measurement results. *Applied Optics*, 41(18), pp.3725-3734.
- McGill, M.J., Hlavka, D.L., Hart, W.D., Welton, E.J. and Campbell, J.R., 2003. Airborne lidar measurements of aerosol optical properties during SAFARI-2000. *Journal of Geophysical Research: Atmospheres*, 108(D13).
- McGill, M.J., Vaughan, M.A., Treppe, C.R., Hart, W.D., Hlavka, D.L., Winker, D.M. and Kuehn, R., 2007. Airborne validation of spatial properties measured by the CALIPSO lidar. *Journal of Geophysical Research: Atmospheres*, 112(D20).
- 695 Mishchenko, M.I., Cairns, B., Hansen, J.E., Travis, L.D., Burg, R., Kaufman, Y.J., Martins, J.V. and Shettle, E.P., 2004. Monitoring of aerosol forcing of climate from space: analysis of measurement requirements. *Journal of Quantitative Spectroscopy and Radiative Transfer*, 88(1-3), pp.149-161.
- Müller, D., Hostetler, C.A., Ferrare, R.A., Burton, S.P., Chemyakin, E., Kolgotin, A., Hair, J.W., Cook, A.L., Harper, D.B., Rogers, R.R. and Hare, R.W., 2014. Airborne multiwavelength high spectral resolution lidar (HSRL-2) observations during
700 TCAP 2012: vertical profiles of optical and microphysical properties of a smoke/urban haze plume over the northeastern coast of the US. *Atmospheric Measurement Techniques*, 7(10), pp.3487-3496.
- National Research Council. 2007. *Earth Science and Applications from Space: National Imperatives for the Next Decade and Beyond*. Washington, DC: The National Academies Press. <https://doi.org/10.17226/11820>.



- National Academies of Sciences, Engineering, and Medicine. 2018. *Thriving on Our Changing Planet: A Decadal Strategy*
705 *for Earth Observation from Space*. Washington, DC: The National Academies Press. doi: <https://doi.org/10.17226/24938>.
- Nowottnick, E., Colarco, P., da Silva, A., Hlavka, D., and McGill, M.: The fate of saharan dust across the atlantic and implications for a central american dust barrier, *Atmos. Chem. Phys.*, 11, 8415-8431, <https://doi.org/10.5194/acp-11-8415-2011>, 2011.
- Ottaviani, M., Chowdhary, J. and Cairns, B., 2019. Remote sensing of the ocean surface refractive index via short-wave
710 infrared polarimetry. *Remote sensing of environment*, 221, pp.14-23.
- Platnick, S. E., K. G. Meyer, M. D. King, G. Wind, N. Amarasinghe, B. Marchant, G. T. Arnold, Z. Zhang, P. A. Hubanks, R. E. Holz, P. Yang, W. L. Ridgway, and J. Riedi, 2017. The MODIS cloud optical and microphysical products: Collection 6 updates and examples from Terra and Aqua. *IEEE Trans. Geosci. Remote Sens.*, 55 (1): 502–525.
- Powell, K.A., Hostetler, C.A., Vaughan, M.A., Lee, K.P., Trepte, C.R., Rogers, R.R., Winker, D.M., Liu, Z., Kuehn, R.E.,
715 Hunt, W.H. and Young, S.A., 2009. CALIPSO lidar calibration algorithms. Part I: Nighttime 532-nm parallel channel and 532-nm perpendicular channel. *Journal of Atmospheric and Oceanic Technology*, 26(10), pp.2015-2033.
- Puthukkudy, A., Martins, J. V., Remer, L. A., Xu, X., Dubovik, O., Litvinov, P., McBride, B., Burton, S., and Barbosa, H. M. J.: Retrieval of aerosol properties from Airborne Hyper Angular Rainbow Polarimeter (AirHARP) observations during ACEPOL 2017, *Atmos. Meas. Tech. Discuss.*, <https://doi.org/10.5194/amt-2020-64>, in review, 2020
- 720 Rogers, R.R., Hostetler, C.A., Hair, J.W., Ferrare, R.A., Liu, Z., Obland, M.D., Harper, D.B., Cook, A.L., Powell, K.A., Vaughan, M.A. and Winker, D.M., 2011. Assessment of the CALIPSO Lidar 532 nm attenuated backscatter calibration using the NASA LaRC airborne High Spectral Resolution Lidar. *Atmospheric Chemistry and Physics*, 11(3), pp.1295-1311.
- Rogers, R.R., Vaughan, M.A., Hostetler, C.A., Burton, S.P., Ferrare, R.A., Young, S.A., Hair, J.W., Obland, M.D., Harper, D.B., Cook, A.L. and Winker, D.M., 2014. Looking through the haze: evaluating the CALIPSO level 2 aerosol optical depth
725 using airborne high spectral resolution lidar data. *Atmospheric Measurement Techniques*, 7(12), pp.4317-4340.
- Ross, J., 1981. The Radiation Regime and Architecture of Plant Stands, 391 pp., *Springer, New York*.
- Roujean, J.-L., M. Leroy, and P.-Y. Deschamps, 1992. A bidirectional reflectance model of the Earth's surface for the correction of remote sensing data, *J. Geophys. Res.*, 97, 20,455–20,468.
- Sawamura, P., Moore, R.H., Burton, S.P., Chemyakin, E., Müller, D., Kolgotin, A., Ferrare, R.A., Hostetler, C.A., Ziemba,
730 L.D., Beyersdorf, A.J. and Anderson, B.E., 2017. HSRL-2 aerosol optical measurements and microphysical retrievals vs. airborne in situ measurements during DISCOVER-AQ 2013: an intercomparison study. *Atmospheric Chemistry and Physics*, 17(11), pp.7229-7243.
- Scarino, A.J., Obland, M.D., Fast, J.D., Burton, S.P., Ferrare, R.A., Hostetler, C.A., Berg, L.K., Lefer, B., Haman, C., Hair, J.W. and Rogers, R.R., 2014. Comparison of mixed layer heights from airborne high spectral resolution lidar, ground-based
735 measurements, and the WRF-Chem model during CalNex and CARES. *Atmospheric Chemistry and Physics*, 14(11), pp.5547-5560.



- Schaaf, C. B., et al. 2002. First operational BRDF, albedo and nadir reflectance products from MODIS, *Remote Sens. Environ.*, 83, 135–148.
- Sinclair, K., B. van Diedenhoven, B. Cairns, J. Yorks, A. Wasilewski, and M. McGill, 2017. Remote sensing of multiple
740 cloud layer heights using multi-angular measurements. *Atmos. Meas. Tech.*, 10, 2361-2375, doi:10.5194/amt-10-2361-2017.
- Smit, J. M., Rietjens, J. H. H., Harten, G. v., Noia, A. D., Laauwen, W., Rheingans, B. E., Diner, D. J., Cairns, B.,
Wasilewski, A., Knobelspiesse, K. D., Ferrare, R., and Hasekamp, O. P.: SPEX airborne spectropolarimeter calibration and
performance, *Applied Optics*, 58, 5695–5719, <https://www.osapublishing.org/ao/abstract.cfm?uri=ao-58-21-5695>, 2019.
- Snik, F., Karalidi, T., and Keller, C. U.: Spectral modulation for full linear polarimetry, *Appl. Opt.*, 48, 1337–1346,
745 <https://doi.org/10.1364/AO.48.001337>, 2009.
- Stamnes, S., Hostetler, C., Ferrare, R., Burton, S., Liu, X., Hair, J., Hu, Y., Wasilewski, A., Martin, W., Van Diedenhoven,
B. and Chowdhary, J., 2018. Simultaneous polarimeter retrievals of microphysical aerosol and ocean color parameters from
the “MAPP” algorithm with comparison to high-spectral-resolution lidar aerosol and ocean products. *Applied optics*, 57(10),
pp.2394-2413.
- 750 Van Harten, G., Diner, D.J., Daugherty, B.J., Rheingans, B.E., Bull, M.A., Seidel, F.C., Chipman, R.A., Cairns, B.,
Wasilewski, A.P. and Knobelspiesse, K.D., 2018. Calibration and validation of airborne multiangle spectropolarimetric
imager (AirMSPI) polarization measurements. *Applied optics*, 57(16), pp.4499-4513.
- Van Diedenhoven, B., B. Cairns, I.V. Geogdzhayev, A.M. Fridlind, A.S. Ackerman, P. Yang, and B.A. Baum, 2012. Remote
sensing of ice crystal asymmetry parameter using multi-directional polarization measurements. Part I: Methodology and
755 evaluation with simulated measurements. *Atmos. Meas. Tech.*, 5, 2361-2374, doi:10.5194/amt-5-2361-2012.
- Van Diedenhoven, B., B. Cairns, A.M. Fridlind, A.S. Ackerman, and T.J. Garrett, 2013. Remote sensing of ice crystal
asymmetry parameter using multi-directional polarization measurements — Part 2: Application to the Research Scanning
Polarimeter. *Atmos. Chem. Phys.*, 13, 3185-3203, doi:10.5194/acp-13-3185-2013.
- Van Diedenhoven, B., 2018. Remote sensing of crystal shapes in ice clouds. In *Springer Series in Light Scattering, Volume*
760 *2: Light Scattering, Radiative Transfer and Remote Sensing*. A. Kokhanovsky, Ed. Springer International, pp. 197-250,
doi:10.1007/978-3-319-70808-9_5.
- Van Harten, G., de Boer, J., Rietjens, J. H. H., Di Noia, A., Snik, F., Volten, H., Smit, J.M., Hasekamp, O. P., Henzing, J. S.,
and Keller, C. U.: Atmospheric aerosol characterization with a ground-based SPEX spectropolarimetric instrument,
Atmospheric Measurement Techniques, 7, 4341–4351, <https://www.atmos-meas-tech.net/7/4341/2014/>, 2014.
- 765 Vaughan, M.A., Liu, Z., McGill, M.J., Hu, Y. and Obland, M.D., 2010. On the spectral dependence of backscatter from
cirrus clouds: Assessing CALIOP's 1064 nm calibration assumptions using cloud physics lidar measurements. *Journal of
Geophysical Research: Atmospheres*, 115(D14).
- Vaughan, M., Garnier, A., Josset, D., Avery, M., Lee, K.P., Liu, Z., Hunt, W., Pelon, J., Hu, Y., Burton, S. and Hair, J.,
2019. CALIPSO lidar calibration at 1064 nm: version 4 algorithm. *Atmospheric Measurement Techniques*, 12(1), pp.51-82.



- 770 Wanner, W., X. Li, and A. H. Strahler, 1995. On the derivation of kernels for kernel-driven models of bidirectional reflectance, *J. Geophys. Res.*, 100, 21,077–21,090.
- Waquet, F., J.-F. Léon, B. Cairns, P. Goloub, J.-L. Deuzé, and F. Auriol, 2009. Analysis of the spectral and angular response of the vegetated surface polarization for the purpose of aerosol remote sensing over land. *Appl. Opt.*, 48, 1228-1236, doi:10.1364/AO.48.001228.
- 775 Wehrli, C. 1985. *Extraterrestrial solar spectrum*. Technical report: WRC Publication No. 615, World Radiation Center (WRC).
- Xu, F., Davis, A.B., West, R.A., Martonchik, J.V. and Diner, D.J. 2011. Markov chain formalism for vector radiative transfer in a plane-parallel atmosphere overlying a polarizing surface. *Optics Letters* Vol. 36, Issue 11, pp. 2083-2085, <https://doi.org/10.1364/OL.36.002083>
- 780 Xu, F., van Harten, G., Diner, D.J., Kalashnikova, O.V., Seidel, F.C., Bruegge, C.J., and Dubovik, O., 2017. Coupled retrieval of aerosol properties and land surface reflection using the Airborne Multiangle SpectroPolarimetric Imager. *J. Geophys. Res.-Atmos.* 122, 7004-7026.
- Weitkamp, C. ed., 2006. *Lidar: range-resolved optical remote sensing of the atmosphere* (Vol. 102). Springer Science & Business.
- 785 Werdell, P.J., S.W. Bailey, G.S. Fargion, C. Pietras, K.D. Knobelspiesse, G.C. Feldman, and C.R. McClain, Unique data repository facilitates ocean color satellite validation, *EOS Trans. AGU* 84 , 38, 377 (2003).
- Werdell, P.J., Behrenfeld, M.J., Bontempi, P.S., Boss, E., Cairns, B., Davis, G.T., Franz, B.A., Gliese, U.B., Gorman, E.T., Hasekamp, O. and Knobelspiesse, K.D., 2019. The Plankton, Aerosol, Cloud, ocean Ecosystem (PACE) mission: Status, science, advances. *Bulletin of the American Meteorological Society*, (2019).
- 790 Winker, D.M., Vaughan, M.A., Omar, A., Hu, Y., Powell, K.A., Liu, Z., Hunt, W.H. and Young, S.A., 2009. Overview of the CALIPSO mission and CALIOP data processing algorithms. *Journal of Atmospheric and Oceanic Technology*, 26(11), pp.2310-2323.
- Xu, F., Davis, A.B., West, R.A., Martonchik, J.V. and Diner, D.J. 2011. Markov chain formalism for vector radiative transfer in a plane-parallel atmosphere overlying a polarizing surface. *Optics Letters* Vol. 36, Issue 11, pp. 2083-2085.
- 795 Yorks, J.E., Hlavka, D.L., Vaughan, M.A., McGill, M.J., Hart, W.D., Rodier, S. and Kuehn, R., 2011. Airborne validation of cirrus cloud properties derived from CALIPSO lidar measurements: Spatial properties. *Journal of Geophysical Research: Atmospheres*, 116(D19).
- Zibordi, G., Mélin, F., Berthon, J.F., Holben, B., Slutsker, I., Giles, D., D'Alimonte, D., Vandemark, D., Feng, H., Schuster, G., Fabbri, B.E., Kaitala, S. and Seppälä, J. 2009. AERONET-OC: a network for the validation of ocean color primary products. *Journal of Atmospheric and Oceanic Technology*, 26(8), pp.1634-1651.
- 800



Tables

Table 1 Airborne instrument characteristics as implemented on the ER-2 during ACEPOL. *AirMSPI has polarization sensitivity for 470, 660 and 865nm only

Polarimeters	Principal Investigator	Spectral band centers	View angles	Spatial sampling	Spatial resolution
AirHARP	J. Vanderlei Martins, UMBC	4: 440, 550, 670, 870 nm	670nm: 60 in $\pm 57^\circ$ fore to aft of nadir, other channels: 20 in $\pm 57^\circ$ fore to aft of nadir	$\pm 47^\circ$ cross track FOV, targeted sampling mode, (~ 42.9 km at ground)	Gridded to 2000 pixels per latitude degree, native value: (~ 55 m)
AirMSPI	David J. Diner, JPL	8: 355, 380, 445, 470*, 555, 660*, 865*, 935 nm	Varies with targeting mode, 10 or 15 angle pseudo-stare or continuous sweep	$\pm 15^\circ$ cross track FOV (9km at ground), targeted sampling mode.	10m at ground for pseudo-stare, 25m for continuous sweep
RSP	Brian Cairns, NASA GISS	9: 410.3, 555, 469.1, 670, 863.5, 960, 1593.5, 1880, 2263.5 nm	120 from 45° fore to 65° aft of nadir	Single pixel (280m), continuous sample	280m, partial successive pixel overlap
SPEX Airborne	Otto Hasekamp, SRON	400-800 nm, ~ 2 nm resolution for intensity, 10-40 nm for polarization	9: $\pm 57^\circ$, $\pm 42^\circ$, $\pm 28^\circ$, $\pm 14^\circ$ and 0°	6° cross track, continuous sample	Native resolution ~ 200 m (nadir) - 1km ($\pm 57^\circ$).
Lidars		Backscatter channels	Extinction Channels	Horizontal resolution	Vertical resolution
CPL	Matthew McGill, NASA GSFC	355, 532, 1064 nm	-	~ 200 m	30m
HSRL-2	Chris Hostetler, NASA LaRC	355, 532, 1064 nm	355, 532nm	1-2km	15m

805

Table 2 Prioritized ACEPOL measurement targets. In this table, low aerosol loading indicates a mid-visible Aerosol Optical Depth (AOD) less than 0.1, moderate AOD between 0.1 and 0.2, and high AOD greater than 0.2.

Target	Description	Achieved?	Dates (2017)
1a	Calibration over ocean with no clouds or aerosols	Yes	10/23, 10/25, 11/07
1b	Calibration over land with no clouds or aerosols	Yes	10/25
1c	Calibration over spatially uniform cloud deck	Partially	11/01
1d	Geolocation using coastlines with no clouds	Yes	10/23, 10/25, 10/26, 11/07
1e	Coordinated CALIOP/CALIPSO or CATS underflight	Yes	10/19, 10/26, 11/07, 11/09
2a	Validation with AERONET with medium to high aerosol loading	Yes	10/23, 10/25, 10/26, 11/01, 11/07, 11/09
2b	Validation with AERONET with low aerosol loading	Yes	10/23, 10/25, 10/26, 11/01, 11/07, 11/09



2c	Validation against CASPER field campaign	No	None, but one overlap with an AJAX flight on 11/09
3a	Satellite intercomparison for aerosol retrievals	Yes	10/23, 10/27, 11/01
3b	Satellite intercomparison for cloud retrievals	Partially	11/09
4a	Targets of opportunity: high aerosol loads over ocean	No	-
4b	Target of opportunity: high aerosol loads over land	Yes	10/27, 11/01, 11/07
4c	Targets of opportunity: multiple aerosol layers	No	-
5	Targets of opportunity: aerosol above cloud	No	-
6	Targets of opportunity: high aerosol loads over urban surfaces	No	-
7	Targets of opportunity: marine stratocumulus clouds far from land	No	-
8	Targets of opportunity: broken clouds far from land	No	-
9	Targets of opportunity: low clouds over land	Yes	11/01, 11/03
10	Targets of opportunity: Cirrus clouds	Yes	10/19, 10/23, 11/03, 11/07, 11/09

Table 3 ACEPOL data availability

Archive	URL, DOI
ASDC	https://eosweb.larc.nasa.gov/10.5067/SUBORBITAL/ACEPOL2017/DATA001
AirMSPI	https://eosweb.larc.nasa.gov/project/airmspi/airmspi_table 10.5067/AIRCRAFT/AIRMSPI/ACEPOL/RADIANCE/ELLIPSOID_V006 10.5067/AIRCRAFT/AIRMSPI/ACEPOL/RADIANCE/TERRAIN_V006
GroundMSPI	https://eosweb.larc.nasa.gov/project/airmspi/airmspi_table 10.5067/GROUND/GROUNDMSPI/ACEPOL/RADIANCE_v009
AERONET	https://aeronet.gsfc.nasa.gov/
CARB	https://www.arb.ca.gov/adam/index.html

810

Table 4 Daily description of ACEPOL flights. Nine flights, with a total of 40.1 flight hours, were carried out between October 19, 2017 and November 9, 2017 for ACEPOL.

Flight Date	Takeoff (UTC)	Duration (hours)	Targets achieved	Instrument status	Coordinated observations	Notes
10/19	16:09	2	1e , CATS: 17:32 10 : 18:00	All instruments functioning	CATS, AERONET	Test flight recalled early due to high winds at landing site. Because of recall, missed potential coordination with CASPER in situ sampling in Central Valley.
10/23	17:01	5.7	1a , late in flight 1d , San Francisco Bay, 19:27 Catalina Island, 21:07 2a , Bakersfield: 17:50, 18:40 2b , Modesto: 19:20 USC_SeaPRISM: 21:07 3a , Terra: 18:40 10 , 19:54-20:26	All instruments functioning	Terra (MODIS & MISR) AERONET, AERONET-OC	Severe clear (few clouds, low aerosol load) flight with satellite coordination. Over flight of ocean AERONET USC_SeaPRISM site has ideal geometry for polarimeters, subject of comparison studies.
10/25	16:30	5.9	1a , near coast, 20:49 1b , 5 legs over Rosamond Dry lake: 17:18, 17:50, 18:21, 18:47, 19:24 1d , near coast, 20:49, Salton	All instruments functioning	GroundMSPI at Rosamond Dry Lake (34.85636N, 118.07649W)	Severe clear, primary focus was overflights of Rosamond Dry Lake while a ground team characterized surface reflectance.



			Sea 21:17 2a CalTech: 18:25, Fresno: 20:15, 2b USC SeaPrism: 18:30, Bakersfield: 19:45		, AERONET, AERONET-OC	
10/26	18:00	4.5	1d , S. California coast: 19:40, Salton Sea: 19:53 1e , CALIPSO underflight: 20:50 2a, Fresno: 18:48 2b, Bakersfield: 19:11	All instruments functioning	CALIPSO, AERONET	Central valley AERONET overflights , followed by CALIPSO track coordination. Cloud free
10/27	17:00	3.2	3a Terra: 18:21 4b Smoke from fires: 18:00, 18:32, 18:55	All instruments functioning, some HSRL gaps (ER-2 cooling problem)	AERONET Terra (MODIS & MISR)	Flight targeting prescribed burns in Arizona. Cloud free.
11/01	16:35	5	1c S. California coast: 17:30 2a Bakersfield: 17:00 2b Flagstaff: 19:20 3a Terra: 18:39 4b Smoke from fires: 19:12 9 Los Angeles basin: 17:45	No HSRL (ER-2 cooling problem), only one AirMSPI target, Reduced AirHARP observations	AERONET Terra (MODIS & MISR)	Marine stratocumulus clouds off S. California, then smoke in Arizona.
11/03	18:58	2.9	9 20:00, 20:42 10 21:10	All instruments functioning		Short flight to test aircraft/instrument repairs. California central valley with multi-layered clouds.
11/07	17:19	5.3	1a 20:31 1d Monterey Bay: 20:16 1e CALIPSO underflight, California Central Valley: 21:18 2a Bakersfield: 17:55, 19:06, 21:57, Fresno: 19:40, Modesto: 20:06 2b CalTech: 18:10 10 18:21, 20:40	AirHARP lost heater, no data for end of flight	CALIPSO, AERONET	Targeting AERONET sites and CALIPSO track, plus clear segment over the ocean.
11/09	17:16	5.6	1e CALIPSO underflight, California and Nevada desert, 21:07 2a Fresno: 22:02 2b Flagstaff: 18:24, 19:55 2c AJAX flight overlap, 21:50 4b Smoke from fires: 19:36, 19:52 10 end of flight	All instruments functioning	CALIPSO, AERONET, AJAX	Return to Arizona for smoke near the Grand Canyon, successfully observed high aerosol loads. CALIPSO under flight, coincident measurement with AJAX flight.



Figures



815


Figure 1 Photograph from the ER-2 of smoke from prescribed burns in Kaibab National Forest in Arizona on November 9th, 2017. Credit: NASA/Stu Broce.



820 Figure 2 A portion of the ACEPOL team with the NASA ER-2 at the NASA Armstrong Flight Research Center in Palmdale, California.



Figure 3 The ACEPOL field campaign emblem, which also shows the positions of instruments onboard the ER-2 aircraft.

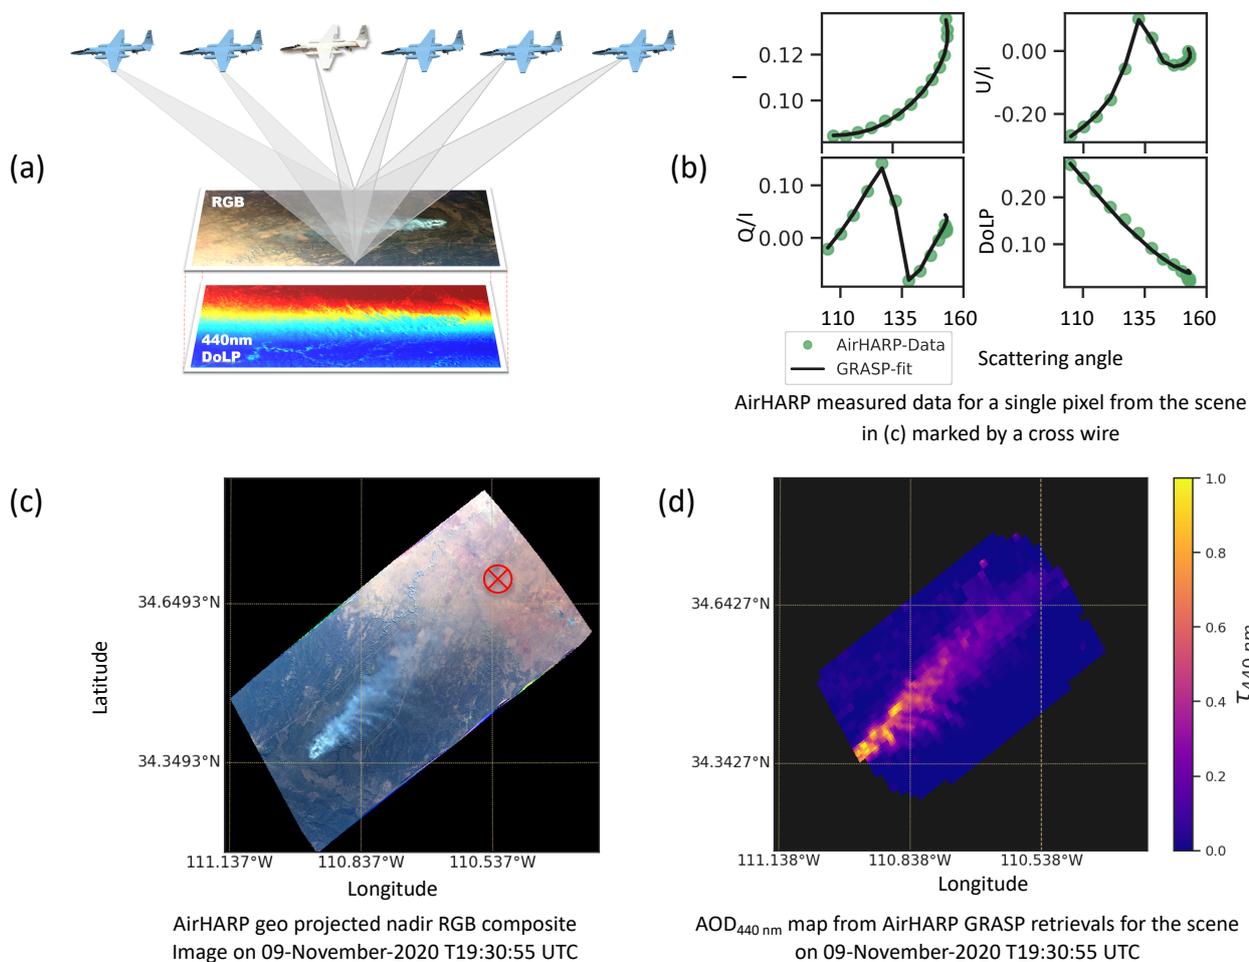

825 Figure 4 (a) Illustration of the AirHARP sampling scheme applied during the ACEPOL experiment. Each along track viewing angle produce a full pushbroom image. Six along track viewing angles are shown in the subplot. HARP has up to 60 along track viewing angles for 670nm and up to 20 viewing angles for other wavelengths; (b) AirHARP measured (solid circles) I, Q/I, U/I and DoLP for a pixel marked by red cross wire in (c), plotted as a function of scattering angle and GRASP forward model fit for the variables of same pixel (solid black lines); (c) RGB composite image of a smoke scene collected on 09th November 2017 T 19:31 UTC; (d) Map of aerosol optical depth (AOD) at 440nm retrieved for the same scene using AirHARP measurements and the GRASP inversion algorithm.

830



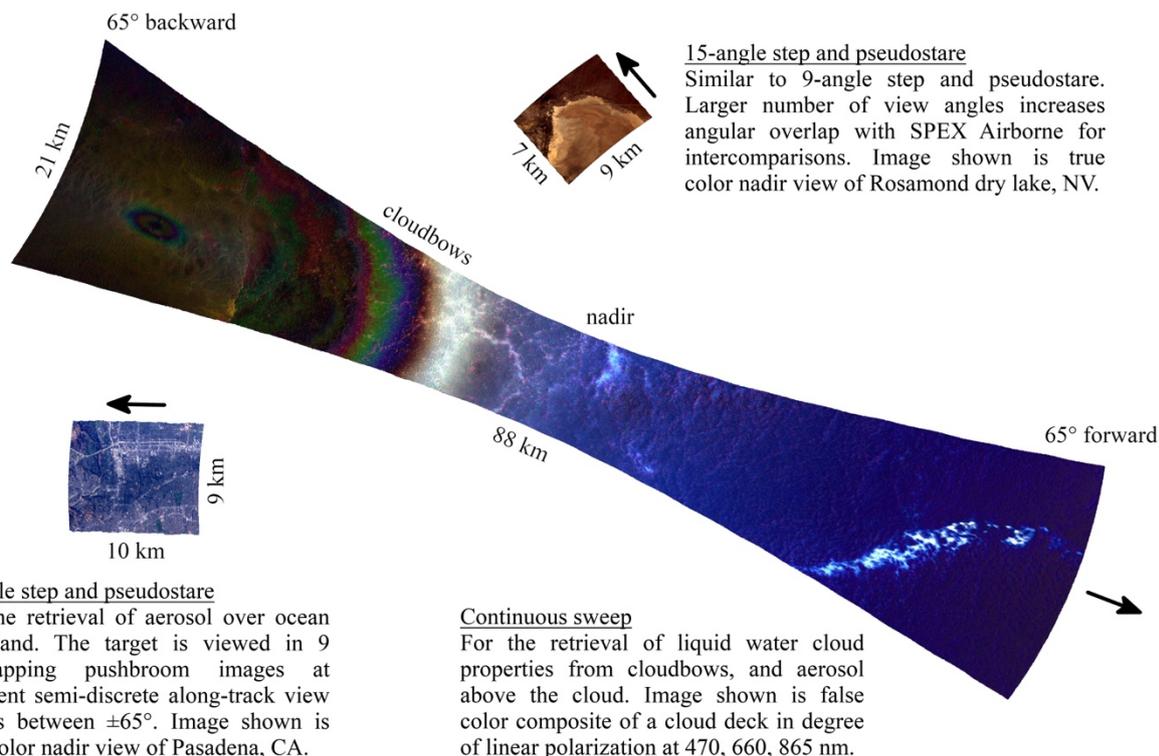


Figure 5 AirMSPI quicklooks for the 3 different multi-angle observation modes. Aircraft flight direction is indicated by arrows.

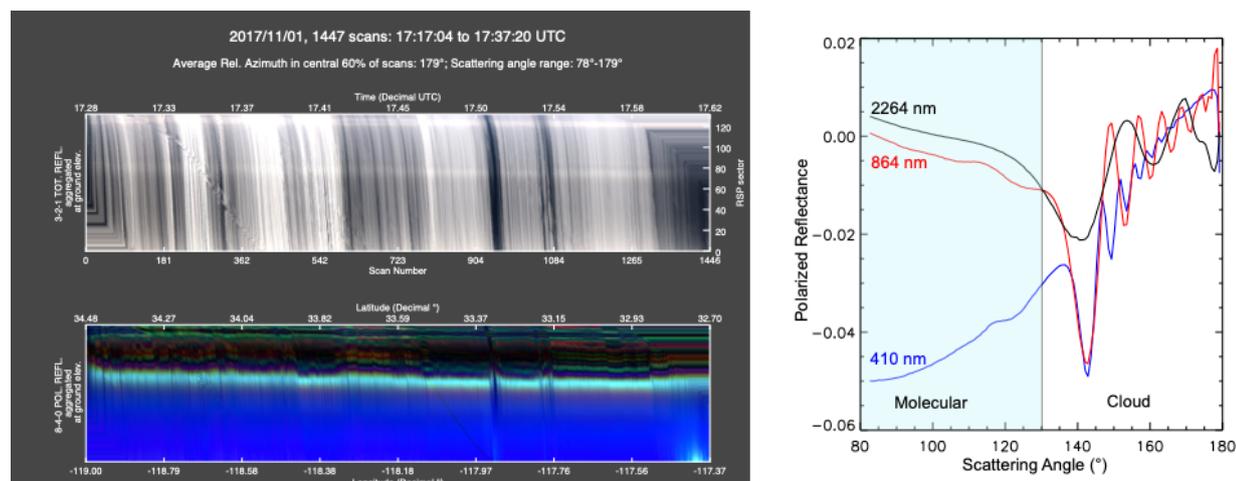


835

Figure 6 RSP quick look image (left) from November 1st, 2017. The vertical dimension represents view angle, and the horizontal dimension scan number (time elapsed). At right is a single level 1C scan corresponding to scan 1235 at left. It shows the signature of cloud bows at large scattering angles (135° - 180°) and molecular (Rayleigh) scattering for 410 nm at scattering angles smaller than 130° . Retrieved droplet size parameters are effective radius of $11.5 \mu\text{m}$ and effective variance of 0.008.

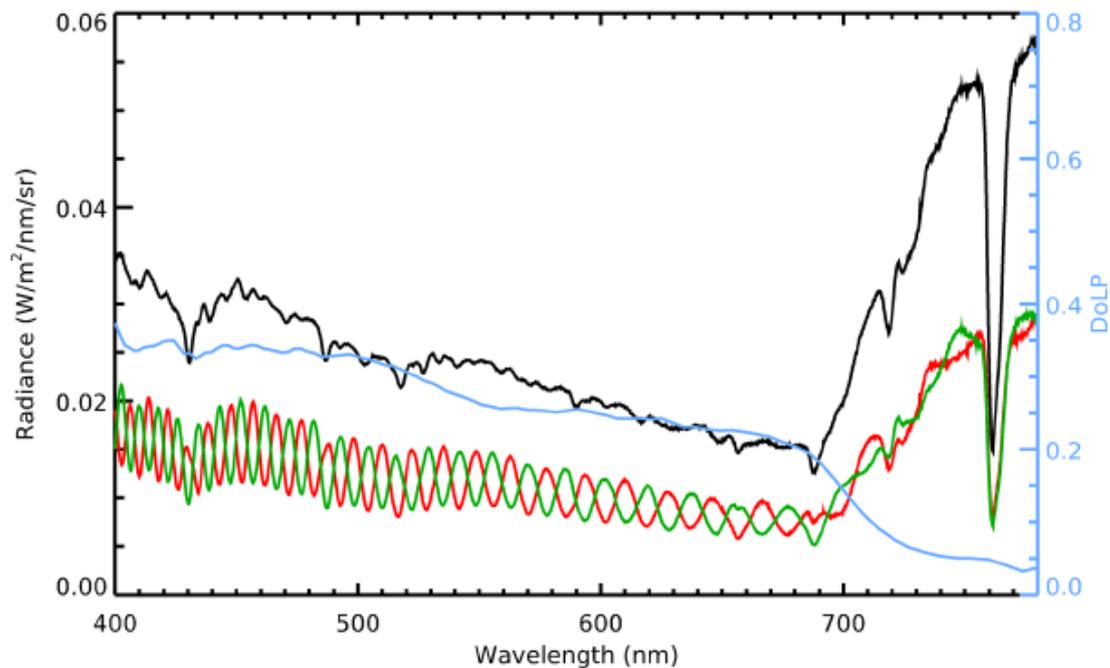

840

Figure 7 Example of SPECTRA airborne measurements over vegetation, for radiance (black line) and DoLP (blue line) as function of wavelength. The modulated spectra from which radiance and DoLP are derived are shown in green and red.

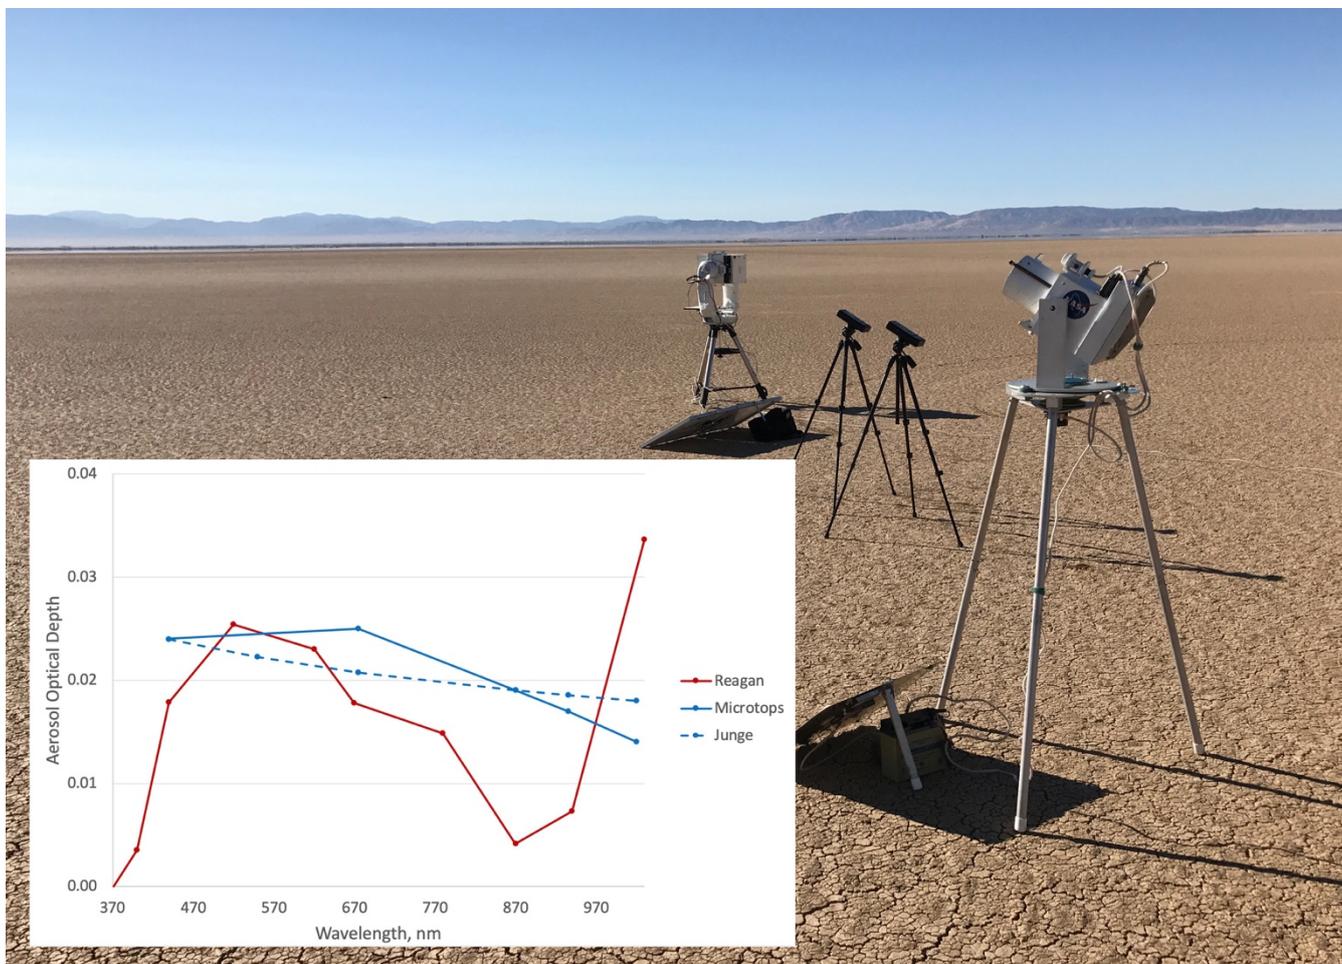

845 **Figure 8** GroundMSPI, two Microtops sunphotometers, and a University of Arizona Reagan sunphotometer deployed on October 25th, 2017 at Rosamond Dry Lake in California. (Inset) AOD as measured by the Microtops and Reagan sunphotometers.



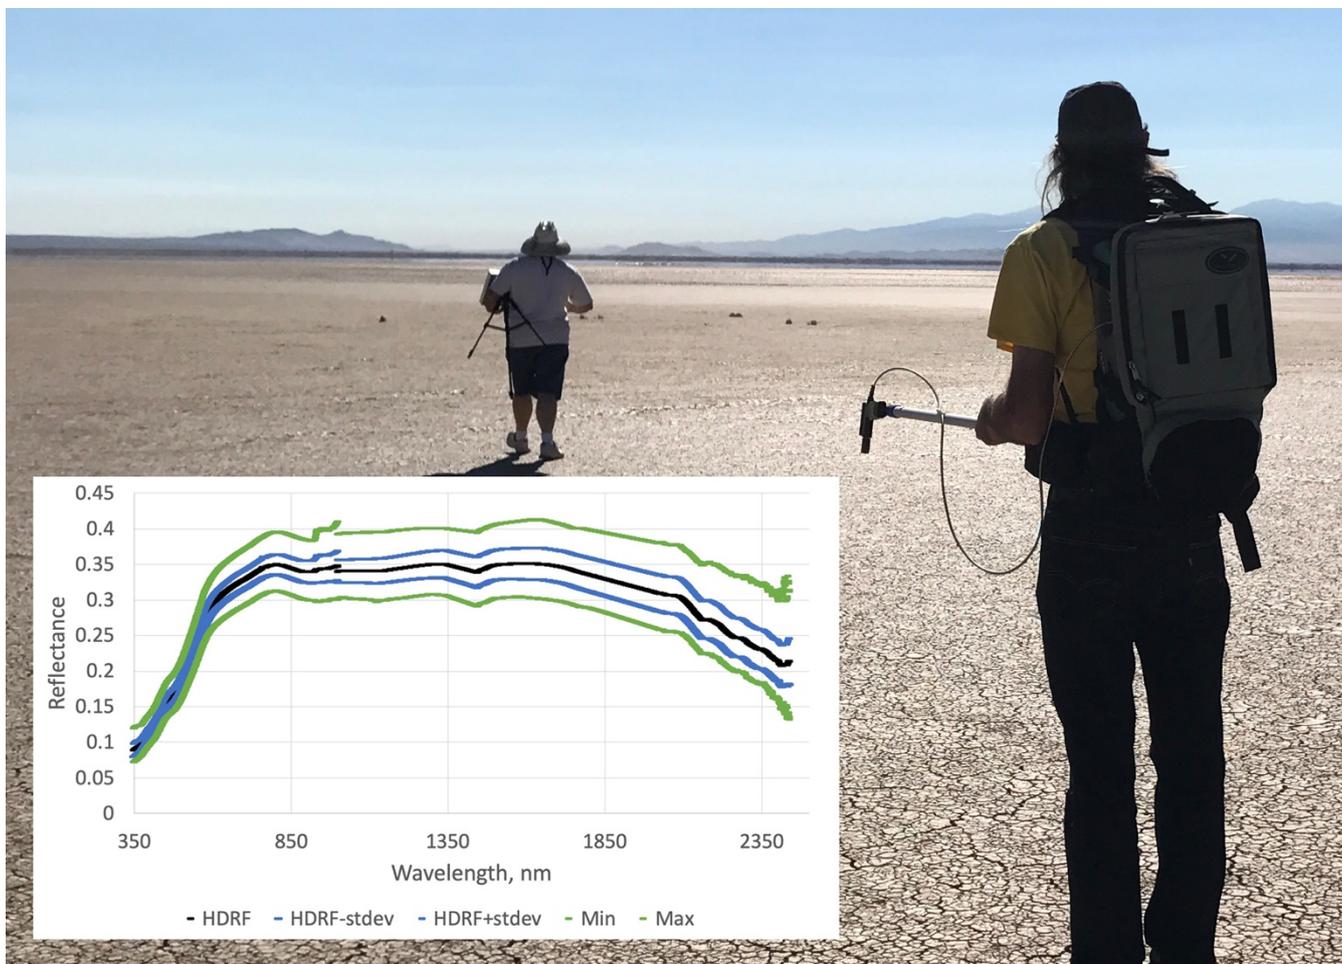


Figure 9 Surface characterization on October 25th, 2017 at Rosamond Dry Lake in California using a Spectralon reflectance standard and ASD FieldSpecPro. (Inset) Mean and standard deviation of surface reflectance (black, blue lines) with maxima and minima spectra (green).

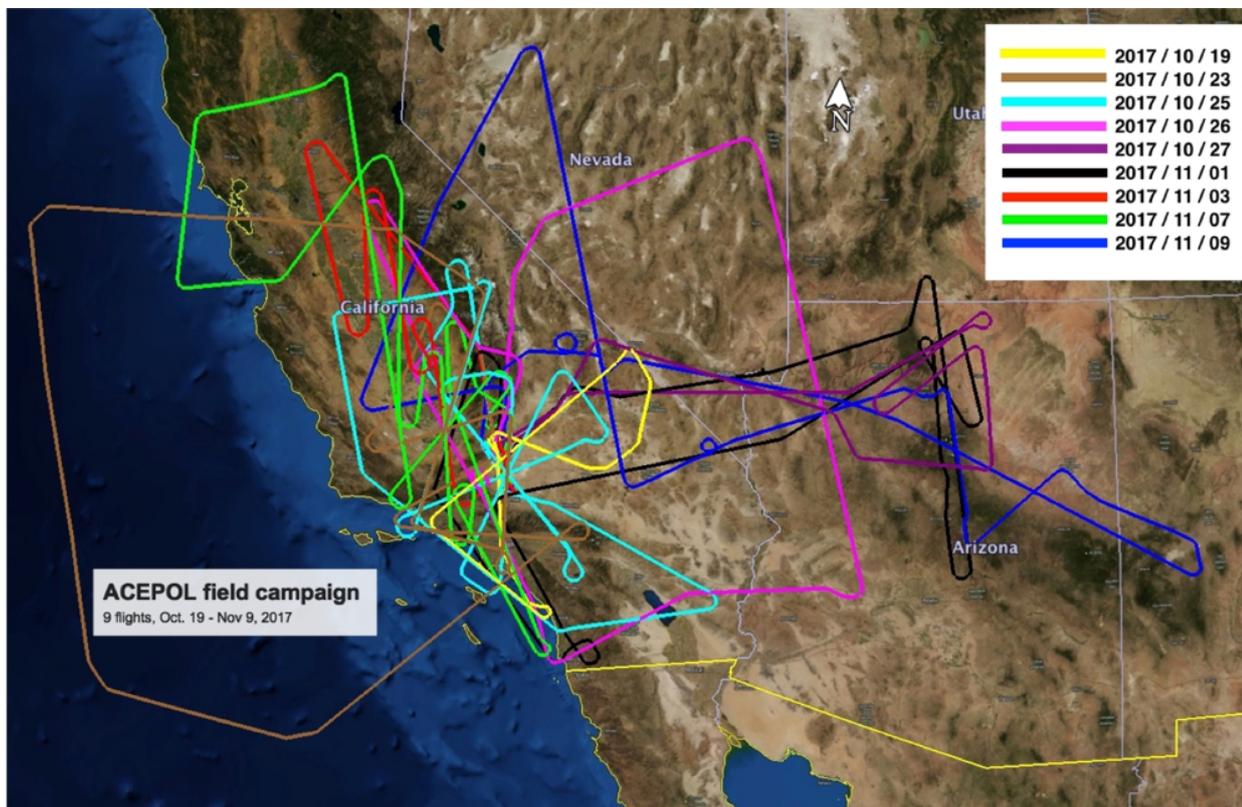

850

Figure 10 Flight tracks for the ACEPOL field campaign. Nine flights were conducted from October 19th to November 9th, 2017 over California, Nevada, Arizona, New Mexico and the coastal Pacific Ocean from the Armstrong Flight Research Center in Palmdale, California. Image mapped using Google Earth, © 2018 Google.

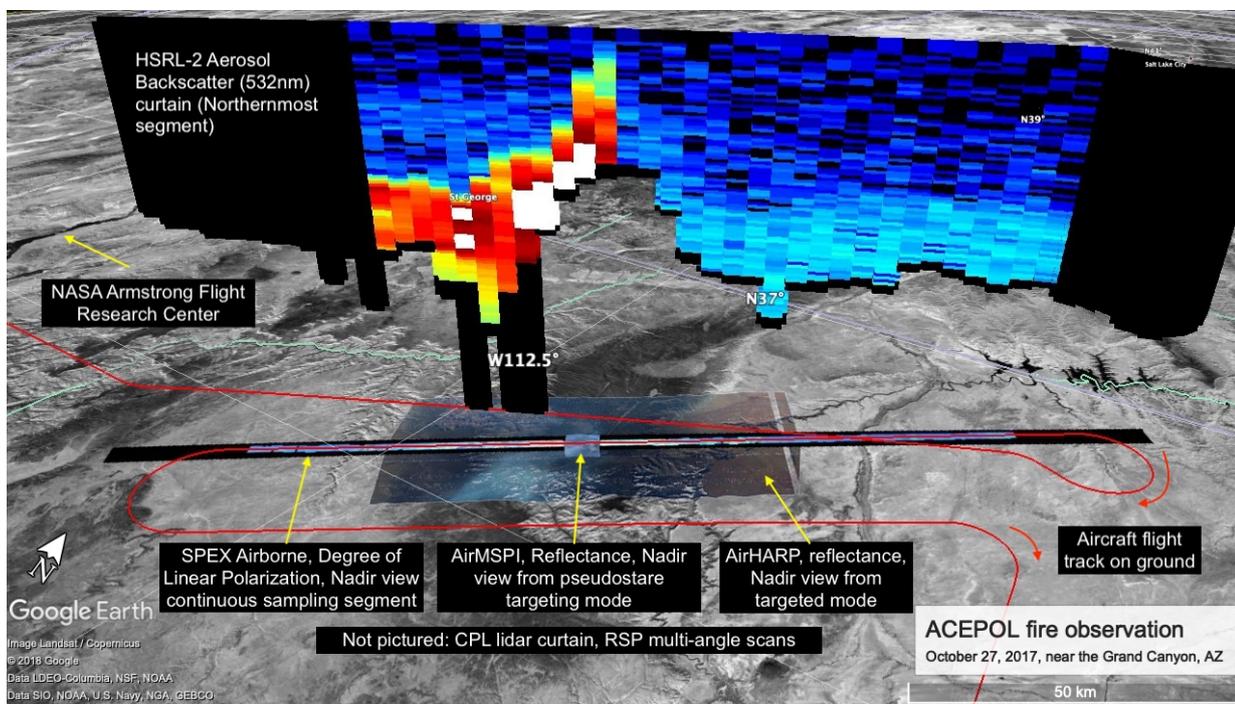

855 **Figure 11** Example of variable instrument observation characteristics for a scene on October 27, 2017, of biomass burning smoke from prescribed burns near the Grand Canyon. Image mapped using Google Earth, © 2018 Google.