

Towards a regional high-resolution bathymetry of the North West Shelf of Australia based on Sentinel-2 satellite images, 3D seismic surveys and historical datasets.

Ulysse Lebrec^{1, 2*}, Victorien Paumard¹, Michael J. O’Leary¹ and Simon C. Lang¹

5 ¹Centre for Energy Geoscience, School of Earth Sciences, The University of Western Australia, 35 Stirling Highway, Perth, WA, 6009, Australia

²Norwegian Geotechnical Institute, 40 St Georges Terrace, Perth, WA, 6000, Australia

* Correspondence to: Ulysse Lebrec (ulyссе.lebrec@ngi.noresearch.uwa.edu.au)

Abstract

10 High-resolution bathymetry is a critical dataset for marine geoscientists. It can be used to characterize the seafloor and its marine habitats, to understand past sedimentary records and even to support the development of offshore engineering projects. Most methods to acquire bathymetry data are costly and can only be practically deployed on relatively small areas. It is therefore critical to develop cost-effective and advanced techniques to produce ~~large~~regional-scale bathymetry datasets.

This paper presents an integrated workflow that builds on satellites images and 3D seismic surveys, integrated with historical
15 depth soundings, to generate ~~a~~-regional high-resolution digital elevation models s (DEMs). The method was applied to the southern half of Australia’s North West Shelf and led to the creation of ~~a~~-new high-resolution bathymetry grids, with a resolution of 10 x 10 m in nearshore areas and 30 x 30 m elsewhere.


The vertical and spatial accuracy of the datasets have been ~~thoroughly~~-assessed using ~~open-source~~open-source Laser Airborne Depth Sounder (LADS) and ~~M~~ulti-~~B~~e~~m~~ ~~E~~~~ch~~~~o~~~~S~~~~o~~~~u~~~~n~~~~d~~~~e~~~~r~~ ~~s~~ounder (MBES) surveys as a reference. The comparison of
20 the datasets indicates that the seismic-derived bathymetry has a vertical accuracy better than 1 m + 2% of the absolute water depths, while the satellite-derived bathymetry has a depth accuracy better than 1 m + 5% of the absolute water depths. This 30 m dataset constitutes a significant improvement of the pre-existing regional 250 x 250 m grid and will support the onset of research projects on coastal morphologies, marine habitats, archaeology, and sedimentology.

All source datasets ~~used as inputs~~ are publicly available and the methods ~~is~~ are fully integrated in Python scripts making ~~it~~
25 them readily applicable elsewhere in Australia and around the world. ~~The workflow as well as the resulting bathymetry have been independently reviewed and approved for release by a technical committee from the AusSeabed Community (Geoscience Australia).~~—The regional digital elevation model ~~as well as~~and the underlying datasets can be accessed at: <https://doi.org/10.26186/144600> (Lebrec et al, 2021).

1 Introduction

30 The North West Shelf (NWS) is a ~2,400 km long carbonate platform ~~spanning~~ along the northern margin of Australia, ~~stretching~~ between 10° S and 25° S (James et al., 2004). The shelf is composed of two parts located on either side of longitude 123°E (Fig. 1). The Rowley Shelf extends westward to Exmouth while the Sahul Shelf extends eastward to ~~the~~ Melville Island (Fairbridge, 1953). The NWS region, which commonly includes the adjacent plateaus and terraces, is a hotspot of biodiversity and hosts several marine conservation parks (Wilson, 2013; Director of National Parks, 2018). The NWS is also a site of key

35 archaeological significance as it may have been one of the entry points for humans into Australia (Veth, 2017). ~~Finally~~ The region is Australia's main hydrocarbon province (Purcell and Purcell, 1988) and concentrates significant fishing activities (Nowara, 2001). Nevertheless, most of the shelf seafloor, marine habitats and biodiversity remain poorly understood (James et al., 2004; Wilson, 2013; Poore et al., 2015).

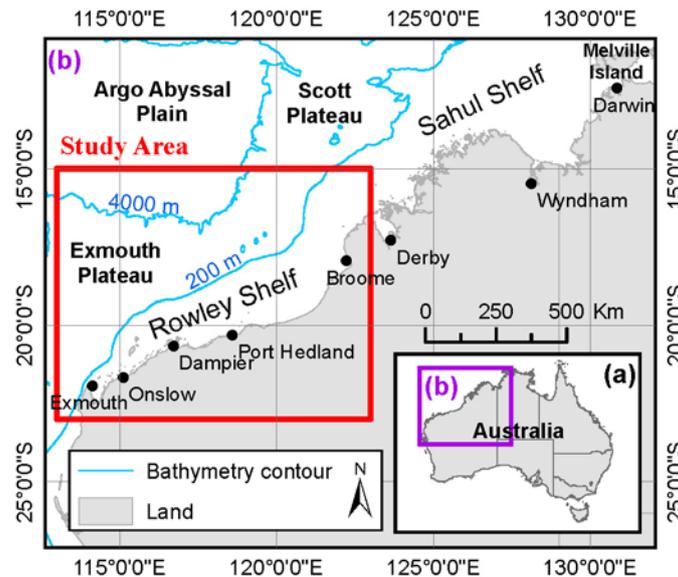

40 **Figure 1: Location of the North West Shelf (NWS) of Australia. The area of interest covers the Rowley Shelf (southern half of the NWS) and the adjacent plateaus. Location of the study area. The area of interest engulfs the Rowley Shelf (Southern half of the North West Shelf) and the adjacent plateaus**

Investigations into the modern depositional environments of the NWS typically cover relatively small areas. Some regional studies exist, but they almost solely build on sparse seabed samples (Carrigy and Fairbridge, 1954; Jones, 1973; Dix, 1989; James et al., 2004; Baker et al., 2008). This observation can be explained by the limited coverage of ~~open source~~ high-resolution geophysical datasets (Fig. 2), which in turn can be explained by the prohibitive cost of acquiring such datasets. Geoscience Australia and the AusSeabed community are leading the effort to map the seabed around Australia via the acquisition and distribution of ~~Multi-multibeam Echo-echoSounder-sounder~~ (MBES) bathymetry (Spinoccia, 2018). ~~As of now~~ Currently, less than 25% of the Australian waters have been mapped using high-resolution techniques (Picard et al., 2018).

50 Along the ~~North West Shelf~~ NWS, ~~this number~~ mapping coverage drops below 15%. The integration of low-resolution and

indirect-multi-source datasets can however allow the interpolation of high-resolution grids and therefore help improve the extent of mapped areas~~reduce the extent of poorly charted areas~~. Based on this approach, high-resolution bathymetry compilations were created over the Sahul Shelf, the Northern Territory and the Great Barrier Reef using MBES data, airborne LiDAR bathymetry (ALB) surveys, satellite-derived bathymetry (SDB) data and singlebeam echosounder surveys ~~data, water depth measurements from navigation charts, LiDAR surveys, satellites data and single beam surveys~~ (Beaman, 2017, 2018).

55

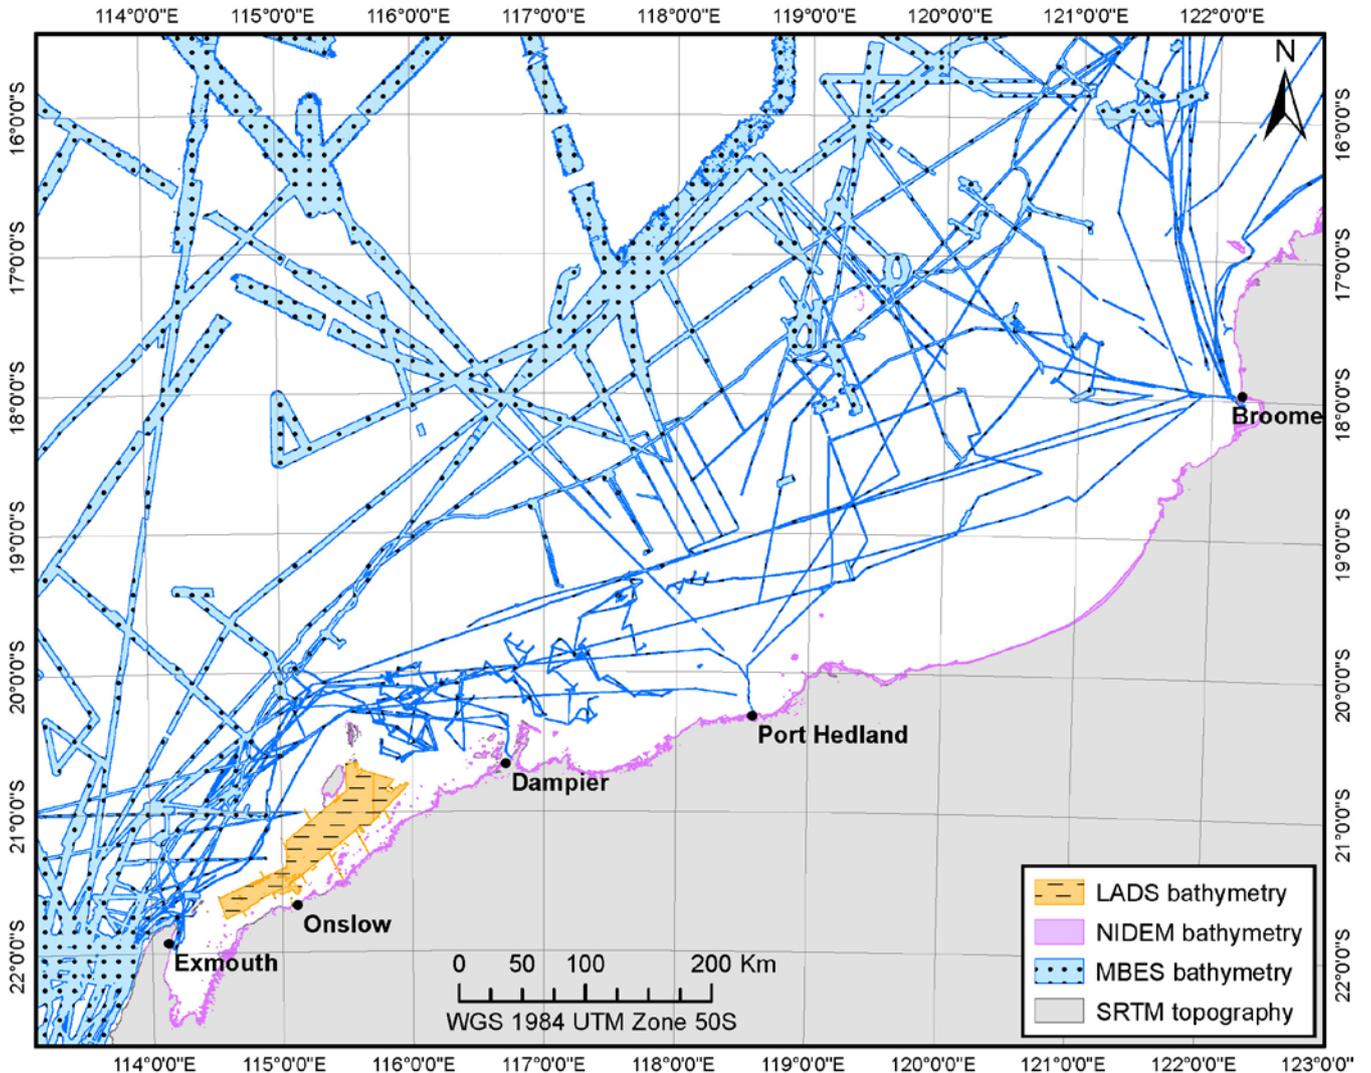


Figure 2: Public data available within the study area including Laser Airborne Depth Sounder (LADS) LiDAR bathymetry, the National Intertidal Digital Elevation Model (NIDEM, (Bishop-Taylor et al., 2019), multibeam echosounder (MBES) (Spinoccia, 2018), bathymetry and Shuttle Radar Topography Mission (SRTM) data (Gallant et al., 2011). ENC navigation charts and the Australian Topography and Bathymetry grid-grid from Whiteway (2009) cover the entire area.

60

The intent of this research was to follow a similar approach to create the first high-resolution bathymetry compilation across the Rowley shelf-Shelf and in doing so complete the existing work conducted over the Sahul shelf by Beaman (2018) to

provide a full bathymetric coverage over the NWS. The main challenge to generate such a compilation is that the underlying high-resolution bathymetry surveys have a limited coverage and most of the areas consist of resampled or interpolated low-resolution datasets. To work around this limitation, we developed an innovative workflow to derive high-resolution bathymetry from satellite images and 3D seismic surveys at a regional scale. The workflow was successfully applied to the area of interest and the resulting product was integrated with pre-existing ~~open-source~~ datasets to create a regional 30 x 30 m ~~Digital~~ ~~elevation~~ ~~Model~~ (DEM) and a 10 x 10 m bathymetry grid over an area of 935,000 km² and 45,000 km² respectively.

The scientific objective of this paper is to introduce the bathymetry compilation produced over the Rowley Shelf and the associated workflows to produce this outcome. The dataset includes the derived ~~digital elevation model~~ DEM as well as the underlying datasets in their original resolution. In the following sections, we present the data selection, the workflows used to produce the satellite-derived bathymetry and the seismic-derived bathymetry, as well as the processes adopted to compile a seamless high-resolution bathymetry DEM. Quality check processes and discussions on the vertical and positional accuracy are presented for each dataset included in the compilation.

2 Processing tools

~~Datasets~~ Source datasets presented in this paper were processed using the Python programming language. Python scripts were developed using three key libraries: (1) raster and shapefile calculations build on ArcGIS geo-processing tools, accessed via the Arcpy library; (2) scikit-learn library, an ~~open-source~~ machine learning Python library was used to perform statistical analysis of the data; and (3) the required computations were dynamically split between the logical cores of the workstation using Python multiprocessing module. While the workflows were fully integrated in scripts, each of the processing steps presented in this paper can be completed manually via ArcGIS, and presumably using any other GIS software. Software used for specific processing steps are presented in the relevant sub-sections.

3 Pre-existing datasets

3.1 Australian ~~bathymetry~~ Bathymetry and ~~topography~~ Topography grid Grid

~~This dataset~~ The Australian Bathymetry and Topography Grid (AusBathyTopo Grid) was released by ~~through~~ Geoscience Australia in 2009 by Whiteway (2009) and covers the totality of the Australian waters and mainland with a ~~bin-pixel~~ size of 9 arc seconds (1 arc second \approx 30 m near the equator). ~~This bathymetry grid was developed using all available depth soundings~~ The bathymetry was generated via the integration of direct water depth soundings acquired or collated by Geoscience Australia with 1 arc minute ETOPO and 2 arc minute ETOPO bathymetry (Whiteway, 2009). Within the area of interest (Fig. 2), the topography is based on the Australian GEODATA 9 arc second ~~Digital Elevation Model (DEM)~~ DEM (Whiteway, 2009). The

~~bin-pixel~~ size does not always reflect the resolution of the data as extended areas, especially in deep-water domains, were interpolated from sparse data points.

3.2 SRTM-derived digital elevation model

95 Geoscience Australia produced the ~~ground-land~~ surface topography using Shuttle Radar Topographic Mission (SRTM) data acquired by the NASA in February 2000 (Farr et al., 2007; Gallant et al., 2011). The data was produced by Gallant et al. (2011) ~~the authors~~ using an automated process to remove the vegetation from the original SRTM data and was released in 2011 as a 1 arc second grid.

3.3 ~~Multi-Beam Echo-sounder-sounder~~ bathymetry

100 ~~Multi-Beam Echo-Sounder-MBES~~ bathymetry acquired around Australia by numerous institutions have been collated and merged by Geoscience Australia (Spinoccia, 2018). ~~The data pack~~ This MBES dataset, which covers limited areas (Fig. 2), is regularly updated and is available as a 50 ~~m~~ 50 m grid. The distance between the recorded points of a beam increases with the ~~water~~ depth and vice versa (Lurton, 2002), hence the average ~~bin-pixel~~ size of 50 m used by Geoscience Australia does not always correspond to the actual resolution of the data (i.e., the points can be spaced by only a few centimetres in the shallowest
105 waters). To overcome this issue, the native xyz data was obtained from Geoscience Australia and re-gridded using the root square of the average point density of each survey line as ~~bin-pixel~~ size. In some instances, where xyz files were not available, the re-gridded datasets were complemented with the 50 m grid.

3.4 ~~National intertidal-Digital-Digital elevation-Elevation model-Model~~

~~This digital elevation model~~ The National Intertidal Digital Elevation Model (NIDEM) was compiled by Bishop-Taylor et al.
110 (2019) using the Inter-Tidal Extent Model (ITEM) developed by Sagar et al. (2017) and Sagar et al. (2018) ~~Sagar et al. (2018); Sagar et al. (2017)~~ and integrates 30 years of Landsat images. The grid has a ~~resolution-pixel size~~ of 25 x 25 m and covers intertidal areas (Fig. 2) typically ~~varying~~ comprised between +5 m and -5 m ~~Mean-mean Sea-sea Level-level~~ (MSL).

3.5 ENC Navigation chart

Electronic nautical charts (ENCs) ~~Navigation charts~~ virtually cover the whole area of interest and were sourced from the
115 Australian Hydrographic Office (AHO). Depth soundings extracted from the charts constitute a unique source of verified water-depth (hereafter 'depth') measurements and can be used to calibrate other surveys. ~~Point's-ENC depth point~~ density varies significantly depending on the distance from the coast and proximity to highly navigable and/or populated coastal areas. On average, the distance between two measurements is ~~comprised-varying~~ between 500 and 5,000 m. Unlike other datasets that are reduced to ~~the Mean Sea Level~~ (MSL), ~~the~~ navigation charts are referenced with respect to the Lowest Astronomical
120 Tide (LAT). To ensure the proper use of this dataset, all depth soundings were converted from LAT to MSL using the Australian Coastal Vertical Datum Transformation Software (~~AUSCoastVDT~~ AusCoastVDT), provided by the

Intergovernmental Committee on Surveying and Mapping (ICSM). The software allows the conversion between vertical datums down to a ~~water~~ depth of approximately 500 m (Crcsi and Frontiersi, 2019). Beyond that depth, the vertical uncertainty related to the datum is considered below the vertical accuracy of the depth sensors and hence of negligible impact.

125 3.6 Open source LADS Airborn LiDAR bathymetry

Laser Airborne Depth Sounder (LADS) data ~~was collected from~~ were collected from the West Australian Government's Department of Transport. The data ~~was~~ were acquired by Fugro LADS Corporation in the vicinity of Onslow and Barrow Island. Surveys were conducted between 1998 and 2002 and cover ans area of $\sim 4,200$ km². The spatial resolution of the data varies but is typically < 5 m.

130 4 Seismic-derived bathymetry

4.1 Overview

Australia's North West Shelf has been extensively surveyed using 3D seismic techniques, with the shelf between Exmouth and Broome now covered by $\sim 325,000$ km² of 3D seismic survey (Paumard et al., 2019b). Under Australian legislation, most of this extensive dataset is publicly available through Geoscience Australia. The bathymetry data can be derived in two ways, 135 either by extracting the first seismic reflection from the data itself (which typically represents the seafloor) or by compiling the ~~water~~ depth measurements from the vessel echo-sounder. The resulting datasets are referred to as reflection-derived bathymetry and navigation-derived bathymetry, respectively.

4.2 Reflection-derived bathymetry

4.2.1 Data source


140 Open-file seismic data were provided by Geoscience Australia. In total, 26 publicly available 3D seismic surveys were processed (Fig. 3). Additional surveys are integrated as they become available.

4.2.2 Data processing

The reflection-derived bathymetry extraction ~~The extraction of the seabed reflection~~ was performed using PaleoScan™, a full volume seismic interpretation software. The interpretation is performed semi-automatically using similarities between adjacent 145 seismic traces to generate an unlimited number of horizons within a chronostratigraphic framework (Paumard et al., 2019a). In this case, the workflow focused on the upper 500 ms (TWT) of each seismic survey to optimize the resolution of the seafloor horizon.

Seismic horizons were subsequently converted from the time domain to depth domain. Due to the lack of regional water-column velocity profiles, an average velocity of 1500 m/s ~~value~~ was obtained by averaging the nominal velocities specified in

150 the navigation files of the surveys. The resulting velocity, while averaged from indirect sources, is comparable with values used in the literature to perform similar conversions (Mosher et al., 2006; Jibrin et al., 2013; Power and Clarke, 2019). The bin pixel size of the reflection-derived bathymetry grids corresponds to the spacing of the seismic traces and is generally comprised between 12.5 m and 37.5 m.

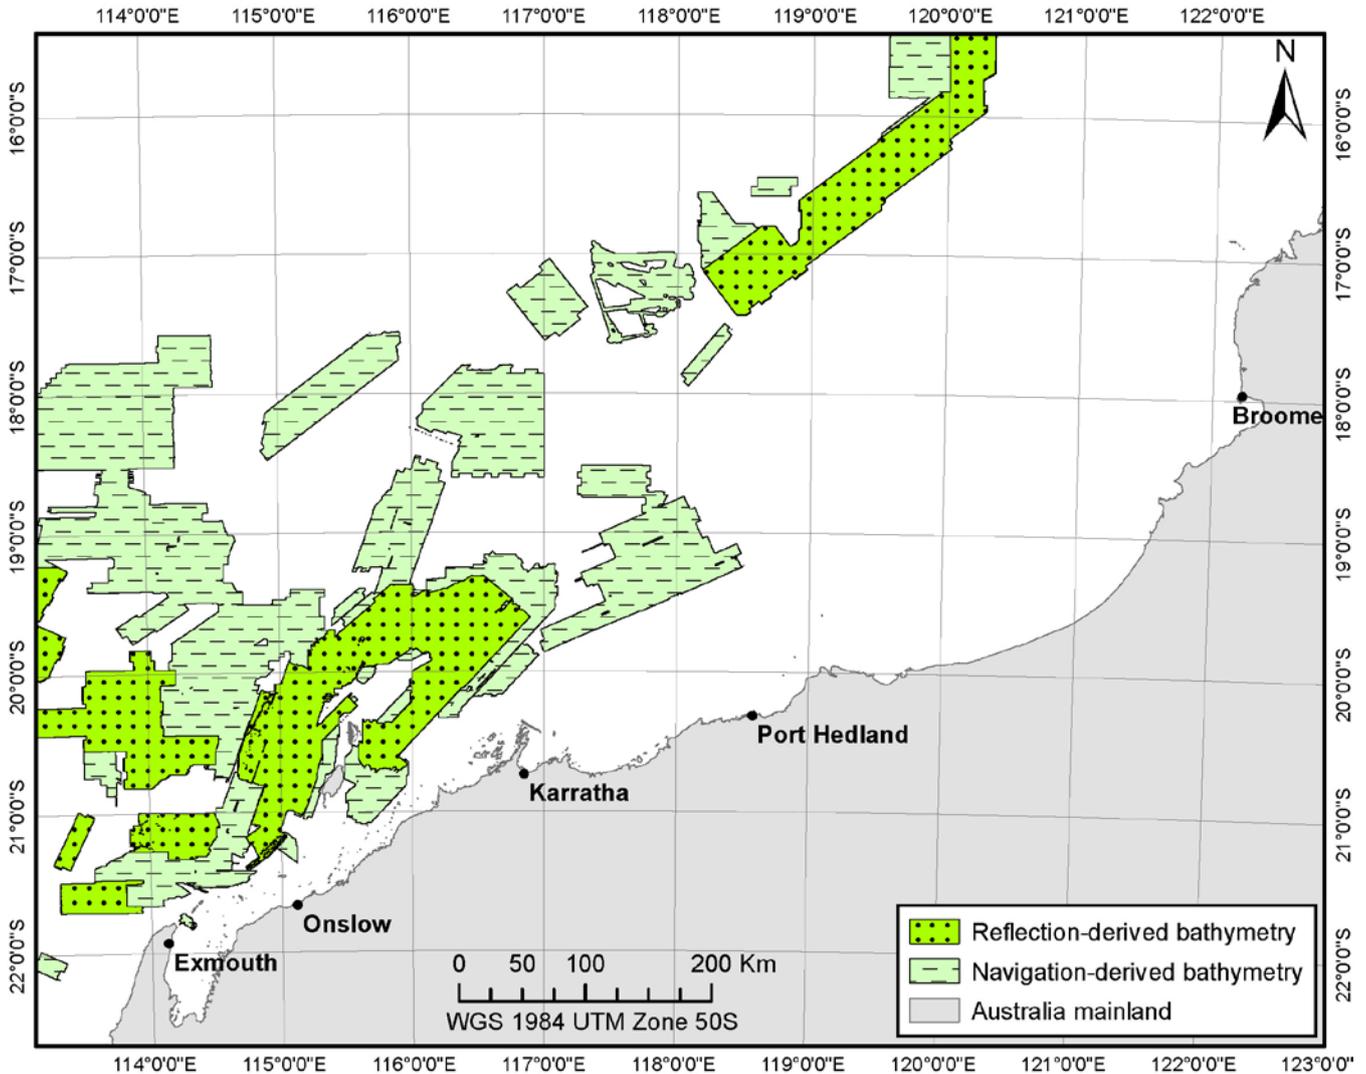

155 **Figure 3** Extent of the reflection-derived and navigation-derived bathymetry. All areas covered by the reflection datasets are also covered by the navigation datasets.

4.2.3 Data limitation

The geometry of multichannel seismic survey acquisition systems appears to result in a reduction of the vertical resolution accuracy in water-depth of less than 150 m. As this-depth reduces, the bathymetry becomes increasingly noisy and the morphologies start to be vertically distorted, to the point where the relative height of seabed features can be multiplied by a

160

factor 5 compared to MBES data (Fig. 4, b). Similar patterns were identified by the U.S. Bureau of Ocean Energy Management in the seismic-derived bathymetry they generated over the Gulf of Mexico (Kramer, 2017). In addition, sound velocity varies in the water column depending on the salinity, temperature and pressure of the seawater (Leroy, 1969). Therefore, the use of a constant velocity to perform the time-depth conversion cannot capture local variations of the velocity profile and may result in a local underestimation or overestimation of the water depths.

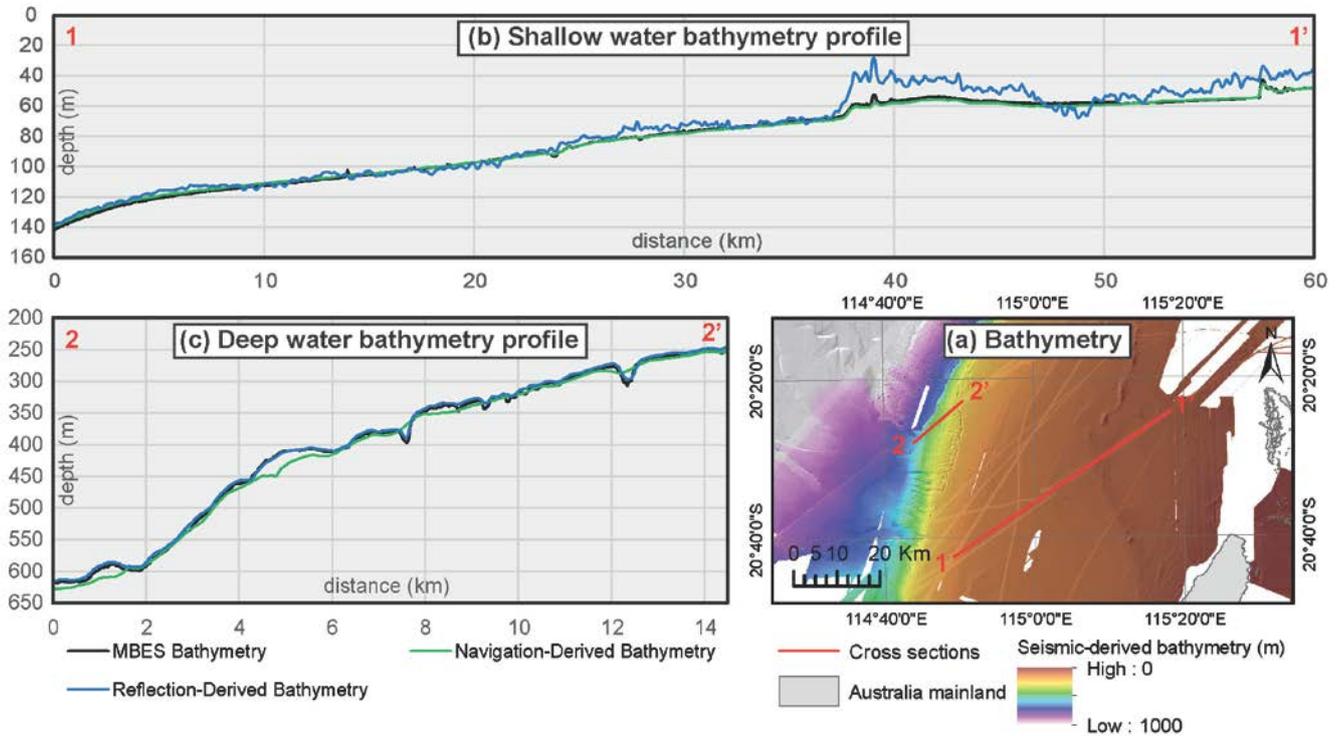


Figure 4 Comparison of the navigation-derived and reflection-derived bathymetry with MBES surveys in the vicinity of Barrow Island (a). Reflection data is-are heavily distorted in shallow waters (cross-section b, from km 37) whereas navigation data is-are over-smoothed in deep waters (cross-section c, until km 0.109).

170 4.3 Navigation-derived bathymetry

4.3.1 Data source

P1/90 files are generated during the seismic acquisition and contain navigation-related information which include, for example, the coordinates of the vessel, source, receivers, and subsequent common mid points. Each entry is associated to a water-depth measurement from the on-board echo-sounder (The Surveying and Positioning Committee, 1990). These files are, in most cases, publicly available making them a powerful input for the generation of bathymetry at a regional scale.

Geoscience Australia has previously undertaken the compilation of the water-depth measurements from both 3D seismic and 2D seismic navigation files into a database. This product was made available to the project but did not include navigation data from the latest 3D seismic surveys. The navigation files from the missing surveys were subsequently sourced from the National

Offshore Petroleum Information Management System (NOPIMS) data portal (<http://www.ga.gov.au/nopims>). In total, 232
180 navigation files were collected from 3D seismic surveys within the area of interest (Fig. 3).

4.3.2 Data processing

During seismic acquisition, whenever a shot point is acquired, the coordinates of the different part of the acquisition system are recorded in the navigation files and are associated to the ~~water~~-depth value recorded by the echo-sounder (The Surveying and Positioning Committee, 1990). Some parts of the acquisition system can be hundreds of meters from the actual echo
185 sounder location, leading to the creation of a significant mismatch between the actual location of the ~~water~~-depth measurements and their coordinates (Fig. 5a). In several instances, this information is not properly recorded in the file (e.g., either the field is empty or the coordinates from the echo-sounder are not recorded, or at the wrong location). The P1/90 files were resultantly filtered in an iterative process to check if the ~~water~~-depth values were properly recorded at the echo-sounder location, and if not, to use the values from the closest recorded point on the vessel. Doing so significantly reduced the spatial offset between
190 the acquisition lines (Fig. 5b).

~~Water-d~~Depth measurements from the navigation files ~~are-were~~ then interpolated and gridded using ArcGIStm inverse distance weight algorithm. Hengl (2006) suggests that the ideal bin-pixel size to interpolate a scattered cloud of point is the average minimum distance between 2 points, divided by 2. ~~In this case~~However, this formula often provided inaccurate results due to the geometry of the modern marine seismic surveys: data points are typically recorded every 6.25 m to 25 m along acquisition
195 lines that are spaced by multiple times this value (Vermeer, 2012). The minimum distance between two points is consequently not representative of the overall point density. The formula was ~~adapted~~-modified to instead use the root-square of the average area occupied by a point, divided by two. Navigation-derived bathymetry grids typically have a bin-pixel size ~~comprised~~ ranging between 30 m and 50 m.

4.3.3 Data Limitation

~~This-The~~ geometry of modern marine seismic surveys was taken into account in the definition of the ideal bin-pixel size but the gap between ~~the-adjacent~~ acquisition lines was sometimes too important compared to the point spacing along these lines to result in an accurate bathymetry grid. In such instances, interpolation artefacts marking the acquisition lines can be seen on the grids. Overall, the navigation-derived bathymetry tends to become smoother as the depth increases (Fig. 4, c).

It is also often unclear from the navigation files what level of correction was applied to the ~~water~~-depth measurements. In some
205 cases, it was stipulated whether the recordings were corrected for the roll, tides, and waves. However, in most cases, this information was not available making it impossible to have a homogeneous correction process for all surveys.

Finally, the headers of some of the files suggest that some measurements may have been converted from the time to depth domain using a constant value instead of site-specific velocity profiles resulting in a possible over-estimation or under-estimation of the ~~water~~-depths.

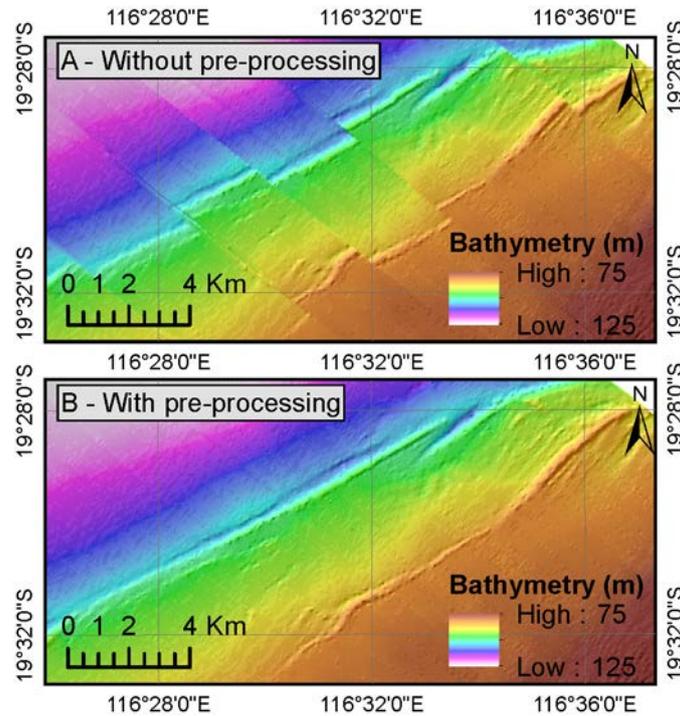


Figure 5: Comparison of the navigation-derived bathymetry generated using ~~the~~ raw navigation files (a) or filtered (*i.e.*, pre-processed) navigation files (b) from Demeter 3D survey. ~~In~~ With raw navigation files, ~~water~~ depth measurements are sometimes associated with the coordinates of the seismic receivers which can be located hundreds of meters behind the vessel hence creating a ‘banded’ pattern. During the filtering process, ~~d~~water ~~depth~~ measurements ~~are~~ were re-aligned with the vessel position.


4.4 Data calibration

~~As the~~ Given that seismic data ~~is~~ are archived in time (ms), the reflection-derived bathymetry lacks a consistent vertical reference systems ~~system~~ and a vertical offset of several meters can often be observed between the produced bathymetry files. Likewise, even though navigation files are supposedly reduced to ~~the mean sea level~~ MSL vertical datum, it is common to observe similar vertical offsets between surveys. The initial intent was to reduce all datasets to ~~the mean sea level~~ MSL using the depth soundings from the navigation charts as calibration points. However, in most cases, this method presented two limits: (1) the point density is often very low in deep waters, meaning that less than 10 points ~~will~~ generally intersect a given 3D seismic survey; and (2) the validity of the ENC depth soundings is sometimes questionable as vertical offsets of tens to hundreds of meters were locally observed with the MBES bathymetry.

Depth soundings from ENC tiles were subsequently complemented with depth values from ~~the~~ MBES bathymetry surveys. MBES surveys having a limited coverage, many seismic survey areas were ~~not~~ intersected by neither ~~the~~ ENC data points nor ~~the~~ MBES surveys. The reflection-derived and navigation-derived bathymetry were therefore vertically shifted in an iterative process to obtain the best fit between the ENC depth soundings, the MBES bathymetry grids and the surrounding seismic surveys.

4.5 Seismic-derived bathymetry compilation

230 Reflection-derived and navigation-derived bathymetry grids were ~~then~~ merged in order to generate a consistent, seamless seismic-derived bathymetry grid (Fig. 6, a). In several areas, multiple surveys are overlapping. In such instances, due to the variability of resolution between surveys, only the values from the most reliable surveys ~~was~~ were selected for inclusion in the final merged grid. Where appropriate, bathymetry grids were cropped to only include parts of them. The selection was performed considering two criteria. Firstly, the accuracy of the reflection-derived bathymetry varies depending on the water depth. Thus, where water depths are of less than 150 m, the navigation-derived bathymetry is preferred, whereas the reflection-derived bathymetry is preferred where the water depths are deeper than ~~above~~ 150 m. Secondly, surveys with the smallest line spacing and bin-pixel size (i.e., high-resolution surveys) were prioritized. Prior to their inclusion, individual grids were resampled using a bilinear interpolation and a bin-pixel size of 30 x 30 m.

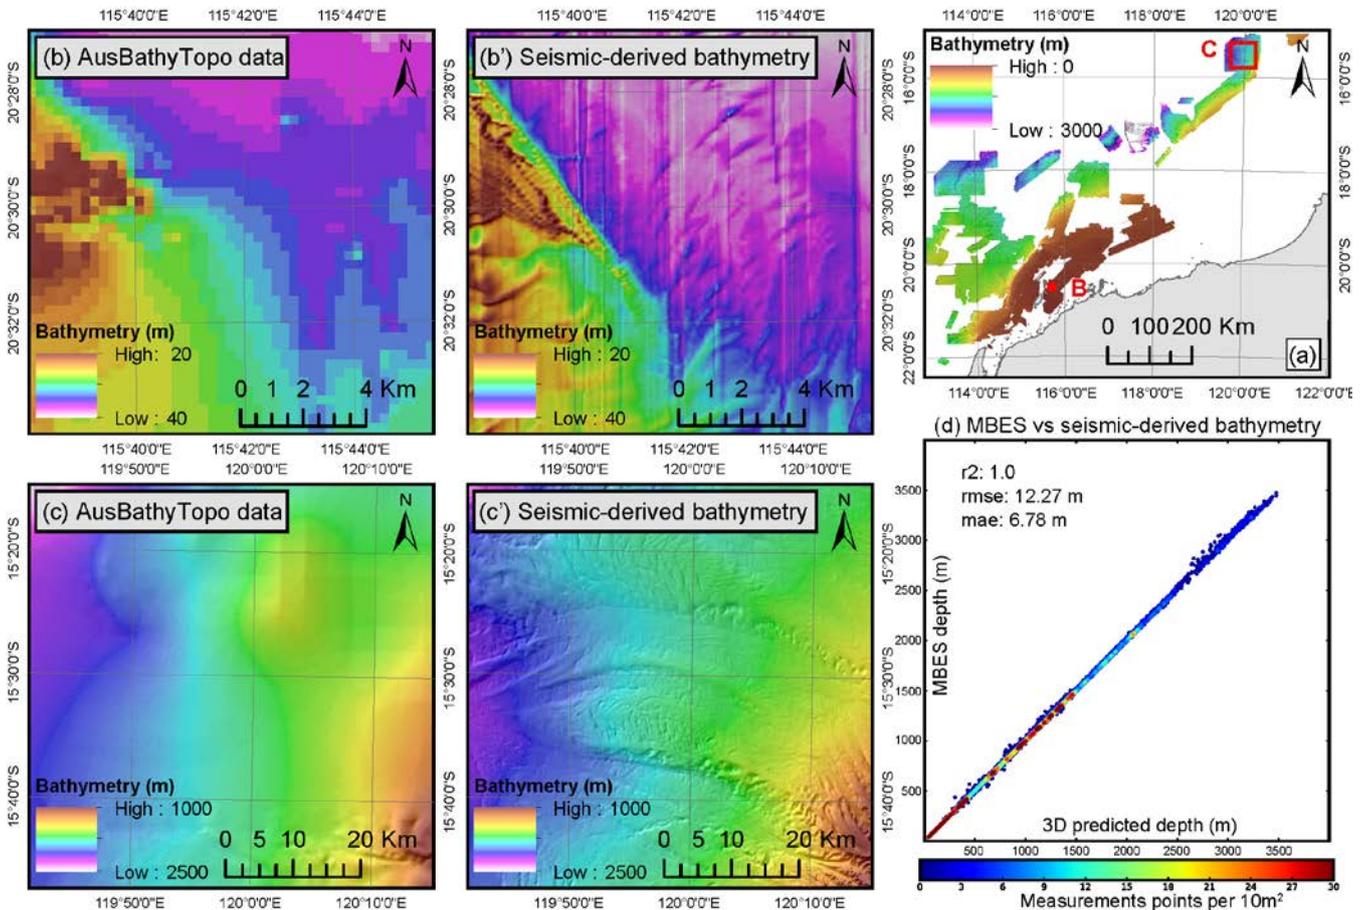

240 **Figure 6:** The seismic-derived bathymetry (a) is mainly composed of navigation-derived bathymetry (b') in water depth of less than 150 m and of reflection-derived bathymetry (c') in deeper water. 12,676 data points were extracted along a mesh from both MBES and seismic-derived bathymetry to assess the accuracy of the latest dataset using the coefficient of correlation (r2), the mean average error (mae) and the root mean square error (rmse). (d). The pProduced bathymetry marks a significant improvement compared to the Australian Bathymetry and Topography from Whiteway (2009) (b vs b' and c vs c').

245 4.6 Data accuracy

The 30 ~~x~~ 30 m bathymetry grid resulting from the compilation of the reflection-derived bathymetry and navigation-derived bathymetry was compared with the MBES bathymetry ~~publicly grids~~ available on the ~~North West Shelf~~ NWS to assess its vertical accuracy (Fig. 6, b, c, d). Values from both datasets were extracted along a 1000 ~~m~~ x 1000 m mesh, representing a total of 12,676 points, and were plotted against each other. The results show a very tight correlation between both datasets
250 ~~with a coefficient of correlation of 1.0~~, hence confirming the quality of the final product. The ~~Mean-mean Absolute-absolute Error-error~~ (MAE) gradually increases with the ~~water~~-depth but its relative percentage of the absolute ~~water~~-depth decreases, meaning that the vertical accuracy of the data increases with depth (Table 1).

Table 1 Statistical metrics of the seismic-derived bathymetry

Water Depth interval (WD) in m	20 -100	100 - 500	500 - 1000	1000 - 2000	2000 - 4000
Mean Absolute-absolute error (MAE)	1.18	4.37	6.87	7.2	14.84
Root mean square error (RMSE)	1.59	7.13	11.54	11.77	22.9
MAE % of median depth WD	2 %d	1.45 %d	0.9 %d	0.48 %d	0.49 %d

5 Satellite-derived bathymetry

255 5.1 Overview

The utilization of satellite images to derive bathymetry has been the focus of numerous papers since the late 1970s and relies on the idea that since the light's wavelengths are not absorbed homogeneously by the water, it should be possible to derive the ~~water~~-depths from the spectral content of the light reflected by the seabed. Out of the various methods developed, two main approaches emerged: (1) the ~~physical-physics~~ approach, which attempts to model the penetration of the light in the water and
260 the resulting spectral content to estimate the bathymetry (Lee et al., 1994; Stephane et al., 1994; Brando et al., 2009); and (2) the empirical approach, which tries to correlate calibration points (i.e., true ~~water~~-depth measurements) with the seabed reflectance (Lyzenga, 1978; Stumpf et al., 2003). Due to the extent of the area of interest and the high density of potential calibration points available (e.g., navigation charts depth soundings), the empirical method has been preferred over the physical approach for this study.

265 The GEBCO ~~cook-Cook book-Book~~ (International Hydrographic Organization and Intergovernmental Oceanographic Commission, 2019) ~~published by the International Hydrographic Organization (IHO) and the Intergovernmental Oceanographic Commission (IOC)~~ presents ~~in great lengths~~ a workflow to implement an empirical method using ArcGIS software. The method, which uses Landsat satellite images and calibration points from public navigation charts, builds on the log-ratio equation (Eq. (1)) developed by Stumpf et al. (2003). The model is, according to the publication, less susceptible to
270 sea bottom effect than the Lyzenga model.

$$z = m_1 \left(\frac{\ln(\text{Blue band})}{\ln(\text{Green band})} \right) - m_0 \quad (1)$$

Where m_1 and m_0 correspond to empirically determined gain and offset and *Blue band* and *Green band* to ~~the observed~~ radiance satellite image spectral bands.

275 The steps are as follow:

1. Manual identification of the water/land separation and removal of the land using infra-red (“IR”) spectral band;
2. Generation of the band ratio using the Green and Blue spectral bands;
3. Extraction of the band ratio values at calibration point locations;
4. Calculation of the average band ratio value per true ~~water~~ depth measurement;
- 280 5. Visual definition of the depth of extinction (i.e., maximum depth of validity of the data);
6. Generation of a linear regression line between the average band ratio values and ~~the true~~ water depth measurements;
7. Application of the gain and offset of the regression line to the band ratio.

285 Following the guidelines from the IHO (International Hydrographic Organization and Intergovernmental Oceanographic Commission, 2019), the GEBCO Cook Book workflow was used as a starting point in the development of the satellites-derived bathymetry.

290 The main limitation of this workflow is that the gain and the offset are calculated at the scale of satellites image tiles (tens to hundreds of km wide, depending on the satellite images used as input). These parameters therefore fail to capture spatial variation of seabed reflectance related to local environmental factors such as the type of substrate, the presence or absence of benthic communities, the presence or absence of marine plants.

Furthermore, existing studies following a ~~GEBCO~~-GEBCO-like workflow typically performed the processing steps manually and only apply the workflow to unique satellite images for unique locations (e.g., ~~Pe~~ri et al., 2014; Hamylton et al., 2015; Kabiri, 2017; Casal et al., 2018; Caballero and Stumpf, 2019). The result is strongly impacted by temporal events affecting either the sea surface or the water column and is therefore difficult to reproduce.

295 Other authors have attempted to circumvent such temporal artefacts by using multiple images acquired through a given period of time over a specific area. While heading in the right directions, these studies usually include a limited number of images (e.g., ~~Chu~~ et al., 2019; Evagorou et al., 2019; Poursanidis et al., 2019).

300 The number of manual steps required in the GEBCO workflow, as well the spatial and temporal uncertainties inherent to the empirical method, make the processing of satellite-derived bathymetry over large areas challenging and of extremely variable accuracy.

In order to allow the production of reproducible seamless satellite-derived bathymetry at a regional scale, the workflow has been fully automated in Python scripts and was complemented by four processing steps, which aim ~~at~~ to:

1. ~~Improving-Improve~~ and ~~automatinge~~ the water/land delineation using the Normalized Difference Water Index (NDWI) from Mcfeeters (1996) (Eq.(2));
2. ~~Improving-Improve~~ and ~~automating-automate~~ the calculation of the depth of extinction;
3. ~~Correcting~~ the data for spatial variation of the seabed reflectance using regional residual error models; and
4. ~~Removing-Remove~~ the effect of temporal events by the generation of statistics model using multi-temporal images for each pixel.

$$NDWI = \frac{Green\ band - NIR\ band}{Green\ band + NIR\ band} \quad (2)$$

Where *Green band* and *NIR band* corresponds to ~~Sentinel band B02 and NIR to Sentinel band B08~~ specific spectral bands of satellite images.

5.2 Data Selection

5.2.1 Satellite data

The Sentinel-2 constellation is composed of two satellites launched by the European Space Agency (ESA) through the Copernicus program in 2015 and 2017 to acquire high-resolution (10 x 10 m to 60 x 60 m) multi-spectral images of the ~~earth~~ Earth surface (European Space Agency, 2020). The data acquired by the constellation, which have a position accuracy of 20 m on the ground, correspond to the ~~highest-highest~~-resolution product publicly available and was therefore selected for this study.

Sentinel-2 satellites images are available as tiles, each covering an area of approximately 100 x 100 km. In total, the area of interest is covered by 26 tiles. Images are composed of 13 spectral bands that are initially available as top-of-atmosphere reflectance products (Level 1c products). These images are not directly usable to derive the bathymetry as 90% of the reflectance actually corresponds to the atmosphere (Gordon, 1983; International Ocean-Colour Coordinating Group, 2010). In December 2018, Copernicus started to release Bottom-of-atmosphere products (Level-2a products) which are corrected for atmospheric effects using the Sens2cor tool (Gatti, 2018). In April 2020, Sentinel-Hub, a third-party company specialized in Earth observation, used the same tool to process from Level-1c to Level-2a all Sentinel-2 images acquired prior to December 2018 and decided to make them freely available (Milcinski, 2020). Thus, the complete catalogue of Sentinel 2 images is now fully and freely available as Level 2a products and can be used for further processing.

The penetration of the light in the water, and hence the accuracy and the penetration of the ~~produced~~ bathymetry ~~produced~~, is highly dependent on seasonal environmental factors such as ~~the~~-cloud cover, turbidity of the water or roughness of the sea (Caballero and Stumpf, 2020; Zheng and Digiaco, 2017). It is therefore necessary to select an optimum time window to minimize ~~abnormal values included in the influence of such environmental factors on~~ the depth model.

Climate data available from the Australian Bureau of Meteorology (Bureau of Meteorology, 2020) suggest that the optimum environmental conditions (i.e., low precipitation and wind speed) may occur between August and November each year. This

335 timeframe was further reduced to the period ranging from August to October following a visual inspection of the data. A total of 1,170 Level-2a Sentinel-2 images acquired in August, September, and October 2017, 2018 and 2019, with a cloud cover of less than 1%, were selected to be included in the bathymetry model. Out of the 13 available spectral bands, Sentinel-2 Band 02 (blue, central wavelength of 492.4 nm), Band 03 (green, central wavelength of 559.8 nm) and Band 08 (near infra-red, central wavelength of 832.8 nm) were used through the processing steps.

340 5.2.2 Calibration points

The determination of the parameters $m0$ and $m1$ from the Stumpf et al. (2003) equation requires true ~~water~~ depth measurements to use as calibration points. The depth soundings extracted from the navigation charts represents the main source of widely spread ~~water~~ depth measurements on the North West Shelf NWS. In total, more than 125,000 points are referenced within the area of interest. Locally, tidal areas are not fully covered by the navigation charts depth soundings. To overcome this, the

345 dataset was complemented with datapoints extracted along a ~~500-m~~ 500 m mesh from the National Intertidal Digital Elevation Model (NIDEM) produced by Bishop-Taylor et al. (2019).

5.3 Data Processing

5.3.1 Pre-processing

The pre-processing aims ~~at to attenuating attenuate~~ the noise, masking the land and making sure that all meaningful information

350 ~~are is~~ used. It ~~is was~~ performed in three steps, applied to the three bands (B02, B03 and B08) of all images used in subsequent ~~processing steps~~. First, image types ~~are were~~ converted from integer to float to make sure that cells can record decimals values. A low pass filter, corresponding to a moving average of 3 x 3 ~~pixels cells is was~~ then applied to minimise the effect of speckle ~~(pixel-based glint), following the recommendation from the IHO Cookbook.s~~. Lastly, the ~~Normalized Difference Water Index (NDWI) is was then~~ calculated using the equation from Mcfeeters (1996)(Eq. (2)). Output values ranges from -1 to 1; positive

355 values indicate the presence of open water while negative values correspond to the land. The NDWI ~~is was~~ used to clip out areas corresponding to the land by changing negative values to null.

5.3.2 Derivation of the initial bathymetry

A band ratio ~~is was then~~ calculated using the first part of Stumpf et al. (2003) as presented in equation Eq. (3). The band ratio values must be tied with true ~~water~~ depth measurements to determine the gain $m1$ and the offset $m0$ of equation Eq. (1). This

360 is the key step of the data processing, as it directly impacts the validity of the generated bathymetry.

$$\text{Band ratio} = \frac{\ln(\text{Blue})}{\ln(\text{Green})} \quad (3)$$

Where *Blue* corresponds to Sentinel-2 band B02 and *Green* to Sentinel-2 band B03.

~~To do so, b~~and ratio values ~~are were~~ extracted at the calibration point locations and grouped by identified depth, rounded to the first decimal. For each unique depth, the band ratio values ~~are were~~ filtered using the interquartile range score to remove

365 outliers, and averaged. The resulting averaged values ~~are-were~~ then plotted against the ~~water~~-depth measurement from the calibration points. This ~~reveals-revealed~~ a linear correlation between the band ratio values and the calibration depths, up to a certain depth which is referred to as the depth of extinction. The depth of extinction (*sensu* International Hydrographic Organization and Intergovernmental Oceanographic Commission (2019)) corresponds to the depth beyond which changes in the satellite image reflectance can no longer reflect changes in depths, and effectively indicates the maximum depth of validity of the method. The depth of extinction is different for each satellite image and varies depending on environmental factors such as the met-ocean conditions and the turbidity of the water. To allow ~~the~~-batch processing ~~of~~-satellites images, the determination of ~~this parameter~~the depth of extinction was automated via python scripts and the use of a threshold coefficient of correlation (Fig. 7): a linear regression ~~is-was~~ calculated using all data points; if its coefficient of correlation ~~is-was~~ higher than 0.95, the regression was validated, else it was recalculated using all depths, minus one meter. This maximum depth boundary corresponds to the theoretical depth of extinction being tested (Fig. 7). The process was repeated until the target coefficient of correlation was achieved or a minimum depth of extinction of 15 m was reached. In such instance, the target coefficient of correlation was iteratively lowered by 0.05 and the process presented in Figure 7 (i.e., the iterative lowering of the theoretical depth of extinction being tested) was repeated all over again and so forth until a target coefficient of correlation was validated. a specific threshold, the regression is validated, else it is recalculated using all water depth, minus one meter. The process is repeated until the target coefficient of correlation is achieved. Similarly, if the targeted coefficient cannot be reached, the threshold is iteratively lowered. Ultimately each satellite image ~~is-was~~ associated to a depth of extinction and a coefficient of correlation.

385 The gain and the offset of the validated linear regression, which correspond to the parameters $m0$ and $m1$ of the Stumpf et al. (2003) equation, ~~are-were~~ applied to the band ratio to derive the bathymetry. These steps were performed for each satellite image.

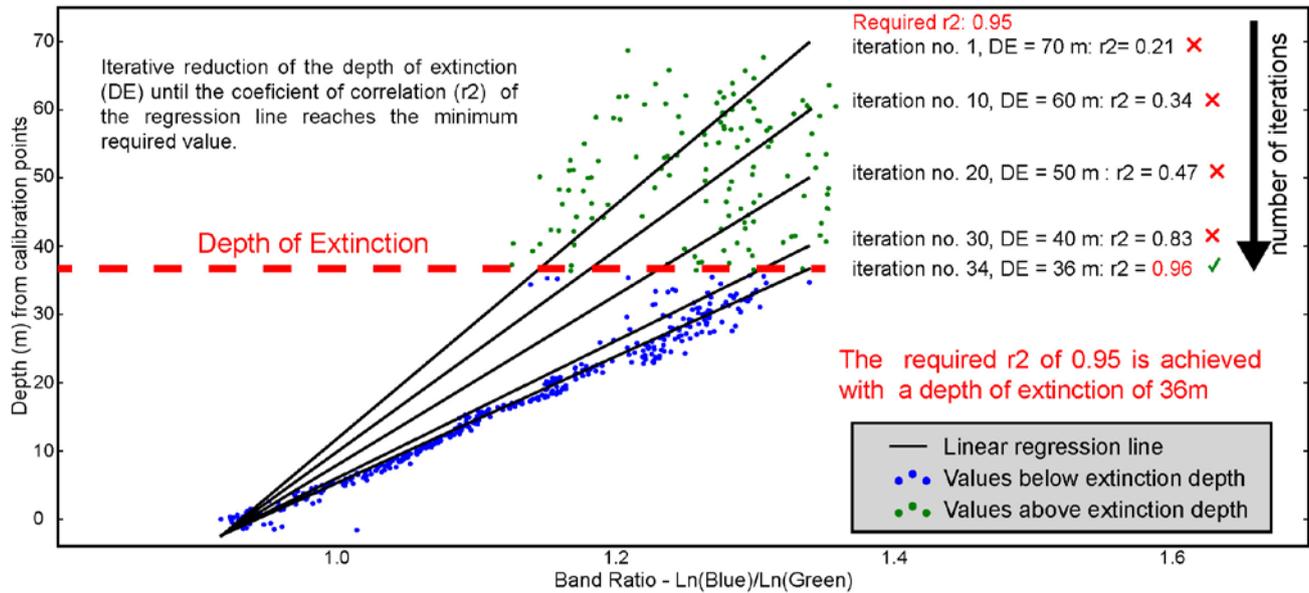


Figure 7: Illustration of the iterative process used to determine the depth of extinction of each satellite image and the resulting regression line. The gain and the offset of this line correspond to the parameters $m0$ and $m1$.


5.3.3 Correction of the initial bathymetry

390 The generation of ~~the~~ bathymetry grids is based on values of gain and offset averaged at the scale of satellite image tiles (100 x 100 km) ~~that therefore do not~~. ~~Thus, the output fails to~~ capture semi-regional (kilometric to multi-kilometric) changes of the ~~band ratio values seabed reflectance properties~~ (Fig. 8, a) ~~related to water column turbidity, seafloor properties variation, atmospheric artefacts, etc.~~ Such variations ~~of the seabed reflectance~~ ~~however~~ follows trends; hence it is possible to correct ~~its~~ some of their effects via the generation of an error model.

395 Predicted depth values from the initial ~~bathymetry are~~ SDB data were extracted at the calibration point locations in order to calculate the absolute error between the predicted depths and the actual ~~water~~ depths. A regional grid of the absolute error ~~is~~ was then generated using inverse distance weighted interpolation algorithm, where the weights are proportional to the inverse distance raised to the power p (Fig. 8, b). The intent being to capture semi-regional trends and not local variations, low values of p (0.5) were used in the interpolation, meaning that the weight of distant points is maintained. ~~Bin-Pixel sizes are were~~ calculated for each error ~~grid~~ grid using the root square of the average point density and are typically between 500 m and 5000 m. The resulting grid, which highlights vertical offsets related to semi-regional ~~variation of the seabed reflectance errors~~, ~~is~~ was then resampled to the satellite image resolution (10 x10 m) using bi-cubic convolution and added to the generated bathymetry to obtain a corrected bathymetry grid (Fig. 8, c).

400 Finally, values ~~below deeper than~~ the extinction depth ~~are were~~ removed from the ~~images grids~~. In order to take into ~~account~~ account the vertical uncertainty of the data, the mean absolute error of the regression line ~~is was~~ added to the depth of

extinction meaning that if an image has had a depth of extinction of 29 m and a mean absolute error of 1 m, all values below deeper than 30 m are were removed.

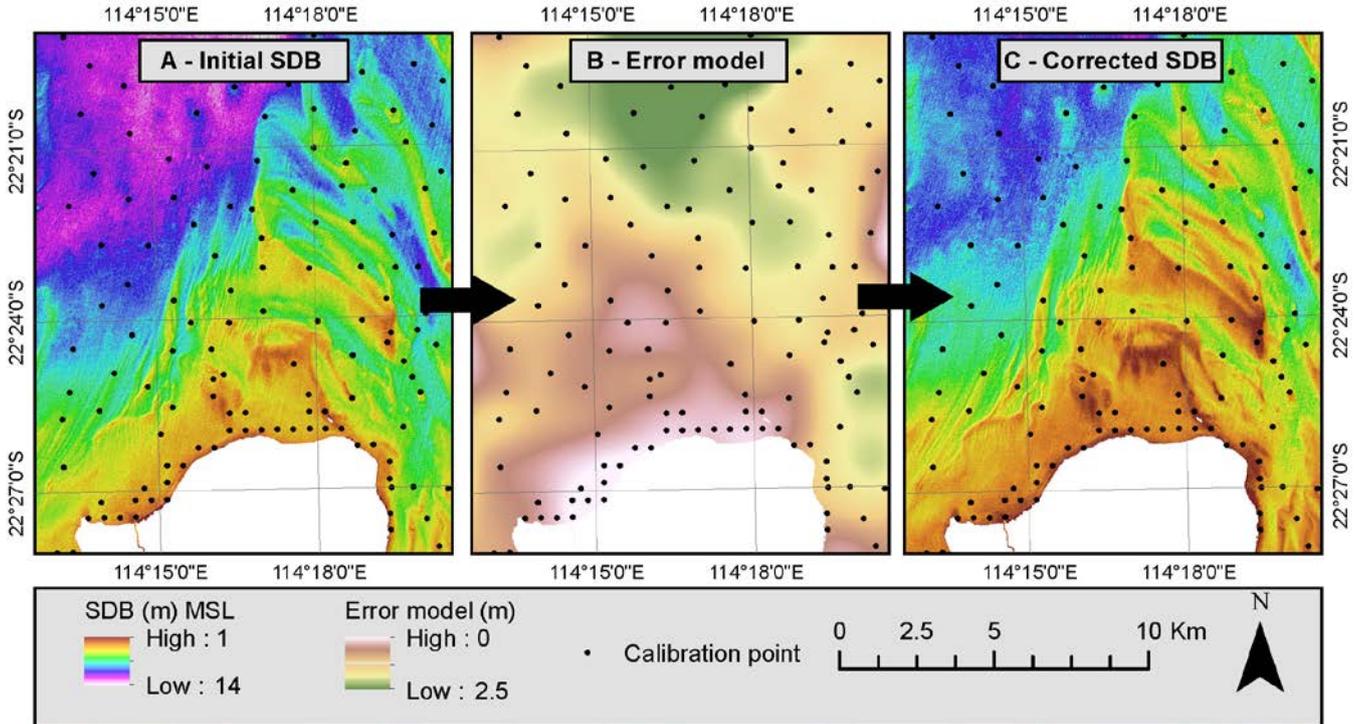

410 Figure 8: illustration of the correction process applied to all seismic images/Sentinel-2 images. The initial SDB grid (a) contains errors due to semi-regional spatial variation of the seabed reflectance band ratio values that are unrelated to depth fluctuations. An error model between the original SDB grid and the calibration points is was calculated to capture such errors to illustrate these variations (b). The model (b) is was subsequently added to the original SDB grid (a) to generate the corrected SDB grid (c).

5.3.4 Generation of the bathymetry stack

415 The processing steps to derive the corrected bathymetry data from the satellite data-images described in previous sections led to the generation of 1,170 individual corrected bathymetry grids, each corresponding to the snapshot of a specific geographic area (tile) at a specific date (date/time of acquisition). Each grid is potentially affected by multiple temporal events and / or objects such as sediment plumes, waves or ships which result in abnormal depth values (Fig. 9, a and c). A We performed statistical analysis was performed on the cell-pixel values from the overlapping bathymetry grids to determine the most likely depth value of a given cell-pixel, hence limiting the effect of such temporal events.

420 For each tile, a minimum coefficient of correlation between the predicted depths and the calibration points is was determined and images with a coefficient below that threshold were discarded. Coefficients of correlation values used here to determine if an image should or should not be included in the stack were the values calculated during the derivation of the initial bathymetry, before the application of any types of correction, to avoid circular correlations. The threshold varies-varied from one tile to another to reflect their respective specificity-specificities: a-tile located in front of a delta, where the seabed is

425 rapidly changing, ~~will~~ have overall lower coefficient of correlation values than ~~an~~-areas with no sediment supply. In that regard it was not possible to establish a firm rule and the threshold was subsequently determined by the authors for each tile to obtain the best ratio between the number of images integrated in the stack and their respective coefficient of correlation. On average, the threshold ~~is~~-was set at 85%. Images with a coefficient below that threshold ~~are~~-were discarded. In total, 222 images from 26 tiles met their respective selection criteria.

430 The median value of all selected grids ~~is~~-was then calculated for each ~~cell~~-pixel. The compilation of these values corresponds to the final ~~bathymetry-SDB grid after stacking~~ (Fig. 9, b and c).


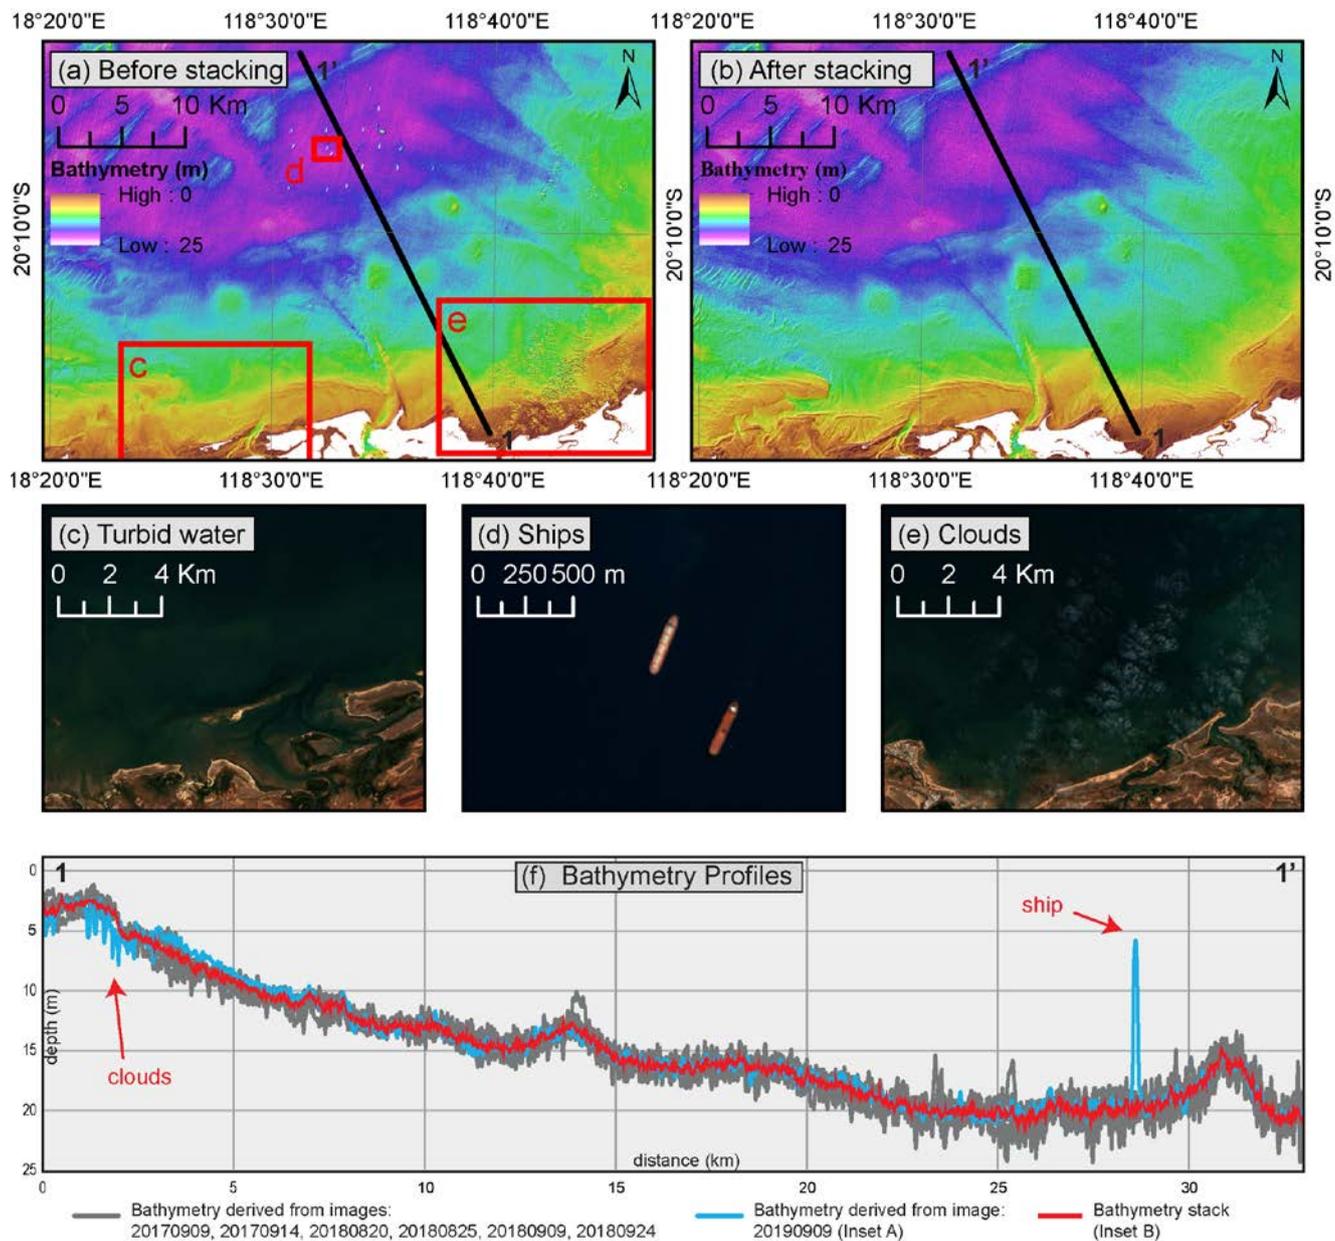


Figure 9: Illustration of the stacking process near Port Hedland (tile “KPC”). In the area, 7 images met the specified coefficient of correlation threshold and were kept for the stacking. Each image is affected by temporal effect (see example a, c, d, e and cross section e_1-e_2 , grey and blue profiles). The median value of all images is-was then calculated resulting in the removal of temporal artefacts (b, cross section e_1-e_2 , red profile).

5.3.5 Post processing data cleaning

The water-water-land separation is based on the NDWI, meaning that any open water area was processed, including lakes and rivers. These water bodies which are often not connected to the ocean, show very variable reflectance patterns, and lack

440 calibration points. This combination of factors often results in abnormal ~~water~~-depth values. To minimize the occurrence of
such artefacts, water bodies disconnected from the main ocean were removed from the final data (Fig. 10). Such filtering was
performed as follow: (1) a raster domain shapefile (i.e., polygon coverage shapefile) was generated using the final SDB grid
as input where each output polygon corresponds to an aggregate of pixels (i.e., a water body). (2) the largest polygon, which
corresponds to the ocean, was extracted and (3) was used to crop the final bathymetry grid.
445 Given that band ratio values were calibrated using MSL reduced depth points~~Band ratio values were calibrated using MSL
reduced measurements~~, it ~~is~~ was ~~therefore~~ not necessary to correct the data for tide vertical effect. However, since satellite
images were acquired at different tides, sharp spatial contacts can appear along the coast at the interface between two images
acquired at different tide rangess; the spatial area covered by the ocean is different on every image (Fig. 10). These contacts
were manually smoothed (only few were identified on the dataset).

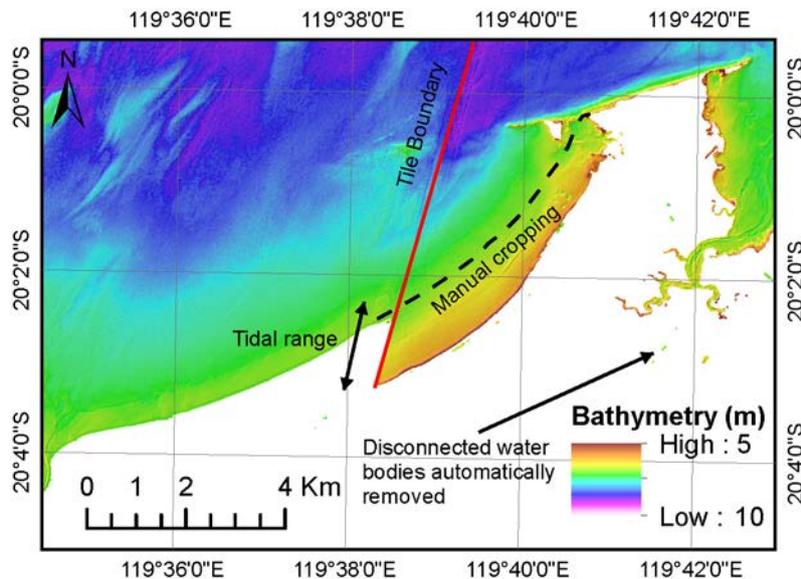


450
455 **Figure 10: illustration of the post processing filtering.** ~~Because~~ Given that each image is captured at a different tide, spatial mismatches can be observed near tile boundaries. Such artefacts ~~only occurs~~ where images included in the stack do not capture the full tidal range. Upon review, they ~~are~~ were removed manually. All disconnected water bodies were automatically removed.

5.4 Data Accuracy

455 The ~~satellite derived bathymetry~~ final SDB grid ~~was~~ is compared with ~4,200 km² of Fugro LADS data (acquired from the West Australian Government's Department of Transport) ~~in order to~~ to independently evaluate ~~its~~ its vertical accuracy (Fig. 11-a). The comparison is based on a 500 x 500 m mesh ~~that was of 500 m~~ used to extract values from both the LADS and the SDB grids. Values ~~are~~ were then plotted against each other on a density chart. Overall, there is a good correlation between the SDB data and the LADS data with metrics indicating a coefficient of correlation of 91% and a mean absolute error of 1.26 m
460 (Fig. 11-b).

It is nevertheless possible to observe that some points deviate from the general trend (Fig. 11, cross-section C-c from 120 to 140 km). Upon review of the data, it appears that these points correspond to areas where there is a constant vertical shift between the calibration points and the LADS data and therefore between the SDB_ and LADS_data. These areas were subsequently cropped out from the comparison area resulting in an ~~an~~ ~~virtually~~ improved correlation between the SDB and LADS data, marked by a coefficient of correlation of 95% and a mean absolute error of 1.01 m. This highlights the importance of the calibration points used in the process and indicates that the vertical accuracy of the SDB_data is constrained by the vertical accuracy of the calibration points.

The LADS data coverage only represents a fraction of the 45,000 km² of processed satellite-derived bathymetry. To estimate the accuracy of the SDB_data elsewhere, ~~we~~ ~~the standard deviation was~~ calculated for each pixel ~~the standard deviation of~~ ~~all~~ using all bathymetry grids included in the final stack. The resulting mean standard deviation is ~~of~~ 1.13 m, which is consistent with the accuracy calculated by comparing the SDB and the LADS data. The standard deviation appears to increase with depth (Fig. 12, Table 2) but also in areas with strong current, water turbidity, tidal range and potentially where major change of seabed type occurs (e.g., seagrass meadows), effectively highlighting areas that have changed significantly through the time interval included in the final stack. This suggests that the standard deviation layer could be used to better understand seabed conditions and could potentially, for example, help identify mobile bedforms.

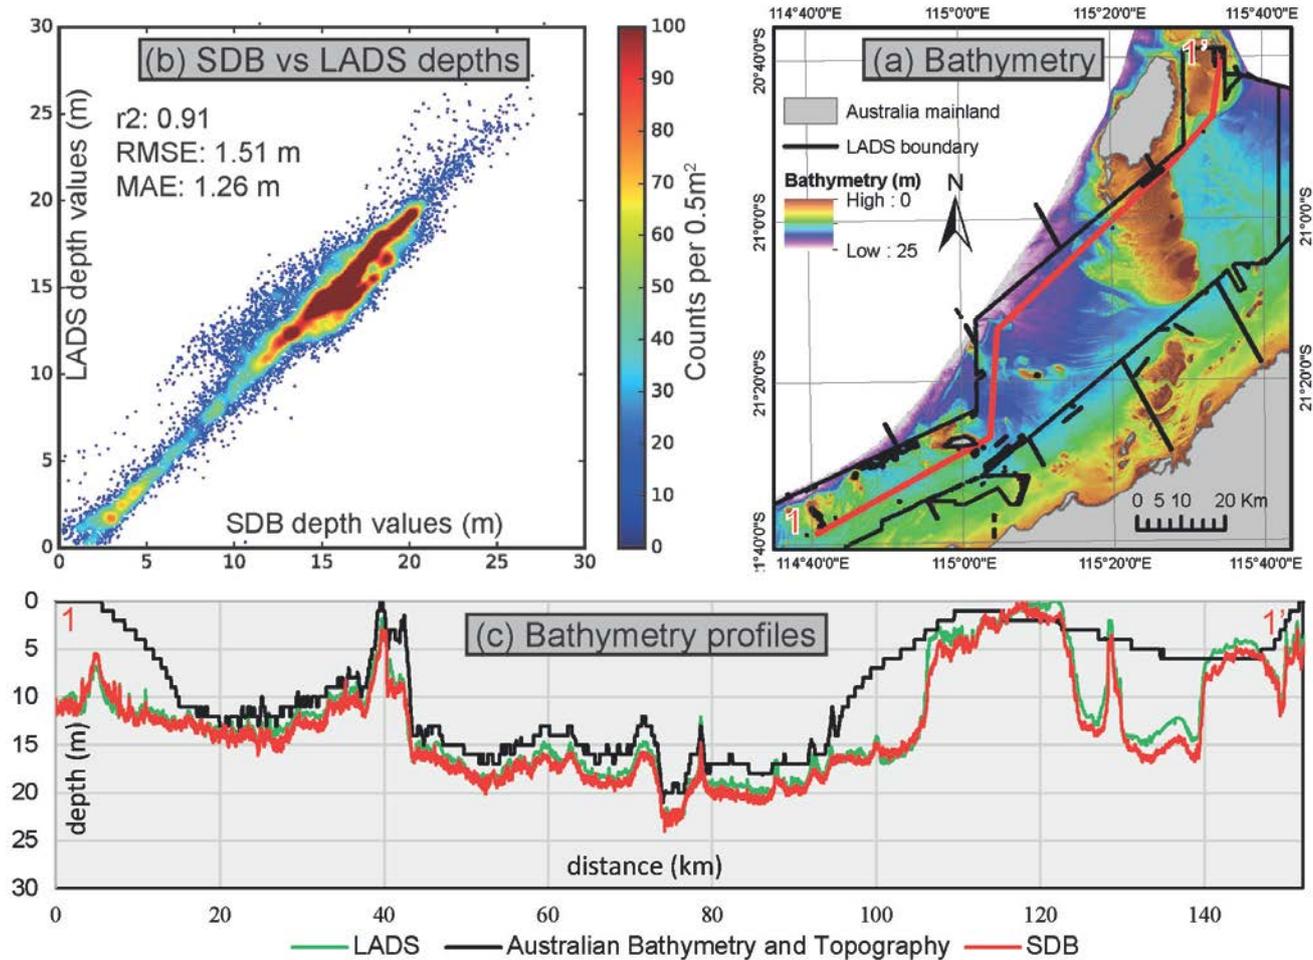

480 Figure 11 Assessment of the accuracy of the SDB using LADS data. In the vicinity of Barrow Island and Onslow, 4,200 km² of LADS data overlap the SDB data (a). Over 16,000 points were extracted along a mesh of 1000 x 1000 m from both datasets and plotted against each other to assess the accuracy of the SDB data (b). There is a strong correlation between both datasets as highlighted by the cross-section (c). Some points seem to diverge from the main trend and reflect areas with a constant shift between the SDB data and LADS bathymetry (cross section c-c', km 125 to 140).

485 The worst-case scenario of an average vertical error of 1.26 m indicates that the vertical accuracy lies is comprised between 1 m +2% of the depth and 1 m + 5% of the depth, depending on the water-depth range considered. This, combined with the positioning accuracy of the SDB of 20 m (positioning accuracy of the satellites-Sentinel-2 images (European Space Agency, 2020)), indicates that the datasets could potentially meet the criteria of one of the assessed Zone of Confidence Order 2 navigation surveys as defined by the International Hydrographic Office S-57-44 Standard (International Hydrographic Organization, 2020). (International Hydrographic Organization, 2014).

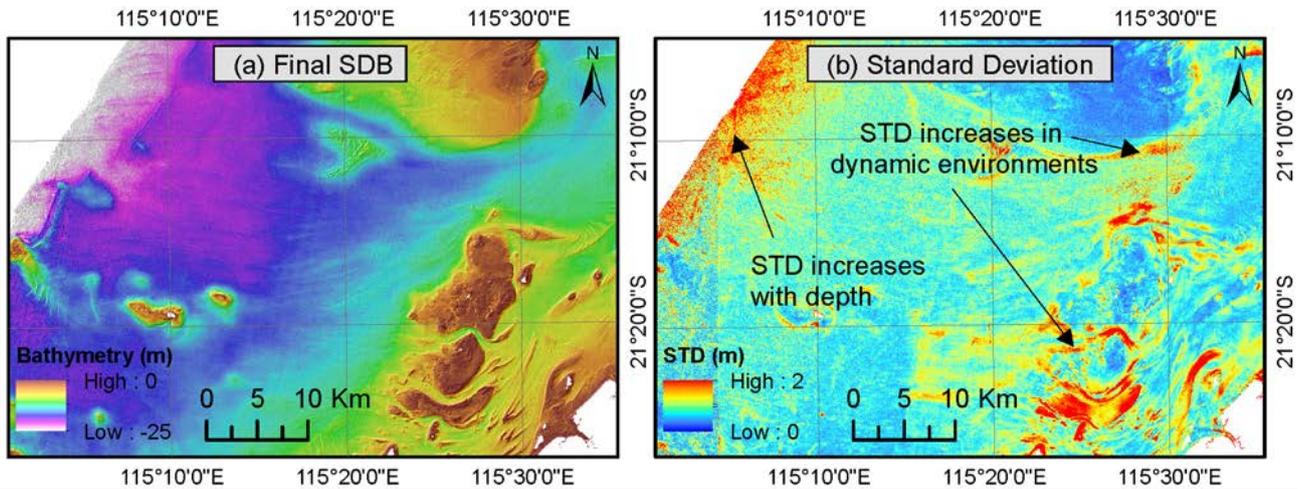


Figure 12: Illustration of the standard deviation grid (b) generated with the final SDB bathymetry (a). The grid illustrates the spatial variability of the final SDB grid accuracy. The standard deviation increases (and hence the accuracy of the bathymetry decreases) with depth as well as in dynamic environment where the seabed changed through the sensing period such as tidal passes (b).

Table 2: Mean standard deviation per depth range.

Depth range (m)	0 - 5	5 - 10	10 - 15	15 - 20	20 - 25	25 - 30
Mean standard deviation (m)	0.90	1.04	1.11	1.23	1.18	1.53

5.65.5 Data Limitation

The relative water depth changes are linked to the resolution and to the quality of the satellite images but the absolute water depth values are related to the calibration points, meaning that the absolute vertical accuracy of the SDB data is tied by the vertical accuracy of the calibration points. Furthermore, the generation of a meaningful error model requires a minimum number of calibration points depending on the regional water depth changes: if the vertical offset between two adjacent calibration points is too high, the error model may generate more artefacts than it removes. This was observed, for example, west of Exmouth. The error model was consequently reviewed for each tile and removed when deemed inaccurate. Overall, the error model was kept for 25 out of the 26 satellite tiles included in the area of interest.

Finally, the stacking process aims at removing the noise and temporal artefacts by combining multiples images that were acquired at different dates. This process is overall very efficient, but if the seabed has changed drastically over the sensing period, the mobile bed-forms will be perceived by the algorithm as artefacts and will be smoothed out. Such behaviour has been observed at the mouth of the De-Grey River delta, east of Port Hedland, where distributary mouth bars seem relatively active. Nevertheless, even at this location, the advantages of the stacking process surpass its limitations as it filtered out most of the water turbidity. The stacking process allow generating a standard deviation grid which illustrate the accuracy of the data.

Standard deviation values are however very sensible to the number of images included in the bathymetry stack. As such an area where only a few images were included in the stack may be associated with low standard deviation values that do not necessarily indicate that the data is of high accuracy.

The computing power and the storage capacity available to the research project limited the number of satellite images that could be efficiently processed. In that regard, images were carefully selected using climate data and cloud coverage thresholds to ensure the best images were considered. Nevertheless, including the complete Sentinel-2 catalogue and using cloud masks, hence allowing the inclusion of partly cloudy images, would presumably enhance the robustness of the model. Similarly, the current workflow solely builds on one band ratio. Recent work from Caballero and Stumpf (2019) suggests that the inclusion of multiple band ratios can improve further the output the results.

6 Merging strategy

The creation of the regional ~~digital elevation model~~ DEM ~~is was~~ based on the integration of the newly produced satellite- and seismic-derived bathymetry with the previously existing datasets. All datasets were reduced to MSL and re-sampled ~~on to~~ a 30 x 30 m grid building on UTM50S WGS84 horizontal datum and using bilinear interpolation. Selected datasets were included and ordered as specified in the following list (Fig. 12 Fig. 13, Fig. 13 Fig. 14-a):

1. Satellite-~~Derived-derived~~ Bathymetry**bathymetry**
2. MBES ~~Bathymetry~~**bathymetry**, reprocessed from XYZ provided by GA
3. MBES ~~Bathymetry~~**bathymetry**, downloaded from AusSeabed website
4. Seismic-~~Derived-derived~~ Bathymetry**bathymetry**
5. SRTM ~~Digital DEM~~**Elevation Model**
6. ~~2009~~-Australian ~~bathymetry~~**Bathymetry** and Topography ~~grid~~**Grid**

The NIDEM, Fugro LADS data and the depth soundings from ENC tiles were not included in the final merge as they were actively used in the calibration and validation process of the other datasets. The vertical and position accuracy of the dataset used to generate the regional ~~digital elevation model~~ DEM are specified in Table 3. Accuracy values were obtained using the ~~sensing tool specifications and datasets metadata~~ source data metadata and specifications (International Hydrographic Organization, 2014; European Space Agency, 2020; Rodriguez et al., 2005; Whiteway, 2009) or were conservatively estimated using intersecting high-resolution datasets (i.e., LADS, MBES).

Table 3 Accuracy of the datasets included in the regional DEM

DEM	Satellite Satellite- derived	Seismic Seismic- derived	MBES	SRTM	2009 Bathymetry <u>AusBathyTopo</u> <u>Grid</u>
Source Bin-pixel size (m)	10	30	1-40	30	250

Vertical (m)	Accuracy	1 + 5%d	1 + 2%d	1 + 2%d	16	Variable
Position (m)	Accuracy	20	200	< 30	20	250+

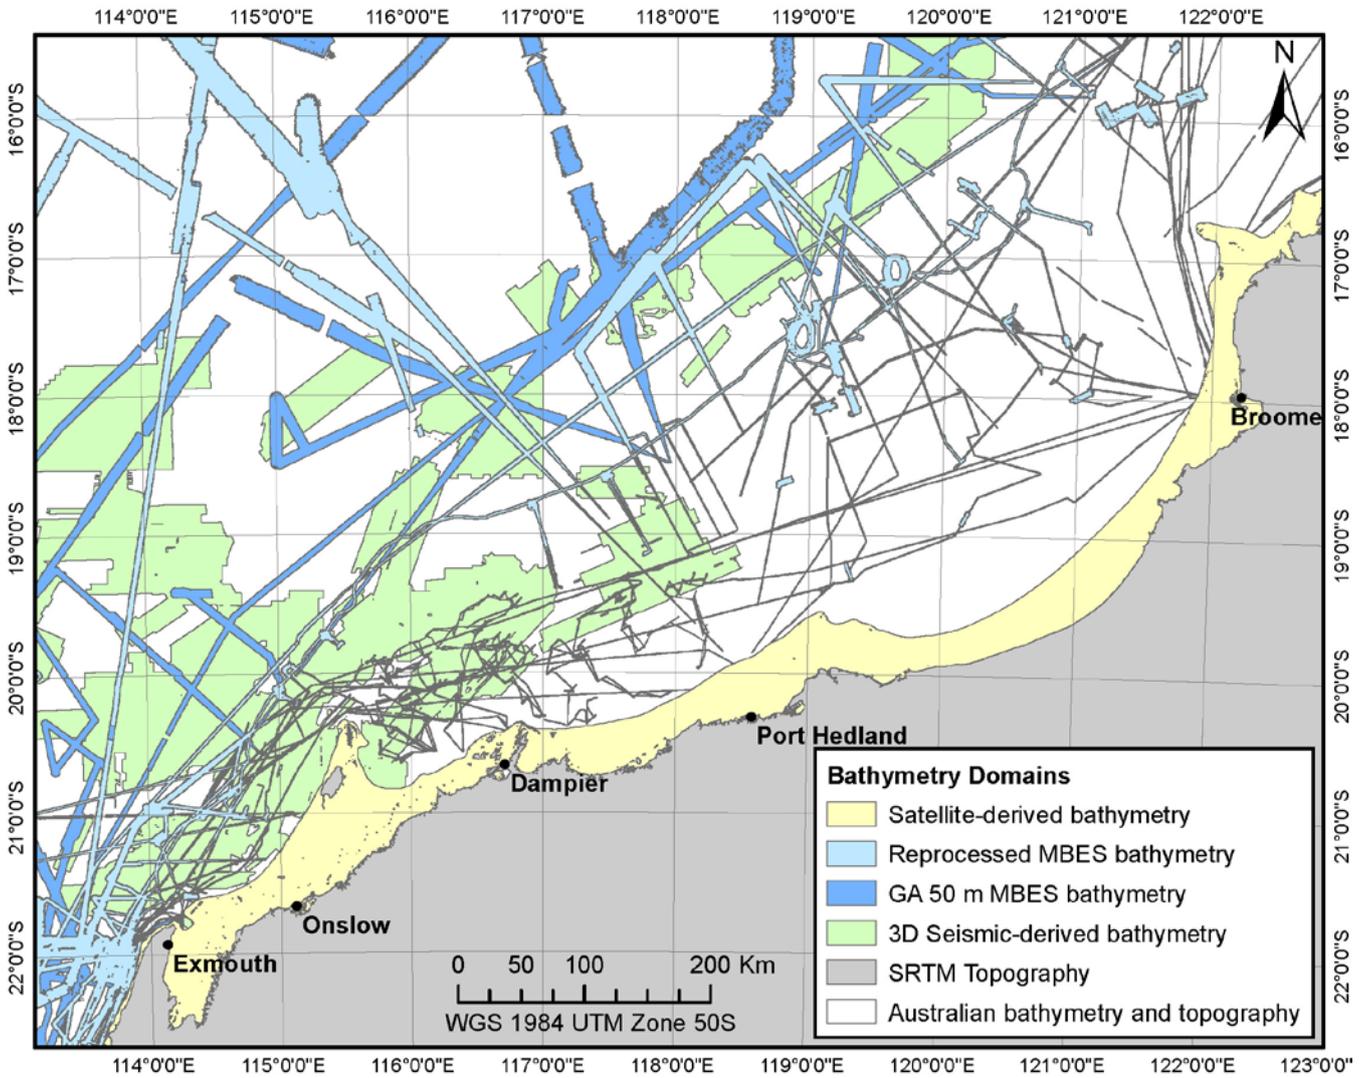


Figure 13: Lineage of the datasets included in the regional bathymetry compilation

7 Summary and outlook




540 The This research project led to the creation of a regional 30 x 30 m digital elevation model (DEM) over the Rowley Shelf and the adjacent plateaus. The dataset is based on the compilation of publicly available elevation measurements with 3D seismic

and satellite-derived bathymetry produced using an innovative workflow and corresponds to a major upgrade of the pre-existing regional Australia Bathymetry and Topography ~~grid-Grid~~ (Fig. 13, b and b') ~~published by~~ Whiteway (2009). The vertical and positioning accuracy of the underlying datasets have been extensively assessed using high-resolution MBES ~~datasets. A technical committee from Geoscience Australia reviewed the data and approved it for release.~~

The produced datasets reveals submerged morphologies at a scale and a resolution never achieved before on the ~~North-West ShelfNWS~~, allowing ~~the onset of for~~ a wide range of local and regional studies. Marine habitat mapping and oceanographic research rely heavily on high-resolution bathymetry ~~data~~. So far, such studies ~~were-have been~~ limited to small areas, extrapolated afterwards to the rest of the shelf (Lyne et al., 2017; Brooke et al., 2017). Similarly, several attempts have been made to reconstruct the paleo-geographic evolution of the shelf using low-resolution bathymetry (Larcombe et al., 2018; Ward et al., 2013; Whitley, 2017). In both cases, the inclusion of ~~a~~ regional high-resolution bathymetry ~~datasets~~ will support the elaboration of ~~largeregional~~-scale data integration and interpretation. In addition, recent studies have investigated the presence of submerged archaeological sites along the shelf (Benjamin et al., 2020; O'leary et al., 2020; Dortch et al., 2019). The understanding of past coastal environments stemming from the study of this dataset could steer the identification of such sites of interest (e.g., ~~(O'leary et al., 2020)~~~~O'Leary et al., 2020~~).

The ~~digital elevation modelDEM~~ provides the full picture of modern sedimentary systems, from the source of the sediments (e.g., fluvial and carbonate systems) to their accumulation grounds along the shelf and in the basin. Parts of these modern systems can be used to better understand past sedimentary records (e.g., ~~(Paumard et al., 2020; Nyberg and Howell, 2016; Ainsworth et al., 2019)~~, the geotechnical properties of marine sediments (e.g., ~~(Beemer et al., 2019; Beemer et al., 2018; Senders et al., 2013)~~ or ~~the~~ geohazards affecting the area (e.g., ~~(Lane and Tyler, 2015; Hogan et al., 2017; Scarselli et al., 2019; Hengesh et al., 2013)~~). Therefore, the integration of ~~regional-multi-source high-resolution~~-bathymetry ~~data~~ can constitute a step change and allow researchers to ponder their results with regard to the regional context and hence support the development of more reliable interpretations and models.

~~The w~~Workflows presented in this paper to generate the bathymetry compilation are exclusively building on publicly available data, meaning that the method can be readily applied elsewhere in Australia and around the world. Additional datasets will be included in the compilation as they become publicly available.

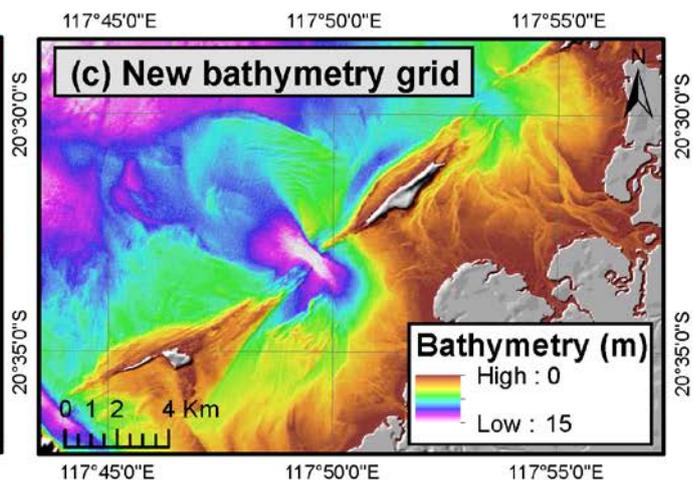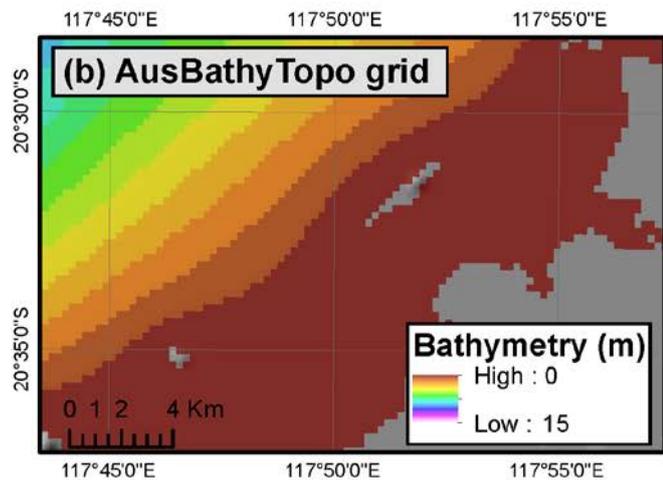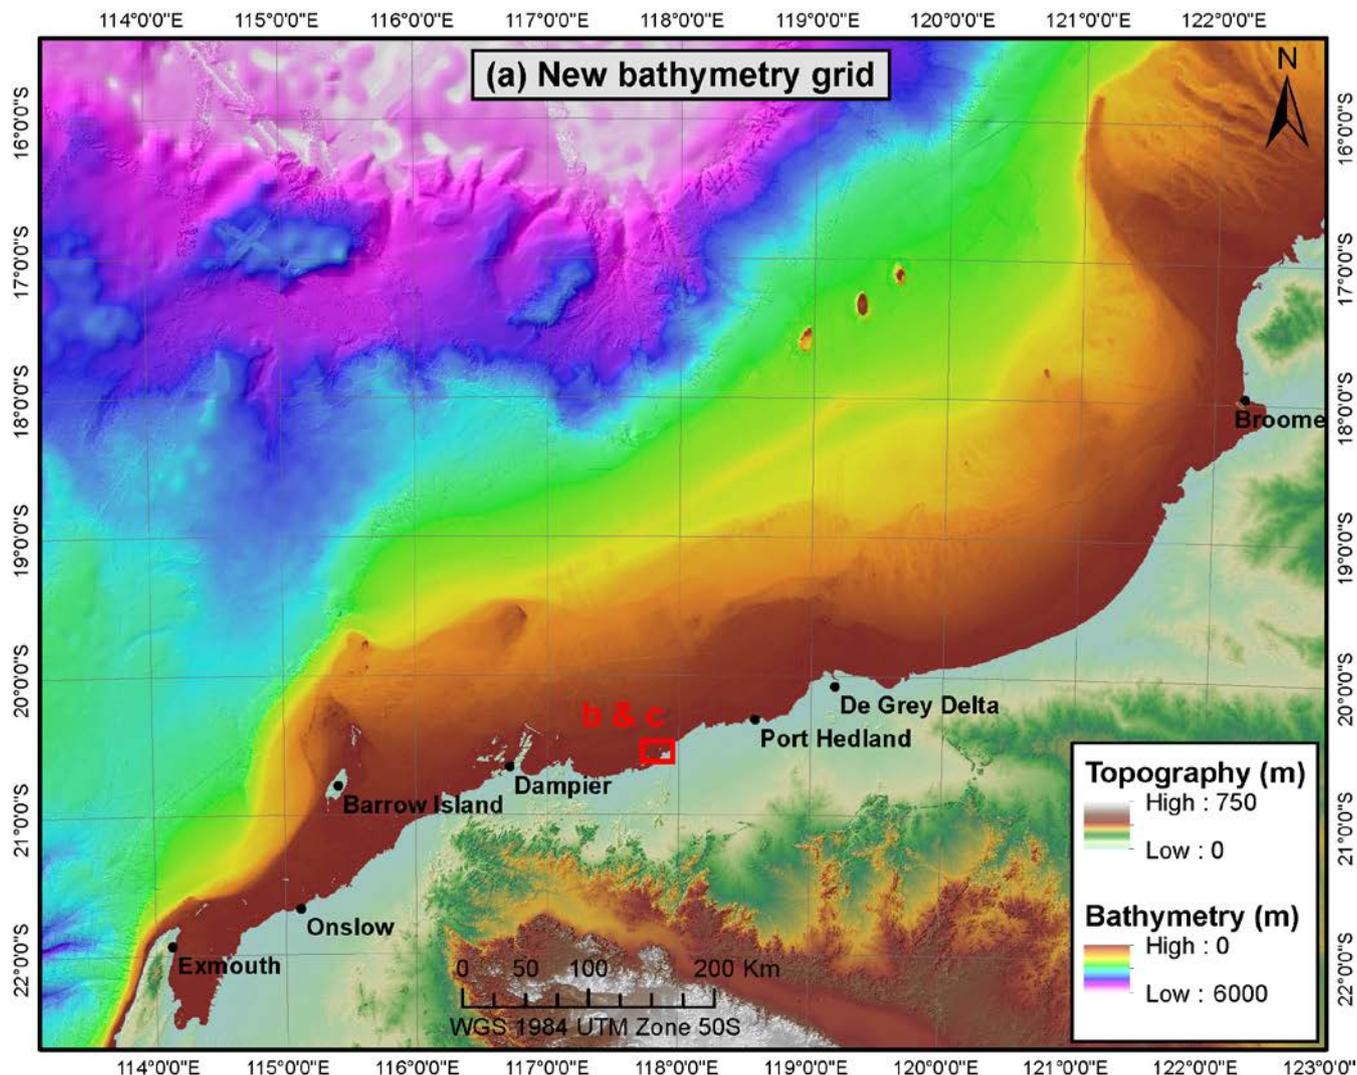

570 **Figure 14 Overview of the produced DEM. Inset (a) displays the new bathymetry grid compilation produced from the integration of the seismic-derived bathymetry, satellite-derived bathymetry, MBES bathymetry (from GA and reprocessed) and SRTM topography. Gaps are filled with the 9 arc seconds Australian Bathymetry and Topography grid. The compilation is a major upgrade of the pre-existing regional data (inset b vs inset ~~b²c~~).**

8 Data availability

575 All datasets can be downloaded at: <https://doi.org/10.26186/144600> (Lebrec et al., 2021). The repository includes the bathymetry compilation and the seismic-derived bathymetry with a resolution of 30 x 30 m as well as the satellite-derived bathymetry with a resolution of 10 x10 m. The repository also contains grids presenting the standard deviation and the image count of the satellite-derived bathymetry. All grids are supported by ~~a~~-lineage ~~file~~ and metadata files. Other datasets presented in this paper can be accessed through their respective references and Geoscience Australia AusSeabed data portal.

9 Author contribution

580 UL was responsible for the conceptualization of ideas and the formulation of research objectives. UL developed the methodology, collected, and processed the satellite and navigation data, and produced the bathymetry grids. VP collected the 3D seismic surveys and extracted their first reflection. MJO and SL provided guidance to organise the research. UL, VP, MJO and SL were responsible for writing, reviewing, and editing the manuscript.

10 Competing interests

585 The authors declare they have no conflict of interests.

1211 Acknowledgements

590 The authors would like to thank Robert Parums from Geoscience Australia for his guidance on the collection and processing of navigation files and Anne Worden from the Australian Hydrographic Office for providing the maritime charts. The authors are also grateful to the AusSeabed ~~Community-community~~ including Kim Picard, Michele Spinnocia, Cameron Mitchel and Stephen Sagar from Geoscience Australia, ~~and~~ Robin Beaman from James Cook University ~~and an anonymous reviewer~~ for taking the time to perform an independent review of the datasets and to Maggie Arnold for uploading and managing the grids on AusSeabed data portal.

595 We are grateful to Geoscience Australia and the Western Australian Department of Mines, Industry Regulation and Safety for providing the open-file 3D seismic data used in this compilation. Thanks are also due to Eliis and Esri for providing the PaleoScanTM and ArcGISTM software, respectively.

Finally, the authors are thankful to the Norwegian Geotechnical Institute and the University of Western Australia for providing the funding of the project.

1312 Financial support

- 600 The research project was conducted with the funding from the Norwegian Geotechnical Institute Ph.D. Scholarship and the University of Western Australia Scholarship for International Research Fees (SIRF).

1413 References

- Ainsworth, R. B., Vakarelov, B. K., Eide, C. H., Howell, J. A., and Bourget, J.: Linking the High-Resolution Architecture of Modern and Ancient Wave-Dominated Deltas: Processes, Products, and Forcing Factors, *Journal of sedimentary research*, 89, 168-185, 10.2110/jsr.2019.7, 2019.
- 605 Baker, C., Potter, A., Tran, M., and Heap, A. D.: Sedimentology and geomorphology of the northwest marine region of Australia, *Geoscience Australia, Canberra* 1448-2177, 220 pp., 2008.
- Beaman, R. J.: Regional-scale 100/30 m-resolution bathymetry grids for north-eastern Australia, *Map the Gaps, A GEBCO Symposium on Bathymetry. General Bathymetric Chart of the Oceans (GEBCO)*, Busan, Republic of Korea, 15 November 2017, 2017.
- 610 Beaman, R. J.: 100/30 m-resolution bathymetry grids for the Northern Australia, *AusSeabed Workshop 4, AusSeabed Working Group, Adelaide, Australia*, 03 July 2018, 2018.
- Beemer, R., Bandini-Maeder, A., Shaw, J., Lebrec, U., and Cassidy, M.: The Granular Structure of Two Marine Carbonate Sediments, *ASME 2018 37th International Conference on Ocean, Offshore and Arctic Engineering*, Madrid, Spain, June 17-22, OMAE2018-77087, 10.1115/OMAE2018-77087, 2018.
- 615 Beemer, R., Sadekov, A., Lebrec, U., Shaw, J., Bandini-Maeder, A., and Cassidy, M.: Impact of Biology on Particle Crushing in Offshore Calcareous Sediments, *Geo-Congress 2019: Eighth International Conference on Case Histories in Geotechnical Engineering: Case histories – capturing the accomplishments of our profession*, Philadelphia, United States, 24 - 27 Mar, 10.1061/9780784482124.065, 2019.
- Benjamin, J., O'Leary, M., McDonald, J., Wiseman, C., McCarthy, J., Beckett, E., Morrison, P., Stankiewicz, F., Leach, J., Hacker, J., Baggaley, P., Jerbic, K., Fowler, M., Fairweather, J., Jeffries, P., Ulm, S., and Bailey, G.: Aboriginal artefacts on the continental shelf reveal ancient drowned cultural landscapes in northwest Australia, *PLoS one*, 15, e0233912, 10.1371/journal.pone.0233912, 2020.
- 620 Bishop-Taylor, R., Sagar, S., Lymburner, L., and Beaman, R. J.: Between the tides: Modelling the elevation of Australia's exposed intertidal zone at continental scale, *Estuarine, Coastal and Shelf Science*, 223, 115-128, 10.1016/j.ecss.2019.03.006, 2019.
- Brando, V. E., Anstee, J. M., Wettle, M., Dekker, A. G., Phinn, S. R., and Roelfsema, C.: A physics based retrieval and quality assessment of bathymetry from suboptimal hyperspectral data, *Remote Sensing of Environment*, 113, 755-770, 10.1016/j.rse.2008.12.003, 2009.
- 625 Brooke, B. P., Nichol, S. L., Huang, Z., and Beaman, R. J.: Palaeoshorelines on the Australian continental shelf: Morphology, sea-level relationship and applications to environmental management and archaeology, *Continental Shelf Research*, 134, 26-38, 10.1016/j.csr.2016.12.012, 2017.
- Bureau of Meteorology: Climate and oceans data and analysis: <http://www.bom.gov.au/climate/data-services/>, last access: 20/07, 2020.
- 630 Caballero, I. and Stumpf, R. P.: Retrieval of nearshore bathymetry from Sentinel-2A and 2B satellites in South Florida coastal waters, *Estuarine, coastal and shelf science*, 226, 106277, 10.1016/j.ecss.2019.106277, 2019.
- Caballero, I. and Stumpf, R. P.: Towards Routine Mapping of Shallow Bathymetry in Environments with Variable Turbidity: Contribution of Sentinel-2A/B Satellites Mission, *Remote sensing (Basel, Switzerland)*, 12, 451, 10.3390/rs12030451, 2020.
- Carrigy, M. A. and Fairbridge, R. W.: Recent Sedimentation Physiography and Structure of the continental shelves of Western Australia, *Journal of the Royal Society of Western Australia*, 38, 65-95, 1954.
- 635 Casal, G., Monteys, X., Hedley, J., Harris, P., Cahalane, C., and McCarthy, T.: Assessment of empirical algorithms for bathymetry extraction using Sentinel-2 data, *International journal of remote sensing*, 40, 2855-2879, 10.1080/01431161.2018.1533660, 2018.
- Chu, S., Cheng, L., Ruan, X., Zhuang, Q., Zhou, X., Li, M., and Shi, Y.: Technical Framework for Shallow-Water Bathymetry With High Reliability and No Missing Data Based on Time-Series Sentinel-2 Images, *IEEE transactions on geoscience and remote sensing*, 57, 8745-8763, 10.1109/tgrs.2019.2922724, 2019.
- 640 CRCSI and FrontierSI: AusCoastVDT software version 1.20, Grid version 3.0 User Manual version 1.3: A Coarse Australian Coastal Vertical Datum Transformation Tool for Elevation Data, Cooperative Research Centre For Spatial Information, Intergovernmental Committee on Surveying and Mapping, 27 pp., 2019.

- Director of National Parks: North-west Marine Parks Network Management Plan 2018, Director of National Parks, Commonwealth of Australia, Canberra, 160 pp., 2018.
- 645 Dix, G. R.: High-energy, inner shelf carbonate facies along a tide-dominated non-rimmed margin, northwestern Australia, *Marine Geology*, 89, 347-362, 10.1016/0025-3227(89)90085-6, 1989.
- Dortch, J., Beckett, E., Paterson, A., and McDonald, J.: Stone artifacts in the intertidal zone, Dampier Archipelago: Evidence for a submerged coastal site in Northwest Australia, *The Journal of Island and Coastal Archaeology*, 1-15, 10.1080/15564894.2019.1666941, 2019.
- 650 European Space Agency: Sentinel-2 MSI performance: <https://earth.esa.int/web/sentinel/technical-guides/sentinel-2-msi/performance>, last access: 10/06, 2020.
- Evagorou, E., Mettas, C., Agapiou, A., Themistocleous, K., and Hadjimitsis, D.: Bathymetric maps from multi-temporal analysis of Sentinel-2 data: the case study of Limassol, Cyprus, *Advances in geosciences*, 45, 397-407, 10.5194/adgeo-45-397-2019, 2019.
- Fairbridge, R. W.: The Sahul Shelf, northern Australia; its structure and geological relationships, *Journal of the Royal Society of Western Australia*, 37, 1-33, 1953.
- 655 Farr, T. G., Rosen, P. A., Caro, E., Crippen, R., Duren, R., Hensley, S., Kobrick, M., Paller, M., Rodriguez, E., Roth, L., Seal, D., Shaffer, S., Shimada, J., Umland, J., Werner, M., Oskin, M., Burbank, D., and Alsdorf, D.: The Shuttle Radar Topography Mission, *Reviews of Geophysics*, 45, 10.1029/2005RG000183, 2007.
- Gallant, J., Wilson, N., Dowling, T., Read, A., and Inskip, C.: SRTM-derived 1 Second Digital Elevation Models Version 1.0 [dataset], <https://ecat.ga.gov.au/geonetwork/srv/eng/catalog.search#/metadata/72759>, 2011.
- 660 Gatti, A., Galoppo, A.: Sentinel-2 Products Specification Document, European Space Agency, 510 pp., 2018.
- Gordon, H. R.: Remote assessment of ocean color for interpretation of satellite visible imagery : a review, *Lecture notes on coastal and estuarine studies ; 4.*, Springer-Verlag, New York, 114 pp., 1983.
- Hamylton, S., Hedley, J., and Beaman, R.: Derivation of High-Resolution Bathymetry from Multispectral Satellite Imagery: A Comparison of Empirical and Optimisation Methods through Geographical Error Analysis, *Remote sensing (Basel, Switzerland)*, 7, 16257-16273, 10.3390/rs71215829, 2015.
- 665 Hengesh, J., Dirstein, J., and Stanley, A. J.: Landslide geomorphology along the exmouth plateau continental margin, North West Shelf, Australia, *Australian Geomechanics Journal*, 48, 71-91, 2013.
- Hengl, T.: Finding the right pixel size, *Computers and Geosciences*, 32, 1283-1298, 10.1016/j.cageo.2005.11.008, 2006.
- Hogan, P., Finnie, I., Tyler, S., and Hengesh, J.: Geohazards of the North West Shelf, Australia, *Offshore Site Investigation Geotechnics 8th International Conference Proceeding*, London, UK, 12-14 Sept, 203-212, 10.3723/OSIG17.203, 2017.
- 670 International Hydrographic Organization: IHO transfer standard for digital hydrographic data. Supplementary Information for the Encoding of S-57 Edition 3.1, International Hydrographic Organisation, 24 pp., 2014.
- International Hydrographic Organization: IHO Standards for Hydrographic Surveys S-44 Edition 6.0.0, International Hydrographic Organisation, Monaco, 51pp., 2020.
- 675 International Hydrographic Organization and Intergovernmental Oceanographic Commission: The IHO-IOC GEBCO Cook Book, Intergovernmental Oceanographic Commission, Monaco, 248-301, 2019.
- International Ocean-Colour Coordinating Group: Atmospheric correction for remotely-sensed ocean-colour products, Dartmouth, NS, Canada, 78 pp., 2010.
- 680 James, N. P., Bone, Y., Kyser, T. K., Dix, G. R., and Collins, L. B.: The importance of changing oceanography in controlling late Quaternary carbonate sedimentation on a high-energy, tropical, oceanic ramp: north-western Australia, *Sedimentology*, 51, 1179-1205, 10.1111/j.1365-3091.2004.00666.x, 2004.
- Jibrin, B. W., Reston, T. J., and Westbrook, G. K.: Seismic-derived seabed topography: Insights from the outer fold and thrust belt in the deep-water Niger Delta, *Leading edge (Tulsa, Okla.)*, 32, 420-423, 10.1190/tle32040420.1, 2013.
- 685 Jones, H. A., Services, A. G. P. (Ed.): Marine geology of the northwest Australian continental shelf, Department of Minerals and Energy, Bureau of Mineral resources, geology and geophysics, 117 pp., <http://pid.geoscience.gov.au/dataset/ga/104>, 1973.
- Kabiri, K.: Discovering optimum method to extract depth information for nearshore coastal waters from Sentinel-2A imagery-case study: Nayband Bay, Iran, *International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, Teheran, Iran, 7-10 Oct, 10.5194/isprs-archives-XLII-4-W4-105-2017, 2017.
- Kramer, K. V., W. W. Shedd: A 1.4-billion-pixel map of the Gulf of Mexico seafloor, *eos*, 98, 10.1029/2017EO073557, 2017.
- 690 Lane, A. and Tyler, S.: The life cycle of geohazards within an offshore engineering development, *Frontiers in Offshore Geotechnics III : Proceedings of the 3rd International Symposium on Frontiers in Offshore Geotechnics (ISFOG 2015)*, Oslo, Norway, 981-985, 2015.
- Larcombe, P., Ward, I. A. K., and Whitley, T.: Physical sedimentary controls on subtropical coastal and shelf sedimentary systems: Initial application in conceptual models and computer visualizations to support archaeology, *Geoarchaeology*, 33, 661-679, 10.1002/gea.21681, 2018.
- 695 Lebec, U., Paumard, V., O'Leary, M. J., and Lang, S.: High-resolution digital elevation model of the North West Shelf – 30m [dataset], 10.26186/144600, 2021.
- Lee, Z., Carder, K. L., Hawes, S. K., Steward, R. G., Peacock, T. G., and Davis, C. O.: Model for the interpretation of hyperspectral remote-sensing reflectance, *Applied optics*, 33, 5721-5732, 10.1364/AO.33.005721, 1994.

- 700 Leroy, C. C.: Development of Simple Equations for Accurate and More Realistic Calculation of the Speed of Sound in Seawater, *The Journal of the Acoustical Society of America*, 46, 216-226, 10.1121/1.1911673, 1969.
- Lurton, X.: *An introduction to underwater acoustics : principles and applications*, Springer, London, 347 pp., 2002.
- Lyne, V., Fuller, M., Last, P., Butler, A., Martin, M., and Scott, R.: *Ecosystem characterisation of Australia's North West Shelf*, Institute for Marine and Antarctic Studies, University of Tasmania, 79 pp., 2017.
- 705 Lyzenga, D. R.: Passive remote sensing techniques for mapping water depth and bottom features, *Applied optics*, 17, 379-383, 10.1364/AO.17.000379, 1978.
- McFeeters, S. K.: The use of the Normalized Difference Water Index (NDWI) in the delineation of open water features, *International Journal of Remote Sensing*, 17, 1425-1432, 10.1080/01431169608948714, 1996.
- Milcinski, G.: Sentinel-2 L2A archive going global: <https://forum.sentinel-hub.com/t/sentinel-2-l2a-archive-going-global/1877>, last access: 01/04, 2020.
- 710 Mosher, D., Bigg, S., and LaPierre, A.: 3D seismic versus multibeam sonar seafloor surface renderings for geohazard assessment: Case examples from the central Scotian Slope, *Leading edge (Tulsa, Okla.)*, 25, 1484-1494, 10.1190/1.2405334, 2006.
- Nowara, G. B.: *A history of foreign fishing activities and fishery-independent surveys of the demersal finfish resources in the Kimberley region of Western Australia*, Fisheries Western Australia, Perth, WA0730984532, 87 pp., 2001.
- Nyberg, B. and Howell, J. A.: Global distribution of modern shallow marine shorelines. Implications for exploration and reservoir analogue studies, *Marine and Petroleum Geology*, 71, 83-104, 10.1016/j.marpetgeo.2015.11.025, 2016.
- 715 O'Leary, M. J., Paumard, V., and Ward, I.: Exploring Sea Country through high-resolution 3D seismic imaging of Australia's NW shelf: Resolving early coastal landscapes and preservation of underwater cultural heritage, *Quaternary science reviews*, 239, 106353, 10.1016/j.quascirev.2020.106353, 2020.
- Paumard, V., Bourget, J., Durot, B., Lacaze, S., Payenberg, T., George, A. D., and Lang, S.: Full-volume 3D seismic interpretation methods: A new step towards high-resolution seismic stratigraphy, *Interpretation*, 7, 33-47, 10.1190/INT-2018-0184.1, 2019a.
- 720 Paumard, V., Bourget, J., Payenberg, T., George, A. D., Ainsworth, R. B., Lang, S., and Posamentier, H. W.: Controls On Deep-Water Sand Delivery Beyond the Shelf Edge: Accommodation, Sediment Supply, and Deltaic Process Regime, *Journal of sedimentary research*, 90, 104-130, 10.2110/jsr.2020.2, 2020.
- Paumard, V., Bourget, J., Lang, S., Wilson, T., Riera, R., Gartrell, A., Vakarelov, B., O'Leary, M., and George, A.: Imaging past depositional environments of the North West Shelf of Australia: Lessons from 3D seismic data, *2nd Australian Exploration Geoscience Conference*, Perth, Australia, 09/01, 30 pp., 2019.
- 725 Pe'eri, S., Parrish, C., Azuike, C., Alexander, L., and Armstrong, A.: Satellite Remote Sensing as a Reconnaissance Tool for Assessing Nautical Chart Adequacy and Completeness, *Marine Geodesy*, 37, 293-314, 10.1080/01490419.2014.902880, 2014.
- Picard, K., Austine, K., Bergersen, N., Cullen, R., Dando, N., Donohue, D., Edwards, S., Ingleton, T., Jordan, A., Lucieer, V., Parnum, I., 730 Siwabessy, J., Spinoccia, M., Talbot-Smith, R., Waterson, C., Barrett, N., B., R., Bergersen, D., Boyd, M., Brace, B., Brooke, B., Cantrill, O., Case, M., Daniell, J., Dunne, S., Fellows, M., H., U., Ierodiaconou, D., Johnstone, E., Kennedy, P., Lepplatrier, A., Lewis, A., Lytton, S., Mackay, K., McLennan, S., Mitchell, C., Monk, J., Nichol, S., Post, A., Price, A., Przeslawski, R., Pugsley, L., Quadros, N., Smith, and J., S., W., Sullivan J., Townsend, N., Tran, M., Whiteway, T.: *Australian Multibeam Guidelines*, Marine Biodiversity Hub, AusSeabed, Canberra9781925297898, 76 pp., 10.11636/Record.2018.019, 2018.
- 735 Poore, G. C. B., Avery, L., Błażewicz-Paszkowycz, M., Browne, J., Bruce, N. L., Gerken, S., Glasby, C., Greaves, E., McCallum, A. W., Staples, D., Syme, A., Taylor, J., Walker-Smith, G., Warne, M., Watson, C., Williams, A., Wilson, R. S., and Woolley, S.: Invertebrate diversity of the unexplored marine western margin of Australia: taxonomy and implications for global biodiversity, *Marine Biodiversity*, 45, 271-286, 10.1007/s12526-014-0255-y, 2015.
- Poursanidis, D., Traganos, D., Chrysoulakis, N., and Reinartz, P.: Cubesats Allow High Spatiotemporal Estimates of Satellite-Derived 740 Bathymetry, *Remote sensing*, 11, 12 pp., 10.3390/rs11111299, 2019.
- Power, H. E. and Clarke, S. L.: 3D seismic-derived bathymetry: a quantitative comparison with multibeam data, *Geo-Marine Letters*, 39, 447-467, 10.1007/s00367-019-00596-w, 2019.
- Purcell, P. G. and Purcell, R. R.: *The North West Shelf, Australia, An Introduction*, North West Shelf Symposium, Perth, W.A, 4-15, 1988.
- Rodriguez, E., Morris, C. S., Belz, J. E., Chapin, E., Martin, J., Daffer, W., and Hensley, S.: *An assessment of the SRTM topographic products* Technical Report JPL D-31639, 143 pp., 2005.
- 745 Sagar, S., Roberts, D., Bala, B., and Lymburner, L.: Extracting the intertidal extent and topography of the Australian coastline from a 28 year time series of Landsat observations, *Remote sensing of environment*, 195, 153-169, 10.1016/j.rse.2017.04.009, 2017.
- Sagar, S., Phillips, C., Bala, B., Roberts, D., and Lymburner, L.: Generating Continental Scale Pixel-Based Surface Reflectance Composites in Coastal Regions with the Use of a Multi-Resolution Tidal Model, *Remote sensing (Basel, Switzerland)*, 10, 15 pp., 10.3390/rs10030480, 750 2018.
- Scarselli, N., McClay, K., and Elders, C.: Seismic Examples of Composite Slope Failures (Offshore North West Shelf, Australia), in: *Submarine Landslides: Subaqueous Mass Transport Deposits from Outcrops to Seismic Profiles*, edited by: Pini, K. O. A. F. G. A., American Geophysical Union, 261-276, 10.1002/9781119500513.ch16, 2019.

- 755 Senders, M., Banimahd, M., Zhang, T., and Lane, A.: Piled foundations on the North West Shelf, *Australian Geomechanics Journal*, 48, 149-160, 2013.
- Spinoccia, M.: AusSeabed Bathymetry Holdings., Geoscience Australia [dataset], <http://pid.geoscience.gov.au/dataset/ga/116321>, 2018.
- Stephane, M., Andre, M., and Bernard, G.: Diffuse Reflectance of Oceanic Shallow Waters: Influence of Water Depth and Bottom Albedo, *Limnology and Oceanography*, 39, 1689-1703, 10.4319/lo.1994.39.7.1689, 1994.
- 760 Stumpf, R. P., Holderied, K., and Sinclair, M.: Determination of water depth with high-resolution satellite imagery over variable bottom types, *Limnology and Oceanography*, 48, 547-556, 10.4319/lo.2003.48.1_part_2.0547, 2003.
- The Surveying and Positioning Committee: U.K.O.O.A. P1/90 post plot data exchange tape, 1990 format, International Association of Oil & Gas Producers, 25 pp., 1990.
- Vermeer, G.: Marine seismic data acquisition, in: 3D Seismic Survey Design, Second edition, Geophysical References Series, Society of Exploration Geophysicists, 143-206, doi:10.1190/1.9781560803041.ch5, 2012.
- 765 Veth, P.: Breaking through the radiocarbon barrier: Madjedbebe and the new chronology for Aboriginal occupation of Australia, *Australian Archaeology*, 83, 165-167, 10.1080/03122417.2017.1408543, 2017.
- Ward, I., Larcombe, P., Mulvaney, K., and Fandry, C.: The potential for discovery of new submerged archaeological sites near the Dampier Archipelago, Western Australia, *Quaternary International*, 308-309, 216-229, 10.1016/j.quaint.2013.03.032, 2013.
- 770 Whiteway, T.: Australian Bathymetry and Topography Grid. Record 2009/021., Geoscience Australia [dataset], 10.4225/25/53D99B6581B9A, 2009.
- Whitley, T. G.: Geospatial analysis as experimental archaeology, *Journal of archaeological science*, 84, 103-114, 10.1016/j.jas.2017.05.008, 2017.
- Wilson, B.: Biogeography of the Australian North West Shelf Environmental Change and Life's Response, Elsevier Science, Saint Louis, 640 pp., 2013.
- 775 Zheng, G. and DiGiacomo, P. M.: Uncertainties and applications of satellite-derived coastal water quality products, *Progress in Oceanography*, 159, 45-72, 10.1016/j.pcean.2017.08.007, 2017.