



Remote and Autonomous Measurements of Precipitation for the Northwest Ross Ice Shelf, Antarctica

Mark W. Seefeldt¹, Taydra M. Low², Scott D. Landolt³, Thomas H. Nylén⁴

¹National Snow Ice and Data Center, University of Colorado Boulder, Boulder, CO, 80303, USA

5 ²Department of Atmospheric and Oceanic Sciences, University of Colorado Boulder, Boulder, CO, 80303, USA

³Research Applications Laboratory, National Center for Atmospheric Research, Boulder, CO, 80301, USA

⁴Technical University of Denmark, Copenhagen, 2800, Denmark

Correspondence to: Mark W. Seefeldt (mark.seefeldt@colorado.edu)

Abstract. The Antarctic Precipitation System project deployed and maintained four sites across the northwest Ross Ice Shelf
10 in Antarctica from November 2017 to November 2019. The goals for the project included the collection of in situ
observations of precipitation in Antarctica spanning a duration of two years, an improvement in the understanding of
precipitation events across the Ross Ice Shelf, and the ability to validate precipitation data from atmospheric numerical
models. At each of the four sites the precipitation was measured with an OTT Pluvio² precipitation gauge. Additionally,
15 snow accumulation at the site was measured with a sonic ranging sensor and using GPS-Interferometry Reflectivity.
Supplemental observations of temperature, wind speed, particle count, particle size and speed, and images and video from a
camera, were collected to provide context to the precipitation measurements. The collected dataset represents some of the
first year-round observations of precipitation in Antarctic at remote locations using an autonomous measurement system.
The acquired observations have been quality controlled, post-processed, and are available for retrieval through the United
States Antarctic Program Data Center (Seefeldt, 2021; doi.org/10.15784/601441).

20 1 Introduction

The in-situ measurement of precipitation in Antarctica is an exceedingly difficult task. It is challenging to
measure precipitation in Antarctica due to the relatively small amount of precipitation, the difficulty in
distinguishing between falling snow (precipitation) and blowing snow, and the need to do all of this in a remote
environment requiring a low-power and autonomous measurement system. Although there are many difficulties
25 in the measurement of precipitation in Antarctica, it is still important that it is accurately measured given it is the
dominant term in the surface mass balance (SMB) of the Antarctic Ice Sheet (AIS). The AIS contains the largest
reservoir of freshwater on Earth and is estimated that approximately 58 m of global mean sea level (GMSL)
equivalent is stored in the AIS (Fretwell et al., 2013). The trend in the AIS mass balance is therefore a key in
understanding the global impacts due to a warming climate. Medley and Thomas (2019) found that there has been



30 a positive trend in snow accumulation on the AIS, based on ice core records and reanalysis data, and that this
increase in snow accumulation has reduced the twentieth century GMSL rise due to the warming climate. This
snow accumulation is referred to as the difference between total precipitation and losses due to
evaporation/sublimation, wind-driven redistribution of snow, and meltwater runoff. Despite the significance of
precipitation in the Antarctic climate system, and the broader Earth climate, there remains a lack of direct
35 observations, understanding of the precipitation processes and links to the other key components of the AIS and
SMB.

Currently, a large amount of what is known about precipitation and snow accumulation for Antarctica is from
numerical model studies. The investigations range from using numerical weather prediction (NWP; e.g.
40 Monaghan et al., 2005), reanalyses (e.g. Bromwich et al., 2011; Nicolas and Bromwich, 2011; Palerme et al.,
2017; Wang et al., 2020b), earth system models (ESMs; e.g. Palerme et al., 2016; Lenaerts et al., 2016; Fyke et
al., 2017; Wang et al., 2020a), and regional climate models (RCMs; e.g. Ligtenberg et al., 2013; Lenaerts et al.,
2017). The combination of these models has provided a much greater understanding of the variability, trends, and
mechanisms of precipitation over Antarctica. Medley et al. (2013) provides a verification of global and
45 atmospheric models using air-borne radar and ice-core observations. However, there is an ongoing need for the
direct measurement of precipitation and snow accumulation to provide an evaluation of the numerical models and
insights into the uncertainties that are critical in understanding the AIS and GMSL in a warming climate.

Remote sensing studies of precipitation have been conducted using observations by CloudSat to determine and
50 characterize precipitation rates across Antarctica. Palerme et al. (2014) created a multi-year, model-independent
climatology of precipitation across Antarctica. The results indicated a mean annual precipitation over the
Antarctic ice sheet, north of 82° S, of 171 mm year⁻¹ spanning the years 2006 to 2011. A follow up study,
Palerme et al. (2019), with refinements to the methodology placed the annual precipitation rate over Antarctica,
north of 82° S, at 159 mm year⁻¹. Additional studies of precipitation over Antarctica using CloudSat include
55 Milani et al. (2018), extending the analysis to over the Southern Ocean, and Lemonnier et al. (2020), looking at
rates of precipitation across several geographic regions and an investigation of the three-dimensional
characteristics of precipitation over Antarctica.

Past studies of snow accumulation at field sites have increased our understanding of the connection between
60 precipitation, weather systems, and the accumulation at a ground-based site. Braaten (1997) installed an



instrument system that disperses microspheres onto the snow surface at fixed intervals, with subsequent snow profile investigations, to track the accumulation rates over time with a comparison to the meteorology observations. Eisen et al. (2008) cover a range of ground-based measurements of snow accumulation, including stakes, ultrasonic sounders, snow pits, and firn and ice cores to provide an understanding of snow accumulation
65 over East Antarctica. Knuth et al. (2010) used snow height measurements from sonic ranging sensors installed at automatic weather station (AWS) sites on the Ross Ice Shelf to track changes in snow height with the corresponding meteorological measurements to investigate precipitation and horizontal snow transport on surface accumulation. Cohen and Dean (2013) used the snow height measurements from the AWS on the Ross Ice Shelf for a study comparing the changes in snow height to that of event-based comparisons to reanalyses. A lacking
70 component in all of these surface-based measurements studies is the direct capturing of the precipitation in real-time with the precipitating event.

There is a significant need for direct measurements of precipitation to better evaluate the quality of the results in the numerical modeling studies and to be able to constrain the uncertainty in estimates of precipitation, snow
75 accumulation, and the SMB of the AIS. A meteorological observatory was established at Princess Elisabeth base in East Antarctica (Gorodetskaya et al., 2015) for the observation of clouds and precipitation. The ground-based observations include a ceilometer, infrared pyranometer, and a vertically profiling precipitation radar (Micro Rain Radar) starting in 2010. The results from this project have provided insights into cloud and precipitation properties, with a focus on atmospheric rivers that produce significant precipitation events for East Antarctica
80 (Gorodetskaya et al., 2014). A collection of precipitation sensors was installed at Rothera Station on the Antarctic Peninsula for an evaluation of the ability of the instruments to capture precipitation in Antarctica (Tang et al. 2018). Two tipping-bucket precipitation gauges, with heating elements, and three laser-based instruments, also known as disdrometers, were setup for 11 months in 2015-16. Only one of tipping-bucket precipitation gauges had a wind shield and it was a single-Altair wind shield. The results were limited by being installed at a base, with
85 no limits on power, and on the Antarctic peninsula, in contrast to over the expansive AIS. The recent APRES3 (Antarctic Precipitation, Remote Sensing from Surface and Space; Grazioli et al., 2017) field campaign setup an assortment of instruments at Dumont d'Urville station in East Antarctica for a focused effort on the monitoring of precipitation in terms of the collection and falling snow profile characteristics and microphysics. APRES3 had an intense measurement campaign for the austral summer 2015-16, with some of the instruments ongoing since then
90 (Genthon et al., 2018). The instruments included a polarimetric radar (MXPOL), a Micro Rain Radar (MRR), a weighing precipitation gauge (OTT Pluvio²), and a Multi-Angle Snowflake Camera (MASC). The results of this



field campaign have been used in several studies including evaluating CloudSat data (Lemonnier et al., 2019), reanalysis data (Grazioli et al., 2017), and a RCM (Vignon et al., 2019).

95 The Antarctic Precipitation System (APS) project, a collaboration between the University of Colorado Boulder (CU-Boulder) and the National Center for Atmospheric Research (NCAR), developed and installed precipitation measurement systems for Antarctica. The objective of the APS project was to install instruments for year-round, in situ measurement of precipitation at remote regions in Antarctica with low-power and autonomous operation. Four APS systems were installed for two years in the northwest region of the Ross Ice Shelf and collected year-
100 round data. A description of the instrumentation and site infrastructure for each of the four sites is presented in section 2. Section 3 follows with a summary of the efforts during the field seasons with the installation, maintenance, and removal of the APS sites. The data collection, quality control, and data products produced by the APS project are covered in section 4. Section 5 provides a sample data analysis, including the data plots that are a part of the data repository, sections 6 and 7 cover data and code availability, and a discussion and
105 conclusion are covered in section 8.

2 Instrumentation and Installations


The instruments for the APS sites were designed based on the experience of solid precipitation measurement accrued at NCAR, associated with the World Meteorological Organization Solid Precipitation Intercomparison Experiment (WMO-SPIICE; Nitu et al., 2018) project, and other precipitation-focused field experiments (Rasmussen et al., 2012). The knowledge
110 and experience in solid precipitation measurement from NCAR was combined with lessons learned on the deployment of meteorological instruments in Antarctica from an association with the University of Wisconsin Antarctic AWS project (Lazzara et al, 2012). The APSs were installed at four sites across the northwest Ross Ice Shelf (Fig. 1). All sites were confined to this region to minimize the necessary field logistics and support to complete the installations, maintenance, and removal of the APS sites. Table 1 provides the site location information for these four sites. Three APS sites were classified
115 as standard installations with a consistent set of instrumentation across all sites. A fourth site was classified as the premier site as it had the standard collection of instruments and an expanded collection of instrumentation for additional experiments. Table 2 provides a summary of the instrumentation at the standard sites and the additional instrumentation for the premier site. Figure 2 shows the APS installation at the standard APS site, Phoenix Airfield.



120

	Alexander Tall Tower	Lorne	Phoenix	Willie Field
Latitude	79° 00.39'	78° 11.35'	77° 56.86'	77° 52.05'
Longitude	170° 44.1'	170° 01.9'	166° 45.5'	166° 55.1'
Elevation	55 m	45 m	10 m	9 m
Install Date	30 November 2017	29 November 2017	26 November 2017	27 November 2017
Removal Date	16 November 2019	15 November 2019	12 November 2019	20 November 2019

Table 1: Latitude, longitude, elevation, installation date, and removal data for APS sites.

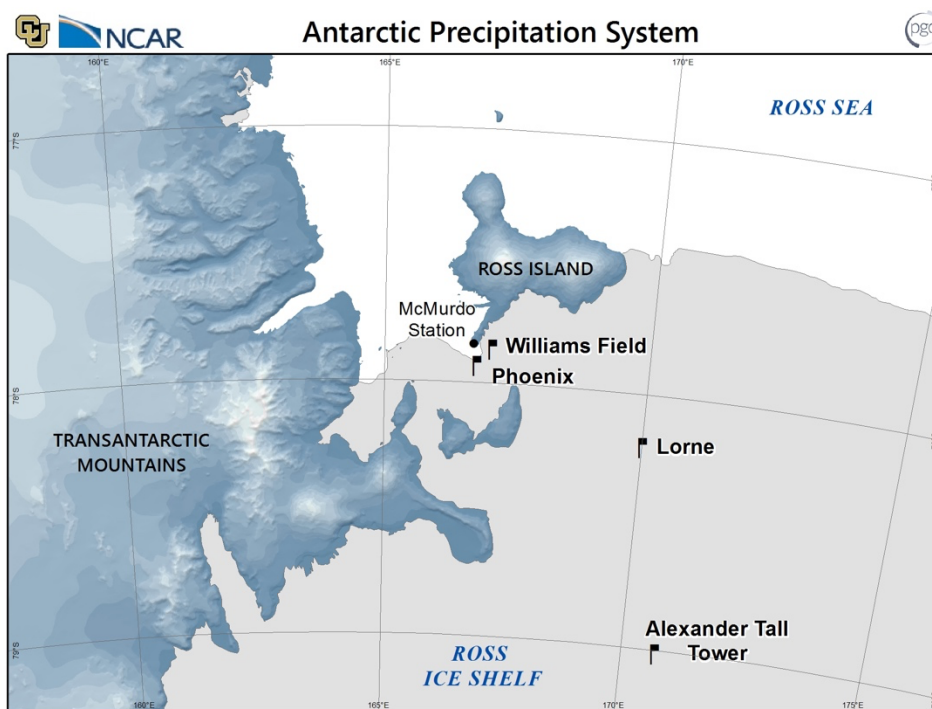

125

Figure 1: Geographic map indicating the site locations for the installed APSs in the Ross Island region of the northwest Ross Ice Shelf in Antarctica. Figure was provided by the Polar Geospatial Center.

130



	Alexander Tall Tower	Lorne	Phoenix	Willie Field
Precipitation	OTT Pluvio ^{2a}	OTT Pluvio ^{2a}	OTT Pluvio ^{2a}	OTT Pluvio ^{2a} OTT Pluvio ^{2bc} OTT Pluvio ^{2de}
Wind Speed	Vaisala WAA151	Vaisala WAA151	Vaisala WAA151	Vaisala WAA151 Vaisala WAA151 _f
Air Temperature	Campbell Sci. SR50AT	Campbell Sci. SR50AT	Campbell Sci. SR50AT	Campbell Sci. SR50AT
Snow Height	Campbell Sci. SR50AT	Campbell Sci. SR50AT	Campbell Sci. SR50AT	Campbell Sci. SR50AT
GPS-IR				
Particle Count	ETI Optical Precipitation Detector Thies Laser Precipitation Monitor _g	ETI Optical Precipitation Detector	ETI Optical Precipitation Detector	ETI Optical Precipitation Detector Thies Laser Precipitation Monitor _g
Disdrometer		OTT Parsivel ^{2gh}	OTT Parsivel ^{2g}	
Pyranometer - Down		Kipp & Zonen CMP3	Kipp & Zonen CMP3	
Pyranometer - Up	Kipp & Zonen CNR4		Kipp & Zonen CMP3	Kipp & Zonen CNR1
Pyrgeometer - Down	Kipp & Zonen CNR4	Kipp & Zonen CGR3	Kipp & Zonen CGR3	Kipp & Zonen CNR1
Pyrgeometer - Up	Kipp & Zonen CNR4	Kipp & Zonen CGR3		Kipp & Zonen CNR1
Field Camera	Campbell Sci. CCFC	Campbell Sci. CCFC	Campbell Sci. CCFC	Campbell Sci. CCFC

a = Installed inside a double-Alter wind shield at an orifice height of approximately 3.4 m

b = Installed inside a double-Alter wind shield at an orifice height of approximately 1.9 m during the first year

c = Installed inside a modified single-Alter wind shield at an orifice height of approximately 2.4 m during the second year

d = Installed inside a DFIR wind shield, with an inner single-Alter wind shield, at an orifice height of approximately 1.9 m during the first year

e = Installed without wind shielding at an orifice height of approximately 2.5 m during the second year

f = Installed at a height of approximately 1.8 m

g = Installed during the first year but no data collected due to hardware/software issues.

h = Removed for the second year due to instrument failure

Table 2: Instruments installed at each APS site including instrument manufacturer and model. The notes provide specifications of the instrument that is different from the description in the text and unique to the indicated site.



140 **Figure 2: A complete APS standard site installation at the Phoenix Airfield site at the completion of the installation in November 2017. The UNAVCO power system is at the far left, the weighing precipitation gauge installed inside the wind shield at the center, and the instrument tower is on the right.**

2.1 Site Infrastructure

The infrastructure for the APS sites was mostly uniform across all four sites. The exception to this is the Willie Field premier site that included the additional instrumentation for cross-instrumentation evaluation, which will be detailed in a later section. An APS site was composed of three components: a precipitation gauge with wind shield, an instrument tower, and a UNAVCO power system. Rohn 25G tower sections were used for the precipitation gauge and the instrument tower. The top of the instrument tower was approximately 3.3 m above the surface at the time of installation. The instrument tower and the precipitation gauge were separated by a distance of approximately 10 m. The bottom of both towers was installed approximately 0.6 m beneath the surface and packed in snow to provide a firm base for the installation. Each of the Rohn 25G towers were then anchored by three 0.0063 m (1/4 inch) wire rope guys, which were anchored into the snow using snow boards, to provide stability in strong winds.

145
150



155 The operation of the instruments, data collection, processing of observations, data storage, and communications was handled by a Campbell Scientific CR6 datalogger at all four sites. The CR6 was enclosed in a fiberglass weatherproof enclosure and mounted on the instrument tower. A MicroSD card was included with the CR6 datalogger for storage of the data between field visits. Communications with the datalogger were accomplished with an internet connection between Boulder, Colorado and McMurdo Station. UHF radio communications, using an Intuicom EB-1 ethernet bridge radio with line-of-sight yagi antennas, allowed communications between each APS site and McMurdo Station. The communications link allowed for year-round, near real-time access to the datalogger for data retrieval and uploading updated datalogger algorithms.

160 The power to the datalogger and instruments was provided by a UNAVCO power system. The power system was designed to provide 3W of continuous power during the long polar night. The power system is comprised of two 90 W solar panels, 16 12V 100 Ah batteries, and a charge controller to handle the charging of the batteries, during summer months, and distribution of power. The batteries and charge controller were placed in two weather resistant enclosures and buried beneath the snow surface to minimize the temperature variations on the batteries during the course of the year. The power systems operated successfully throughout the duration of the project, except for insufficient capacity of the batteries to power the Lorne and Alexander Tall Tower APS sites through the polar night.

2.2 Standard Sites

170 The OTT Pluvio² precipitation gauge was used for the measurement of precipitation. The Pluvio² uses a high-precision load cell, in combination with algorithms designed to compensate for the wind and temperature, to produce measurements of amount and intensity of precipitation using a weight-based technology. The collection area of the Pluvio² was 400 cm² at the Alexander Tall Tower, Willie Field, and Lorne APS sites and 200 cm² at the Phoenix Airfield site. The Pluvio² was mounted on a Rohn 25G top plate at the top of a Rohn 25G tower, at a height of approximately 2.4 m above the surface. This resulted in the orifice opening of the Pluvio² at a height of approximately 3.4 m at time of installation. (The actual height of the instruments varied over the duration of the project due to the increasing height of the snow surface, which is common to this region.) The elevated height of the Pluvio² was chosen to minimize the interaction of the collection of precipitation with the blowing snow near the surface. A custom fabricated double-Altair wind shield was installed surrounding the Pluvio² to slow the horizontal transport of snow by the winds and to increase the collection rate of the precipitation gauge. The customizations to the double-Altair wind shield were made to increase the functionality and durability of the wind shield in the harsh Antarctic climate conditions. The top of the wind shield was installed at the same height as the opening of the Pluvio². A customized base of aluminum piping was fabricated to install and support the wind shield at the elevated height of the precipitation gauge. The Pluvio² and wind shield is at the center of the Fig. 2.

185 The snow surface height was measured with a Campbell Scientific SR50AT sonic ranging sensor with temperature probe. The SR50AT operates by emitting an ultrasonic pulse and measuring the elapsed time between the emission and the return of



the pulse. The snow height is calculated based on this elapsed time and a temperature corrected speed of sound. The SR50AT sonic ranging and temperature sensors were installed on the instrument tower at a height of approximately 1.0 m, at the time of installation, with slight variations by site. In addition to being used for correcting the speed of sound, the temperature sensor was also used to provide continuous measurements of air temperature. Snow height was also measured using a GPS receiver and the method of GPS-IR, detailed later in this paper.

Additional instrumentation was installed on the instrument tower to characterize the atmospheric conditions to better understand and interpret the measurements by the Pluvio² and SR50AT. A Vaisala WAA151 3-cup anemometer was installed at approximately the same height as the opening of the Pluvio² to provide a measurement of wind speed at gauge height. An ETI Optical Precipitation Detector (OPD-104) was installed at a height of approximately 1 m above the surface. The OPD-104 provided a continuous, robust, and low-power measurement of a count of particles in the air moving past the sensor (either by falling or blowing through the LED light beam). This measurement was used to characterize occurrences of precipitation and/or blowing snow. Whenever the OPD-104 was measuring more than 30 counts in 6 seconds, for a sustained two minutes, the conditions would be classified as an “event”. The classification of an “event” triggers additional instruments to be used, as detailed below. A Campbell Scientific CCFC Field Camera was installed near the top of the instrument tower to provide a visual record of the conditions of the precipitation gauge and wind shield during events, as classified by the OPD-104. The CCFC Field Camera included infrared LEDs providing operation throughout the long polar night. A laser disdrometer was installed at approximately the height of the opening of the precipitation gauge on the instrument tower to provide a measurement of particle size and fall speed in the air. Two different models of disdrometers were used with an OTT Parsivel² installed at Phoenix Airfield and Lorne APS sites and a Thies Laser Precipitation Monitor (LPM) installed at Willie Field and Alexander Tall Tower APS sites. The disdrometers were in operation only during events to minimize the higher power consumption of these instruments. Lastly, radiation sensors were installed at the APS sites for measuring downwelling and upwelling shortwave and longwave radiation. A Kipp & Zonen CNR1 net radiometer was installed at Willie Field, and a CNR4 net radiometer was installed at Alexander Tall Tower, providing measurements of downwelling shortwave and longwave and upwelling longwave radiation. Two Kipp & Zonen CMP3 pyranometers and a Kipp & Zonen CGR3 pyrgeometer were installed at Phoenix Airfield for measurements of shortwave downwelling and upwelling radiation, and longwave downwelling radiation. Lorne had a slightly different set of instruments with one CMP3 pyranometer and two CGR3 pyrgeometers for measurements of downwelling shortwave, and downwelling and upwelling longwave radiation.

2.3 Premier Site

The Willie Field site was classified as the premier site for the APS project. Figure 3 is a photo of the Willie Field APS premier site at the time of installation. The premier site had all of the instrumentation installed as the standard sites and it included two additional Pluvio² precipitation gauges. The experiment to be conducted with these gauges changed after the



220 first year for reasons that will be explained below in the section covering the Season 2 field work. In this section, the original
configuration and rationale for the premier site at the outset of the project will be described. One of the additional Pluvio²
precipitation gauges was installed at a height of approximately 1.9 m, inside a Double Fenced Automated Reference (DFAR)
wind shield. A DFAR is the use of a Double Fence Intercomparison Reference (DFIR) wooden fence, as the wind shield, in
combination with an automatic precipitation gauge inside a single-Alter wind shield, as defined by the WMO SPICE report
(see Fig. 3.4 in Nitu et al., 2018). The DFIR-fence is an octagonal, vertical, double-fence inscribed in circles of 12 m and 4
225 m in diameter. The DFAR wind shield is considered the WMO automated standard for the measurement of solid
precipitation (Nitu et al., 2018). The installation of a DFAR at all sites would have been costly and prohibitive to install with
limited field installation time. Therefore, a DFAR was installed at Willie Field to provide a comparison to the measurement
of precipitation in the double-Alter wind shield. The goal was to develop a transfer function between the measurement of
precipitation with the double-Alter wind shield and the DFAR wind shield that could then be applied to the other APS sites
230 to correct the gauge measurements for wind under catch. An additional Pluvio² precipitation gauge at Willie Field was
installed at a height of 1.9 m, matching that of the DFAR, inside a double-Alter wind shield. This side-by-side comparison of
the DFAR to a double-Alter shielded precipitation gauge was designed to minimize the impacts that different heights of the
gauge installations could have on precipitation collection. An additional Vaisala WAA 151 3-cup anemometer was also
installed on the instrument tower at the same height (1.9 m) of the opening of the two additional Pluvio² precipitation gauges
235 to determine the wind speed at their gauge heights. A UNAVCO 5W power system was installed at the Willie Field site to
accommodate the additional instrumentation at this site. The 5W power system is the same as the 3W except with six
additional 12-V 100 Ah batteries in a third weather-tight enclosure buried beneath the surface, similar to the two other
enclosures.



240 **Figure 3: The APS premier site installation at the Willie Field site at the completion of the installation in November 2017. The precipitation gauge installed inside a double-fenced automated reference (DFAR) shield is on the left and the precipitation gauge installed inside a double-Alter wind shield, at the same height as the DFAR precipitation gauge, is on the right. The instrument tower and precipitation gauge installed in the double-Alter wind shield are similar to that of the standard sites.**



245 2.4 GPS-IR

A novel method of measuring snow height through the interferometric pattern of Global Positioning Satellites (GPS) signals was included in the project to provide for an additional measurement of snow height (Larson et al., 2009; Larson et al., 2015; Siegfried et al., 2017; Larson et al., 2020). A GPS receiver was included in the instruments at each APS site to complete the GPS interferometric reflectometry (GPS-IR) measurements. This additional measurement of snow height at the APS sites
250 provided an opportunity to demonstrate the capabilities of GPS-IR for studies involving precipitation, snow accumulation, and SMB of the AIS (see references for GPS-IR). GPS-IR operates on the principle that GPS signals at low elevation angles are reflected off of the snow surface. This reflected signal creates an interference pattern with the direct GPS signal to the geodetic antenna (see Fig. 1 in Larson et al., 2020). This interference pattern has a characteristic signal-to-noise ratio that can be used to retrieve the height of the GPS antenna above the snow surface. This snow height measurement is similar to that of
255 the snow height measurement from the sonic ranging sensor except with very different characteristics. For example, the sonic ranging sensor has a footprint with a radius of tens of centimeters and the GPS-IR has a footprint with a radius of tens of meters. The sonic ranging sensor takes measurement every minute while the GPS-IR processing creates a daily average. The result is a much more uniform measurement representative of the larger APS site rather than the snow surface directly beneath the sonic ranging sensor that can be influenced by migrating drifts and sastrugi. A study currently in preparation
260 compares the measurements from the GPS-IR, sonic ranging sensor, precipitation measured by the precipitation gauge, and wind speed for an improved characterization of snow accumulation at a given site. The results will also be beneficial to better understand previous studies that relied on similar sonic ranging sensors for snow height measurements (e.g. Eisen et al., 2008; Knuth et al., 2010; Cohen and Dean, 2013).

3 Field Work

265 3.1 Season 1: November 2017

The goal for the first season was the installation of the four APS sites to provide for the collection of two years of observations over the duration of the project. The first field season lasted from 31 October to 1 December 2017. Much of the time in the field was spent at the two sites nearby McMurdo Station, Willie Field and Phoenix Airfield, as they allowed for ease of access using a wheeled, or tracked, light vehicle truck. This provided the ability to refine and adapt the installation
270 hardware and methods for the unique Antarctic environment. These modifications and improvements in the field installation resulted in the entire Lorne APS site being installed in under seven hours with four field personnel on the second to last day of the field season. The installation of the DFAR at the APS premier site, Willie Field, was also a success and required a full day for installation with five field personnel. All sites were operating at the conclusion of the field season. An additional 4-6 weeks of remote work, depending on the site, after the completion of the field season were required to address issues with




275 the measurement and communication algorithms before the commencement of recording observations from the four APS sites.

3.2 Season 2: November 2018

The activities for the second field season concentrated on the maintenance and repairs for the four APS sites. The first year was an overall success in terms of retrieving measurements of precipitation, especially when factoring in the frequent
280 difficulties encountered with typical instrument deployments in Antarctica. There were minor issues with the instruments and algorithms that needed further refinements to improve the results and quality of observations for the second year. The second field season lasted from 5 November to 7 December 2018. One of the major repairs was made to the aluminum piping base for the wind shield at the Phoenix Airfield APS site, which became partially unassembled during a windstorm in early September 2018. All joints in the aluminum piping at this site, as well as the other three sites, were reinforced with
285 bolts during the second field season. Measurements from the disdrometers at all four sites were unsuccessful during the first year due to a combination of hardware and software issues. These were sorted out during the second field season with the disdrometers working at all sites, except for Lorne site where the Parsivel² had to be removed due to a hardware failure. Maintenance at each of the sites included repositioning some of the instruments on the instrument tower to new heights and, when necessary, fixing or tightening any instrumentation hardware mounts.

290

The most significant negative outcome from the first year was that the DFAR at the premier site became fully buried due to drifting and blowing snow. Observations from the Pluvio² precipitation gauge indicate that in mid-March 2018 the snow surface reached the height where the drifting snow was able to enter into the opening and fill the precipitation gauge. It is uncertain as to when the DFAR became fully buried during the austral winter. The dome of snow that was created, as a result
295 of the burying of the DFAR, resulted in the snow height increasing dramatically (approximately 1-2 m) at the Willie Field APS site, including the instrument tower and the two Pluvio² precipitation gauges installed in the double-Alter wind shields. Past measurements at the nearby AWS site indicate that this site typically has an annual increase in snow height of approximately 0.4 m. The entire DFAR installation was removed from the site with the associated Pluvio² precipitation gauge being re-installed in an unshielded configuration. The Pluvio² precipitation gauge with a double-Alter wind shield at
300 the lower height was raised and modified by removing the outer shield and creating a single-Alter wind shield configuration. The result of the field work was a modified experimental setup at the premier site for the second year with three Pluvio² precipitation gauges having different configurations of wind shielding: double-Alter, single-Alter, and unshielded. The lower instruments (e.g. OPD-104, SR50AT, lower WAA151) were raised on the instrument tower due to the increase in snow height at this site. Figure 4 is a photo of the reconfigured premier Willie Field APS site for the second year of data
305 collection.

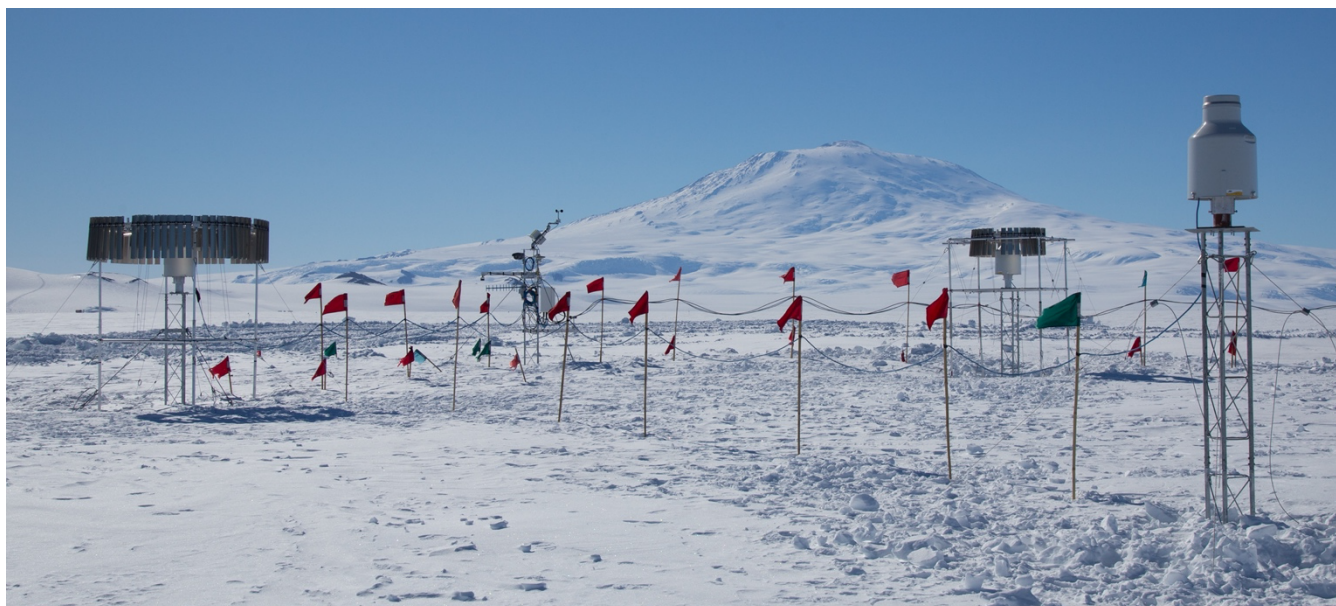

**Figure 4: The modified experimental setup at the Willie Field site for the second year, at the completion of the modifications in November 2018. The three precipitation gauges are installed in a double-Alter wind shield, single-
310 Alter wind shield, and unshielded from left to right in the photo.**

3.3 Season 3: November 2019

The third field season involved the removal of all instruments and hardware marking the completion of the field deployment for the project. The field season lasted from 7 November to 3 December 2019. The instruments, hardware, and power systems for each site were successfully removed without any issues. Each APS site was surveyed and assessed for the
315 conditions of the instruments and hardware for lessons learned to be applied to potential future deployments of the APS project. One ongoing issue to be addressed is the occurrence of capping within the opening of the Pluvio² precipitation gauge. Capping is the occurrence of snow accumulation on the rim of the gauge leading to partial or complete blockage of the orifice (Nigu et al., 2018). At differing points during the austral winter, each of the Pluvio² precipitation gauges stopped measuring precipitation due to the orifice of the gauge becoming blocked with snow. This issue is indicated in the
320 observations with the measurement of liquid water equivalent (LWE) being constant for days and extending into weeks. On several occasions over the two years, the observations at a site would indicate a sudden increase in the precipitation measurement due to the accumulation of snow/ice on the inside of the orifice being loosened and falling onto the Pluvio² load cell in a large dump.



4 Quality Control and Data Processing Section

325 The data from the four APS sites were collected remotely in Boulder, Colorado. In general, the data was retrieved hourly to a
local data server using the Campbell Scientific LoggerNet software. The data was also stored on a MicroSD card installed in
the Campbell Scientific CR6 datalogger, which provided a second source of data to fill any gaps that occurred due to issues
with the radio communications. This was a rare event. The observations were collected in three intervals: 6 seconds, 1
330 minute, and 5 minutes. The 1-minute data is considered the primary data source and was the data which underwent
subsequent quality control (QC) and sharing for community use. Initial processing of the 1-minute data was completed using
a csh script to create daily text files (obs1min) of the collected data from the larger LoggerNet text files. This process was
repeated for the duration of the two years that the APS sites were in operation. The 6-second data was collected to capture a
higher temporal resolution providing more information on the performance of the Pluvio² precipitation gauges. The 6-second
observations did not undergo QC processing, have only been used and archived for instrument characterization, and are not
335 included in the data repository. The 5-minute data are not continuous and were only recorded for occurrences when the APS
site was considered to be experiencing an “event”, as determined by the OPD-104 measurements. The snow height and air
temperature measurements from the SR50AT were included in the 5-minute observations for the first three months of the
first year at Phoenix Airfield and Willie Field, and the entire first year at Lorne and Alexander Tall Tower. There were no
measurements from the disdrometers during the first year, as was discussed earlier. Single text files for the first year and for
340 each site were created containing the 5-minute observations (obs5min) and are posted without QC processing. The
disdrometer data in the second year was recorded with 1-minute resolution, active only during events, and stored in a single
file for each site. Table 3 provides a summary of the observations that were collected by time resolution, site, and for which
years the observations were completed.

345 The 1-minute data underwent QC processing at CU-Boulder for use in the scientific analyses and for posting of the data to
the repository for community use. The QC processing was applied to the 1-minute data using an automated algorithm
developed over iterations of analyses of the data and modifications to the algorithm to produce the best results. QC
processing was applied to the Bucket NRT measurements from the Pluvio², the air temperature and snow height
measurements from the SR50A, the particle count from the OPD, and wind speed from the WAA151 (see Table 3). The
350 Bucket NRT values are the non-real-time measured values of bucket content, corresponding to the filtered weight value from
the Pluvio². These five measurements are considered the primary observations for analysis of the results from the APS
project. The QC algorithms were unique to each site and instrument and included methods to remove outliers beyond an
established range, removing values beyond a threshold from a rolling mean, and removing measurements due to a faulty
instrument (e.g. the OPD 104 being buried at Willie Field APS site).

355



Time Resolution	Instrument	Measurement	ATT		LRN		PHX		WFD	
			1	2	1	2	1	2	1	2
1 minute	Pluvio	Accu RT-NRT	X	X	X	X	X	X	X	X
		Accu NRT	X	X	X	X	X	X	X	X
		Accu total NRT	X	X	X	X	X	X	X	X
		Bucket RT	X	X	X	X	X	X	X	X
		Bucket NRT	Q	Q	Q	Q	Q	Q	Q	Q
	SR50A	Snow Height		Q		Q	Q	Q	Q	Q
		Temperature-Air		Q		Q	Q	Q	Q	Q
	WAA151	Wind Speed	Q	Q	Q	Q	Q	Q	Q	Q
		OPD	Q	Q	Q	Q	Q	Q	Q	Q
	Radiation	Path Status	X	X	X	X	X	X	X	X
		Shortwave-Downward	-	-	X	X	X	X	-	-
		Shortwave-Upward	X	X	-	-	X	X	X	X
		Lonwave-Downward	X	X	X	X	X	X	X	X
Longwave-Upward		X	X	X	X	-	-	X	X	
Event Based (1 minute and 5 minute)	SR50A	Snow Height	X		X					
		Temperature-Air	X		X					
	Parsivel	Num. Part. Detected and Valid	-	-		-		X	-	-
		Num. Part. Detected - All	-	-		-		X	-	-
		Avg. Vol.Eq.Dia. (ved) of n Class	-	-		-		X	-	-
		Avg. Part. Speed (ps) of n Class	-	-		-		X	-	-
	LPM	Raw Data (Bins of Spd, Dia)	-	-		-		X	-	-
		Precipitation Amount		X	-	-	-	-		X
		Imin Visibility in Precipitation		X	-	-	-	-		X
		Number Particles		X	-	-	-	-		X
		Number Particles LT 0.15 m/s		X	-	-	-	-		X
		Number Particles GT 20 m/s		X	-	-	-	-		X
		Number Particls LT 0.15 mm		X	-	-	-	-		X
		Number Particles - NoHydro		X	-	-	-	-		X
		Number Particles - Unknown		X	-	-	-	-		X
		Number Particles - Classes 1-9		X	-	-	-	-		X
Total Volume - Classes 1-9		X	-	-	-	-		X		
Raw Data (Bins of Spd, Dia)		X	-	-	-	-		X		
1 hr (EB)	CCFC	Image		Q		Q		Q		Q
		Video (5s)	Q	Q	Q	Q	Q	Q	Q	Q
Daily	CCFC	Image		Q		Q		Q		Q
		Video (5s)		Q		Q		Q		Q

Table 3: Data availability listed by measurement, site, and year. Measurements indicated by a Q indicate quality-controlled measurements, a X indicates non-quality-controlled measurements, and a dash indicates that the instrument was not installed at a site.




360 Images and movies were also captured of the APS sites using the CCFC Field Camera installed with the instruments. The camera captured 5-second videos during the first year at one-hour intervals during events. Photos and 5-second videos were captured during the second year at one-hour intervals during events, and a photo was captured every day at 00 UTC to indicate conditions at each site. The videos in the first year, and still images in the second year, were retrieved to the data server in Boulder, Colorado using the remote communications and LoggerNet software. However, it is the videos and images
365 stored on the MicroSD card that were used for the APS data archive. The videos were converted in post-processing from the CCFC Field Camera specified avi video format to a more user friendly mp4 video format and encoding. The images and videos were manually reviewed and all images and videos that had obstructed views, providing no usable information, were removed. The views might have been obstructed due to accretion of ice on the camera lens, extensive blowing snow in the field of view making the image useless, or a configuration error at Phoenix Airfield site that did not enable the infrared LEDs
370 during the first year. All of the useful images and videos are included in the repository.

The observations from the GPS receivers were collected by UNAVCO through either a UHF and internet link, similar to the APS communications, or an Iridium satellite link. The data processing and quality control for the GPS-IR observations are being handled by the Department of Geophysics at the Colorado School of Mines. They are completing the processing of
375 GPS-IR observations for the entire Antarctic continent, beyond the four APS sites. The data processing, documentation, and public release of the data is under development at this time.

Corresponding meteorology observations for each of the sites can be retrieved from the co-located University of Wisconsin AWS sites (Lazzara et al. 2012). The standard measurements available at each of the sites include atmospheric pressure,
380 wind speed, wind direction and relative humidity. Additional measurements are available at each site, highlighted by Alexander Tall Tower, which is an instrumented meteorological tower with a height of 30 m with six levels of measurements of wind, temperature, and relative humidity.

5 Plots and Sample Data Analysis

Time series of plots of the quality-controlled, 1-minute observations, of the five primary APS measurements, have been
385 created with durations of 10-days, 1-month, and the entire observation period for each APS site. The plots for the Willie Field premier site include the Bucket NRT measurements from the additional Pluvio² instruments, and the lower wind speed. All of these plots are included in the data repository to provide an overview of the APS data for interested users, as well as actual analyses of individual events.

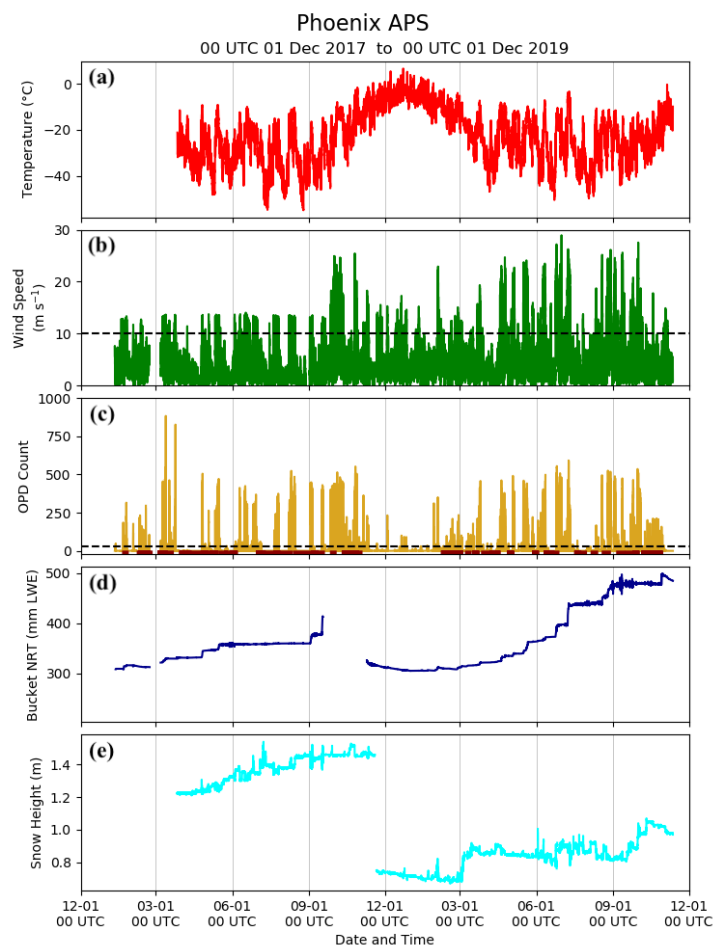

390

Figure 5: Time series plots of the quality-controlled data from Phoenix Airfield APS site spanning from December 2017 to November 2019. Plotted data include temperature (a), wind speed (b), particle count (c), Bucket NRT (d; see text for a description), and snow height (e). The dashed line in (b) indicates a wind speed of 10 m s^{-1} , which is the approximate speed when there is blowing snow at the surface. The dashed line in (c) indicates a particle count of 30, which when sustained is classified as an “event” and triggers additional observations.

395

Figure 5 is a plot of the quality-controlled, 1-minute observations from Phoenix Airfield APS site spanning the entire period of data collection. The plot covering the entire data record for each site provides an overview of the performance of the instruments and broad characterizations of the data. Figure 5a indicates the pattern of temperature at the site over the course of installation, once the SR50A data were added to the 1-minute data files starting in March 2018. The Bucket NRT data (Fig. 5d), shows the progression of precipitation accumulation during the first year until late May when the Pluvio² becomes capped and additional precipitation is not collected. In early September 2018, with the gauge warming due to solar radiation,

400



the capping collapses indicated with the spike in the Bucket NRT values. That is followed with a data gap, which was the result of the disassembly of the wind shield base due to high winds during a storm. The Bucket NRT value decreases as the start of the second year after the removal of the snow collected in the bucket from the first year, during the field maintenance at the Phoenix Airfield site. There is then a steady event-by-event increase in the precipitation collection at Phoenix Airfield site until late June 2019 when the Pluvio² capping eliminates the collection of precipitation in the Pluvio². A similar analysis of the progression through the snow height can be completed in analyzing Fig. 5e. The SR50AT measures a distance from the sensor to the surface. In order to better correspond to increasing snow height, the value from the SR50AT is subtracted from a constant, such as 2 m for Phoenix Airfield APS, in order to indicate a positive trend for increasing snow height. The break in the snow height data in November 2018 is the result of the repositioning of the SR50AT sensor on the instrument tower during the 2018 field season.

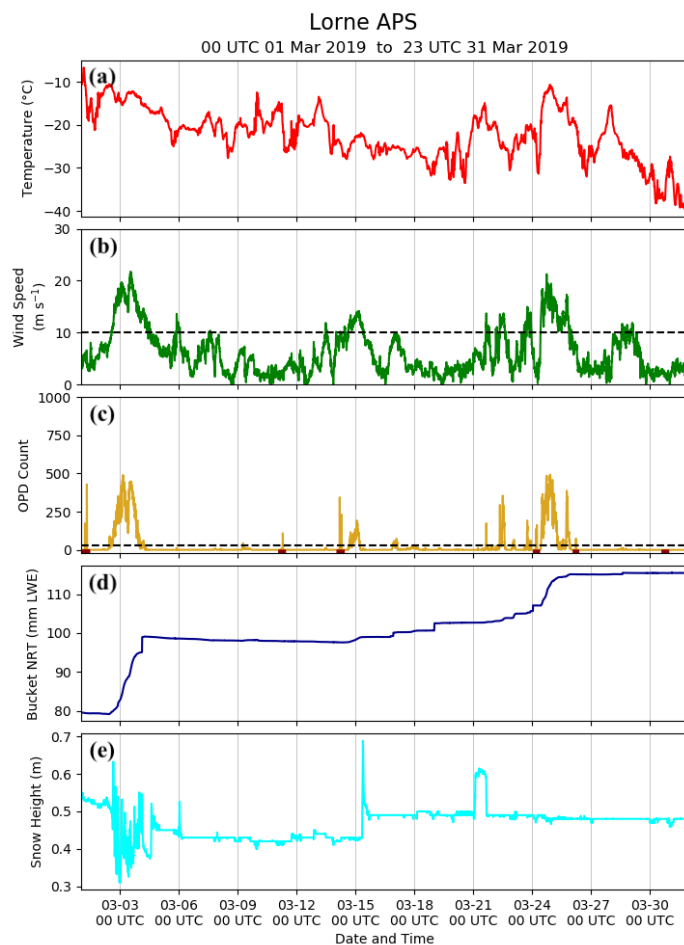


Figure 6: The same as Fig. 5 but for Lorne APS site and March 2019.



415 Figure 6 shows the analysis of the quality-controlled observations for March 2019 at Lorne APS site. The 10 m s^{-1} line is highlighted in Fig. 6b to indicate the approximate wind speed when there is blowing snow near the surface. This threshold of blowing snow is verified with the particle counts from the OPD (Fig. 6c) increasing due to the blowing snow. The 30-count line is highlighted in Fig. 6c as this is the level of particles measured by the OPD classifying as “event” and the additional measurements by the CCFC Field Camera and disdrometer. The Bucket NRT measurements indicate the collection of precipitation during a big event at the start of the month, some smaller accumulations in the middle of the month, and another large event towards the end of the month. There are also noticeable large and sharp increases in the Bucket NRT, such as on 4 March 2019, when it appears that snow and ice that had accumulated on the surface inside the orifice, falls into the bucket in a dump. The snow height (Fig. 6e) shows the large variability in snow height during high wind speed events and the lack of correlation of the precipitation to the accumulated snow height. This feature will be highlighted in a
420
425 forthcoming study currently in preparation.

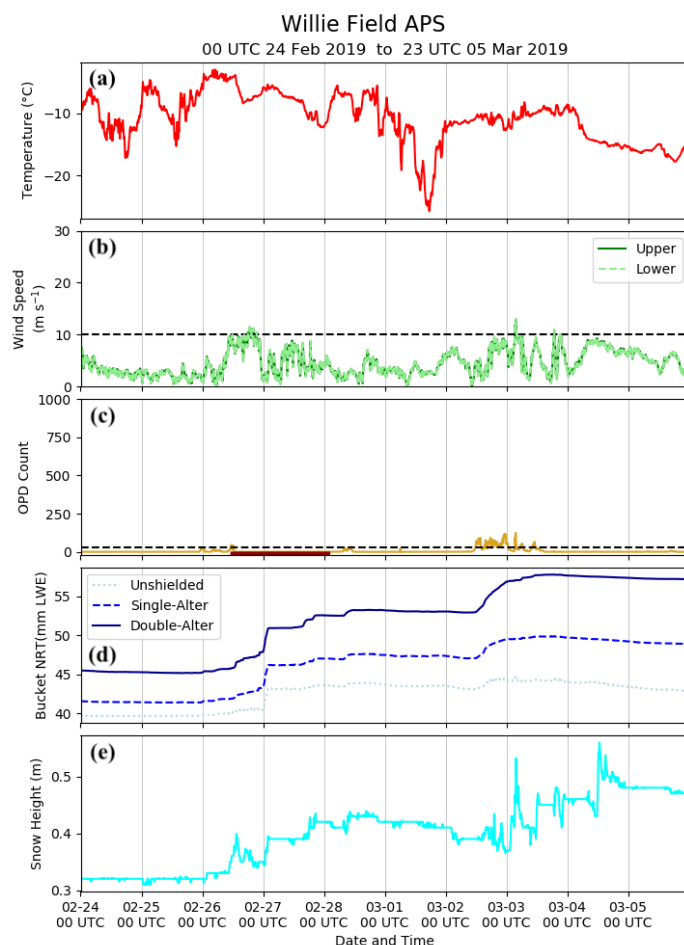


Figure 7: The same as Fig. 6 but for Willie Field APS site for 24 February through 5 March 2019.



Specific precipitation events are better analyzed using 10-day plots from each APS site. Figure 7 shows a 10-day plot of APS
430 observations from 24 February 2019 through 5 March 2019. Similar features as described with Fig. 5 and Fig. 6 can be
applied to the 10-day plots. The dark red line that is a part of Fig. 6c indicates the times when the OPD instrument is
indicating that the path is blocked for the detection of particle counts. Figure 6d shows the results of the modified
experimental configuration at Willie Field APS site for the second year in comparing precipitation measurements Pluvio²
435 throughout this 10-day period which results in a better correlation between the snow height measurements and the
precipitation collected in the Pluvio² instruments.

6 Data Availability

The data from the four APS sites can be retrieved from the United States Antarctic Program Data Center (<https://www.usap-dc.org/view/dataset/601441>, last accessed: 10 May 2021). The APS data can also be accessed at (Seefeldt, 2021;
440 doi.org/10.15784/601441). All data files are comma-delimited, text files with a header line indicating the columns in the
data. The plots of APS data are png files. The photos from the CCFC camera are in jpeg format and the movies are in mp4
format. Readme pdf files are included with the data collection to provide additional information on the data availability and
history.

7 Code Availability

445 All python code used for the processing, quality control, and creating of plots is available by request to the corresponding
author. Additionally, the programs used in the Campbell Scientific CR6 dataloggers are available by request to the
corresponding author.

8 Conclusions

Four APS sites were installed across the northwest Ross Ice Shelf from 2017 to 2019 providing two years of in situ
450 measurement of precipitation in Antarctica. The APS sites were deployed to provide a direct measurement of precipitation
providing a greater understanding of precipitation in Antarctica, comparison to and evaluation of atmospheric numerical
models, and new insights in understanding the AIS, SMB, and changes in the GMSL in a warming climate. The instruments
at each APS site included a weighing precipitation gauge installed inside a wind shield, anemometer, thermometer, sonic
ranging sensor for snow height, particle counter, disdrometer, radiation sensors, and a camera. The premier site, Willie Field
455 APS, included two additional weighing precipitation gauges and a second anemometer for experimental configurations that



changed over the course of the installation. Three field seasons were completed as a part of the APS deployment covering the installation, maintenance, and removal of the APS sites. The measurements were collected in Boulder, Colorado from the combination of an internet and a radio link to the APS dataloggers. The data was processed, and quality controlled, for use in the ongoing science analyses and for sharing with the larger community. Plots of the quality-controlled data spanning the duration of data collection, monthly, and 10-day time periods have also been created for community use. The data, quality-controlled and non-quality-controlled, images and videos from the cameras, and plots have been posted to the USAP Data Center (Seefeldt, 2021; doi.org/10.15784/601441). The APS project was successful in providing in situ measurement of precipitation at remote sites in Antarctica using a low-power, autonomous measurement system. Lessons have been learned in ways to modify and improve the APSs for potential future redeployment in the Antarctic or the Arctic.

465 **9 Author Contributions**

MS led the APS project, contributed to the APS design, co-led the field work, led the data collection and quality control, and prepared the manuscript with contributions from all authors. TL assisted MS in the data collection, quality control, and creating of plots. SL led the APS design and fabrication and co-led the field work. TN assisted with the field work and was responsible for the GPS installation and configuration.

470 **10 Competing Interests**

The authors declare that they have no conflict of interest.

11 Acknowledgments

The authors thank the United States Antarctic Program and the Antarctic Support Contract for the organization of the field season, field assistance, and support throughout the field work based out of McMurdo Station. UNAVCO provided the power systems for the APS sites and personnel for the installation of the power systems and assisting with the APS installation, maintenance, and removal. Thanks goes to the University of Wisconsin Automatic Weather Station project, with particular recognition of Carol Constanza, for assistance with the APS installations. The authors also thank Al Jachcik and Justin Lentz of the National Center for Atmospheric Research for their work in designing and fabricating the APS equipment and datalogger programming. Thanks goes to Kristine Larson of the University of Colorado – Boulder for leading the GPS-IR data processing and interpretation of the GPS-IR results.

12 Financial Support

The APS project was funded by the National Science Foundation grant numbers PLR 1543377 and PLR 1543325.



References

- 485 Braaten, D. A.: A detailed assessment of snow accumulation in katabatic wind areas on the Ross Ice Shelf, Antarctica, 102, 30047–30058, <https://doi.org/10.1029/97jd02337>, 1997.
- Bromwich, D. H., Nicolas, J. P., and Monaghan, A. J.: An Assessment of Precipitation Changes over Antarctica and the Southern Ocean since 1989 in Contemporary Global Reanalyses, 24, 4189–4209, <https://doi.org/10.1175/2011jcli4074.1>,
490 2011.
- Cohen, L. and Dean, S.: Snow on the Ross Ice Shelf: comparison of reanalyses and observations from automatic weather stations, 7, 1399–1410, <https://doi.org/10.5194/tc-7-1399-2013>, 2013.
- 495 Eisen, O., Frezzotti, M., Genthon, C., Isaksson, E., Magand, O., Broeke, M. R. van den, Dixon, D. A., Ekaykin, A., Holmlund, P., Kameda, T., Karlöf, L., Kaspari, S., Lipenkov, V. Y., Oerter, H., Takahashi, S., and Vaughan, D. G.: Ground-based measurements of spatial and temporal variability of snow accumulation in East Antarctica, *Rev Geophys*, 46, <https://doi.org/10.1029/2006rg000218>, 2008.
- 500 Fretwell, P., Pritchard, H. D., Vaughan, D. G., Bamber, J. L., Barrand, N. E., Bell, R., Bianchi, C., Bingham, R. G., Blankenship, D. D., Casassa, G., Catania, G., Callens, D., Conway, H., Cook, A. J., Corr, H. F. J., Damaske, D., Damm, V., Ferraccioli, F., Forsberg, R., Fujita, S., Gim, Y., Gogineni, P., Griggs, J. A., Hindmarsh, R. C. A., Holmlund, P., Holt, J. W., Jacobel, R. W., Jenkins, A., Jokat, W., Jordan, T., King, E. C., Kohler, J., Krabill, W., Riger-Kusk, M., Langley, K. A., Leitchenkov, G., Leuschen, C., Luyendyk, B. P., Matsuoka, K., Mouginot, J., Nitsche, F. O., Nogi, Y., Nost, O. A., Popov,
505 S. V., Rignot, E., Ripplin, D. M., Rivera, A., Roberts, J., Ross, N., Siegert, M. J., Smith, A. M., Steinhage, D., Studinger, M., Sun, B., Tinto, B. K., Welch, B. C., Wilson, D., Young, D. A., Xiangbin, C., and Zirizzotti, A.: Bedmap2: improved ice bed, surface and thickness datasets for Antarctica, *Cryosphere*, 7, 375–393, <https://doi.org/10.5194/tc-7-375-2013>, 2013.
- Fyke, J., Lenaerts, J. T. M., and Wang, H.: Basin-scale heterogeneity in Antarctic precipitation and its impact on surface
510 mass variability, 11, 2595–2609, <https://doi.org/10.5194/tc-11-2595-2017>, 2017.
- Genthon, C., Berne, A., Grazioli, J., Alarcón, C. D., Praz, C., and Boudevillain, B.: Precipitation at Dumont d’Urville, Adélie Land, East Antarctica: the APRES3 field campaigns dataset, *Earth Syst Sci Data*, 10, 1605–1612, <https://doi.org/10.5194/essd-10-1605-2018>, 2018.



515

Gorodetskaya, I. V., Tsukernik, M., Claes, K., Ralph, M. F., Neff, W. D., and Lipzig, N. P. M. V.: The role of atmospheric rivers in anomalous snow accumulation in East Antarctica, 41, 6199–6206, <https://doi.org/10.1002/2014gl060881>, 2014.

520 Gorodetskaya, I. V., Kneifel, S., Maahn, M., Tricht, K. V., Thiery, W., Schween, J. H., Mangold, A., Crewell, S., and Lipzig, N. P. M. V.: Cloud and precipitation properties from ground-based remote-sensing instruments in East Antarctica, Cryosphere, 9, 285–304, <https://doi.org/10.5194/tc-9-285-2015>, 2015.

525 Grazioli, J., Genthon, C., Boudevillain, B., Duran-Alarcon, C., Guasta, M. D., Madeleine, J.-B., and Berne, A.: Measurements of precipitation in Dumont d’Urville, Adélie Land, East Antarctica, 11, 1797–1811, <https://doi.org/10.5194/tc-11-1797-2017>, 2017.

530 Knuth, S. L., Tripoli, G. J., Thom, J. E., and Weidner, G. A.: The Influence of Blowing Snow and Precipitation on Snow Depth Change across the Ross Ice Shelf and Ross Sea Regions of Antarctica, 49, 1306–1321, <https://doi.org/10.1175/2010jame2245.1>, 2010.

Larson, K. M., Gutmann, E. D., Zavorotny, V. U., Braun, J. J., Williams, M. W., and Nievinski, F. G.: Can we measure snow depth with GPS receivers?, 36, L17502-5, <https://doi.org/10.1029/2009gl039430>, 2009.

535 Larson, K. M., Wahr, J., and Munneke, P. K.: Constraints on snow accumulation and firn density in Greenland using GPS receivers, 61, 101–114, <https://doi.org/10.3189/2015jog14j130>, 2015.

Larson, K. M., MacFerrin, M., and Nysten, T.: Brief Communication: Update on the GPS reflection technique for measuring snow accumulation in Greenland, Cryosphere, 14, 1985–1988, <https://doi.org/10.5194/tc-14-1985-2020>, 2020.

540 Lazzara, M. A., Weidner, G. A., Keller, L. M., Thom, J. E., and Cassano, J. J.: ANTARCTIC AUTOMATIC WEATHER STATION PROGRAM 30 Years of Polar Observations, 93, 1519–1537, <https://doi.org/10.1175/bams-d-11-00015.1>, 2012.

545 Lemonnier, F., Madeleine, J.-B., Claud, C., Genthon, C., Durán-Alarcón, C., Palerme, C., Berne, A., Souverijns, N., Lipzig, N. van, Gorodetskaya, I. V., L’Ecuyer, T., and Wood, N.: Evaluation of CloudSat snowfall rate profiles by a comparison with in situ micro-rain radar observations in East Antarctica, Cryosphere, 13, 943–954, <https://doi.org/10.5194/tc-13-943-2019>, 2019.



- Lemonnier, F., Madeleine, J. B., Claud, C., Palerme, C., Genthon, C., L'Ecuyer, T., and Wood, N. B.: CloudSat-Inferred Vertical Structure of Snowfall Over the Antarctic Continent, 125, 1–20, <https://doi.org/10.1029/2019jd031399>, 2020.
- 550
- Lenaerts, J. T. M., Vizcaino, M., Fyke, J., Kampenhout, L. van, and Broeke, M. R. van den: Present-day and future Antarctic ice sheet climate and surface mass balance in the Community Earth System Model, *Clim Dynam*, 47, 1367–1381, <https://doi.org/10.1007/s00382-015-2907-4>, 2016.
- 555
- Lenaerts, J. T. M., Ligtenberg, S. R. M., Medley, B., Berg, W. J. van de, Konrad, H., Nicolas, J. P., Wessem, J. M. van, Trusel, L. D., Mulvaney, R., Tuckwell, R. J., Hogg, A. E., and Thomas, E. R.: Climate and surface mass balance of coastal West Antarctica resolved by regional climate modelling, 59, 29–41, <https://doi.org/10.1017/aog.2017.42>, 2017.
- Ligtenberg, S. R. M., Berg, W. J. van de, Broeke, M. R. van den, Rae, J. G. L., and Meijgaard, E. van: Future surface mass balance of the Antarctic ice sheet and its influence on sea level change, simulated by a regional atmospheric climate model, *Clim Dynam*, 41, 867–884, <https://doi.org/10.1007/s00382-013-1749-1>, 2013.
- 560
- Medley, B. and Thomas, E. R.: Increased snowfall over the Antarctic Ice Sheet mitigated twentieth-century sea-level rise, 34–41, <https://doi.org/10.1038/s41558-018-0356-x>, 2019.
- 565
- Medley, B., Joughin, I., Das, S. B., Steig, E. J., Conway, H., Gogineni, S., Criscitiello, A. S., McConnell, J. R., Smith, B. E., Broeke, M. R. van den, Lenaerts, J. T. M., Bromwich, D. H., and Nicolas, J. P.: Airborne-radar and ice-core observations of annual snow accumulation over Thwaites Glacier, West Antarctica confirm the spatiotemporal variability of global and regional atmospheric models, 40, 3649–3654, <https://doi.org/10.1002/grl.50706>, 2013.
- 570
- Milani, L., Kulie, M. S., Casella, D., Dietrich, S., L'Ecuyer, T. S., Panegrossi, G., Porcù, F., Sanò, P., and Wood, N. B.: CloudSat snowfall estimates over Antarctica and the Southern Ocean: An assessment of independent retrieval methodologies and multi-year snowfall analysis, *Atmos Res*, 213, 121–135, <https://doi.org/10.1016/j.atmosres.2018.05.015>, 2018.
- 575
- Monaghan, A. J., Bromwich, D. H., Powers, J. G., and Manning, K. W.: The Climate of the McMurdo, Antarctica, Region as Represented by One Year of Forecasts from the Antarctic Mesoscale Prediction System*, 18, 1174–1189, <https://doi.org/10.1175/jcli3336.1>, 2005.
- Nicolas, J. P. and Bromwich, D. H.: Precipitation Changes in High Southern Latitudes from Global Reanalyses: A Cautionary Tale, 32, 475–494, <https://doi.org/10.1007/s10712-011-9114-6>, 2011.
- 580



Nitu, R., Roulet, Y.-A., Wolff, M., Earle, M., Reverdin, A., Smith, C., Kochendorger, J., Morin, S., Rasmussen, R., Wong, K., Alastué, J., Arnold, L., Baker, B., Buisán, S., Collado, J. L., Colli, M., Collins, B., Gaydos, A., Hannula, H.-R., Hoover, J., Joe, P., Kontu, A., Laine, T., Lanza, L., Lanzinger, E., Lee, G., Lejeune, Y., Leppänen, L., Mekis, E., Panel, J.-M.,
585 Poikonen, A., Ryu, S., Sabatini, F., Theriault, J., Yang, D., Genthon, C., Heuvel, F. van den, Hirasawa, N., Konishi, H., Motoyoshi, H., Nakai, S., Nishimura, K., Senese, A., and Yamashita, K.: WMO Solid Precipitation Intercomparison Experiment (SPICE) (2012-2015), World Meteorological Organization, Geneva, 2018.

Palermo, C., Kay, J. E., Genthon, C., L'Ecuyer, T., Wood, N. B., and Claud, C.: How much snow falls on the Antarctic ice
590 sheet?, 8, 1577–1587, <https://doi.org/10.5194/tc-8-1577-2014>, 2014.

Palermo, C., Genthon, C., Claud, C., Kay, J. E., Wood, N. B., and L'Ecuyer, T.: Evaluation of current and projected Antarctic precipitation in CMIP5 models, *Clim Dynam*, 48, 225–239, <https://doi.org/10.1007/s00382-016-3071-1>, 2016.

595 Palermo, C., Claud, C., Dufour, A., Genthon, C., Wood, N. B., and L'Ecuyer, T.: Evaluation of Antarctic snowfall in global meteorological reanalyses, 190, 104–112, <https://doi.org/10.1016/j.atmosres.2017.02.015>, 2017.

Palermo, C., Claud, C., Wood, N. B., L'Ecuyer, T., and Genthon, C.: How Does Ground Clutter Affect CloudSat Snowfall Retrievals Over Ice Sheets?, *Ieee Geosci Remote S*, 16, 342–346, <https://doi.org/10.1109/lgrs.2018.2875007>, 2019.

600

Rasmussen, R., Baker, B., Kochendorfer, J., Meyers, T., Landolt, S., Fischer, A. P., Black, J., Thériault, J. M., Kucera, P., Gochis, D., Smith, C., Nitu, R., Hall, M., Ikeda, K., and Gutmann, E.: How Well Are We Measuring Snow: The NOAA/FAA/NCAR Winter Precipitation Test Bed, 93, 811–829, <https://doi.org/10.1175/bams-d-11-00052.1>, 2012.

605 Seefeldt, M.: Precipitation Observations for the Northwest Ross Ice Shelf - 2017-12 to 2019-11, U.S. Antarctic Program (USAP) Data Center, <https://doi.org/10.15784/601441>, 2021.

Siegfried, M. R., Medley, B., Larson, K. M., Fricker, H. A., and Tulaczyk, S.: Snow accumulation variability on a West Antarctic ice stream observed with GPS reflectometry, 2007-2017, 44, 7808–7816, <https://doi.org/10.1002/2017gl074039>,
610 2017.

Tang, M. S. Y., Chenoli, S. N., Colwell, S., Grant, R., Simms, M., Law, J., and Samah, A. A.: Precipitation instruments at Rothera Station, Antarctic Peninsula: a comparative study, *Polar Res*, 37, 1503906, <https://doi.org/10.1080/17518369.2018.1503906>, 2018.

615



Vignon, É., Besic, N., Jullien, N., Gehring, J., and Berne, A.: Microphysics of Snowfall Over Coastal East Antarctica Simulated by Polar WRF and Observed by Radar, *124*, 11452–11476, <https://doi.org/10.1029/2019jd031028>, 2019.

620 Wang, H., Fyke, J. G., Lenaerts, J. T. M., Nusbaumer, J. M., Singh, H., Noone, D., Rasch, P. J., and Zhang, R.: Influence of sea-ice anomalies on Antarctic precipitation using source attribution in the Community Earth System Model, *Cryosphere*, *14*, 429–444, <https://doi.org/10.5194/tc-14-429-2020>, 2020a.

Wang, Y., Hou, S., Ding, M., and Sun, W.: On the performance of twentieth century reanalysis products for Antarctic snow accumulation, *Clim Dynam*, *54*, 435–455, <https://doi.org/10.1007/s00382-019-05008-4>, 2020b.

625