

In-situ observations of the Swiss periglacial environment using GNSS instruments

Alessandro Cicoira^{1,2,3,*}, Samuel Weber^{1,4,5,6,7,*}, Andreas Biri⁴, Ben Buchli⁴, Reynald Delaloye², Reto Da Forno⁴, Isabelle Gärtner-Roer¹, Stephan Gruber⁸, Tonio Gsell⁴, Andreas Hasler⁹, Roman Lim⁴, Philippe Limpach¹⁰, Raphael Mayoraz¹¹, Matthias Meyer⁴, Jeannette Noetzli⁶, Marcia Phillips⁶, Eric Pointner¹², Hugo Raetzo¹³, Cristian Scapozza¹⁴, Tazio Strozzi¹⁵, Lothar Thiele⁴, Andreas Vieli¹, Daniel Vonder Mühll¹⁶, Vanessa Wirz¹, and Jan Beutel¹⁷

¹Department of Geography, University of Zurich, Switzerland

²Department of Geosciences, University of Fribourg, Switzerland

³School of Architecture, Civil and Environmental Engineering, Swiss Federal Institute of Technology, Lausanne, Switzerland

⁴Computer Engineering and Networks Laboratory, ETH Zurich, Switzerland

⁵Chair of Landslide Research, Technical University of Munich, Germany

⁶WSL Institute for Snow and Avalanche Research SLF, Davos, Switzerland

⁷Climate Change, Extremes and Natural Hazards in Alpine Regions Research Center CERC, Davos Dorf, Switzerland

⁸Carleton University, Ottawa, Canada

⁹SensAlpin GmbH, Davos, Switzerland

¹⁰Terradata AG, Zurich, Switzerland

¹¹Ct. Valais, Sion, Switzerland

¹²Rovina und Partner AG, Visp, Switzerland

¹³Federal Office for the Environment FOEN, Ittigen, Switzerland

¹⁴Institute of Earth Sciences, University of Applied Sciences and Arts of Southern Switzerland (SUPSI), Switzerland

¹⁵GAMMA Remote Sensing and Consulting AG, Gümlingen, Switzerland

¹⁶Personalized Health and Related Technologies, ETH Zurich, Switzerland

¹⁷Department of Computer Science, University of Innsbruck, Austria

Correspondence: Alessandro Cicoira (alessandro.cicoira@geo.uzh.ch) and Samuel Weber (samuel.weber@slf.ch)

* Shared first authorship - These authors contributed equally to this work.

Abstract. Monitoring of the periglacial environment is relevant for many disciplines including glaciology, natural hazard management, geomorphology and geodesy. However, geodetic surveys at high-elevation are very challenging due to environmental and logistical reasons. During the past decades, the introduction of low-cost Global Navigation Satellite System (GNSS) technologies has allowed to increase the accuracy and the frequency of the observations. Today, permanent GNSS instruments enable continuous surface displacement observations at millimeter accuracy with a sub-daily resolution.

In this manuscript, we describe decennial time-series of GNSS observables as well as accompanying meteorological data. The observations are located on different periglacial landforms (rock glaciers, landslides, and steep rock walls) at altitudes ranging from 2304 to 4003 m a.s.l. and spread across the Swiss Alps. The primary data products consist of raw GNSS observables in RINEX format, inclinometer and weather station data. Additionally, cleaned and aggregated time-series of the primary data products are provided, including daily GNSS positions derived through two independent processing tool-chains.

The observations documented here extend beyond the dataset presented in the manuscript and are currently continued with the intention of long-term monitoring. An annual update of the dataset, available at <https://doi.org/10.1594/PANGAEA.932761> is planned. With its future continuation, the dataset holds potential for advancing fundamental process understanding and for the development of applied methods in support of e.g., natural hazard management.

1 GNSS Monitoring in high mountain environments

Observations based on permanent in-situ Global Navigation Satellite Systems (GNSS) instruments have been intensively investigated over the past decade in pursuit of a better process understanding of the periglacial environment and its related mass movements (Wirz et al., 2013; Raveland and Deline, 2014; Cicoira et al., 2019b). The advantage of this method for assessing surface displacements over traditional field-surveying and remote sensing techniques is the level of detail that can be obtained at different temporal scales. Today it is possible to monitor at millimeter accuracy with a temporal resolutions of minutes using double difference processing techniques (Teunissen and Montenbruck, 2017) and commodity receiver hardware similar to those found in consumer products, e.g. mobile phones or automotive systems (Paziewski et al., 2021). Depending on the level of detail required, chiefly characterized by the accuracy of coordinate tuples and their temporal resolution is achieved by operating GNSS receiver pairs continuously and subsequently post-processing the observation data derived. While the cost footprint of the required hardware is several orders of magnitude lower than that required for traditional geodetic surveying equipment (Wirz et al., 2013), the power and communication bandwidth required for operating the sensors remotely remain high. However, it has been shown that by selectively duty-cycling receivers and transmitting the GNSS observation data on a low-power wireless sensor network (Buchli et al., 2012), a trade-off between energy/data volumes and the fidelity required can be obtained. In this way, permanent monitoring in near real-time in remote locations, over large timescales and in adverse meteorological conditions becomes possible.

In this manuscript, we document a data set of continuous GNSS observations of 54 positions obtained in the periglacial environment of the Swiss Alps over the past fourteen years in the framework of the X-Sense Project and the PermaSense consortium. PermaSense has been a large interdisciplinary research consortium targeting to custom-design low-cost wireless sensors for the detection and analysis of temporal and spatial variability of high-alpine slope movements (Beutel et al., 2011). In Section 2, we provide a description of the GNSS sensor stations, their technical specifications, an overview of the local geodetic network, and of the data communication system used to collect the data in near real-time. The observation positions are distributed throughout the Swiss Alps and range in elevation from 2304 to 4003 m a.s.l.. The data cover sites with differing geomorphological characteristics including rock glaciers (ice-rich creeping landforms indicating the occurrence of permafrost), permafrost affected landslides, and steep rock-walls. The field sites are presented in Section 3 and in more detail in Appendix A. The primary data of this manuscript are the raw GNSS observables of all GNSS stations, accompanied by two-axis inclinometer measurements as well as weather station data for some of the investigated sites. The published data set contains the complete raw data at full sampling rates of all instruments (primary data set, see Section 4) as well as a selection of derived data products (secondary data set, see Sect. 5). The derived data products are down-sampled and cleaned time series of weather

station and inclinometer data as well as post-processed GNSS daily positions obtained by double difference processing of the GNSS data. In Appendix B, we briefly describe the different research projects that contributed to the consortium, to the development of the sensors, and to the evolution of the field sites monitoring network. The history of the consortium is tightly linked to the success of the method and it can not be illustrated without mentioning its practical applications in the fields of natural hazard management e.g. in the Swiss Permafrost Monitoring Service PERMOS. A tool-set, originally created for the data describing the Matterhorn Hörnligrat field site data (Weber et al., 2019a), allows to (re-)create and independently update (living data process) the data documented in this manuscript. The code, first presented in Weber et al. (2019b), is available at https://git.uibk.ac.at/informatik/neslab/public/permasense/permasense_datamgr. We expect and encourage the use of this data set to further develop processing methods, provide atmospheric (Hurter et al., 2012) and ground-based (Henkel et al., 2018) observations as well as for educational purposes, but we also foresee future research applications in the fields of geomorphology, engineering geology, and natural hazard management.

2 Instrumentation technology and data management

The measurement network consists of distributed GNSS stations that are permanently installed on locations of interest, i.e. on the surface of a land form under investigation. The GNSS sensor system and the fix installations were designed in the framework of the PermaSense Project; both are depicted in Figure 1. In addition a MEMS two-axis inclinometer has been fully integrated in the sensor system. At selected locations, automatic weather stations provide auxiliary ambient data valuable for the analysis of the GNSS observations. In the following paragraphs, we provide a brief description of the different sensors (GNSS, inclinometers, weather stations) as well as the data communication and management infrastructure. All sensor types, including their indicative period of operation, unit system and key characteristics are synthesised in Table 1.

2.1 GNSS sensor instruments

Each location is equipped with a station consisting of an integrated GNSS sensor, a 12V solar power system mounted on and housed inside a fiberglass reinforced tubular mast, and anchored to the underlying rock (see left panel in Fig. 1). The sensor systems consist of an active GNSS antenna a GNSS receiver, a two-axis inclinometer, a data logger and in many cases a low-power wireless transmission system (right in Fig. 1). Typically, the sensor is mounted on top of a rock outcrop or a boulder large enough for a stable positioning (see Sect. 3.3 for more details). Power for all instruments is provided by a standard 12V photovoltaic systems: a solar panel, a charge controller and a 12V Absorbed Glass Mat (AGM) sealed lead-acid battery housed inside a Pelicase. In order to guarantee maximum exposure to solar radiation, to facilitate operation with extended snow cover in winter and protect the instrument, the instrument is mounted inside the top of the fiberglass mast. All wires are routed inside the tubular mast.

At select positions a GNSS sensor system has been installed on stable terrain in order to provide a stable reference for the double-difference GNSS post-processing. These additional positions ensure a shorter baseline than what would be obtained by using the national reference network. Additionally, these reference stations act as the sink of the local Wireless Sensor Network

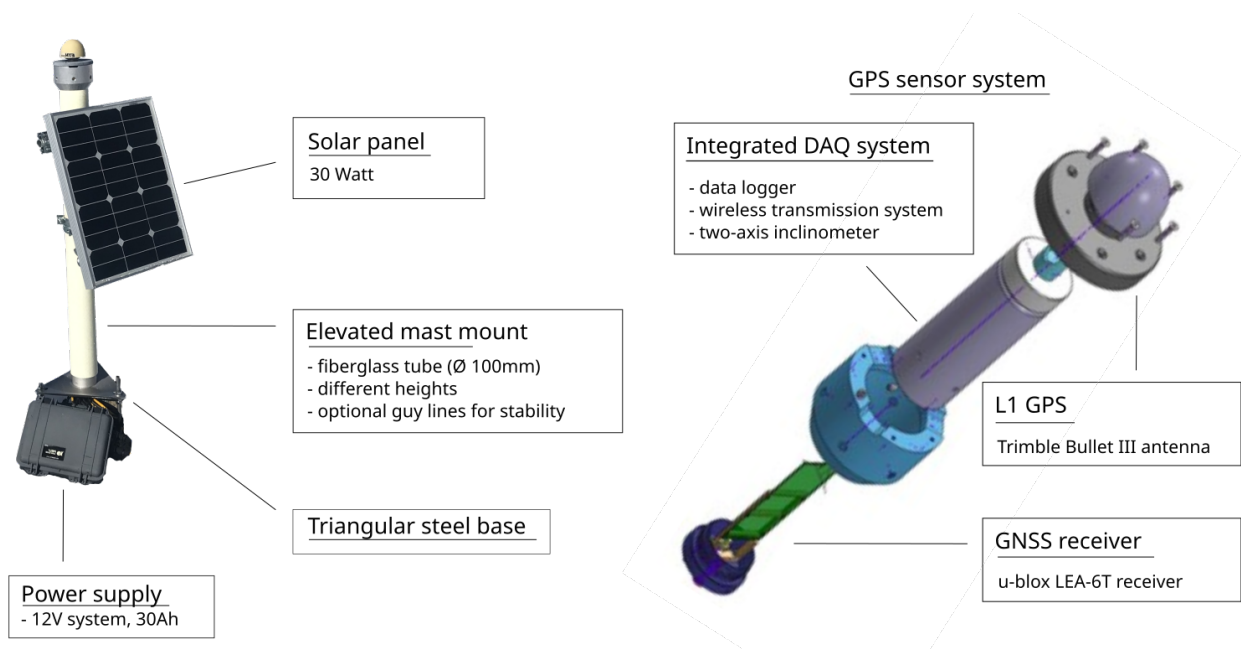


Figure 1. Structure and components of the GNSS sensor system developed in the PermaSense Project. (Left) Structure of the GNSS station. (Right) Detail of the embedded GNSS antenna, data logger, and wireless transmitter.

(WSN) and host the instrumentation for the data collection from all GNSS measurement points. More information are provided in Section 3.2.

The GNSS sensor instruments are based on commodity L1 GNSS receivers with the extended capability to output the raw satellite observables (u-blox LEA-6T) and an active antenna (Trimble Bullet III) (Wirz et al., 2013; Buchli et al., 2012).

80 Furthermore a two-axis inclinometer (Murata SCA830), an ambient temperature/humidity sensor (Sensirion SHT31) and power supervisory circuits are integrated. In order to reduce the necessary power footprint, e.g. at times of reduced solar radiation for energy harvesting, a data acquisition schedule can be set on each device individually. This sampling schedule has hourly granularity and on-windows are typically centered at 12:00:00 UTC to facilitate overlapping time intervals for double difference GNSS processing.

85 A proof-of-concept study in 2010 lead to the development of the first generation of these instruments, which were capable of logging data to internal SD-card storage only (Wirz et al., 2013). This first prototype was subsequently refined into two wireless systems: one focused on experimentation (Beutel et al., 2011), the second being a fully-integrated wireless GNSS sensor system (Buchli et al., 2012). This two-step approach allowed for a fast startup of the project, which was initially independent from infrastructure and network coverage. Over time, most of the sensor locations (initially equipped with data loggers only)

90 have been equipped with wireless data transmission facilitating sensor operation and near real-time data retrieval (see Tables A1–A6). The data availability is visualized in Figure A1.

2.2 Two-axis inclination sensors

Two-axis inclinometers (Murata SCA830) are integrated in the sensor systems that are aligned with a marking on the mast mount. This allows for a direct determination of the rotation along two axes and subsequently to correct the GNSS measurements for the tilt of the mast, i.e. correct for rotational movements, common in the active layer of permafrost landforms (Wirz et al., 2013; Cicoira et al., 2021). Experience has shown that this correction can yield favorable results and provides the coordinates of the mounting point (Wirz et al., 2014a), but in most cases the exact point of rotation still remains unclear because the geometry of the rotating mass (where the station is mounted) is unknown.

2.3 Auxiliary weather instruments

At select locations, a Vaisala WXT520 compact all-in-one weather station has been installed to obtain a more detailed record of local weather data. The measured variables include ambient air temperature, air pressure, relative humidity, wind (speed and direction) and liquid precipitation. At two locations, a four-component net radiometer Kipp & Zonen CNR4 without capabilities for ventilation and heating are installed. The WXT520 is capable of heating the rain and wind sensor but for practical reasons this feature is only enabled when enough power is available which typically corresponds to good weather periods and turned off especially in prolonged bad-weather periods. Both instruments have been vendor calibrated and the respective calibration data are applied in the data conversion procedures as advised by the manufacturer.

2.4 Near-realtime data communication

The locations monitored in the scope of the research and the data presented in this manuscript are located in high-alpine areas, where cellular network coverage is limited or unavailable. Some field sites have been instrumented following a long-term

Table 1. Overview list of the sensors used ordered by sensor type.

Sensor Type	Sensor	Unit	Interval	Accuracy
L1/L2-GNSS;	Leica GRX1200+, AR10/25 antenna	m	30 s	n.a.
L1-GPS;	u-blox LEA-6T, Trimble Bullet III	m	5 s, 30 s	n.a.
Inclination	Murata SCA830-D07 Inclinometer	°	120 s	±30 mg
Air temperature	Vaisala WXT520	°C	120 s	±0.3 °C
Barometric pressure	Vaisala WXT520	hPa	120 s	±1 hPa
Relative humidity	Vaisala WXT520	%RH	120 s	±3 – 5% RH
Wind speed	Vaisala WXT520	km/h	120 s	±3 % at 10 m/s
Wind direction	Vaisala WXT520	°	120 s	±3° at 10 m/s
Precipitation	Vaisala WXT520	mm	120 s	resolution 0.01 mm
Radiation	Kipp & Zonen CNR4	W/m ²	120 s	non-linearity <1 %

110 monitoring strategy, where retrieval of the data once or twice a year is sufficient for the continuation of the time-series and their analysis. However, many of the GNSS stations, especially in the Mattertal, are particularly relevant from a natural hazard perspective and timely data communication is essential for their applicability to management strategies. For this reason, a large effort was put into the design and implementation of a data communication systems in near real-time. A unique solution comprising of a wireless LAN (WLAN) backbone and a fine distribution using a low-power Wireless Sensor Network (WSN) 115 was sought. The topology of the wireless data communication backbone in the Mattertal is illustrated in Figure A6. Using this approach it is possible to reach back into areas in the back of side valleys that are interesting from the monitoring perspective but not covered with regards to connectivity. All locations serviced by the WLAN backbone have Internet Protocol (IP) connectivity facilitating the use of standard sensing equipment. For ease of maintenance, a local WLAN hotspot is also available at these sites for all kind of activities that require an internet connection. In selected locations, standard 3G/4G modems were further 120 implemented as a backup to the network communication system.

Since Wireless LAN equipment serving the communication backbone is energy consuming, the actual sensors are integrated with a custom low-power Wireless Sensor Network (WSN) operating on ISM-band radio transceivers and a specialized communication protocol for data gathering (Beutel et al., 2009). Using a hierarchical system of commodity components for the backbone and a highly optimized and custom network for the fine distribution to spatially separated sensing locations 125 it is possible to operate on a much reduced resource footprint and overlong periods of time and minimising the number of interventions.

2.5 Data management infrastructure

All data collected are organised and stored so that reproducible research and reuse of the data in different contexts and in future projects are possible. The data infrastructure must also allow for flexibility with respect to extensions (e.g. integrating 130 new sensor types), support of different sampling rates, metadata integration and life-cycle management. The data back-end is implemented using a data streaming middle-ware, where a dedicated processing structure called a virtual sensor is responsible for processing a specific data type, e.g., one virtual sensor for temperature measurements and another virtual sensor for GNSS positions. Complete processing chains can be implemented by concatenating virtual sensors either within the same instance of the Global Sensor Network (Aberer et al., 2006) or also across multiple instances of GSN. More details about data processing 135 and storing are given in Weber et al. (2019a).

In order to consistently manage and document with homogeneous metadata the field site and all the sensors, a set of rules has been defined:

- An individual protocol sheet is used for each intervention (field work day) where all noteworthy items are recorded (installation, maintenance, removal).
- 140 ■ Sensor interventions on site take place at different times for each position. To simplify things, the whole day of an intervention is typically assumed to be invalid data.

- All sensor devices are mapped to a distinct position ID. The mapping contains start and finish timestamps, the device ID of the sensor, sensor type and calibration data.
- All data from a specific data source (sensor type) are kept in an individual data structure. Queries are typically made per data type and position ID.
- Detailed circumstances (orientation angles, status of the station) are recorded using auxiliary data formats: text files, Excel files or photographs.

3 Field sites

The data set described can be divided in five main geographical areas. Moving from West to East, they are: the Matterhorn Hörnli Ridge, the main trunk of the Mattertal, and the upper Saas Valley in the Canton of Valais, Stabbio di Largario in Ticino, and the upper Engadin Valley in Canton Graubünden. All of the field sites monitored are located in the periglacial environment or in its proximity. We classify the instrumented landforms in three types: rock glaciers, landslides, and steep rock-walls. In this section, we present an overview of the landform types and of the instrumented field sites. A more detailed description of the investigated landforms accompanied by some scientific references which can be used as a starting point for additional information is given in Appendix A. All the landforms and their type are illustrated in Figure 2 alongside the number of the GNSS sensor installed. An example of a small-scale local geodetic network and the wireless communication geometry are provided in subsection 3.2.

3.1 Landforms

Rock glaciers

Eleven rock glaciers across the Swiss Alps have been instrumented with permanent GNSS sensors. A cluster of five rock glaciers is concentrated in the right orographic side of Matter Valley: Dirru - DI, Distelhorn - DIS, Gugla/Bielzug - BH (positions 10 and 13), Ritigraben - RIT, Steintälli - ST. In the neighbouring Saas Valley, above the village of Saas-Baalen, the rock glaciers Gruben - GRU and Jegi - JAE, host two more GNSS stations. These valleys are rich in rock glaciers, many of which move relatively rapidly, with average displacement rates up to several meters per year (Delaloye et al., 2013; Strozzi et al., 2020).

Some rock glaciers are being monitored under the auspices of the Swiss Permafrost Monitoring Network (Noetzli et al., 2019, kinematics data are available online www.permos.ch). They include the *Ritigraben Rock Glacier* (RIT1), and the *Gruben Rock Glacier* (GRU1) in the Valais, the *Stabbio di Largario Rock Glacier* (LAR1 and LAR2) in Val Blenio, and a second large cluster in the upper Engadine consisting of the rock glaciers Murtèl-Corvatsch (COR1), Muragl (MUA1), and Schafberg (SCH1). The two valleys of Engadine and Mattertal are the driest valley in Switzerland and are characterised by high mountain peaks. For these reasons they host the majority of rock glaciers in the country (Haeberli and Vonder Mühll, 1996). Many of the sites,

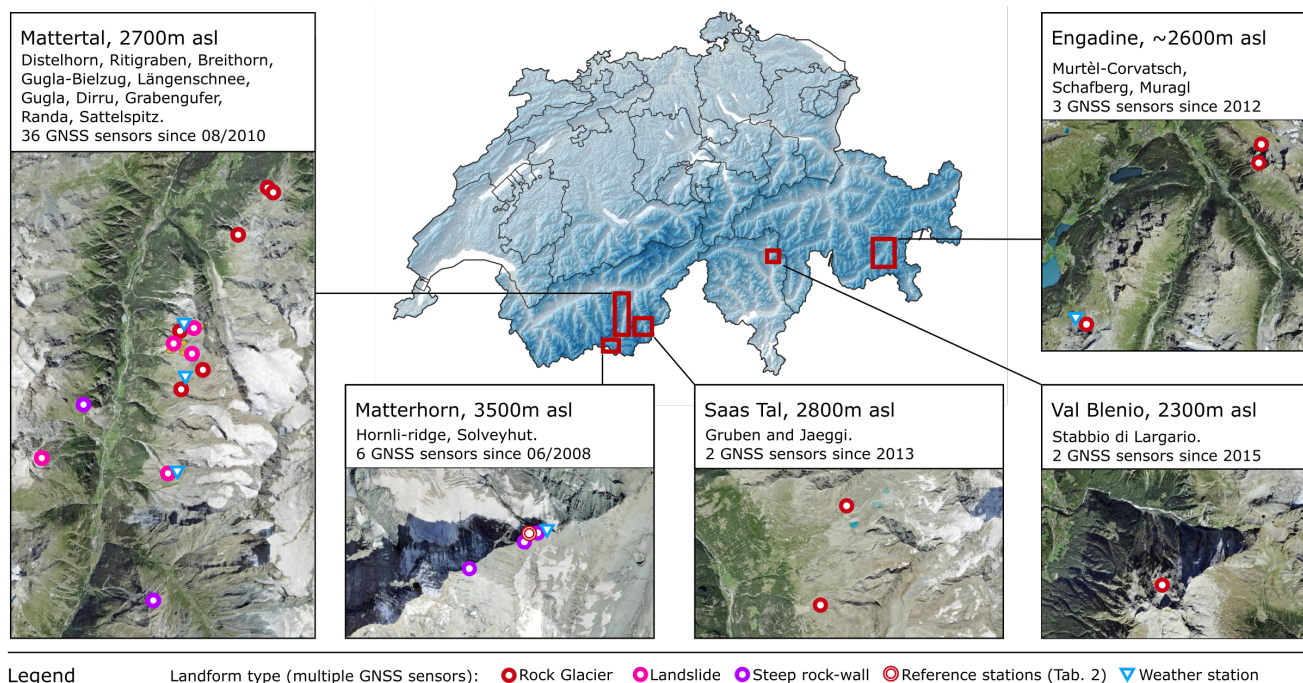


Figure 2. Overview map of the field sites. The field sites are divided in four major geographical and geomorphological areas, for which a panel provides a more detailed sight of the sensor network. Further details can be investigated in the Supplementary material of the manuscript.

especially the PERMOS locations, are also monitored by terrestrial geodetic surveys. The relative data can be obtained from the responsible institutions and from the PERMOS office.

Steep rock-walls

- 175 Three field sites are focusing on steep bedrock. The Matterhorn Hörnligrat - MH, the Randa Grossgufer - RA and the Sattelspitz
- SA north ridge are all located in the Mattertal. All sites are particularly relevant from the perspective of natural hazard
management. The Hörnligrat, despite its remoteness, has an important social and economic component due to all the touristic
activities that take place on the Matterhorn. The Randa Grossgufer is the remaining lip of the large and famous Randa rockslide,
which took place in 1991. The Sattelspitz north-west ridge is a currently accelerating buttress, potentially endangering some
180 constructions and activities in the Täsch-Alp.

Landslides

Five permafrost affected landslides have been instrumented in the Matter valley with goal of monitoring unstable and potentially
dangerous slopes. The south-west flank of the Breithorn - BH, one of the culminating peaks of the Mischabel ridge, the west

flank of the Gugla summit, locally called Längenschnee - LS, the Grabengufer - GG landslide above the village of Randa
 185 and the Wisse Schijen - WYS on the easter flank of the Weisshorn, directly facing it on the other side of the valley. All these
 sites are well known from the local population and the cantonal authorities for a long-lasting history of displacement and in
 some cases for hazardous phenomena. Particularly interesting are the Längenschnee and the Grabengufer Landslides from an
 historical and geomorphological perspective respectively. More details can be found in Appendix A and in Appendix B.

3.2 Local geodetic network

190 The most accurate position data can be computed using differential GNSS processing techniques (see Sec. 5) when correction
 data from a GNSS receiver on a non-moving position is available in close proximity to the rover (short baseline) (Wirz et al.,
 2013; Bu et al., 2021). For the chosen approach using single frequency GNSS receivers a short baseline on the order of hundreds
 of meters to max. a few kilometers is favorable. Furthermore, the non-moving reference position and the rover receiver should
 be situated in the same altitude regime, exhibit similar shading by topographic obstacles (sky view) and need to be operated in
 195 overlapping time windows in order to generate the best results.

Table 2. Local geodetic network: reference stations. RD01 - Reference Dirru 01, RL01 - Reference Längschnee 01, RG01 - Reference
 Grabengufer 01, RAND - Reference Randa, HOGR - Hörnligrat Reference.

Reference	Area	Topographic Feature	Sensor	Period
RD01	next to <i>Dirru Rock Glacier</i>	large bedrock feature	u-blox LEA-6T, Trimble Bullet III	03/2011 - ongoing
RL01	between Längschnee and Breithorn	fractured ridge	u-blox LEA-6T, Trimble Bullet III	08/2011 - 05/2013
RG01	above <i>Grabengufer Rock Glacier</i>	bedrock on ridge	u-blox LEA-6T, Trimble Bullet III	09/2011 - ongoing
RAND	top of Grossgufer	bedrock above rockfall	Leica GRX1200+, AR25 antenna	05/2011 - ongoing
HOGR	Hörnligrat ridge	rock buttress on ridge	Leica GRX1200+, AR10 antenna	12/2010 - ongoing

Based on the aforementioned factors, a set of local reference positions has been defined and equipped with continuously
 operating GNSS receivers as well as high-bandwidth data transmission (see Tab. 2) forming a local geodetic reference network.
 In cases where only few or single observation points have been deployed, stations from the Permanent GNSS network in
 Switzerland (AGNES) serve as reference. Periodic checks against the national GNSS network have shown that all but two
 200 (Längschnee/RL01 and Hörnligrat/HOGR) reference locations are stable and do not exhibit local movements (see Fig. A2).
 The station RL01 was abandoned after the discovery that contrary to the assumptions made at an initial site survey, the ridge
 where it is located is actually moving at a rate of a few centimeters per year. The reference station HOGR represents a special
 case, as it is located on a moving buttress on the Matterhorn Hörnligrat Ridge. In this case however, due to the extreme nature
 of the environment in which the station is installed, no stable terrain at the same elevation is available. Therefore the reference
 205 position is maintained, but the observations have to be corrected for the movement of the reference position before further
 analysis as explained in more detail in Weber et al. (2019a).

3.3 Field site selection and prerequisites for in-situ GNSS sensor installation

The variety of the field sites presented in this manuscript is the result of the historical development of the PermaSense project (a short summary is given in Appendix B). The multitude of measuring points and field sites presented embodies the variety of applications that the project have served over time. Natural hazard management applications are often very well constrained in the selection of the site and the single location of the measurement positions, as these are the relevant ones from the hazard perspective. On the other hand, long-term climatic monitoring requires more thorough thinking and preliminary investigations to select the best suited field sites first and then the single measurement points. It is important to note that the measurements provide a detailed description of the kinematic behaviour of surface boulder, which are only a proxy of deep seated geomorphological processes. The results have to be evaluated with care and expert knowledge, see e.g., Cicoira et al. (2021) for the components of rock glacier velocities. In this paragraph, we provide a brief overview of three guiding criteria (technical and geomorphological) that all the GNSS positions have to respect.

Within the PermaSense project, the installation of an in-situ GNSS sensor on an observation point had to comply with minimum technical and geomorphological requirements, which can be more or less easy met depending on the field site:

- i From a technical perspective, good visibility to the horizon in direction of the equator (southern sky when working on the northern hemisphere) is required both for good and persistent satellite visibility as well as for maximum solar radiation for power generation (see Fig. 3). Where different positions are equivalent with regard to the other criteria, the technical feasibility of the measurements can be used as a discriminant for a decision. In case of abundant snow cover or large periods without sunlight, a tall mast and conservative power set-ups are critical.
- ii From a geomorphological perspective, the chosen point must be representative of the investigated process. As explained in Wirz et al. (2014b) and later in Cicoira et al. (2021), the velocity measured at the surface of a periglacial land form is typically the result of three super-imposed signals. On bedrock, the representatives of the selected point is directly connected with the structural geology of the site, making the selection less prone to personal interpretation. In order to minimise the noise due to stochastic movement within the active layer and at the terrain surface, it is favourable to choose large boulders well embedded in the active layer (with two metaphors: a stable boat in water or a tooth with a deep root, see Figure3). The additional two-axis inclination measurements allow to retrieve critical information about the three-dimensional nature of the roto-translation of the surveyed point (not known a priori) and with the use of proper post-processing analysis, reduce the relative error associated in the measurements (Wirz et al., 2014a).
- iii The longevity of the measuring point must be anticipated prior to installing the GNSS station. In extreme cases with blocks sliding on the surface or strongly rotating above the surface, it may be required to re-level the GNSS instrument back to vertical after some time (see Fig. A7 left). Finally, it may happen that a station is severely damaged or destroyed, e.g., by a rockfall (see Fig. A7 right) or a snow avalanche. In this case, the position has to be replaced. A location as close as possible and with similar characteristics has to be chosen in order to minimise the influence of spatial variability and guarantee (as much as possible in this unwanted condition) data homogeneity and the continuation of the time series.

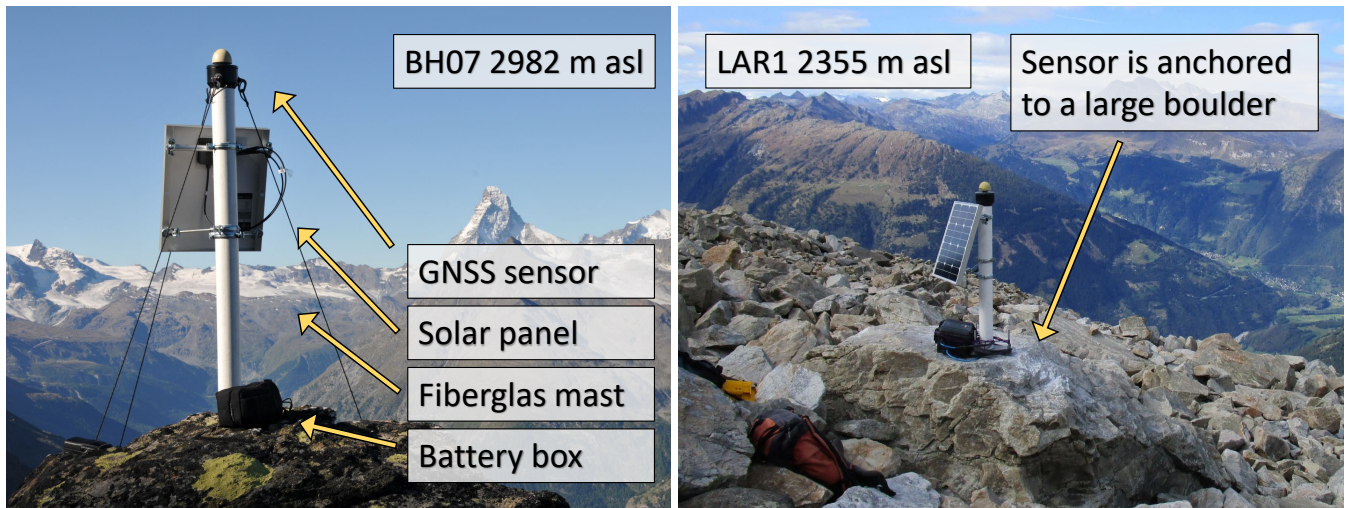


Figure 3. Two GNSS stations mounted atop large boulders on the Breithorn landslide 2982 m a.s.l., Herbruggen (left) and on the *Largario Rock Glacier* 2355 m a.s.l., Val di Blenio (right) illustrate how a field deployment including all sensor set-up and anchoring appears.

240 4 Primary data products

In this section, we present the primary data products provided within the scope of this manuscript. The primary data products are the raw files as provided by the sensors. They comprise GNSS observables in the form of compressed RINEX files, as well as inclinometer, and weather station data (CSV files). Technical specifications about the sensors are given in Section 2 and in Table 1. More comprehensive information about the data availability, operation window of all sensors, their instrumentation and additional plots are given in appendix. Tables A1–A6 provide a detailed list of all GNSS and automatic weather stations, along with some basic information about them. On the very left, the label of the station is indicated. Right after, we indicate the period of operation, from the date of deployment to the end-date of the operations or an indication if currently ongoing. Next, the name of the reference station (as in Tab. 2) used for the double-difference GNSS processing is given. Additionally to these basic information, the field "online data" allows to identify all the sensors that are currently connected with the online data management infrastructure via the near-realtime WSN (see Sec. 2.4 for more details). Under the field "location", the coordinates of the station at the time of deployment are indicated in the EPSG:2056 - Swiss CH1903+ / LV95 coordinate system. The current coordinates are available in the dataset. Finally, two fields are used to illustrate the sensors installed at each station. We distinguish between kinematics for all GNSS stations, including optional inclinometers, and automatic weather stations. A more detailed overview of the data availability for all sensors is given in Figure A1, where all operating periods, data gaps and discontinued sensors are visualized.

The sensor labels are given due to historical reasons and follow a geographical and chronological order. Each sensor is given a four letter alphanumeric label, with two or three letters indicating the field site (as illustrated in Sec. 3) and the number identifying a given sensor on a field site. The labelling of the data files consists of this four alphanumeric char-

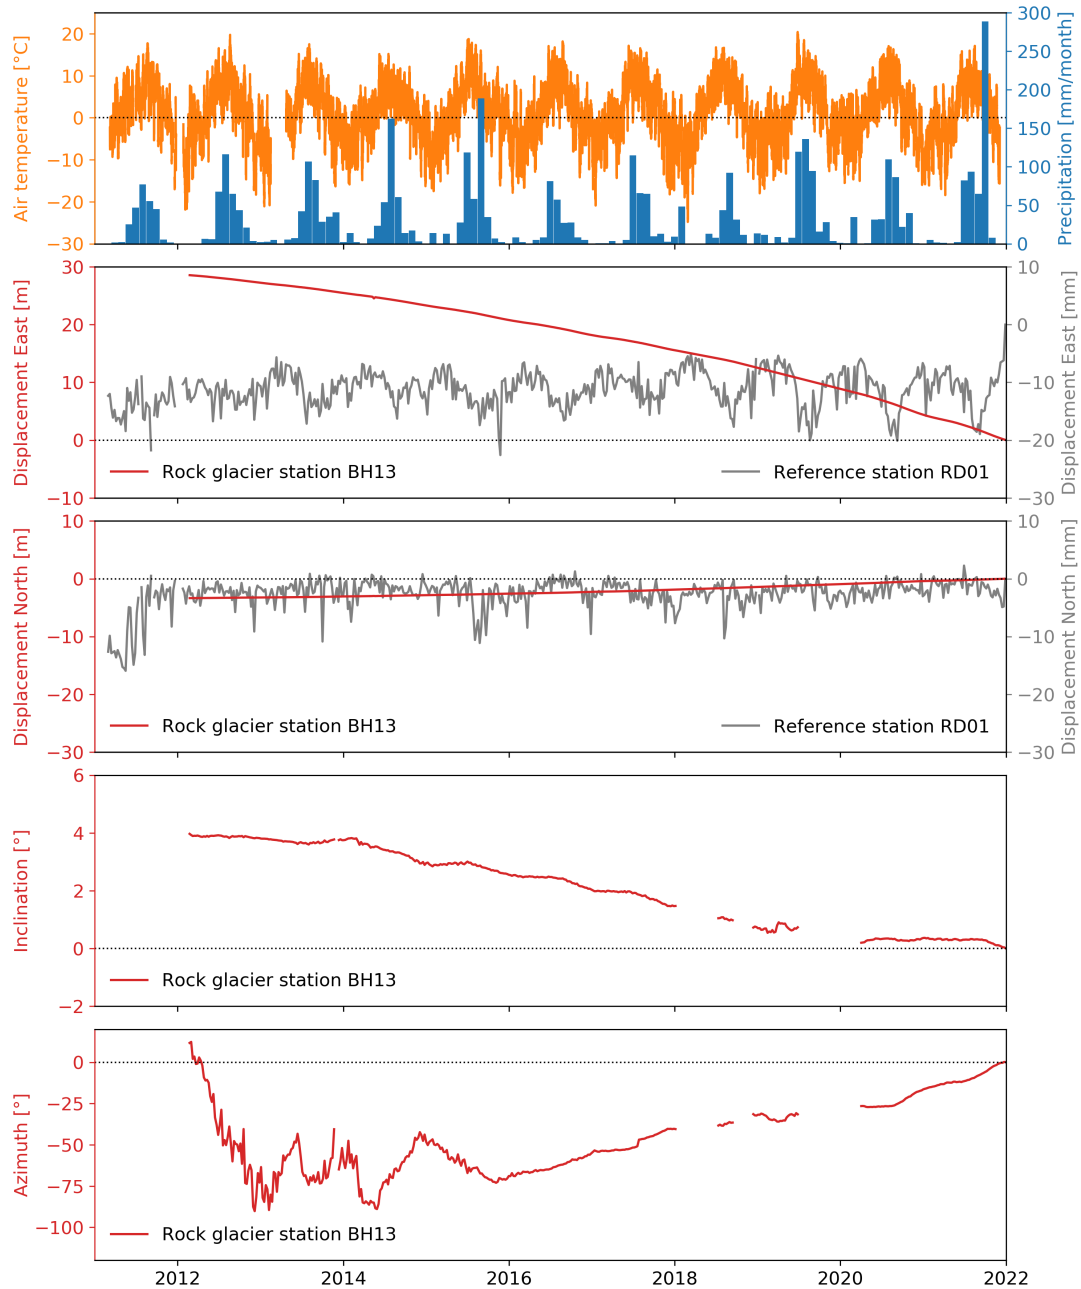


Figure 4. A decade of air temperature and precipitation from weather station DH13, as well as displacement, inclination and azimuth for *Gugla Bielzug Rock Glacier* (position BH13) and displacements for reference station RD01.

acters label prefixing a string for the sensor type, and a string indicating the time period of the measurements included in
260 the file: e.g. BH10_gps_inclinometer_2018.csv contains GPS inclinometer data for the year 2018 for the position
Breithorn 10. More information on the structure of the data repository is provided in Section 6 and Table 3.

4.1 GNSS raw observation data

The key primary data product of this manuscript are raw GNSS observables. The raw observables are provided in the form of
industry standard daily RINEX 2.11 files for each station presented. They include carrier phase measurements, pseudo-range
265 values as well as Doppler shift and raw signal strength. Furthermore, the two positions RAND and HOGH equipped with a
reference grade L1/L2 GNSS receiver and used as reference stations, contain both GPS and GLONASS observation data. For
both receiver types employed, signals are tracked at an interval of 30 s with the exception of the L1-GPS reference stations
that were changed from 30 s to 5 s mid through the project. By using a higher sampling rate, a very large amount of data is
obtained, but the approach allows for more flexible analysis, especially for the exploration of real-time kinematic applications.
270 As explained in Section 2.4, the GNSS rovers employed (Wirz et al., 2013; Buchli et al., 2012) are not continuously sampling
data at the given rate. In order to reduce energy consumption, the data generation duration can be configured based on a
user-defined daily schedule. The schedule is defined using hourly granularity with a minimum of one on-hour per day.

4.2 Inclinometer data

Almost all L1-GPS sensors are equipped with an integrated two-axis inclinometer based on a MEMS component (Murata
275 SCA830-D07). An example of the inclinometer data for station BH13 is given in Figure 4. These are sampled at 2 min intervals
during periods at which the GNSS sensor is running. The schedule for the inclinometer data acquisition is the same as for the
GNSS sensor. Data are provided in CSV files. The data can be used to constrain the rotational movement of the sensor around a
center of rotation, which in principle is not known. Wirz et al. (2014b) provided a framework to use this information to correct
the position measurement on the ground for the component of the rotation between the anchor and the sensor (given by the
280 mast height). For some applications (e.g. Leinauer et al., 2022, under review), the inclinometer data have been proven to be a
valuable proxy of more expensive position/displacement measurements.

4.3 Weather station data

The Dirruhorm and the Matterhorn sites are instrumented with automatic weather stations. The data comprise ambient air tem-
perature, air pressure, relative humidity, wind (speed and direction) and precipitation as well as four-component net radiation.
285 The time series for the Dirruhorm field site is given in Figure 4. The raw weather station data sampled at 2 min intervals is
provided in the form of CSV files.

5 Derived data products: GNSS processing, cleaning and aggregation

In order to favour direct usage of the data presented in this manuscript, we provide derived data products derived from post-processing of the raw sampled data presented above. This process consists of three main steps: data transformations, cleaning, and aggregation. The only transformation needed for the presented dataset is from the raw GNSS observables to daily positions; more details are discussed in the next subsection. In the second step, artifacts that have been identified manually or are known a-priori from the metadata (e.g., due to field interventions) are corrected in the data cleaning step. Cleaning operations available are to delete, offset or replace single or multiple data points. Finally, for all data, aggregates are computed. For inclinometer and weather data the aggregates are given in hourly values. Different aggregation functions are used. In most cases, the *arithmetic mean* is applied. For the cumulative precipitation, we used *sum*. Peak rain intensity is obtained with the *maximum*. From the GNSS data, the daily positions are calculated with the GNSS processing routine. The aggregation function in the toolchain can further provide aggregation over longer time periods, e.g., to weekly, monthly, or yearly values. In the following, we provide a brief explanation of the methods used, which represent operational best-practices emerged from the context of the PermaSense project. A more detailed description of the processing steps and the related algorithm (also provided in the manuscript) is given in Appendix.

5.1 GNSS processing

The main data transformation step performed within this manuscript is the transformation from the raw primary GNSS data to calculate daily static GNSS positions using double-difference GNSS post-processing. Double-difference GNSS processing (Teunissen and Montenbruck, 2017) is based on data obtained in a common observation interval from a station pair. The workflow is illustrated in Figure 5. Positions for the so-called “rover” station can be calculated with high precision under the assumption that the “reference” station location is quasi-stationary and that observations from both stations are subject to similar perturbations. Care should be taken that the baseline distance between any station pair is short, the field of view to the satellites (horizon) is similar and that a station pair be located in the same altitude regime. The main quality indicators of the input data (GNSS observables) are the number of visible satellites, the signal-to-noise ratio and the observation duration. For the derived data products, the ratio of fixed ambiguities as well as the standard deviations per coordinate axis are key quality indicators. Double-difference processing achieves best accuracy when utilizing the precision final GNSS data products from the International GNSS Service (IGS) although other GNSS data products can be used as well, e.g. if near-realtime solutions are required for practical applications in e.g., landslide monitoring procedures. The GNSS processing flow employed uses two different post-processing tool chains, namely the Bernese GNSS Software (Dach et al., 2015) and the open-source RTKLIB toolchain¹.

The post processing with RTKLIB starts from the daily observation files, which are compiled from the online database as one file per day per position. To constitute a baseline pair between a rover position and a reference station, in most cases we use a sensor from the local geodetic network. Differently, we use reference positions from the permanent GNSS network in

¹<http://www.rtklib.com>

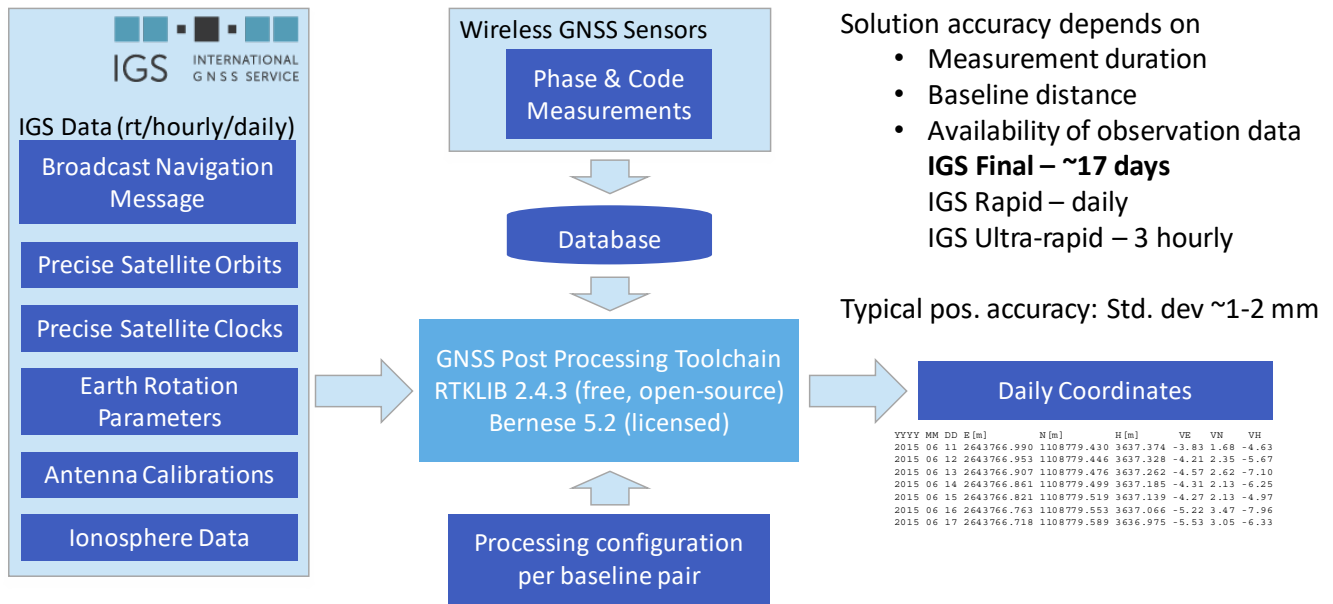


Figure 5. Typical GNSS post-processing workflow using the Bernese GNSS Software or RTKLIB.

Switzerland (AGNES) for determining the coordinates of the reference stations and in cases when the baseline distance is too high for the calculation of accurate positions. All rover-reference pairs are indicated in Tables A1–A6. Then a coordinates are calculated. In a final step, the daily coordinates are re-projected from the WGS84 to Swiss national coordinate system by using the online REFRAME conversion service (REST API) by swisstopo. The geodetic datum of all daily position data is EPSG:2056 - Swiss CH1903+ / LV95 coordinate system with the reference frame Bessel (ellipsoidal). After post-processing the derived data is uploaded again to the PermaSense database for convenient online data access. A custom developed set of wrapper scripts to be used with RTKLIB is described in Appendix D.

The processing using the Bernese GNSS software is a similar process and follows the same steps presented in Figure 5. However, further details on this tool are omitted due to its license-only availability. Because the two processing tools use different algorithms and parameter sets, the output data can show differences. Most noticeably, due to different parameter threshold settings, it may happen that a daily computed position is available for a given tool, but not for the other. Given the long-term nature of the observations these often spurious missing values can be safely interpolated in a further processing step if deemed necessary by the application.

5.2 Data cleaning and aggregation

A generic tool-chain to access, compile, clean, aggregate and validate both primary as well as derived data from the online PermaSense database has been developed by Weber et al. (2018a) and is available at <https://git.uibk.ac.at/informatik/neslab/>

public/permasense/permasense_datamgr. This tool allows to query the database based on location and sensor type/data type, compile raw CSV files, apply metadata, data cleaning and correction functions, aggregate time-series data to pre-selectable aggregation intervals and produce intuitive validation plots. The data cleaning and correction step allows to delete outliers based on time intervals or value thresholds as well as perform simple mathematical corrections, e.g. to apply a constant factor or an offset for a given interval. Using this latter feature allows to correct artifacts introduced during site maintenance, e.g. from changing sensor equipment or from re-levelling a GNSS mast that is required when the tilt angle changes very much. An example for such a correction is shown in Figure 6 for the north component of the inclinometer data of station BH10 that is located on the very active tongue of the *Gugla/Bielzug Rock Glacier*. Additionally, outliers from days with sensor device changes are removed using the `del` operation and offsets due to differences between two sensor devices are corrected using the `offset` operation. The original data (with a number of artifacts) is plotted in orange, while the cleaned data is shown in green and the aggregated data over 1400 minutes (daily values) is shown in red in Figure 6. A quick tutorial for this tool is given in C.

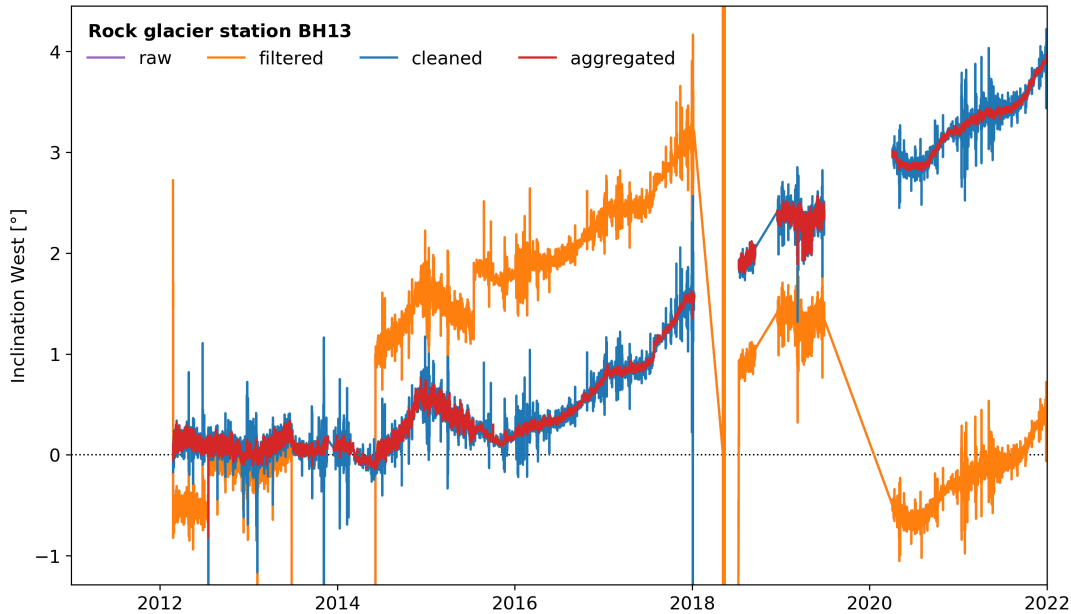


Figure 6. Data cleaning example: Inclinometer West component time series data for location BH13 on the *Gugla Bielzug Rock Glacier* has severe outliers and jumps in the raw data that can be removed, compensated for and aggregated to smooth time series using the PermaSense Data Manager.

5.2.1 GNSS daily positions and displacements

All GNSS derived daily positions are converted to relative coordinates starting with a zero value at the start of the measurement period and have undergone a rudimentary data cleaning step: outliers and jumps pertaining from device changes on field

350 service days have been removed. All cleaned daily files showing displacements from beginning are available in the folder `gnss_derived_data_products`. Such cleaned time series easily enables to visualize and compare the displacement rates measured at the several locations and to distinguish different patterns linked to landforms (see Fig. 7).

5.2.2 Inclinometer data

Similarly, the raw data from inclinometer and weather station sensors are available at 2 min sampling intervals. As described
355 based on the example of the *Gugla/Bielzug Rock Glacier* earlier (see Sec. C) all time series data from inclinometer and weather station are cleaned, offset-compensated and aggregated to hourly data products. All of these data files are available in the folder `timeseries_derived_data_products`.

5.3 Standardized analysis plots

For each position a number of standardized graphs are generated (see Fig. A3, Fig. A4 and Fig. A5). These plots are available
360 for all derived data products in the folder `timeseries_sanity_plots` of the data repository and also as supplement to this manuscript.

6 Code and data availability

The data set published with this manuscript contains data from March 01, 2011 until December 31, 2021. An overview of the structure, file types and size of the data sets, for both the raw primary data and derived data products, is given in Table 3.
365 Furthermore, the data set also contains the key metadata files for the field sites. Annual updates of this data set are planned (living data process). Using the toolset described in Appendix C and using the online repository at <http://data.permasense.ch> (see Weber et al., 2019a, for details), the data user can also create custom updates of the data set independently. Furthermore, a set of wrapper scripts for GNSS post-processing using the open-source RTKLIB toolchain (<http://www.rtklib.com>) are described in Appendix D. This tool-chain allows to compute the differential GNSS daily positions both from the RINEX files contained
370 in this dataset as well as from the online data from the PermaSense database.

The data sets as well as the toolset (code) for preparing, processing, validating and updating the data contained in this publication are available through the following providers and data links:

- Data set
10.1594/PANGAEA.932761

375 The code for processing the data in this publication is available in:

- https://git.uibk.ac.at/informatik/neslab/public/permasense/permasense_datamgr
- https://git.uibk.ac.at/informatik/neslab/public/permasense/rtklib_processing

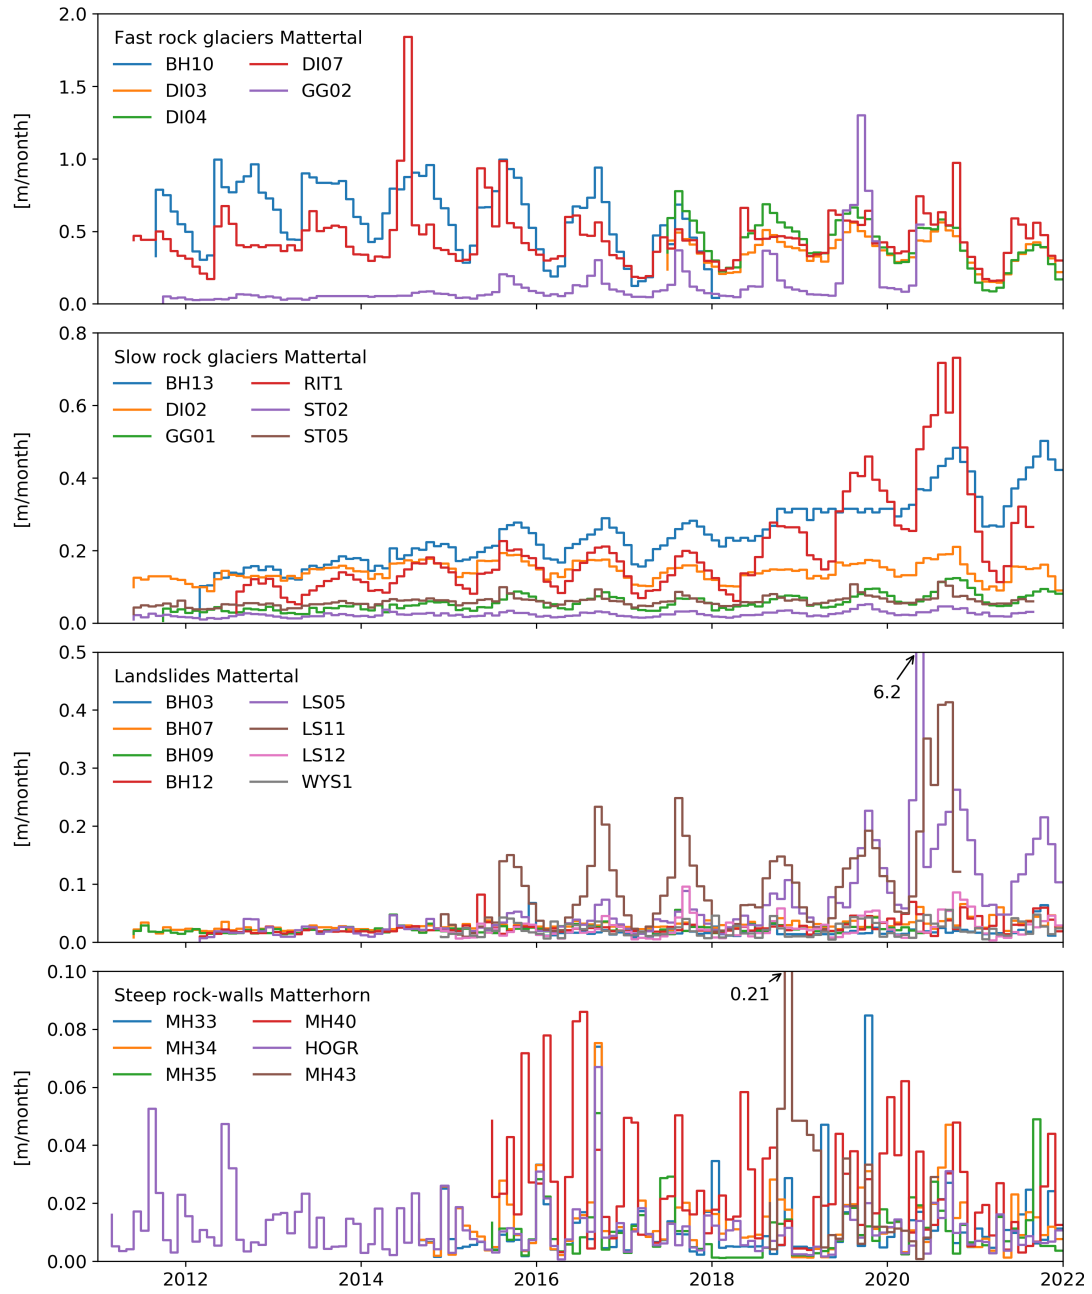


Figure 7. Time series of all GNSS positions presented in this manuscript, classified by landform type and range of displacement rates. The outlier in the Landslides Mattertal (LS05, Summer 2020) was due to a superficial roto-translatory movement of the boulder on which the sensor was placed, as confirmed by a 24° rotation visible in the inclinometer data.

Table 3. Structure, description, formats and sizes of the data set components.

File	Data Description	Format	# Data Points	# Files	Size
gnss_data_raw.zip	raw daily position data	csv	231'136	885	61.3 MB
gnss_data_raw_observables.zip	GNSS raw observations	RINEX 2.11	199'551'511	126'395	38.1 GB
timeseries_data_raw.zip	raw primary sensor data	csv	60'622'944	472	10.4 GB
gnss_derived_data_products.zip	daily position data	csv	229'669 ²	774	23 MB
timeseries_derived_data_products.zip	sensor data after cleaning/aggregation	csv	3'290'599	416	161.3 MB
timeseries_sanity_plots.zip	standard plots for all data	png	-	694	174.1 MB
dirruhorn_nodepositions.xlsx	general metadata file	xlsx	-	1	98 kB
matterhorn_nodepositions.xlsx	general metadata file	xlsx	-	1	58 kB
permos_nodepositions.xlsx	general metadata file	xlsx	-	1	37 kB
README.md	-	md	-	1	4 kB
Total	-	-	263'925'859	129'636	48.9 GB

7 Conclusions and outlook

This manuscript documents the data resulting from a multi field-site monitoring effort using in-situ GNSS sensors on different
380 landforms in the Swiss Alps. This dataset constitutes one of the largest and highest fidelity dataset documenting mass movement
by means of permanent ground measurement points, a method that has been developed and put into practice by the authors. The
data is obtained mainly at mass movement sites in the periglacial field with a few placements at lower altitudes at or beyond
the fringe of permafrost. Most of these sites are subject to further investigations using a multitude of methods, e.g. terrestrial
surveys, seismic, time-lapse photography, UAV surveys, InSAR. A basic overview of these field sites, methods employed and
385 data available are documented. As such, this dataset provides an important step for future work and development of novel
methods, further process understanding and help mitigate natural hazards as well as adaptation strategies. The method and
data presented here are currently in discussion through stakeholders at the International Permafrost Association (IPA) and the
Global Terrestrial Network on Permafrost (GTN-P) to establish kinematic observations of the cryosphere as a further Essential
Climate Variable (ECV) within the worldwide climate-monitoring program (GCOS/GTOS).

A1 Rock glaciers

The Dirru Rock Glacier (DI) is a well studied landform for his peculiar kinematic behaviour (Delaloye et al., 2010). Continuous kinematic measurements are available since 2011 for three positions on the upper part and the first steep flank of the rock glacier. In year 2018 two more positions were instrumented on the fast moving tongue, with the goal of creating
 395 a spatially resolved network for the analysis of the spatial variability of rock glacier velocities at a daily scale (Cicoira et al., 2019b, 2021).

The Distelhorn Rock Glacier (DIS) is the northernmost rock glacier of the Mattertal cluster. It is located on the western flank of the Distelhorn, above the municipality of Grächen in Mattertal. The two instrumented GNSS positions are located on two fronts. The upper one (at 2500 m a.s.l.) shows a bulgy morphology, while the lower one (at 2420 m a.s.l.) is more
 400 distinct. Access to the rock glacier is facilitated by the presence of nearby ski slopes.

The Gruben Rock Glacier (GRU) and Jegi Rock Glacier (JAE) are located in the adjacent Saas Valley, near Saas Grund, (Switzerland). They are among the first rock glaciers investigated in Switzerland (Haeberli et al., 1979; Haeberli, 1996, 1985; Haeberli and Schmid, 1988).

The Gugla/Bielzug Rock Glacier (BH 10/13) is situated towards the north above the village of Herbriggen between the peaks
 405 of the Gugla and Breithorn. The frontal part of the rock glacier opens up into a very steep gully with frequent and high-volume discharge of loose material. The *Gugla/Bielzug Rock Glacier* and Bielzug debris flow are a serious hazard source in the area. Significant efforts have been undertaken to (i) study the details and (ii) implement protective measures for the safety of the valley habitat and infrastructure. Specifically a debris catchment, several damming structures and an early warning system using geophones has been implemented (Kummert et al., 2018a; Kummert and Delaloye, 2018;
 410 Kummert et al., 2018b; Wirz et al., 2014b; Guillemot et al., 2021; Oggier et al., 2016).

The Jaegi Rock Glacier (JAE) consists of two overriding fronts at around 2550 m a.s.l.. The rock glacier has shown signs of destabilization since the 1950s (Ghirlanda et al., 2016). Currently, the upper lobe – between 2670 and 2550 m a.s.l. - has to be considered destabilized, with large displacement rates and geomorphological signs of degradation. The GNSS position is located close to this fast moving front.

The Stabbio di Largario Rock Glacier (LAR) is located in the Adula/Rheinwaldhorn massif and therefore ads to the monitoring concept in a different weather zone (Scapozza et al., 2014). This rock glacier is known as an important source of debris reworked by debris flow descending the Soi Valley, and causing in the past several damages at the village of Dangio-Torre and destroying, the 28/29 August 1908, the chocolate plant located at the confluence of Soi Valley into the Blenio Valley.

The Muragl Rock Glacier (MUR) is located in the homonym valley in the municipality of Samedan (Switzerland). The rock glacier has been investigated already twenty years ago in some of the first detailed photogrammetric studies from aerial

and satellite imagery in the periglacial environment (Kääb et al., 1997; Kaeaeb et al., 1998). On site, one fixed GNSS sensor is located a few hundred meters up from the PERMOS borehole (Cicoira et al., 2019a).

425 **The Murtèl-Corvatsch Rock Glacier (COR)** is one of the first rock glaciers to be intensively studied worldwide. Its displacement rates are one to two orders of magnitude smaller than most other rock glaciers presented in this dataset. It hosts the longest time series of permafrost temperatures in an alpine rock glacier, dating back to 1987 (Vonder Mühll and Haeberli, 1990; Hoelzle et al., 2002). In the same years, also vertical inclinometer profiles were measured manually, providing a unique dataset. Recent detailed process oriented studies are based on the dataset presented (Cicoira et al., 2019a, 2021).

430 **The Ritigraben Rock Glacier (RI)** is a well studied landform in the vicinity of the ski slopes of Grächen (Switzerland). In addition to the kinematics data, borehole temperatures and inclinometers data are available (Kenner et al., 2017, 2018; Cicoira et al., 2019a).

435 **The Schafberg Rock Glacier (SCH)** is located above the municipality of Pontresina (Switzerland). The rock glacier delivers debris to steep slopes prone to snow avalanches and debris flows, that endanger the infrastructure and the village in the valley bottom. Therefore, it has been object of investigations from this and other projects related to natural hazards. The kinematics measurements are complemented by borehole temperatures and past inclinometer profile measurements (Arenson et al., 2002), available through PERMOS. Detailed studies about rock glacier dynamics have investigated this well monitored site (Cicoira et al., 2019a; Kenner et al., 2020).

440 **The Steintälli Rock Glacier (ST)** is located a few hundred meters higher in the same catchment as the *Dirru Rock Glacier*. It is not directly connected to the valley bottom and is characterized by gentler slope gradients in comparison to the other rock glaciers in the valley. However it carries two exemplary steep frontal zones above which the two GNSS sensors are positioned. The creep rates and the seasonal variability of this rock glacier are less pronounced and are more related to the general patterns observed in the Alps rather than its steeper neighbours in the Matter Valley (Noetzli et al., 2019).

A2 Steep rock-walls

445 **The Mattehorn Hörnli ridge (MH)** is the East ridge of the Matterhorn. The measurements are mainly clustered in and around a prominent high-alpine rockfall (at a elevation of about 3500 m a.s.l.) that took place in year 2003 (Hasler et al., 2008, 2011, 2012). The highest position at this site and in the entire dataset is located at the Solvey Hut at 4003 m a.s.l.. Apart from the thermal and kinematic measurements documented in Weber et al. (2019a) recent years have also seen experimentation with seismic sensors (Weber et al., 2018c, b).

450 **The Randa Grossguger (RA)** is a $30 \times 10^6 \text{ m}^3$ rockslide site on the orographic left side of the Matter Valley just opposite from the *Dirru Rock Glacier*. It has been thoroughly investigated by numerous researchers (Willenberg et al., 2008b, a; Gischig et al., 2011b; Fäh et al., 2012-12; Gischig et al., 2011a; Moore et al., 2011; Burjáněk et al., 2010; Eberhardt et al., 2004). Monitoring activity has increased in the past years with one GNSS reference and 3x GNSS sensor rovers situated at the lip of the detachment.

455 **The Sattelspitz buttress SA** is a minor buttress on the west ridge above Täsch (Switzerland). Due to slope instabilities and hazard potential for the fresh water supply of the village of Täsch a kinematic monitoring has been set up at this site. A fix GNSS sensor has been installed on top of a rock tower that is currently showing the largest displacement rates on the rock face. The data have not been analysed in a scientific publication.

A3 Landslides

460 **The Breithorn Landslide (BH)** is a landslide situated on the South-West slope of the Breithorn summit (). It is located in close proximity, a few hundreds of meters north, of the *Gugla/Bielzug Rock Glacier*, which holds the same label. Positions 3,7,9,12, and 68 are/were located on the landslide. Positions 10 and 13 are located on the rock glacier (see below).

465 **The Längenschnee (LS) and Gugla (GU) Landslides** can be found one ridge line further south in the valley. This area features a large, relict landslide that surged at least once in 1959 when the village of Herbriggen was evacuated for a number of days in mid-winter³. The lower parts of the slopes leading down from the Gugla are known as Längschnee, a sediment and debris rich area characterized by sharp steepening drop leading into the valley and towering above the village of Herbriggen. Here, the downslope movement of the whole area poses a significant and real risk for the habitat in the valley. Important countermeasures apart from observation and monitoring have been recently undertaken, e.g. a protective dam is currently being constructed and a large boulder (Grosse Stei) in the area of Längschnee has been fixed by anchoring and concrete under-filling. This boulder is monitored since 2018 using a GNSS sensor (position LS11).

470 **The Grabengufer Landslide (GG)** is a complex landform comprising of a landslide (sagging) originating at approx. 2800 m a.s.l. as well as a very fast moving rock glacier releasing its debris into a hazardous debris flow ending just north of the village of Randa (Delaloye et al., 2013). It has seen mitigation measures for many decades with the earliest on record dating back to 1945 where a protective wall was constructed to fence off a lateral part of the moving rock glacier in the area of the "Grüne Garten" above the village of Randa⁴.

475 **The Wisse Schijen Landslide (WYS)** is situated on the orographic left side of the Matter Valley at around 3100 m, to the West of Randa. A large landslide is affecting the top of the permafrost slope equipped with avalanche protection structures (8 rows of snow nets). These nets retain snow in the Wisse Schijen avalanche release area and protect numerous rows of steel snow bridges below. A GNSS sensor is situated in the centre of the landslide to monitor slope displacements in parallel to borehole inclinometer measurements.

480 Appendix B: Project context and history

X-Sense, the initial project, conducted from 2010 to 2013, focused on a study area on the orographic right side of the Matter Valley above the municipalities of Randa and Herbriggen (Switzerland). This area is dominantly situated in permafrost, exhibits

³Geologisches Gutachten, Dr. R.U. Winterhalter, Zurich, 1959, personal communication R. Allmendinger, Herbriggen, various news reports from 1959.

⁴Protocol of the Swiss Federal Council, February 15, 1945.

several features (Wirz et al., 2013) (see Fig. 2) and has a rich history w.r.t. mass movement-related natural hazards. Specifically, the earliest known records for hazards mitigation efforts date back to 1945 (subsidies by the Swiss federal government for rock-wall protection measures near the Grabengufer) and February 1959 (evacuation of the village of Herbriggen due to an excessive landslide spontaneously developing on the Längschnee/Gugla area).

Apart from obtaining sensor data and working on geoscientific process studies, this project also focused on developing and proving the utility of low-power wireless GNSS sensing system in the scope of the application described. As mentioned earlier in Section 2, a new set of sensors was developed based on commodity L1-GPS receivers and ubiquitous wireless data access based on previous work on the Matterhorn (Talzi et al., 2007; Hasler et al., 2008, 2012; Weber et al., 2017) and Jungfrauoch (Hasler et al., 2011; Girard et al., 2012). The main challenge apart from designing a robust and long-lived sensing system suitable for year-around operation in a high-alpine setting lies in the fact that the GNSS sensors employed are characterized by (i) large data volumes and (ii) a significant power consumption compared to many other in-situ sensors used in this domain. This has its cause in the fact that in order to obtain sufficient observation data from the satellite constellation both w.r.t. quality and quantity the GNSS receiver needs to be operated continuously over large periods of time (typically hours) and without using any low-power operating modes and also using an active antenna. For the detection of very small displacements, such as in compact bedrock or the ability to react fast on changing displacement dynamics, e.g. in natural hazard scenarios a 24/7 operation of the sensors is required. The resulting energy and data footprint of the GNSS sensor alone (without data logging and data transmission) is on the order of Watts and Megabytes per station and per day. It thus significantly exceeds typical requirements of geoscientific data acquisition systems, e.g. a typical data logger with sensors attached.

The deployment activities of GNSS sensors started in summer 2010 on the central orographic right side of the Matter Valley above the village of Herbriggen. Starting from there the newly developed GNSS sensors were tested and put to use to survey kinematics across different landforms and hazard areas (Wirz et al., 2014b). Further extensions took place to the *Steintälli Rock Glacier*, the *Gugla/Bielzug Rock Glacier*, the Längschnee, Breithorn, Gugla landslide areas as well as the Grabengufer above Randa.

During the study period further hazard and mitigation events took place where the data documented by and supplementing this manuscript served as integral component for decision making by the Swiss cantonal and federal authorities. A selection of the most noteworthy events and measures are described in the following: In spring 2013 excessive discharge from the *Gugla/Bielzug Rock Glacier* caused severe debris flow in the Bielzug torrent causing a partial evacuation of the village of Herbriggen. Subsequently a new catchment, with dam as well as geophone-based monitoring was projected and erected. In order to protect hikers crossing the Grabengufer a hanging bridge spanning the upper part of the discharge gully was constructed in 2010. Due to the rapid evolution of the *Grabengufer Rock Glacier* and the landslide above it, the bridge was hit multiple times by debris discharged, subsequently closed and dismantled. In 2017 a new bridge with a span of 494 m was erected further downslope in the gully. In 2018, a large boulder on the order of 2000 m³ was blasted in a two-month effort to protect the village of Randa below (see Figure B1 and Figure B2). This freestanding boulder was located at the front of the landslide feeding into the *Grabengufer Rock Glacier* and was gradually revealed due to continuous erosion happening due to the excessive slope movements in the area. Figure B2 shows the long term evolution of position GG02. Notable are the seasonal acceleration

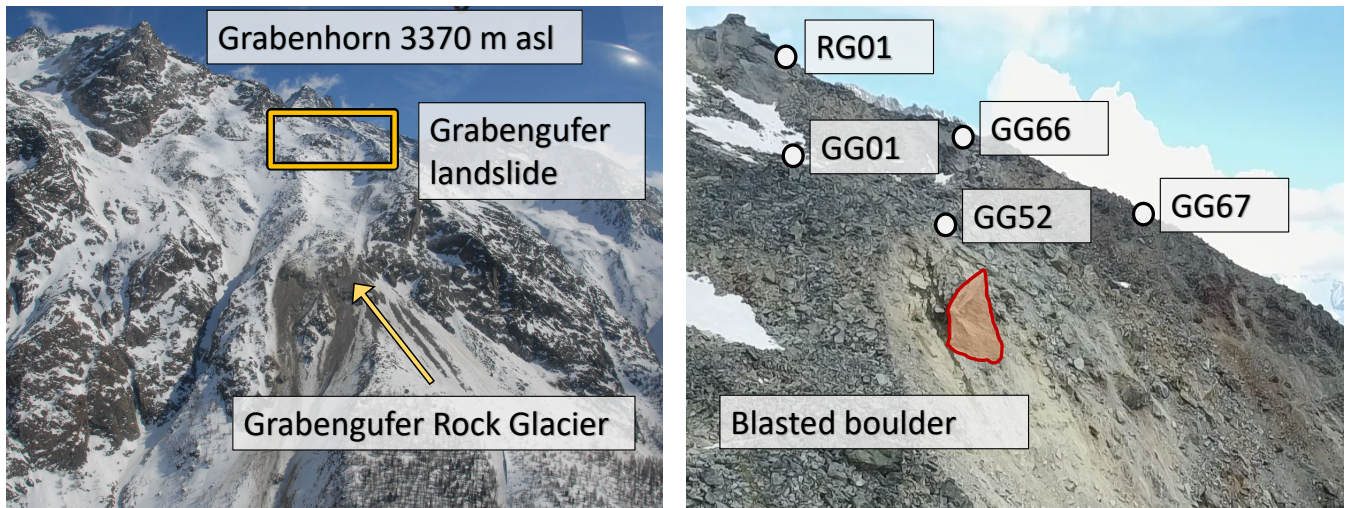


Figure B1. The *Grabengufer Rock Glacier* in Winter. Left, overview of the catchment with the Grabenhorn on top, the Grabengufer landslide, and the *Grabengufer Rock Glacier* above the Dorfbächji channel, with exposed eroded debris. Right, zoom in the area highlighted with the yellow box, the Grabengufer landslide in Summer. The different measurement positions, the reference station, and the freestanding block (approx. 2000 m³) blasted in Summer 2018 are labeled.

throughout the time series and the anomalous behaviour (exponential acceleration) during 2020, that lead to the detachment of the boulder from the slope and a consequent rockfall. The process is visible in both the displacement and in the inclinometer data. Another relevant case interests the area of Längschnee, where a large rock boulder (2524 meter a.s.l.) endangering the municipality of Herbruggen was stabilized with anchors and concrete underfilling in 2014. Here, the monitoring of slope movement using 3x GPS on unstable masses and 1x GNSS sensor on the stabilized rock serve as integral part of the protection measures for the village of Herbruggen. Due to the recent evolution of the landslide, the village has received a new hazard zonation in 2018 and recently four large protective dams have been erected on the upper limit of the village. In the Ritigraben area, the rock glacier has repeatedly led to severe debris flow with impact on the road, railway track and Matter Vispa river below. The most notable event was in 2018 when the debris discharged by the *Ritigraben Rock Glacier* obstructed the river and caused severe flooding all the way into the central sewage treatment plant of the valley (Kenner et al., 2017, 2018).

The method devised in this initial project (Buchli et al., 2012; Wirz et al., 2013) has proven very successful and was thus expanded to other locations and applications of monitoring (Kenner et al., 2018; Cicoira et al., 2021) as well as natural hazard mitigation (Kenner et al., 2020) in collaboration with partners of the Swiss Permafrost Monitoring Network (PERMOS), the Swiss cantonal and federal authorities (Randa Grossgauer, Wisse Schijen, PERMOS GNSS sites) (Noetzli et al., 2019).

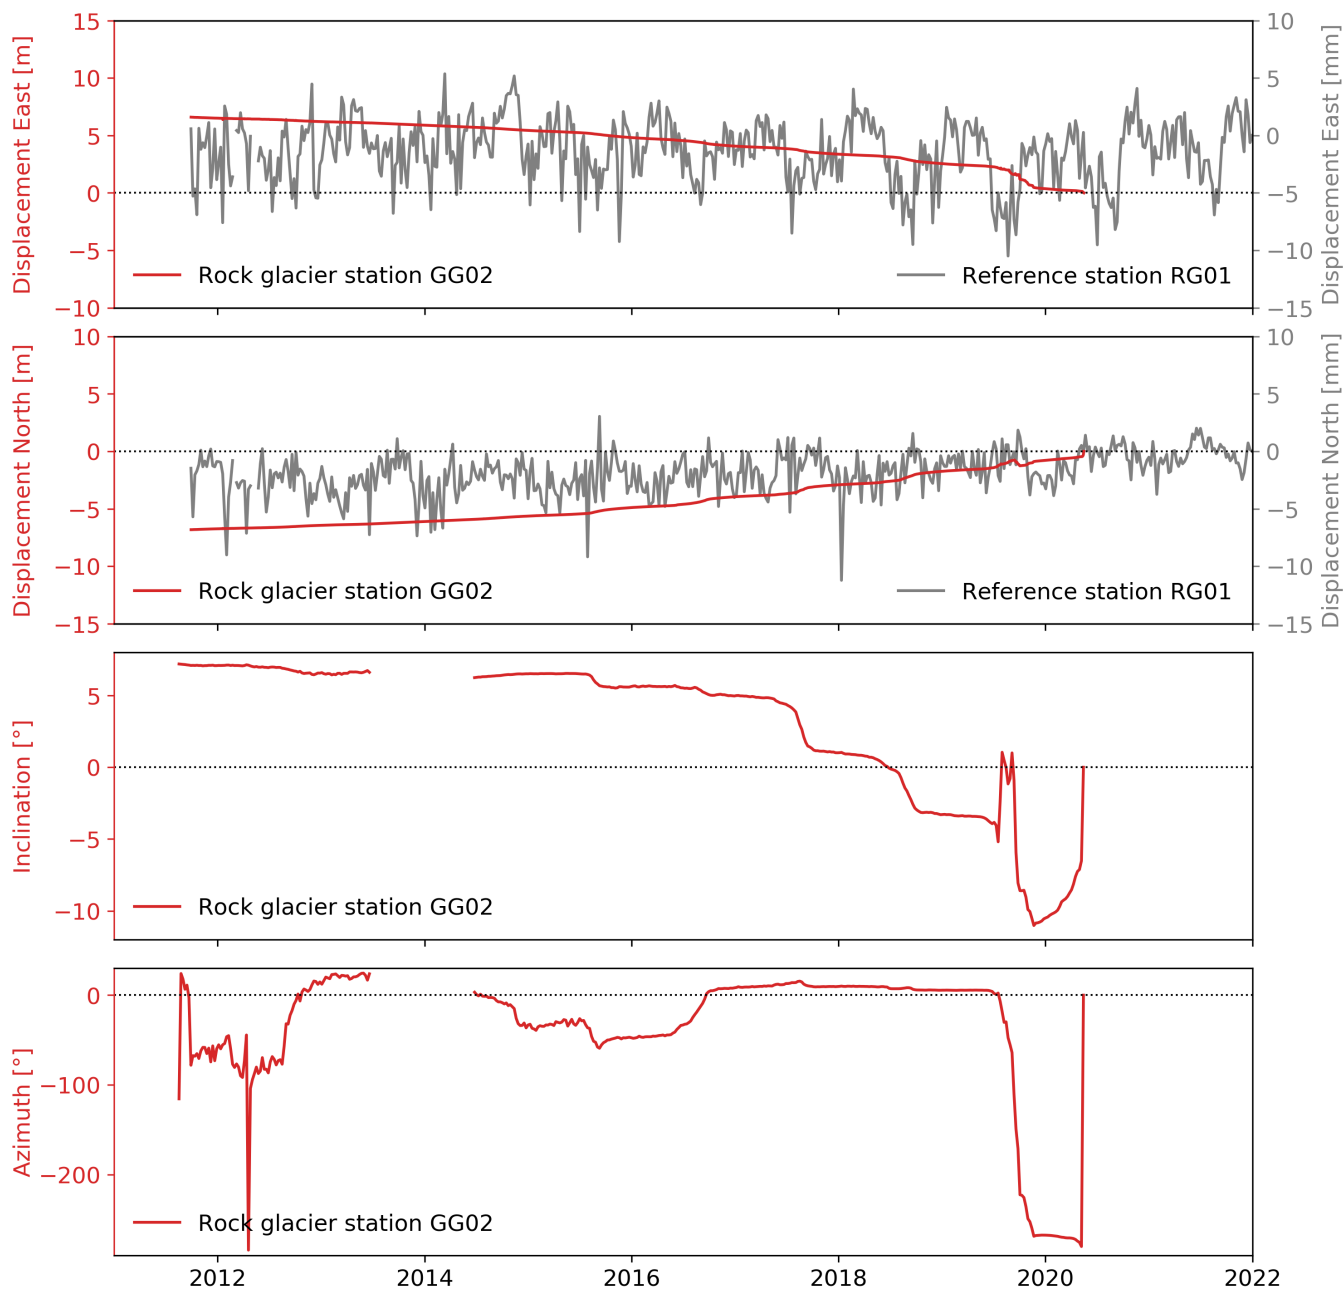


Figure B2. A decade of displacement, inclination and azimuth for the Grabengufer Rock Glacier (position GG02) In year 2020 the boulder where the GNSS station was installed showed an anomalous behaviour and strong acceleration until falling into the gully. The data show this process until the last day.

Appendix C: PermaSense Data Manager

Code for the management and processing of data associated with this manuscript is available at https://git.uibk.ac.at/informatik/neslab/public/permasense/permasense_datamgr (Weber et al., 2019b). It contains both a Python toolbox for downloading and
535 processing primary as well as secondary. The toolbox contains routines for the compilation, cleaning, aggregation and validation of both primary as well as derived data products from the online PermaSense database at <http://data.permasense.ch> into a local file system. Specifically the PermaSense data manager allows to:

- Query data from PermaSense GSN server and save them locally as CSV files
- Load the locally stored CSV files
- 540 – Filter according to reference values if available
- Clean data manually if needed
- Generate aggregates using an arithmetic mean (exceptions for weather data)
- Generate per-year CSV files for each position and datatype
- Generate standard plots for all positions as an intuitive sanity check
- 545 – Query images from the PermaSense database server, convert to JPEG and save them locally.

A `README.md` with this software package explains its usage. In short a suitable Python environment is required. Using `anaconda` you can install the requirements by executing the following command:

```
conda env create -f condaEnvironment.yaml
conda activate permasense_datamgr
```

Individual positions can be enabled/disabled in the main python file `manage_GSNdata.py`, the metadata for filtering and cleaning is contained in the folder `./metadata`. Finally the tool is run by:

```
python manage_GSNdata.py
```

550 By default data are generated in the directory `./data`.

Appendix D: GNSS Processing using the Open-source RTKLIB

A set of scripts automates the computation of static double-difference GNSS solutions using the open-source toolchain RTK-LIB⁵. The scripts are configurable for each baseline pair w.r.t. input data, configuration parameter and the toolchain to be used. The configuration files and especially paths are set up specifically for processing and producing the PermaSense GNSS data
555 contained in this dataset but they can be adapted to other processing needs accordingly. This allows flexibility for individual processing needs for each position should that be required. The scripts are designed to run on x86 Linux but porting this to other platforms is straightforward.

D1 Prerequisites

In order to run these scripts the following prerequisites must be installed:

- 560 – RTKLIB processing scripts https://git.uibk.ac.at/informatik/neslab/public/permasense/rtklib_processing
- RTKLIB can be obtained from <http://www.rtklib.com/> or alternatively <https://github.com/rtklibexplorer/RTKLIB>
- RINEX file compression tools <https://terras.gsi.go.jp/ja/crx2rnx.html>

Some of the double-difference baselines are configured using reference positions from the Permanent GNSS network in Switzerland (AGNES) and therefore these observation data must be obtained directly from swisstopo as they are not contained
565 in this dataset.

D2 Processing sequence and configuration setup

A single processing job always computes a single daily position for a given baseline pair. There are two kinds of configuration files that are required for each processing job. A parameter file that specifies a baseline pair, data down-/upload location, starting dates, default directories and tools to use for processing as well as a RTKLIB tool configuration file. The script package
570 first collects the necessary data from either the online server at <http://data.permasense.ch> from the IGS service or from a local file repository from disk and copies these files together with the necessary configuration files into a local temporary directory. If required, RINEX files are produced using the `conv2bin` tool from the RTKLIB toolchain. Then the post-processing tool `rnx2rtkp` is called producing an output file with the coordinate data (see Table D1). Lastly the coordinates are transformed from WGS84 to Swiss national coordinate system by using the online REFRAME conversion service (REST API) by
575 swisstopo.

The output format of the position data CSV files produced by RTKLIB is described in Table D1.

⁵<http://www.rtklib.com>

Value	Unit	Description
time	[-]	Timestamp of the position data
position	[-]	Inventory position number from the database
label	[-]	Station label
processing_time	ms	Processing time in Unix time in milliseconds
device_type	[-]	Sensor type
version	[-]	Processing framework version
reference_label	[-]	Reference station label
e	m	Easting
n	m	Northing
h	m	Altitude
sd_e	m	Standard deviation Easting
sd_n	m	Standard deviation Northing
sd_h	m	Standard deviation Altitude
ratio_of_fixed_ambiguities	[-]	Quality metric from post-processing

Table D1. GNSS computed daily position data CSV file format.

D3 Processing wrapper script syntax

The main processing wrapper script is responsible for downloading all required data, creating a local temporary compute space, executing the post-processing tool `rnx2rtkp`, upload of the resulting data to the PermaSense database and archiving input and output data as well as cleaning up the temporary file space.

```
compute_solution.sh -p
[parameter_file] -d -b -r -c -f -u YYYY MM DD
# -d: igs data download
# -b: no data download and no conversion
#     for the basestation
# -r: no data download and no conversion
#     for the roverstation
# -c: no conversion
# -f: use IGS final data product
# -u: upload to GSN database
```

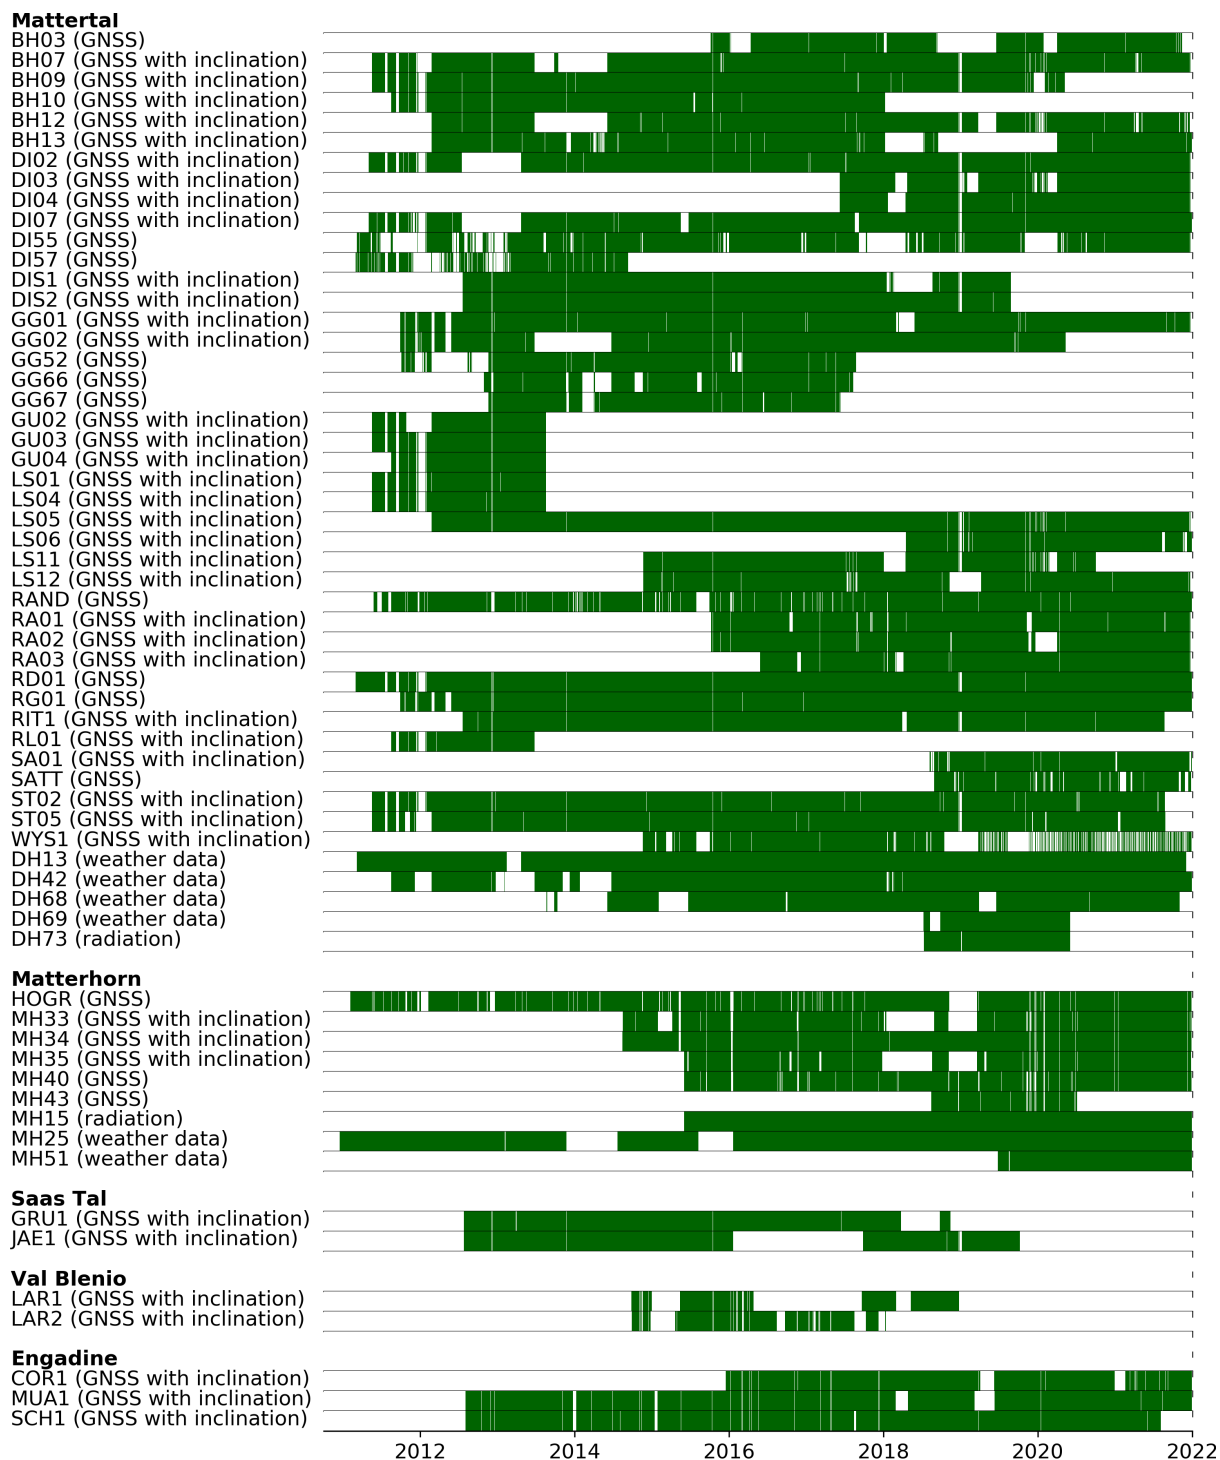



Figure A1. Data availability for all primary data products. The time periods when data are available are indicated in green.

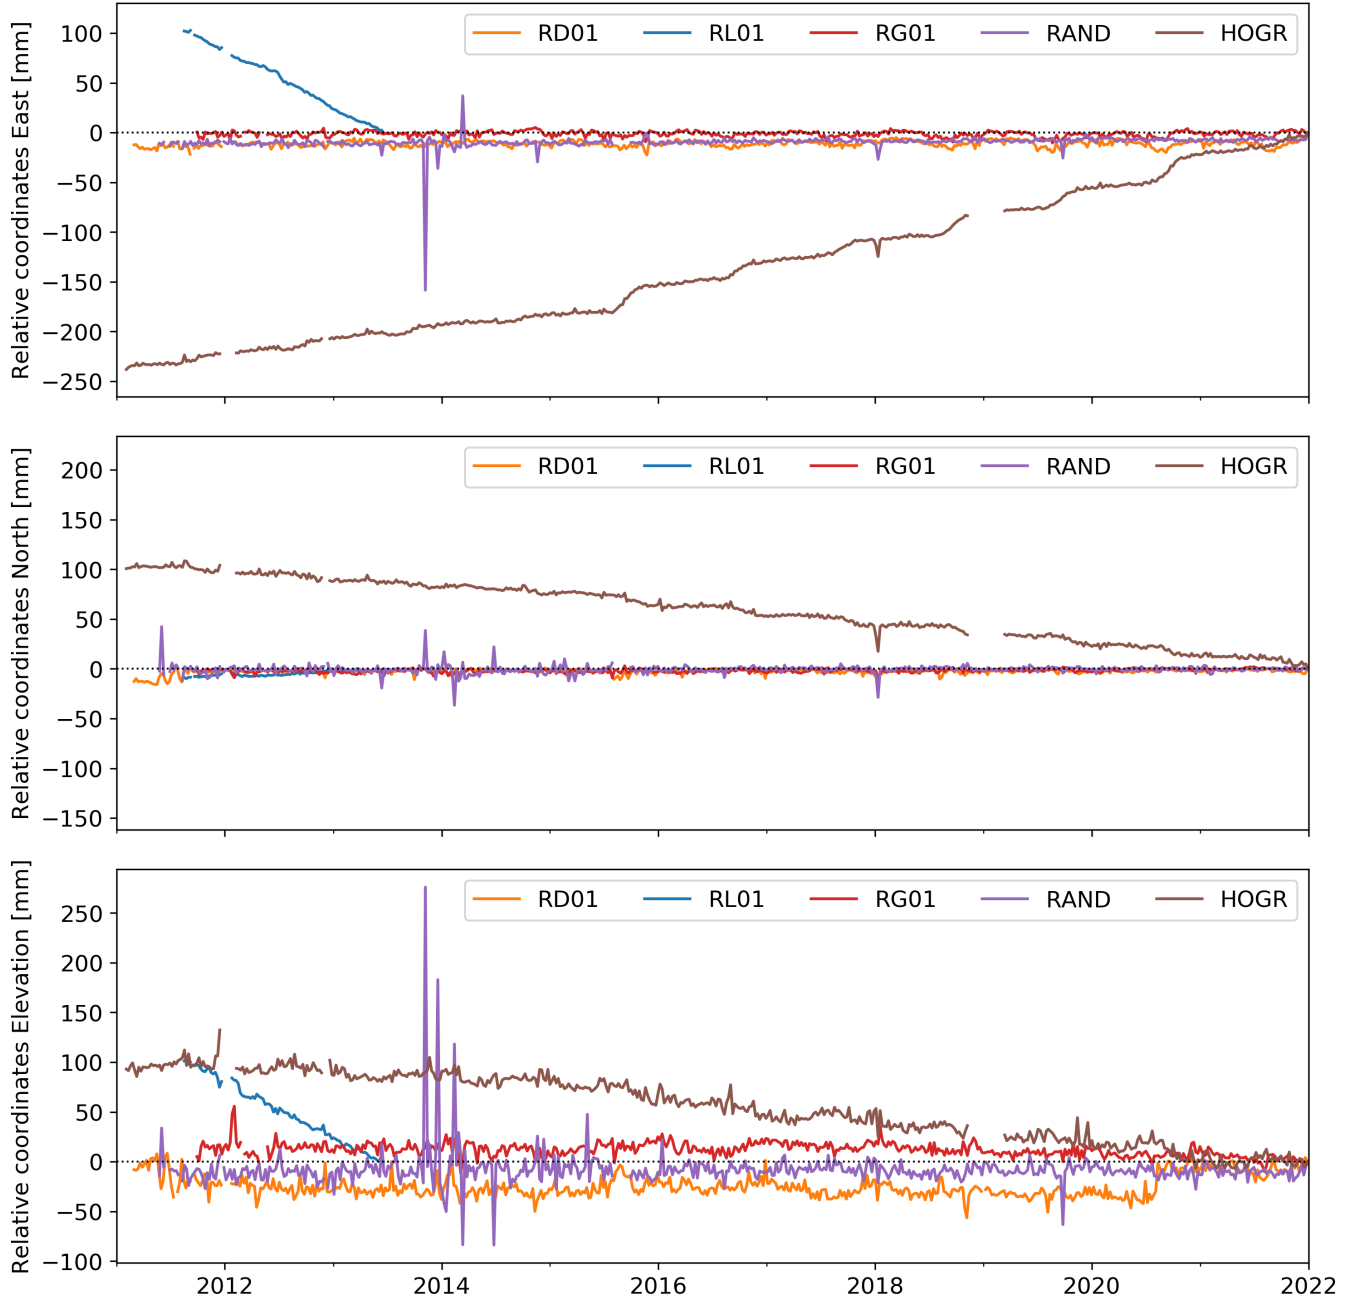


Figure A2. Timeseries (weekly mean) the three components of all reference stations used. A detailed description of each station is given in Table 2.

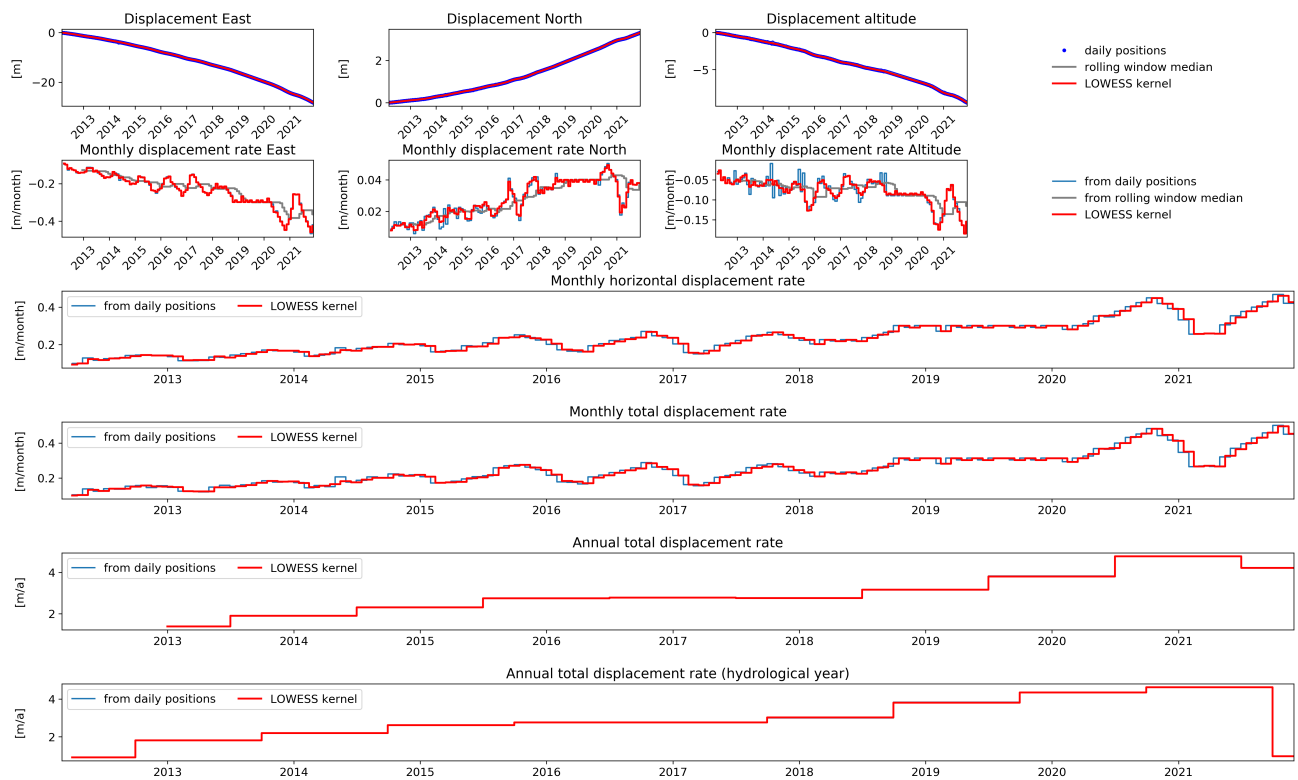


Figure A3. Station BH13 on the *Breithorn/Bielzug Rock Glacier* above Herbruggen, VS is exhibiting a steady acceleration downslope.

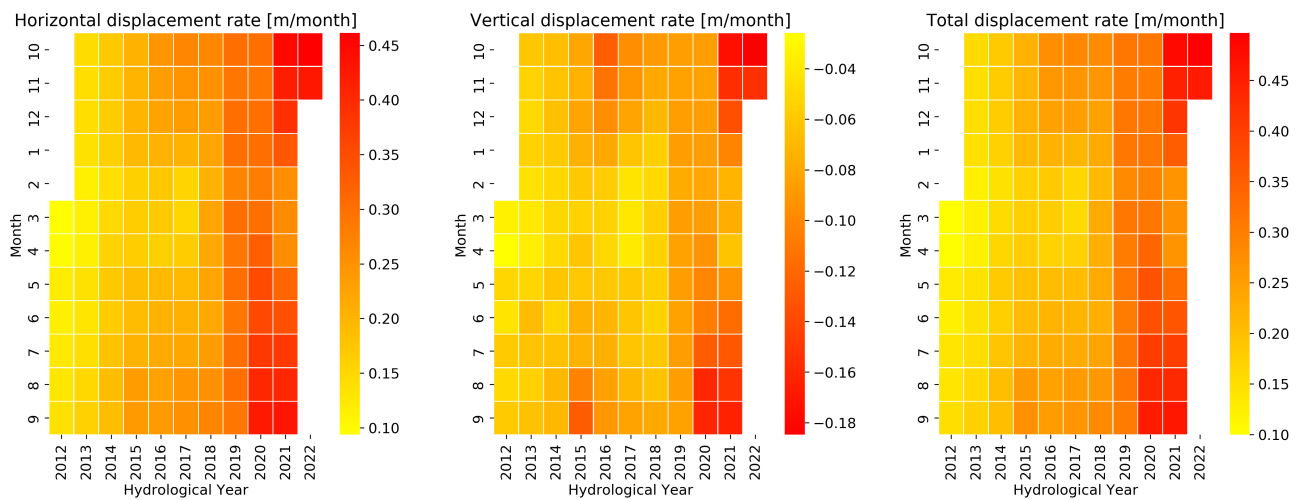


Figure A4. Station BH13 on the *Breithorn/Bielzug Rock Glacier* above Herbruggen, VS is exhibiting a steady acceleration downslope.

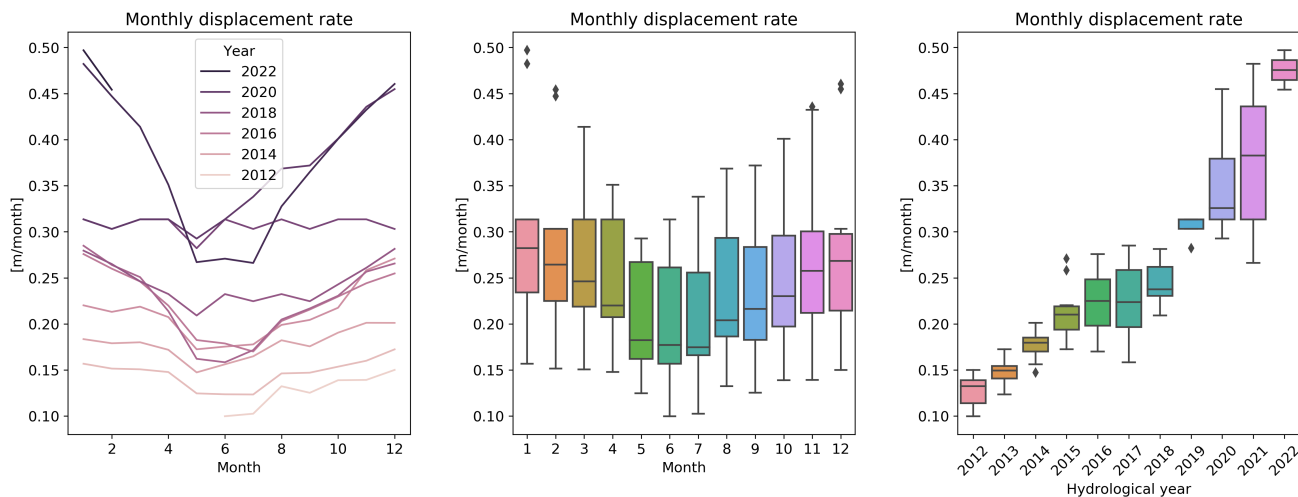


Figure A5. Station BH13 on the *Breithorn/Bielzug Rock Glacier* above Herbriggen, VS is exhibiting a steady acceleration downslope.

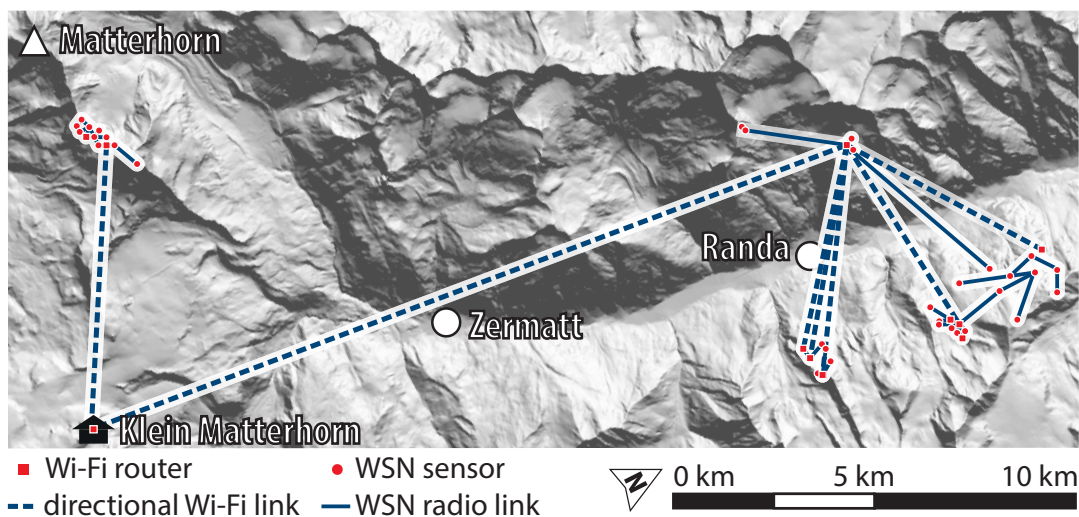


Figure A6. Wireless LAN backbone and fine distribution of wireless connectivity to all sensor locations in the Matter Valley. Base for such connection is a WLAN access point located at the cable car station of the Klein Matterhorn 3883m a.s.l. about 6.5 km away where the network is attached to a local Internet service provider using glass fiber. In a previous publication, Weber et al. (2019a) provided a more comprehensive and detailed description of the technology of the wireless sensor network.

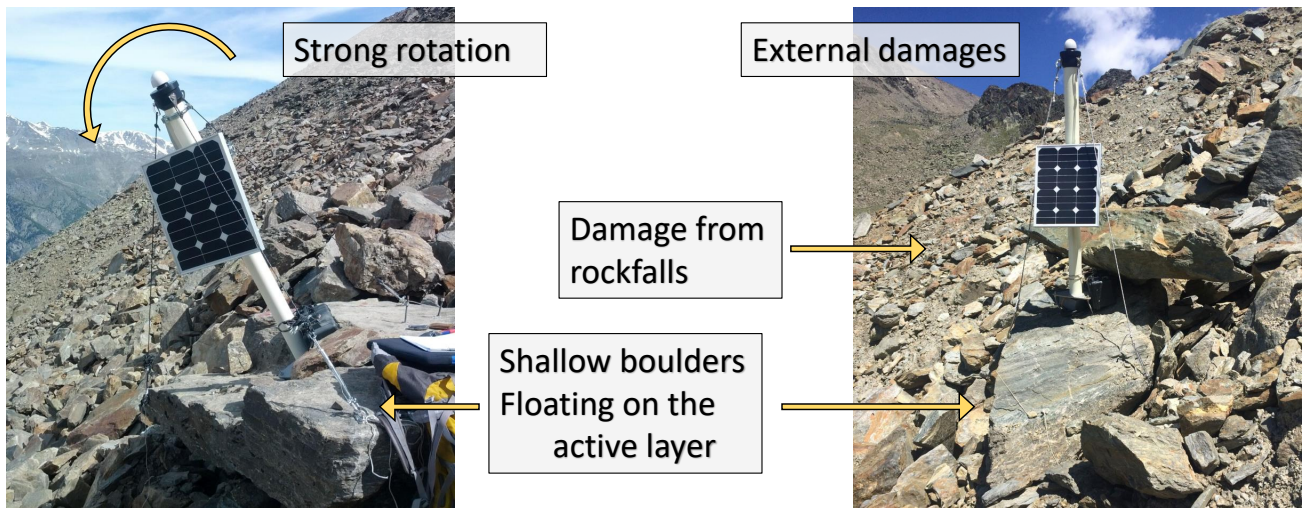


Figure A7. In very active movement zones finding a single block to fix the measurement instrument can be challenging both w.r.t. longevity and w.r.t. the representativeness motion of the investigated landform. The two locations shown in this figure are very active zones in steep parts of two rock glaciers above Herbruggen (Switzerland): *Dirru Rock Glacier* (left) and *Breithorn/Bielzug Rock Glacier* (right).

Table A1. Per position overview of the sensors in the Mattertal field site (see Fig. 2): Part 1

General					Location ^a			Kinematics			Weather	
Station	Period of operation	Reference	Mast height [m]	Online data	East	North	Altitude	L1/L2-GNSS	L1-GPS	Inclination	Radiation	Weather data
BH03	2015-10-07 - ongoing	RD01	1.0	X	2629378	1109934	2754		X	X		
BH07	2011-05-18 - ongoing	RD01	1.0	X	2629787	1110178	2982		X	X		
BH09	2011-05-18 - ongoing	RD01	1.5	X	2630158	1110218	3159		X	X		
BH10	2011-08-17 - 2018-01-08 ^b	RD01	1.5	X	2629255	1109755	2662		X	X		
BH12	2012-02-24 - ongoing	RD01	1.0	X	2629596	1110114	2872		X	X		
BH13	2012-02-24 - ongoing	RD01	1.0	X	2629332	1109779	2701		X	X		
DI02	2011-05-02 - ongoing	RD01	1.5	X	2629569	1107710	2770		X	X		
DI03	2017-06-09 - ongoing	RD01	1.5	X	2629354	1107798	2676		X	X		
DI04	2017-06-09 - ongoing	RD01	1.0	X	2629241	1107861	2599		X	X		
DI07	2010-12-16 - ongoing	RD01	1.5	X	2629355	1107810	2673		X	X		
DI55	2011-03-09 - ongoing	RD01	1.0	X	2629457	1107876	2694		X			
DI57	2011-03-01 - 2014-09-11	RD01	1.5		2629354	1107816	2673		X			
DIS1	2012-07-19 - ongoing	RD01	1.0		2632748	1115588	2426		X	X		
DIS2	2012-07-19 - ongoing	RD01	1.0		2632911	1115403	2501		X	X		
GG01	2011-09-29 - ongoing	RG01	1.0	X	2628937	1104474	2906		X	X		
GG02	2011-09-29 - 2020-05-17 ^c	RG01	1.0	X	2628872	1104513	2894		X	X		
GG52	2011-10-03 - 2016-12-30	RG01	1.0		2628872	1104514	2894		X			
GG66	2012-10-26 - 2016-12-30	RG01	1.3	X	2628817	1104430	2905		X			
GG67	2012-11-20 - 2016-12-30	RG01	1.3	X	2628782	1104448	2889		X			
GU02	2011-05-18 - 2013-05-24	RD01	1.0		2629715	1109034	2969		X	X		
GU03	2011-05-18 - 2013-05-24	RD01	1.5		2629761	1108988	2996		X	X		
GU04	2011-08-17 - 2013-05-24	RD01	1.5		2629946	1108966	3130		X	X		
LS01	2011-05-18 - 2013-08-19	RD01	1.5		2629465	1109281	2804		X	X		
LS04	2011-05-18 - 2013-08-19	RD01	1.5		2629455	1109179	2802		X	X		
LS05	2012-02-24 - ongoing	RD01	1.0	X	2629059	1109378	2611		X	X		
LS06	2018-04-17 - ongoing	RD01	1.0	X	2628942	1109255	2524		X	X		
LS11	2014-11-21 - 2020-10-03 ^c	RD01	1.0	X	2629018	1109451	2588		X	X		
LS12	2014-11-21 - ongoing	RD01	1.0	X	2629053	1109268	2604		X	X		

^a Location coordinates are given for the first day of deployment. ^b Sensor was destroyed in an avalanche ending the time series. ^c Sensor location detached in a rockfall ending the time series. * Data from the Permanent GNSS network in Switzerland (AGNES) is used here.

Table A2. Per position overview of the sensors in the Mattertal field site (see Fig. 2): Part 2

General					Location ^a			Kinematics			Weather	
Station	Period of operation	Reference	Mast height [m]	Online data	East	North	Altitude	L1/L2-GNSS	L1-GPS	Inclination	Radiation	Weather data
RAND	2011-05-28 - ongoing	ZERM*		X	2625632	1107181	2415	X				
RA01	2015-10-08 - ongoing	RAND	1.0	X	2625797	1107096	2326		X	X		
RA02	2015-10-08 - ongoing	RAND	1.0	X	2625772	1107086	2336		X	X		
RA03	2016-05-27 - ongoing	RAND	1.0	X	2625736	1107044	2325		X	X		
RD01	2011-03-01 - ongoing	RAND	0.5	X	2629577	1108071	2706		X			
RG01	2011-09-29 - ongoing	RAND	0.5	X	2628984	1104371	2974		X			
RIT1	2012-07-19 - ongoing	RD01	1.0		2631650	1113771	2605		X	X		
RL01	2011-08-17 - 2013-05-24	RD01	1.0		2629491	1109569	2873		X	X		
SA01	2018-08-06 - ongoing	RAND	1.0	X	2628397	1099584	3079		X	X		
SATT	2018-08-29 - ongoing	RAND		X	2628357	1099535	3127		X	X		
ST02	2011-05-18 - ongoing	RD01	1.0		2630157	1108556	2997		X	X		
ST05	2011-05-18 - ongoing	RD01	1.5		2630237	1108650	3029		X	X		
WYS1	2014-11-20 - ongoing	RAND	1.0	X	2624011	1105068	3056		X	X		
DH13	2011-03-08 - ongoing			X	2629563	1108035	2690					X
DH42	2011-08-17 - ongoing			X	2628985	1104370	2827					X
DH68	2013-08-20 - ongoing			X	2629598	1110119	2870					X
DH69	2018-07-10 - 2020-06-03			X	2629385	1107919	2644					X
DH73	2018-07-10 - 2020-06-03			X	2629385	1107919	2644				X	

^a Location coordinates are given for the first day of deployment. * Data from the Permanent GNSS network in Switzerland (AGNES) is used here.

Table A3. Per position overview of the sensors in the Matterhorn field site.

General					Location ^a			Kinematics			Weather	
Station	Period of operation	Reference	Mast height [m]	Online data	East	North	Altitude	L1/L2-GNSS	L1-GPS	Inclination	Radiation	Weather data
HOGH	2011-02-03 - ongoing	ZERM*	X		2618012	1092200	3463	X				
MH33	2014-08-16 - ongoing	HOGH	X		2617961	1092175	3487		X	X		
MH34	2014-08-14 - ongoing	HOGH	X		2618001	1092197	3463		X	X		
MH35	2015-06-02 - ongoing	HOGH	X		2617961	1092175	3487		X	X		
MH40	2015-06-03 - ongoing	HOGH	X		2617957	1092175	3489		X			
MH43	2018-08-15 - 2020-07-08	HOGH	X		2617957	1092175	3489		X			
MH15	2015-06-02 - ongoing			X	2618019	1092200	3402				X	
MH25	2010-12-17 - ongoing			X	2618019	1092200	3402					X
MH51	2019-06-26 - ongoing			X	2617392	1091918	4003				X	

^a Location coordinates are given for the first day of deployment. * Data from the Permanent GNSS network in Switzerland (AGNES) is used here.

Table A4. Per position overview of the sensors in the Saas Tal field site.

General					Location ^a			Kinematics			Weather	
Station	Period of operation	Reference	Mast height [m]	Online data	East	North	Altitude	L1/L2-GNSS	L1-GPS	Inclination	Radiation	Weather data
GRU1	2012-07-25 - ongoing	RD01	0.5		2640436	1113468	2823		X	X		
JAEL	2012-07-26 - ongoing	RD01	0.5		2639856	1111235	2585		X	X		

^a Location coordinates are given for the first day of deployment. * Data from the Permanent GNSS network in Switzerland (AGNES) is used here.

Table A5. Per position overview of the sensors in the Val Blenio field site.

General					Location ^a			Kinematics			Weather	
Station	Period of operation	Reference	Mast height [m]	Online data	East	North	Altitude	L1/L2-GNSS	L1-GPS	Inclination	Radiation	Weather data
LAR1	2014-09-26 - ongoing	SANB*	1.0		2718881	1148509	2355		X	X		
LAR2	2014-09-28 - ongoing	SANB*	1.0		2718731	1148483	2304		X	X		

^a Location coordinates are given for the first day of deployment. * Data from the Permanent GNSS network in Switzerland (AGNES) is used here.

Table A6. Per position overview of the sensors in the Engadine field site.

General					Location ^a			Kinematics			Weather	
Station	Period of operation	Reference	Mast height [m]	Online data	East	North	Altitude	L1/L2-GNSS	L1-GPS	Inclination	Radiation	Weather data
COR1	2015-12-17 - ongoing	SAME*	0.8		2783147	1144727	2669		X	X		
MUA1	2012-08-04 - ongoing	SAME*	1.0		2791144	1153620	2609		X	X		
SCH1	2012-08-04 - ongoing	SAME*	1.0		2791062	1152725	2809		X	X		

^a Location coordinates are given for the first day of deployment. * Data from the Permanent GNSS network in Switzerland (AGNES) is used here.

Author contributions. JB, AC, and SW developed the concept and prepared the manuscript. JB, SG, AH, SW, BB AB, MM, RL, TG and RdF developed the sensor technology, the data management architecture as well as the tools for managing the data. VW, SG, HR and JB conceived the initial GNSS sensor deployments with the help of LT, TS, AV and DvM that jointly had instrumental roles in launching and executing the initial X-Sense project. PL implemented the first GNSS post-processing prototype. JB, AV, SW, AC, AH, HR, LT, Ts, RD, IGR, RM, JN, MP, EP, CS and DvM contributed to the scaling and application of the technology to further field sites and applications, especially in the domain of long-term monitoring, natural hazard mitigation and early warning. All authors contributed to the article and approved the submitted manuscript.

Competing interests. None

Acknowledgements. This research has been supported by the funding through Swiss National Science Foundation NCCR-MICS, the ETH Zurich Competence Center on Environment and Sustainability (CCES), the Swiss Federal Office of the Environment (FOEN), nano-tera.ch (grant no. 530659) as well as the Swiss Permafrost Monitoring Network (PERMOS). Support in the form of equipment has been given by Hilti Schweiz AG, Arc'teryx, Petzl and Beal. The technical workshops at ETHZ and UniZH as well as Art of Technology, Zurich, contributed to the successful development and implementation of various pieces of equipment. Furthermore we are thankful for technical support and consultancy by Art of Technology, Zurich, CH (Rolf Schmid) as well as Swisstopo, Wabern, CH (Elmar Brockmann). We are indebted to the extraordinary local support we have received for our research activities in the Matter and Saas Valleys, specifically the municipality of Zermatt (Romy Biner-Hauser), St. Niklaus (Gaby Fux), Herbriggen, Randa, Taesch (Klaus Tscherrig) and Saas Grund, the whole team of Air Zermatt (Gerold Biner), Kurt Lauber, Stephanie Mayor, Martin and Edith Lehner and the Hörnlihütte team, Europahütte (Marcel Brantschen), Kinnhütte (Victor Imboden), Alpin Center Zermatt, Kurt Guntli (Zermatter Bergbahnen), Willy Gitz and Angelo Gruber (Sprengtechnik-GFS), Hotel Bahnhof, Zermatt (Fabi Lauber) as well as the local mountain guides Hermann Biner, Robert Andenmatten, Willy Taugwalder, Urs Lerjen, Benedikt Perren, Bruno Jelk, Hannes Walser, Simon Anthamatten, Yann Dupertuis and Anjan Truffer. Without this strong positive welcome this work would not have been possible. What would we have done without our "homebase" at Hotel Bergfreund in Herbriggen (CH)? Big thank you for the generous support to all generations of the whole family Rosi and Rudi Allmendinger. Many friends and helpers were involved in supporting the field work: Lucas Girard, Stephanie Gubler, Christoph Walser, Robert Kenner, Johann Müller, Jeff Moore and Valentin Gischig.

- Aberer, K., Hauswirth, M., and Salehi, A.: A Middleware for Fast and Flexible Sensor Network Deployment, in: Proceedings of the 32nd International Conference on Very Large Data Bases, VLDB '06, pp. 1199–1202, VLDB Endowment, 2006.
- Arenson, L., Hoelzle, M., and Springman, S.: Borehole deformation measurements and internal structure of some rock glaciers in Switzerland, *Permafrost and Periglacial Processes*, 13, 117–135, <https://doi.org/https://doi.org/10.1002/ppp.414>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/ppp.414>, 2002.
- 610 Beutel, J., Gruber, S., Hasler, A., Lim, R., Meier, A., Plessl, C., Talzi, I., Thiele, L., Tschudin, C., Woehrle, M., and Yucel, M.: PermaDAQ: A scientific instrument for precision sensing and data recovery in environmental extremes, in: The 8th ACM/IEEE International Conference on Information Processing in Sensor Networks, pp. 265–276, 2009.
- Beutel, J., Buchli, B., Ferrari, F., Keller, M., Thiele, L., and Zimmerling, M.: X-Sense: Sensing in Extreme Environments, Proceedings of Design, Automation and Test in Europe (DATE 2011), pp. 1460–1465, <https://doi.org/10.1109/DATE.2011.5763236>, 2011.
- 615 Bu, J., Yu, K., Qian, N., Zuo, X., and Chang, J.: Performance Assessment of Positioning Based on Multi-Frequency Multi-GNSS Observations: Signal Quality, PPP and Baseline Solution, *IEEE Access*, 9, 5845–5861, <https://doi.org/10.1109/ACCESS.2020.3048352>, 2021.
- Buchli, B., Sutton, F., and Beutel, J.: GPS-equipped Wireless Sensor Network Node for High-accuracy Positioning Applications, *Lecture Notes on Computer Science 7158. Proc. of 9th European Conference on Wireless Sensor Networks (EWSN 2012)*, pp. 179–195, 2012.
- 620 Burjánek, J., Gassner-Stamm, G., Poggi, V., Moore, J. R., and Fäh, D.: Ambient vibration analysis of an unstable mountain slope, *Geophysical Journal International*, 180, 820–828, <https://doi.org/10.1111/j.1365-246X.2009.04451.x>, 2010.
- Cicoira, A., Beutel, J., Faillettaz, J., Gärtner-Roer, I., and Vieli, A.: Resolving the influence of temperature forcing through heat conduction on rock glacier dynamics: a numerical modelling approach, *The Cryosphere*, 13, 927–942, <https://doi.org/10.5194/tc-13-927-2019>, 2019a.
- Cicoira, A., Beutel, J., Faillettaz, J., and Vieli, A.: Water controls the seasonal rhythm of rock glacier flow, *Earth and Planetary Science Letters*, 528, 115 844, <https://doi.org/https://doi.org/10.1016/j.epsl.2019.115844>, 2019b.
- 625 Cicoira, A., Marcer, M., Gärtner-Roer, I., Bodin, X., Arenson, L. U., and Vieli, A.: A general theory of rock glacier creep based on in-situ and remote sensing observations, *Permafrost and Periglacial Processes*, 32, 139–153, <https://doi.org/https://doi.org/10.1002/ppp.2090>, 2021.
- Dach, R., Lutz, S., Walser, P., and Fridez, P.: Bernese GNSS Software Version 5.2. User manual, Astronomical Institute, University of Bern, <https://doi.org/10.7892/boris.72297>, 2015.
- 630 Delaloye, R., Lambiel, C., and Gärtner-Roer, I.: Overview of rock glacier kinematics research in the Swiss Alps: Seasonal rhythm, interannual variations and trends over several decades, *Geogr. Helv.*, 65, 135–145, <https://doi.org/10.5194/gh-65-135-2010>, 2010.
- Delaloye, R., Morard, S., Barboux, C., Abbet, D., Gruber, V., Riedo, M., and Gachet, S.: Rapidly moving rock glaciers in Mattertal, in: *Mattertal – ein Tal in Bewegung, Publikation zur Jahrestagung der Schweizerischen Geomorphologischen Gesellschaft*, pp. 21–30, Eidg. Forschungsanstalt WSL, Birmensdorf, CH, St. Niklaus, CH, 2013.
- 635 Eberhardt, E., Stead, D., and Coggan, J.: Numerical analysis of initiation and progressive failure in natural rock slopes – The 1991 Randa rockslide, *Int. J. Rock Mech. Min.*, 41, 69–87, [https://doi.org/10.1016/S1365-1609\(03\)00076-5](https://doi.org/10.1016/S1365-1609(03)00076-5), 2004.
- Fäh, D., Moore, J., Burjanek, J., Iosifescu Enescu, I., Dalguer, L., Dupray, F., Michel, C., Woessner, J., Villiger, A., Laue, J., Marschall, I., Gischig, V., Loew, S., Alvarez, S., Balderer, W., Kästli, P., Giardini, D., Iosifescu Enescu, C. M., Hurni, L., Lestuzzi, P., Karbassi, A., Baumann, C., Geiger, A., Ferrari, A., Lalou, L., Clinton, J., and Deichmann, N.: Coupled seismogenic geohazards in alpine regions, *Bollettino di Geofisica Teorica ed Applicata*, 53, 485 – 508, <https://doi.org/10.4430/bgta0048>, 2012-12.
- 640

- Ghirlanda, A., Braillard, L., Delaloye, R., Kummert, M., and Staub, B.: The complex pluri-decennial and multiphasic destabilization of the Jégi rock glacier (western Swiss Alps): historical development and ongoing crisis, in: XI. International Conference On Permafrost, 2016.
- Girard, L., Beutel, J., Gruber, S., Hunziker, J., Lim, R., and Weber, S.: A custom acoustic emission monitoring system for harsh environments: Application to freezing-induced damage in alpine rock walls, *Geosci. Instrum. Method. Data Syst.*, 1, 155–167, <https://doi.org/10.5194/gi-1-155-2012>, 2012.
- Gischig, S., Moore, J. R., Evans, K. F., Amann, F., and Loew, S.: Thermomechanical forcing of deep rock slope deformation: 2. The Randa rock slope instability, *Journal of Geophysical Research: Earth Surface*, 116, <https://doi.org/10.1029/2011JF002007>, 2011a.
- Gischig, V., Amann, F., Moore, J., Loew, S., Eisenbeiss, H., and Stempfhuber, W.: Composite rock slope kinematics at the current Randa instability, Switzerland, based on remote sensing and numerical modeling, *Engineering Geology*, 118, 37–53, <https://doi.org/https://doi.org/10.1016/j.enggeo.2010.11.006>, <https://www.sciencedirect.com/science/article/pii/S0013795210002371>, 2011b.
- Guillemot, A., Baillet, L., Garambois, S., Bodin, X., Helmstetter, A., Mayoraz, R., and Larose, E.: Modal sensitivity of rock glaciers to elastic changes from spectral seismic noise monitoring and modeling, *The Cryosphere*, 15, 501–529, <https://doi.org/10.5194/tc-15-501-2021>, <https://tc.copernicus.org/articles/15/501/2021/>, 2021.
- Haerberli, W.: Creep of mountain permafrost: Internal Structure and Flow of Alpine Rock Glaciers, Ph.D. thesis, ETH Zurich, 1985.
- Haerberli, W.: On the morphodynamics of ice/ debris-transport systems in cold mountain areas, *Norsk Geografisk Tidsskrift*, 50, 3–9, <https://doi.org/10.1080/00291959608552346>, 1996.
- Haerberli, W. and Schmid, W.: Aerophotogrammetrical monitoring of rock glaciers, in: *Proc. Fifth International Conference on Permafrost*, pp. 764–769, International Permafrost Association, Trondheim, Norway, 1988.
- Haerberli, W. and Vonder Mühl, D.: On the characteristics and possible origins of ice in rock glacier permafrost, *Zeitschrift für Geomorphologie*, pp. 43–57, 1996.
- Haerberli, W., King, L., and Flotron, A.: Surface movement and lichen-cover studies at the active rock glacier near the Grubengletscher, Wallis, Swiss Alps, *Arctic and Alpine Research*, 11, 421–441, 1979.
- Hasler, A., Talzi, I., Beutel, J., Tschudin, C., and Gruber, S.: Wireless sensor networks in permafrost research: Concept, requirements, implementation, and challenges, in: *Proceedings of the 9th International Conference on Permafrost*, 2008.
- Hasler, A., Gruber, S., and Haerberli, W.: Temperature variability and offset in steep alpine rock and ice faces, *The Cryosphere*, 5, 977–988, <https://doi.org/10.5194/tc-5-977-2011>, 2011.
- Hasler, A., Gruber, S., and Beutel, J.: Kinematics of steep bedrock permafrost, *J. Geophys. Res.*, 117, F01016, <https://doi.org/10.1029/2011JF001981>, 2012.
- Henkel, P., Koch, F., Appel, F., Bach, H., Prash, M., Schmid, L., Schweizer, J., and Mauser, W.: Snow Water Equivalent of Dry Snow Derived From GNSS Carrier Phases, *IEEE Transactions on Geoscience and Remote Sensing*, 56, 3561–3572, <https://doi.org/10.1109/TGRS.2018.2802494>, 2018.
- Hoelzle, M., Vonder Mühl, D., and Haerberli, W.: Thirty years of permafrost research in the Corvatsch-Furtschellas area, Eastern Swiss Alps: A review, *Norsk Geografisk Tidsskrift - Norwegian Journal of Geography*, 56, 137–145, <https://doi.org/10.1080/002919502760056468>, 2002.
- Hurter, F., Geiger, A., Perler, D., and Rothacher, M.: GNSS water vapor monitoring in the Swiss Alps, in: *2012 IEEE International Geoscience and Remote Sensing Symposium*, pp. 1972–1975, <https://doi.org/10.1109/IGARSS.2012.6351115>, 2012.

- Kaeab, A., Gudmundsson, G. H., and Hoelzle, M.: Surface deformation of creeping mountain permafrost. Photogrammetric investigations on Murtel Rock Glacier, Swiss Alps, in: Proc. Seventh International Conference on Permafrost, pp. 531–537, International Permafrost Association, Yellowknife, Canada, 1998.
- 680 Kenner, R., Phillips, M., Beutel, J., Hiller, M., Limpach, P., Pointner, E., and Volken, M.: Factors Controlling Velocity Variations at Short-Term, Seasonal and Multiyear Time Scales, Ritigraben Rock Glacier, Western Swiss Alps, *Permafrost and Periglacial Processes*, 28, 675–684, <https://doi.org/10.1002/ppp.1953>, 2017.
- Kenner, R., Phillips, M., Limpach, P., Beutel, J., and Hiller, M.: Monitoring mass movements using georeferenced time-lapse photography: Ritigraben rock glacier, western Swiss Alps, *Cold Regions Science and Technology*, 145, 127 – 134, <https://doi.org/https://doi.org/10.1016/j.coldregions.2017.10.018>, 2018.
- 685 Kenner, R., Pruessner, L., Beutel, J., Limpach, P., and Phillips, M.: How rock glacier hydrology, deformation velocities and ground temperatures interact: Examples from the Swiss Alps, *Permafrost and Periglacial Processes*, 31, 3–14, <https://doi.org/10.1002/ppp.2023>, 2020.
- Kummert, M. and Delaloye, R.: Mapping and quantifying sediment transfer between the front of rapidly moving rock glaciers and torrential gullies, *Geomorphology*, 309, 60–76, <https://doi.org/https://doi.org/10.1016/j.geomorph.2018.02.021>, <https://www.sciencedirect.com/science/article/pii/S0169555X18300795>, 2018.
- 690 Kummert, M., Delaloye, R., and Braillard, L.: Erosion and sediment transfer processes at the front of rapidly moving rock glaciers: Systematic observations with automatic cameras in the western Swiss Alps, *Permafrost and Periglacial Processes*, 29, 21–33, <https://doi.org/https://doi.org/10.1002/ppp.1960>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/ppp.1960>, 2018a.
- 695 Kummert, M., Delaloye, R., and Braillard, L.: Erosion and sediment transfer processes at the front of rapidly moving rock glaciers: Systematic observations with automatic cameras in the western Swiss Alps, *Permafrost and Periglacial Processes*, 29, 21–33, <https://doi.org/https://doi.org/10.1002/ppp.1960>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/ppp.1960>, 2018b.
- Kääb, A., Haeberli, W., and Gudmundsson, G. H.: Analysing the creep of mountain permafrost using high precision aerial photogrammetry: 25 years of monitoring Gruben rock glacier, Swiss Alps, *Permafrost and Periglacial Processes*, 8, 409–426, [https://doi.org/https://doi.org/10.1002/\(SICI\)1099-1530\(199710/12\)8:4<409::AID-PPP267>3.0.CO;2-C](https://doi.org/https://doi.org/10.1002/(SICI)1099-1530(199710/12)8:4<409::AID-PPP267>3.0.CO;2-C), 1997.
- 700 Leinauer, J., Weber, S., Cicoira, A., Beutel, J., and Krautblatter, M.: Prospective forecasting of rock slope failure time, Submitted to *Nature Communications*, 2022.
- Moore, J., Gischig, V., Burjánek, J., Loew, S., , and Fäh, D.: Site effects in unstable rock slopes: Dynamic behavior of the Randa instability (Switzerland), *Bull. Seism. Soc. Am.*, 101, 3110–3116, <https://doi.org/10.1785/0120110127>, 2011.
- 705 Noetzli, J., Pellet, C., and Staub, B., eds.: PERMOS 2019. Permafrost in Switzerland 2014/2015 to 2017/2018, Glaciological Report (Permafrost) No. 16-19 of the Cryospheric Commission of the Swiss Academy of Sciences (SCNAT), <https://doi.org/10.13093/permos-rep-2019-16-19>, 2019.
- Oggier, N., Graf, C., Delaloye, R., and Burkard, A.: Integral protection concept "Bielzug" - Integrales Schutzkonzept Bielzug, in: Proc. INTERPRAEVENT 2016, pp. 525–534, 2016.
- 710 Paziewski, J., Fortunato, M., Mazzoni, A., and Odolinski, R.: An analysis of multi-GNSS observations tracked by recent Android smartphones and smartphone-only relative positioning results, *Measurement*, 175, 109 162, <https://doi.org/https://doi.org/10.1016/j.measurement.2021.109162>, <https://www.sciencedirect.com/science/article/pii/S0263224121001858>, 2021.

- Ravanel, L. and Deline, P.: Rockfall hazard in the Mont Blanc massif increased by the current atmospheric warming, in: IAEG 12th Congress, edited by Lollino, G., Manconi, A., Clague, J., Shan, W., and Chiarle, M., *Climate Change and Engineering Geology*, pp. p. 425–428, Torino, Italy, <https://hal-sde.archives-ouvertes.fr/hal-01896005>, 2014.
- Scapoza, C., Lambiel, C., Bozzini, C., Mari, S., and Conedera, M.: Assessing the rock glacier kinematics on three different timescales: a case study from the southern Swiss Alps, *Earth Surface Processes and Landforms*, 39, 2056–2069, <https://doi.org/https://doi.org/10.1002/esp.3599>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/esp.3599>, 2014.
- Strozzi, T., Caduff, R., Jones, N., Barboux, C., Delaloye, R., Bodin, X., Kääb, A., Mätzler, E., and Schrott, L.: Monitoring Rock Glacier Kinematics with Satellite Synthetic Aperture Radar, *Remote Sensing*, 12, <https://doi.org/10.3390/rs12030559>, <https://www.mdpi.com/2072-4292/12/3/559>, 2020.
- Talzi, I., Hasler, A., Gruber, S., and Tschudin, C.: PermaSense: Investigating Permafrost with a WSN in the Swiss Alps, in: *Proceedings of the 4th Workshop on Embedded Networked Sensors, EmNets '07*, pp. 8–12, ACM, New York, NY, USA, <https://doi.org/10.1145/1278972.1278974>, 2007.
- Teunissen, P. J. and Montenbruck, O., eds.: *Handbook of Global Navigation Satellite Systems*, Springer International Publishing, <https://doi.org/10.1007/978-3-319-42928-1>, 2017.
- Vonder Mühll, D. and Haeberli, W.: Thermal Characteristics of the Permafrost within an Active Rock Glacier (Murtèl/Corvatsch, Grisons, Swiss Alps), *Journal of Glaciology*, 36, 151–158, <https://doi.org/10.3189/S0022143000009382>, 1990.
- Weber, S., Beutel, J., Faillettaz, J., Hasler, A., Krautblatter, M., and Vieli, A.: Quantifying irreversible movement in steep, fractured bedrock permafrost on Matterhorn (CH), *The Cryosphere*, 11, 567–583, <https://doi.org/10.5194/tc-11-567-2017>, 2017.
- Weber, S., Beutel, J., Gruber, S., Gsell, T., Hasler, A., and Vieli, A.: Rock-temperature, fracture displacement and acoustic/micro-seismic data measured at Matterhorn Hörnligrat, Switzerland, <https://doi.org/10.5281/zenodo.1163037>, 2018a.
- Weber, S., Fäh, D., Beutel, J., Faillettaz, J., Gruber, S., and Vieli, A.: Ambient seismic vibrations in steep bedrock permafrost used to infer variations of ice-fill in fractures, *Earth and Planetary Science Letters*, 501, 119–127, <https://doi.org/10.1016/j.epsl.2018.08.042>, 2018b.
- Weber, S., Faillettaz, J., Meyer, M., Beutel, J., and Vieli, A.: Acoustic and micro-seismic characterization in steep bedrock permafrost on Matterhorn (CH), *Journal of Geophysical Research: Earth Surface*, 123, 1363–1385, <https://doi.org/10.1029/2018JF004615>, 2018c.
- Weber, S., Beutel, J., Da Forno, R., Geiger, A., Gruber, S., Gsell, T., Hasler, A., Keller, M., Lim, R., Limpach, P., Meyer, M., Talzi, I., Thiele, L., Tschudin, C., Vieli, A., Vonder Mühll, D., and Yücel, M.: A decade of detailed observations (2008–2018) in steep bedrock permafrost at Matterhorn Hörnligrat (Zermatt, CH), *Earth System Science Data*, 2019, 1203–1237, <https://doi.org/10.5194/essd-11-1203-2019>, 2019a.
- Weber, S., Beutel, J., and Meyer, M.: Code for PermaSense GSN data management, <https://doi.org/10.5281/zenodo.2542714>, 2019b.
- Willenberg, H., Evans, K. F., Eberhardt, E., Spillmann, T., and Loew, S.: Internal structure and deformation of an unstable crystalline rock mass above Randa (Switzerland): Part II — Three-dimensional deformation patterns, *Engineering Geology*, 101, 15–32, <https://doi.org/https://doi.org/10.1016/j.enggeo.2008.01.016>, <https://www.sciencedirect.com/science/article/pii/S0013795208000264>, 2008a.
- Willenberg, H., Loew, S., Eberhardt, E., Evans, K. F., Spillmann, T., Heincke, B., Maurer, H., and Green, A. G.: Internal structure and deformation of an unstable crystalline rock mass above Randa (Switzerland): Part I — Internal structure from integrated geological and geophysical investigations, *Engineering Geology*, 101, 1–14, <https://doi.org/https://doi.org/10.1016/j.enggeo.2008.01.015>, <https://www.sciencedirect.com/science/article/pii/S0013795208000239>, 2008b.
- Wirz, V., Beutel, J., Buchli, B., Gruber, S., and Limpach, P.: Temporal Characteristics of Different Cryosphere-Related Slope Movements in High Mountains, pp. 383–390, Springer, Berlin, Heidelberg, https://doi.org/10.1007/978-3-642-31337-0_49, 2013.

- Wirz, V., Beutel, J., Gruber, S., Gubler, S., and Purves, R. S.: Estimating velocity from noisy GPS data for investigating the temporal variability of slope movements, *Natural Hazards and Earth System Sciences*, 14, 2503–2520, <https://doi.org/10.5194/nhess-14-2503-2014>, 2014a.
- 755 Wirz, V., Geertsema, M., Gruber, S., and Purves, R. S.: Temporal variability of diverse mountain permafrost slope movements derived from multi-year daily GPS data, Mattertal, Switzerland, *Landslides*, 13, 67–83, <https://doi.org/10.1007/s10346-014-0544-3>, 2014b.