

---

Dear Editor and Reviewers,

Thank you for your attention. We appreciate your earnest work including comments and suggestions concerning our manuscript. Based on the comments, we have made careful modifications on the original manuscript. As required by this journal, the responses to the referees have been structured as follows: (1) comments from Referees and corresponding author's response, and (2) author's changes in manuscript. Therefore, we have responded to the reviewers in the sequence: (1) the original comments in black and our point-by-point responses in blue, and (2) our revised manuscript highlighted using “track change”. All line numbers in the responses are made with respect to this “track change” version of the manuscript.

The details of the response to the referee and the corresponding revised manuscript are shown in the following section. We hope that the revised manuscript at this stage could be qualified for potential publication, and we look forward to hearing from you soon.

Yours sincerely,

Prof. Yongqiang Zhang; Dr. Peilin Song

Key Laboratory of Water Cycle and Related Land Surface Processes, Institute of Geographic Sciences and Natural Resources Research, The Chinese Academy of Sciences, Beijing 100101, China

Emails: [zhangyq@igsnr.ac.cn](mailto:zhangyq@igsnr.ac.cn); [songpl@igsnr.ac.cn](mailto:songpl@igsnr.ac.cn)

---

# Author Response to Referee-report-2

**Journal:** ESSD

**Title:** A 1-km daily surface soil moisture dataset of enhanced coverage under all-weather conditions over China in 2003-2019

**Author(s):** Peilin Song et al.

**MS No.:** essd-2021-428

**MS Type:** Data description paper

## Response to specific comments

*1. Feedback towards the response letter*

*1) The authors emphasized that the proposed dataset aims to capture spatiotemporal trends national wide, and regional uncertainty analysis in Fig. 5, or temporal analysis requested from reviewer #2, are not focused. Site distribution could be a limitation but won't affect the analysis.*

*Can you provide temporal analysis at typical regions, and spatial uncertainty analysis (as in Fig. 5), by comparing the data with SMAP? Temporal variation comparison between regional averages of two datasets can prevent the 'cherry picking' and resolution mismatch issue.*

*(Maybe more datasets are better, to see if this proposed data is not consistent with the majority.) Even though SMAP has a coarse resolution, it still has relatively good accuracy, spatiotemporal continuity, and reliability from passive microwave observations. If the study focuses on national scale analysis, coarse resolution won't be a problem.*

*What I would like to point out here is that, the advantage of a dataset with a high spatiotemporal resolution is to do regional analyses, not a national scale. Therefore, I would still recommend the authors provide such detailed regional and temporal assessment.*

*Additionally, considering that the model parameters are obtained mainly based on spatial information national wide, accuracy stability at the time dimension is very important.*

### **Response:**

We have accepted your suggestions and added temporal analysis of our developed product against SMAP 36-km SSM by dividing China into six geographic regions. Please see Lines 512-528 as well as the new added Fig.5 for details. Descriptions about the study area in Section 2.1.3 is also refined.

We also have added spatial uncertainty analysis for both our developed data and the SMAP-sentinel data against SMAP 36-km SSM. The results are shown in Fig.6 (Just the

original Fig.5)-(c) and -(d). Please see relevant analyses in Lines 546-556. Clearly, the advantage of our developed product over the existing SMAP-Sentinel combined product is found mainly in the south-western part of the country with increased topographic effects.

2) *SM and radiative temperature have strong interactions during the daytime due to ET and energy partitioning, unlike other “triangle method”-based studies, why does the proposed method only used nighttime LST, when the whole energy partitioning process is very weak? (even Fig. 2 of the response letter shows the daytime relationship between LST and vegetation cover)*

#### Response:

Thanks for your questions. We’d like to explain the reason for using nighttime LST from the following perspectives.

First, we found that Dr.Merlin’s team indeed prefer using daytime LST for downscaling the early morning SMAP or SMOS SSM in their studies. However, other study (Piles et al., 2014) reports close performances between using daytime and nighttime LST. Such inconsistent results can at least lead to a conclusion that whether the daytime LST outperforms the nighttime LST may depend on the specific case. From the point of view of physical mechanisms, LST influences SSM through the intermediate parameter of evaporative efficiency (i.e.  $EE = \frac{LST_{max} - LST_{modis}}{LST_{max} - LST_{min}}$ ). We herein made a simple experiment, based on the

Aqua MODIS daytime and nighttime LST images in China on June 30, 2018. We defined the  $LST_{max}$  and  $LST_{min}$  as the maximum and minimum LST of each 36-km pixel, and then calculated EE for each 1-km LST. The day-time and night-time comparisons are shown in the following Fig.1. Fig.1-(a) shows that the LST variation in the night time is weaker than in the day time. From Fig.1-(b), however, the variation range for day-time and night-time EE is much closer. This indicates that influences of weaker energy partitioning process in the night time on EE estimates (and SSM downscaling performance) is not so strong.

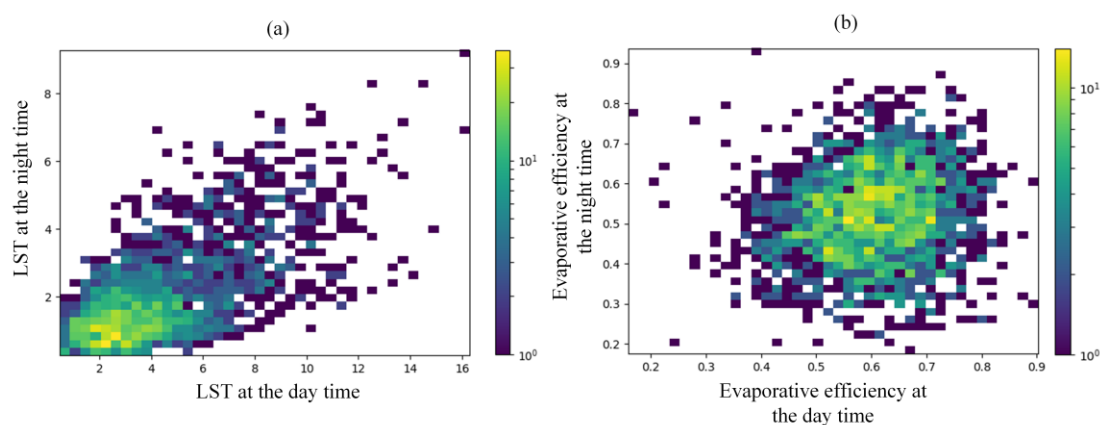


Fig.1 An experiment illustrating difference between day-/night- time LST (a) and day-/night-time EE (b), using Aqua MODIS data on June 30, 2018.

Second, as we have responded in the last round of revision, LST cloud-gap-filling results at night have higher reliability than in the day time. Also, consistency between satellite and ground-based temperature measurements is better at night than in the day time. Therefore, using night-time LST can generate more consistent SSM estimates for all-weather conditions, and can better implement validation of the SSM product based on ground measurements.

---

Besides, as night-time LST are synchronously observed with AMSR-2 TB, this may avoid influence from rapid soil moisture change during the time lag between day-time and night-time observations.

Based on all above, we believe using night-time LST is a better choice for downscaling PM SSM for our study case.

## 2. Issues with the data

*After I downloaded the proposed dataset, I found several issues, especially focusing on regional levels, and that is why I start to suspect its ability to work on regional studies.*

*Taking Day 2008053 as an example:*

- 1) *mosaic issue/spatial discontinuity. Clearly severe mosaic patterns are illustrated. Such an issue is also obvious in northeastern China on this day. In fact, I can find similar mosaic patterns in most images and places, such as a day (Day 2008210) with good spatial completeness at central south of China: pixels at connection regions among mosaics will have large uncertainties. Such mosaic issue is not reflected in Fig. 5. This problem should be focused on because it will affect the feasibility in regional studies.*

### **Response:**

Thanks for your comments to our data product. We admit that the mosaic issue is one that we cannot completely solve based on current downscaling frameworks. Please see Equation-5 in Section 2.2.2. In this downscaling equation, the 1-km SSM is the sum of the 36-km PM SSM plus 1-st and even higher orders of derivatives of a specific model function. This means, the spatial texture of the 36-km PM SSM is inherently contained in the finally downscaled dataset. For cases with drastically varied texture on neighboring PM pixels (for such cases, one of the PM SSM retrievals may have relatively lower reliability), the mosaic issue is raised for the downscaled SSM.

Actually, this problem exists for all mapping results shown in existing studies like (Molero et al., 2016; Stefan et al., 2020; Peng et al., 2016). Since our study is conducted at a much large spatial area, the problem can be even more obvious especially for special land cover conditions that may influence the accuracy of PM SSM (e.g. in the Qinghai-Tibet Plateau with complicated topography, melt snow or partially frozen soils that cannot be completely screened out by the PM product flag in winter).

As mentioned in Section 2.2.2, we have used a parameter of ‘spatial square window (ws)’ in Equation-(3) to decline this negative effect to the best of our ability. But overall, we believe the fundamental reason for this problem is related to the quality of the PM SSM, as well as other uncertainty sources discussed in Section 4.1 and 4.2. Therefore, completely solving this problem requires a series of improvement in future studies.

We have added a paragraph to specifically discuss this issue. Please see Lines 767-781 in Section 4.3.

- 2) *Besides, there are lots of randomly scattered high SM values (case Day 2008053), which seems not correct in the dry region:*

### **Response:**

---

The algorithm is consistent for all pixels including the scattered ones. Although these scattered high SSM values may contain higher uncertainties, possibility does exist that they represent a situation of partially melt snow or ice-water mixture in the northwestern China in winter. As our ground observation data cannot evaluate such situations accurately in the current time, we finally decided to preserve such pixels and leave them for “further investigation through field survey or experiments”. Please see our added discussion on this issue in Lines 775-781 in Section 4.3.

3) *There are no coordinate, projection, or geolocation information in the dataset, causing it hard to be used. Moreover, I would like to recommend the authors include ‘QC’ band in the dataset in the future version, based on comprehensive uncertainty analysis and available input data.*

**Response:**

The projection and geo-transform information is stored in the metadata (Global\_Attributes) of each HDF5 files. Such a file structure is learned from that of NASA MODIS datasets. We suggest you to examine it through a professional HDF5-reading software like Beam-VISAT. We are contacting the manager of the TPDC (<http://data.tpsc.ac.cn/>) web database for uploading an updated user guideline on this information. However, this may take extra time before the updated guideline is available.

We appreciate your suggestion on the ‘QC’ band. We initially planned to create this band, but has finally decided to delay it to the future version, before which we may need a more comprehensive judgement on the data product based on feedback from community users.

**Technical comments**

1. Line 54: blank missing before ‘(’

**Response:**

Revised already.

**Reference**

Molero, B., Merlin, O., Malbêteau, Y., Al Bitar, A., Cabot, F., Stefan, V., . . . Jackson, T. J.: SMOS disaggregated soil moisture product at 1km resolution: Processor overview and first validation results, Remote Sens. Environ., 180, 361-376, <http://doi.org/10.1016/j.rse.2016.02.045>, 2016.

Peng, J., Loew, A., Zhang, S. Q., Wang, J., and Niesel, J.: Spatial downscaling of satellite soil moisture data using a vegetation temperature condition index, IEEE Trans. Geosci. Remote Sens., 54, 558-566, <http://doi.org/10.1109/TGRS.2015.2462074>, 2016.

Piles, M., Sanchez, N., Vall-llossera, M., Camps, A., Martinez-Fernandez, J., Martinez, J., and Gonzalez-Gambau, V.: A downscaling approach for SMOS land observations: Evaluation of high-resolution soil moisture maps over the Iberian Peninsula, IEEE J. Sel. Top. Appl. Earth Observ. Remote Sens., 7, 3845-3857, <http://doi.org/10.1109/JSTARS.2014.2325398>, 2014.

Stefan, V. G., Merlin, O., Escorihuela, M.-J., Molero, B., and Er-Raki, S.: Temporal Calibration of an Evaporation-Based Spatial Disaggregation Method of SMOS Soil Moisture Data, Remote Sens., 12, 1671, 2020.

---

# **A 1-km daily surface soil moisture dataset of enhanced coverage under all-weather conditions over China in 2003-2019**

Peilin Song<sup>1,4</sup>, Yongqiang Zhang<sup>1\*</sup>, Jianping Guo<sup>2\*</sup>, Jiancheng Shi<sup>3</sup>, Tianjie  
Zhao<sup>4</sup>, Bing Tong<sup>2</sup>

<sup>1</sup> Key Laboratory of Water Cycle and Related Land Surface Processes, Institute of Geographic Sciences  
and Natural Resources Research, The Chinese Academy of Sciences, Beijing 100101, China

<sup>2</sup> State Key Laboratory of Severe Weather, Chinese Academy of Meteorological Sciences, Beijing  
100081, China

<sup>3</sup> National Space Science Center, Chinese Academy of Sciences, Beijing 100190, China

<sup>4</sup> State Key Laboratory of Remote Sensing Science, Aerospace Information Research Institute, Chinese  
Academy of Sciences, Beijing 100101, China

*\*Correspondence to:* Yongqiang Zhang ([zhangyq@igsrr.ac.cn](mailto:zhangyq@igsrr.ac.cn)); Jianping Guo ( [jpguo@cma.gov.cn](mailto:jpguo@cma.gov.cn) )

---

## Abstract:

Surface soil moisture (SSM) is crucial for understanding the hydrological process of our earth surface. Passive microwave (PM) technique has long been the primary tool for estimating global SSM from the view of satellite, while the coarse resolution (usually  $>10$  km) of PM observations hampers its applications at finer scales. Although quantitative studies have been proposed for downscaling satellite PM-based SSM, very few products have been available to public that meet the qualification of 1-km resolution and daily revisit cycles under all-weather conditions. In this study, we developed one such SSM product in China with all these characteristics. The product was generated through downscaling the AMSR-E/AMSR-2 based SSM at 36-km, covering all on-orbit time of the two radiometers during 2003-2019. MODIS optical reflectance data and daily thermal infrared land surface temperature (LST) that had been gap-filled for cloudy conditions were the primary data inputs of the downscaling model, so that the “all-weather” quality was achieved for the 1-km SSM. Daily images from this developed SSM product have quasi-complete coverage over the country during April-September. For other months, the national coverage percentage of the developed product is also greatly improved against the original daily PM observations, through a specifically developed sub-model for filling the gap between seams of neighboring PM swaths during the downscaling procedure. The product is well compared against *in situ* soil moisture measurements from 2000+ meteorological stations, indicated by station averages of the unbiased RMSD ranging from 0.052 vol/vol to 0.059 vol/vol. Moreover, the evaluation results also show that the developed

---

product outperforms the SMAP-Sentinel (Active-Passive microwave) combined SSM product at 1-km, with a correlation coefficient of 0.55 achieved against that of 0.40 for the latter product. This indicates the new product has great potential to be used for hydrological community, agricultural industry, water resource and environment management.

## 1. Introduction

Surface soil moisture (SSM) is one of the most important variables that dominate the mass and energy cycles of earth surface system (Entekhabi et al., 2010b). Satellite-based SSM datasets of sufficiently fine spatio-temporal resolutions over large-scale areas have significant implication on improved investigations at various research fields including hydrological signature identification (Zhou et al., 2021; Jung et al., 2010), agricultural yield production estimation (Ines et al., 2013; Pan et al., 2019), drought/waterlogging monitoring and warning (Vergopolan et al., 2021; Den Besten et al., 2021; Jing and Zhang, 2010), as well as weather prediction and future climate analysis (Koster et al., 2010; Jeffrey et al., 2001). Microwave bands with centimeter-level or longer wavelengths (X-band, C-band, and L-band) are currently identified as the primary band channels suitable for SSM observations from view of satellite, due to their high penetration capabilities through cloud layers and vegetation canopies. In terms of sensor types, microwave SSM detection includes passive microwave (radiometer-based) techniques and active microwave (radar, scatterometer) techniques. Satellite-based passive microwave (PM) radiometers, e.g. the Soil Moisture Active



---

Passive (SMAP), the Soil Moisture and Ocean Salinity (SMOS), and the Advance Microwave Scanning Radiometer-2 (AMSR-2), can obtain SSM observations at a revisit interval of 1-3 days, with relatively poor native spatial resolutions of tens of kilometers. Active microwave (AM) such as radar can achieve kilometer-level and even finer resolution of observations targeting at the earth surface. However, this usually sacrifices the swath width of radar configuration, because of which, most satellite-based synthetic aperture radars (SAR) have an obviously longer global revisit cycle (usually longer than 5 days, e.g. Sentinel-1 SAR data) than the typical radiometers. Moreover, AM radar backscatter signals are extremely sensitive to speckle noise (Entekhabi et al., 2016), as well as influence from soil roughness, vegetation canopy structure and water content (Piles et al., 2009). All above influential factors have seriously impeded the use of AM radar techniques or combination of passive/active microwave datasets for producing high spatial resolution SSM products with a frequent revisit.

Apart from microwave signals, solar reflectance or ground emission signals originated from optical and infrared band domains also have the potential to reflect SSM variation. Based on optical/infrared bands, however, SSM is typically estimated based on indirect relationships through intermediate variables like soil evaporation (Komatsu, 2003), vegetation condition (Zeng et al., 2004), or soil thermal inertia (Verstraeten et al., 2006). To overcome the spatio-temporally instable performance on SSM modelling that might be brought by such indirect relationships, they are typically fused with the PM SSM datasets. In this manner, it can well reconcile the advantage of PM observations with respect to its high sensitivity to SSM variation, as well as that of

---

optical/infrared observations with respect to its finer spatial resolutions at kilometer- or even hectometer-levels. Such data fusion techniques are also known as downscaling techniques of PM remote sensing SSM. Archetypal downscaling models include the “universal triangle feature space (UTFS)”-based models (Chauhan et al., 2003; Choi and Hur, 2012; Sanchez-Ruiz et al., 2014), the “DISaggregation based on a Physical And Theoretical scale CHange (DISPACTH)” model (Merlin et al., 2010; Merlin et al., 2005; Merlin et al., 2013; Merlin et al., 2008), and the “University of California, Los Angeles (UCLA)” model (Peng et al., 2016). The physics of these models are mainly based on the response of SSM variation to changes in soil evaporation or land surface evapotranspiration. Another significant branch of such downscaling models are based on the sensitivity of SSM to soil thermal inertia, which is quantified by diurnal LST difference estimated from thermal-infrared wave bands (Fang and Lakshmi, 2013; Fang et al., 2018).

Sabaghy et al. (2020) have shown that using optical and infrared data can achieve finer-resolution SSM estimates which are better consistent with ground soil moisture records, compared with using the radar datasets. Moreover, considering the short revisit cycle (daily) of optical/infrared sensors onboard typical polar-orbit satellites, using optical/infrared datasets to downscale PM SSM should be among the optimal methods for obtaining SSM data with high spatio-temporal resolutions over national, continental, or global scales. On the other hand, satellite remote sensing SSM products that are characterized by 1-km resolution of daily revisit intervals and stable long time series dating back to at least 15-20 years ago, are urgently required for accelerating the

---

development of various research fields, especially agriculture industry, water resources management, and hydrological disaster monitoring (Sabaghy et al., 2020; Mendoza et al., 2016). However, very seldom sets of such data products are publicly available to the remote sensing research community because of the following drawbacks. First, there is a serious lack of cloud-free optical/infrared imagery, which means the method cannot deliver any SSM downscaling under cloudy/rainy weather. Second, most of the above-mentioned optical/infrared-data-based downscaling methods were mainly evaluated at regional or even smaller scales. This might raise concern on the universality of those methods. For example, the DISPATCH method has been recognized to be less effective in humid (energy-limited) regions compared with in arid and semi-arid (water-limited) regions (Molero et al., 2016; Song et al., 2021; Zheng et al., 2021). As far as the UTFS-based method is concerned, a poorer performance was obtained compared to the DISPATCH in a typical water-limited region in North America, according to the experiment conducted by Kim and Hogue (2012).

To improve the above-mentioned issues, we produced an all-weather daily SSM data product at 1-km resolution all over China during 2003-2019, based on fusion of multiple remote sensing techniques, including reconstruction of optical/infrared observations under cloud as well as an improved PM SSM downscaling methodology proposed in our previous study (Song et al., 2021). The potential significance of this study includes

(i) to better serve and investigate the land surface hydrology processes and their sophisticated interactions to human society at multi-scale (from national to regional)

---

resolutions in China because the country covers about 1/15 of the global terrestrial area with about 1/5 of the world population, and (ii) to provide a methodology framework that can inspire future studies on generating similar SSM datasets all over the globe, based on the plentifulness of resources on climate type, land covers, and topography in China.

## **2. Methods and Materials**

### **2.1 Datasets**

#### **2.1.1 PM SSM data**

Spatial downscaling of PM SSM is the fundamental theory for constructing the target finer-resolution data product in this study. Therefore, the native retrieval accuracy of the coarse-resolution PM SSM data product, based on which the downscaling procedures are performed, is considerably crucial to the performance of the downscaled data product (Busch et al., 2012; Im et al., 2016; Kim and Hogue, 2012). Although the L-band PM brightness temperature (TB) observed by satellite missions such as SMAP or SMOS are considered more suitable for SSM retrieval compared with C- or X-band TB, both above missions started their space operations in the 2010s. This means that to obtain downscaled SSM of longer historical periods, we still require to rely on other C-/X-band-based radiometers which started their operations earlier than SMAP and SMOS. An optimal satellite PM TB observation system dating back to earlier years of this century is composed of the “Advanced Microwave Scanning

---

Radiometer of the Earth Observing System (AMSR-E)”, together with its successor of AMSR-2. AMSR-E operated during 2002-2011 onboard the Aqua satellite which is governed by National Aeronautics and Space Administration (NASA), whilst AMSR-2 is operating onboard the Global Change Observation Mission1-Water (GCOM-W1) satellite developed by the Japan Aerospace Exploration Agency (JAXA) since 2012.

Several classical PM SSM retrieval algorithms have been applied to the aforementioned “AMSR series (including AMSR-E and AMSR-2)” TB for generating long-term global SSM products at 25 km ([Table 1](#)~~Table 1~~), including the JAXA algorithm (Fujii et al., 2009; Koike et al., 2004), the “Land Parameter Retrieval Model (LPRM)” algorithm (Song et al., 2019b; Meesters et al., 2005; Owe et al., 2001), and the algorithm developed by the University of Montana (UMT) (Jones et al., 2009; Du et al., 2016). A recent AMSR-based night-time SSM product during 2002-2019 has been produced through a neural network trained against SMAP [radiometer-based](#) descending SSM (hereafter referred to as “NN-SM product”) (Yao et al., 2021). The global validation results show that this NN-SM product is better than the JAXA and LPRM products.

Besides, the NN-SM has also been compared with another long-term ~25-km all-weather SSM dataset generated through the European Space Agency (ESA)’s Climate Change Initiative (CCI) program. The ESA-CCI SSM product is different from the rest products mentioned above in that it was implemented by fusion of observations from comprehensive AM- and PM-based satellite sensors, rather than only relying on the radiometers of AMSR series. According to Yao et al. (2021), the ESA-CCI SSM has

---

slightly better validation accuracy than the NN-SM product, but the number of available observations per pixel cell in an entire year is much smaller for the ESA-CCI SSM in Southeast China. In view of all above coarse-resolution SSM data products, we finally selected the NN-SM product to implement the following spatial downscaling procedures rather than the ESA-CCI SSM, to make a balance between data accuracy and data availability per year. We have also made additional evaluations within China in Section Appendix-A to ensure the relatively outstanding performance of the NN-SM product as described above.

Table 1 Information of all-weather microwave remote sensing coarse-resolution SSM data products that can be potentially downscaled to obtain fine resolution SSM.

Name	Resolution	Satellite radiometers involved	Data availability (URL)
NN-SM product	36 km (by the EASE Grid projection)	AMSR-E/ AMSR-2 (2002-2011, 2012-present)	<a href="https://data.tpsc.ac.cn/en/data/c26201fc-526c-465d-bae7-5f02fa49d738/">https://data.tpsc.ac.cn/en/data/c26201fc-526c-465d-bae7-5f02fa49d738/</a>
ESA-CCI v6.1 product	0.25°	AMSR-E/ AMSR-2/ SMOS/ WindSat/ SMMR/ SSM/I/ TMI (1978-2020)	<a href="https://www.esa-soilmoisture-cci.org/v06.1_release">https://www.esa-soilmoisture-cci.org/v06.1_release</a>
JAXA product	0.25° / 0.1°	AMSR-E/ AMSR-2 (2002-2011, 2012-present)	<a href="https://gportal.jaxa.jp/">https://gportal.jaxa.jp/</a>
LPRM product	0.25° / 0.1°	AMSR-E/ AMSR-2 (2002-2011, 2012-present)	<a href="https://search.earthdata.nasa.gov/">https://search.earthdata.nasa.gov/</a>
UMT product	25 km (by the EASE Grid projection)	AMSR-E/ AMSR-2 (2002-present)	<a href="http://files.ntsg.umd.edu/data/LPDR_v2/">http://files.ntsg.umd.edu/data/LPDR_v2/</a>

---

### 2.1.2 Optical remote sensing data and digital elevation model (DEM)

Optical remote sensing datasets provide finer spatial texture information on the daily basis for the downscaling purpose of PM SSM. Such data that can be used as inputs of our SSM product processing line are mainly provided by the Moderate-resolution Imaging Spectroradiometer (MODIS) onboard the Terra and Aqua satellites. Specifically, they involve the 1-km daily night-time Aqua MODIS LST product (MYD21A1N.v061) and the 500-m daily “Bidirectional Reflectance Distribution Function (BRDF)” - Adjusted Reflectance dataset (MCD43A4.v061). MYD21A1 LST data can be recognized as a crucial proxy of land surface thermal capacity (Fang et al., 2013) and soil evaporative rate (Merlin et al., 2008). The MCD43A4 nadir reflectance product, with view angle effect corrected using the BRDF model, is capable to provide observations from visible to shortwave-infrared bands that can characterize water content variation of the bare soils as well as the vegetation canopy. Overall, the above-mentioned datasets were selected primarily because they deliver indicators (land surface thermal capacity, soil evaporative rate, or vegetation condition) that can well response to soil moisture dynamics from different aspects. Prior to being employed for SSM downscaling, conventional pre-processing procedure of pixel quality check was applied for both optical products by screening out pixels not classed as “good quality”, according to the 8-bit “Quality Assessment (QA)” field of each spectral band. Moreover, to normalize their natively different spatial resolutions, all MCD43A4 based reflectance values at the 500-m pixel level were upscaled to the sinusoidally projected MODIS 1-km grids using their spatial averages.

---

Apart from MODIS optical remote sensing data, all 90-m DEM tiles generated by the NASA Shuttle Radar Topography Mission (SRTM; <http://srtm.csi.cgiar.org/>, last access: July 10, 2020) were mosaicked all over China and then employed as another essential input variable for the procedures as described by Section 2.2.2 below. Similar to that applied to the MCD43A4 product, spatial upscaling in correspondence to the MODIS 1-km grids is also an indispensable pre-processing step for the mosaicked DEM data.

### 2.1.3 Study area and ~~Ground~~-validation data

Our study area is set up as the total terrestrial extent of China. To comprehensively evaluate the SSM downscaling performances for different geographic ~~settings~~regions (see Section 3.3), we divided the country further into six different geographic-climate regions ~~based on various features involving~~using elevation, ~~rainfall~~precipitation, hydrogeology, vegetation type, and topography. ~~Particularly, they~~The six regions include the Northeast Monsoon (NEM) region, the Northwest Arid (NWA) region, the Qinghai–Tibet Plateau (QTP) region, the North China Monsoon (NCM) region, the South China Monsoon (SCM) region, and the Southwest Humid (SWH) region. The detailed delimitation principle of these geographic-climate regions was originally described in Meng et al. (2021). The geographic zoning map is shown in Fig. 1, while the corresponding shapefile boundary files can be ~~derived~~accessed from the Resource and Environment Science and Data Center of the Chinese Academy of Sciences (<http://www.resdc.cn/>, last access: May 22, 2021).



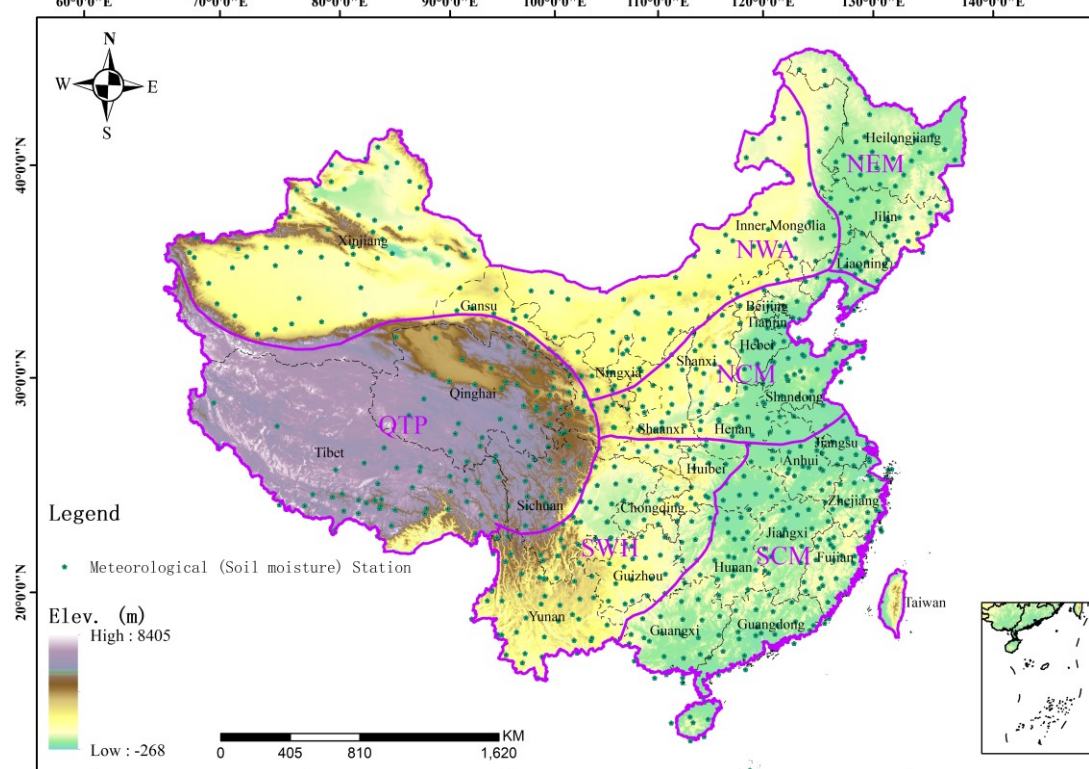
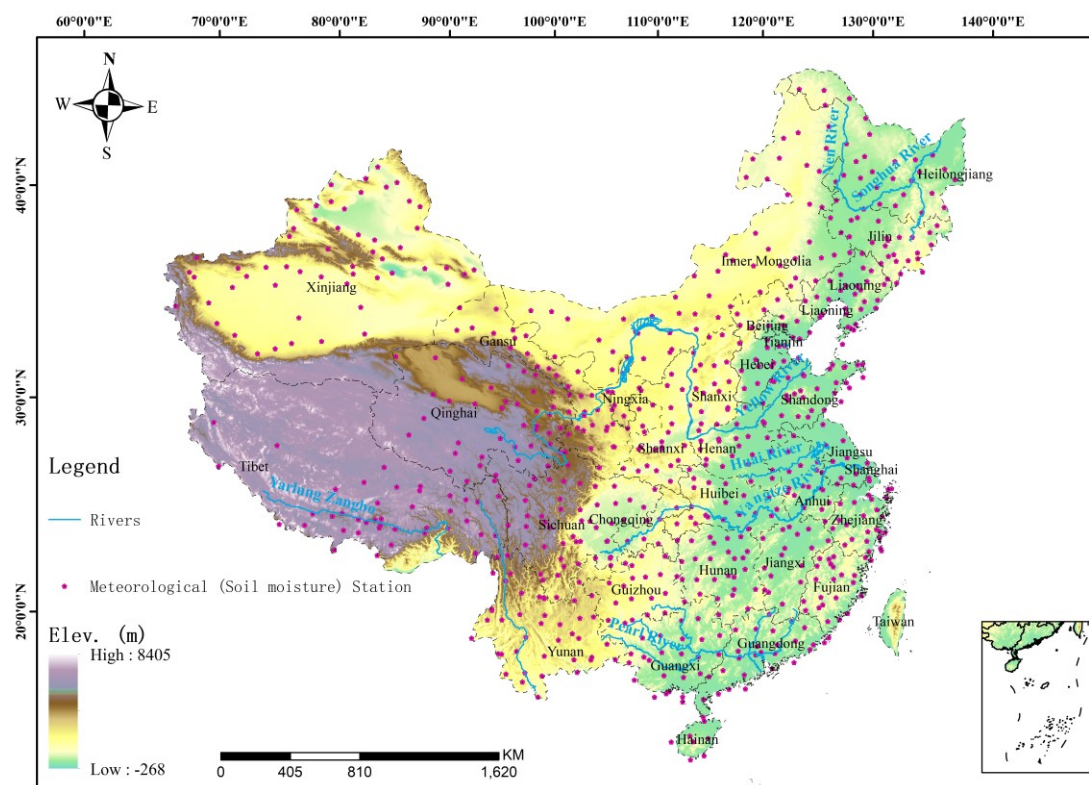


Fig. 1 The provincial-level administrative geographic zoning map of China (delineated using the purple color) superposed with topographic information, as well as general locations for the 756 basic

---

meteorological stations (<http://data.cma.cn/>, last access: January 20, 2021) that provide partial

benchmark measurements for SSM and LST validation in this study.

We utilized ground soil moisture measurements for validating the downscaled remote sensing SSM product at the local scale. The ground measurements are derived from 2417 meteorological stations (including 756 basic stations of the National Climate Observatory and 1661 regionally intensified stations) of over China, as partially shown in Fig. 1~~Fig. 1~~. The soil moisture measurement devices in these stations, with uniform observation standards, are instrumented under the national project of “Operation Monitoring System of Automatic Soil Moisture Observation Network in China (Wu et al., 2014 )”, the construction of which has been led by China Meteorological Administration since 2005. Until 2016, all stations have been in operation for automatically observing hourly in situ soil moisture dynamics at eight different depth ranges (0-10 cm, 10-20 cm, 20-30 cm, 30-40 cm, 40-50 cm, 50-60 cm, 70-80 cm, 90-100 cm). It has also been widely used by previous studies for evaluating satellite soil moisture estimates in China (Meng et al., 2021; Chen et al., 2020; Zhang et al., 2014; Zhu and Shi, 2014). In our current study, ground measurements matching the shallowest depth range (0-10 cm) from the initial time of each station until the end of 2019 are employed as validation benchmark of the satellite SSM retrievals. At the temporal dimension, measurements made at 1:00 A.M. and 2:00 A.M are averaged, in order to match the mean satellite transit time of 1:30 A.M. for AMSR descending observations.

Moreover, 0-cm top ground temperatures are simultaneously measured at all these meteorological stations on the daily basis, at the local time windows of 2:00 A.M./P.M.

---

and 10:00 A.M./P.M., respectively. We therefore exploited such measurements recorded at 2:00 A.M. to validate the cloud gap-filled night-time (~1:30 A.M.) LST estimates over the Aqua-MODIS based 1-km pixels containing these stations (see Section 2.2.2). Our primary validation period covers the entire years of 2017, 2018, and 2019.

In addition to the ground soil moisture measurements, the SMAP Level3 radiometer-based daily 36-km SSM product (<https://dx.doi.org/10.5067/OMHVSRGFX38O> ) in its descending orbit scenes (at ~6:00 A.M. of local time) from 2016 to 2019, was employed as another complementary validation benchmark. This dataset is potential for providing more comprehensive evaluations to our developed product at regional/national scales, especially on account of its notably creditable performance (see Fig. A1 in Appendix A). The latest version of this dataset (SPL3SMP, Version 8) contains soil moisture retrievals based on different algorithms including the dual channel algorithm and the single channel algorithm. In this study we only extracted SSM estimates derived with the dual channel algorithm because this algorithm ~~was reported to slightly surpass~~ outperform the single channel algorithm over some agricultural cropland core validation sites (O'Neill et al., 2021).

#### 2.1.4 Ancillary SSM products for comparison

In order to comprehensively demonstrate the validation performance of our proposed SSM product, there is necessity to make an inter-comparison against similar

---

existing datasets. In this regard, we introduced the Level2 SMAP/Sentinel Active-Passive combined SSM product on 1-km earth-fixed grids, i.e., the SPL2SMAP\_S\_V3 dataset (Das et al., 2020), and used its validation performance against in-situ measurements throughout the years of 2017, 2018, and 2019, as a baseline to better evaluate our proposed SSM product. The SPL2SMAP\_S\_V3 dataset contains global SSM at resolutions of 3 km and 1 km respectively, which were disaggregated from the SMAP radiometer-based SSM retrievals of 36-km/9-km footprints in conjunction with the high-resolution Sentinel-1 C-band radar backscatter coefficients (Das et al., 2019). To our knowledge, this dataset is possibly the only publicly available product which can provide global remote sensing SSM estimates at the 1-km resolution. The sentinel backscatter coefficient inputs for this product are only those received in the descending orbit scenes (at ~6:00 A.M. of local time), whilst the closest SMAP SSM retrievals from either ascending (at ~6:00 P.M. of local time) or descending orbits are used to spatially match up with the sentinel-1 scene. It is noticed that at the descending observation time the soil moisture vertical profile has approached a hydrostatic balance (Montaldo et al., 2001), thereby providing the optimal chance for soil moisture fusion and validation with observations at different soil depths. Therefore, we only selected the 1-km disaggregated SSM estimates based on descending SMAP SSM retrievals (i.e., the subset with field name of ‘disagg\_soil\_moisture\_1 km’ in the SPL2SMAP\_S\_V3 dataset). Meanwhile, the 0-10 cm in-situ soil moisture measurements observed at 6:00 A.M. and the SMAP radiometer-based descending SSM estimates were employed as

the validation benchmarks, in a manner similar to that applied to our proposed SSM product (Section 2.1.3).

(O'Neill et al., 2021)

## 2.2 Methodology

The general methodological framework for producing the all-weather daily 1-km SSM product is shown as in Fig. 2, with details described in the following context of this section.

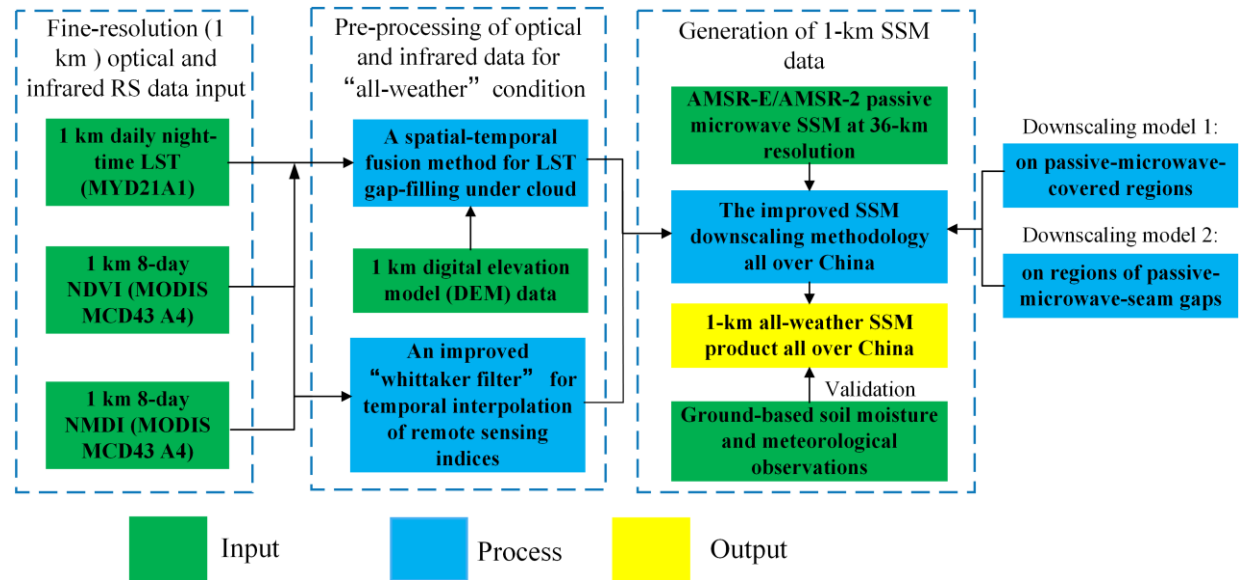


Fig. 2 The overall methodological framework of this study.

### 2.2.1 Reconstruction of thermal-infrared LST and remote sensing (vegetation) indices under cloud

Reconstruction of missing pixels under cloud in the optical remote sensing input datasets is the prerequisite for achieving the “all-weather” property of the final downsampled SSM output. For reconstructing thermal-infrared LST, we adopted the cloud gap-filling method as proposed by our previous study (Song et al., 2019a). This method, also referred to as a typical “spatio-temporal data fusion” (STDF) method (Dowling et al., 2021), was built using clear-sky LST observations of spatially

---

neighboring pixels observed at proximal dates, with concurrent NDVI and DEM also employed as additional data inputs. The STDF method can be expressed as follows:

$$LST_{t_1}^* = a \times LST_{t_0}^* + b \times NDVI_{t_1}^* + c \times DEM^* + d \quad (1)$$

Where the superscript “\*” indicates that this variable has been normalized to the range 0 to 1.0 (Song et al., 2019a), based on the maximum and minimum values of that variable found across China (excluding invalid values representing states of snow, ice, and water bodies). Parameters  $a$ ,  $b$ ,  $c$ , and  $d$  are coefficients fitted between all pixels with clear-sky LST estimates on a specific date  $t_1$  ( $LST_{t_1}^*$ ) and their counterparts on one proximal date,  $t_0$  ( $LST_{t_0}^*$ ).  $NDVI_{t_1}^*$  indicates the corresponding (normalized) NDVI on the  $t_1$  date calculated using the MCD43A4 daily product. After deriving the coefficients of  $a$ ,  $b$ ,  $c$ , and  $d$ , Equation (1) was used to fill all cloudy MODIS LST pixels on the  $t_1$  date. For any  $t_1$  date included in the study period, the  $t_0$  date was iterated among all neighboring dates of  $t_1$  meeting the condition  $|t_0 - t_1| \leq 30$  (from the nearest date to the furthest date). The average of estimated LST values for  $t_0$  was then taken where a cloud gap pixel was filled more than once (based on the iterative  $t_0$  dates). The iteration was stopped when the fraction of pixels with effective LST values on  $t_1$  was equal to or exceeded 0.99.

An important flaw of this STDF method should be noticed with regard to potentially existential bias of the cloud gap-filled LST outputs, because the outputs represent theoretically reconstructed LST under clear sky rather than under the real cloudy condition. Another of our previous studies (Dowling et al., 2021) concerning this STDF method proposed a follow-up step, which incorporated PM-derived surface temperature, to adjust that bias. In our current production pipeline, however, this follow-up step for cloud bias adjustment in LST was not carried out. This is because the results in Section Appendix-B show that using LST generated by the STDF alone

---

leads to more accurate SSM outcomes in general. The possible reasons for this are discussed in Section 4.2.

Reconstruction of the remote sensing vegetation indices under cloudy conditions, including NDVI and MNDI, was simply based on the modified time series filter of the Whittaker Smoother (MWS) as developed by Kong et al. (2019). This is reasonable because the dynamic trends of vegetation growth are relatively less volatile compared to LST on the daily basis, and can thus be gap-filled for missing values using a time-series-filtering-like algorithm.

#### 2.2.2 Improved downscaling technique of SSM based on fusion of PM and optical/infrared data

The core component of the SSM downscaling methodology is an improved linking model between PM SSM and (fine-resolution) optical remote sensing observations. This model enhances the relatively poorer performance of the conventional DISPATCH in energy-limited regions, whilst maintains the generally good quality of the DISPATCH in water-limited ones. Therefore, the improved model is more appropriate to be applied in China which contains a wide range of geographical settings, compared to other conventional downscaling models. Since this model originates from our previous study (Song et al., 2021), herein we simply give its mathematical expression as follows:

$$SSM = \frac{a \times \ln(1 - SEE)}{1 - b \times NMDI} + c \quad (2)$$

In Equation (2), *SEE* denotes “soil evaporative efficiency” and is a mathematical function of LST and the typical Normalized Difference Vegetation Index (NDVI), with its specific form described in Merlin et al. (2008). NMDI is another remote sensing

---

index calculated as  $\frac{R_{infr,860nm} - (R_{sw,1600nm} - R_{sw,2100nm})}{R_{infr,860nm} + (R_{sw,1600nm} - R_{sw,2100nm})}$  (Wang and Qu, 2007).

$R_{infr,860nm}$ ,  $R_{infr,1600nm}$ , and  $R_{infr,2100nm}$  represent land surface reflectance signals derived from three different MODIS-MCD43A4 based near-infrared/shortwave-infrared bands, with their wavelengths centering at 860 nm, 1600 nm, and 2100 nm respectively. The parameters  $a$ ,  $b$ , and  $c$  are empirical coefficients that represent background information of local soil texture and vegetation types. In Song et al. (2021), these coefficients have been fitted and calibrated based on multi-temporal observations at the PM pixel scale. In our current study, however, we have discovered that coupling of multiphase observations at both the spatial and the temporal dimensions can lead to more optimal solution of the coefficients, as they can produce downscaled SSM images with notably declined effect of ‘mosaic’ against the original PM 36-km pixels. Therefore, the modified optimal cost function  $\chi^2$  for deriving these coefficients is re-defined as follows:

$$\chi^2 = \sum_{d=-dl}^{dl} \sum_{i=0}^{N=ws \times ws} w_i \times (SSM_{ob,i,d} - SSM_{mod,i,d})^2 \quad (3)$$

Through the cost function, the spatial extent of each 36-km pixel  $P_0$  on any arbitrary date  $D_0$  obtains a unique set of coefficients. As shown by Equation (3), all pixels were exploited within the spatial square window (with its side length equal to  $ws$ ) centered at  $P_0$  ranging from  $-dl$ -th day to  $dl$ -th day relative to the date of  $D_0$ . To determine the optimum values for  $dl$  and  $ws$ , we have tested each member in the collection of [3, 5, 7, 9, 11, 13] for both of the parameters. Evaluation against in-situ data indicates that the optimum  $dl$  and  $ws$  are 5 and 7, respectively (results are similar to what is shown in Section 3.2, but not presented here).  $SSM_{ob}$  and  $SSM_{mod}$  denote the AMSR NN-SM 36-



---

km SSM observations as well as SSM observations modelled by Equation (2) based on upscaled optical datasets, respectively.  $w_i$  is a weight coefficient used to ensure that neighboring observations near the centering pixel  $P_0$  play more dominating roles as compared with the far-end pixels in the cost function, considering the “Tobler’s First Law of Geography (Sui, 2004)” .  $w_i$  is calculated using an adaptive bi-square function:

$$w_i = [1 - (\frac{dis_i}{b})^2]^2, dis_i < b$$

$$w_i = 0, dis_i \geq b$$
(4)

where  $dis_i$  indicates the distance between the  $i$ -th pixel and the centering pixel  $P_0$ .  $b$  is named as the adaptive kernel bandwidth of the bi-square function (Duan and Li, 2016), and is optimized as 200 km through using a cross validation method as recommended by Brunson et al. (1996).

With the linking model obtained, we can subsequently utilize the spatial downscaling relationship function to produce 1-km fine resolution SSM. The downscaling relationship function is constructed by transforming the linking model into its Taylor expansion formula and preserving all components with respect to the input optical variables of the linking model at first and second orders. This relationship is inspired from Malbêteau et al. (2016) and Merlin et al. (2010), and is mathematically described below:

$$SSM_{1-km} = SSM_{36km} + (\frac{\partial SSM}{\partial SSE})_{36km} \times (SSE_{1km} - \langle SSE \rangle_{36km}) + 0.5 \times (\frac{\partial^2 SSM}{\partial SSE^2}) \times (SSE_{1km} - \langle SSE \rangle_{36km})^2 + (\frac{\partial SSM}{\partial NMDI})_{36km} \times (NMDI_{1km} - \langle NMDI \rangle_{36km}) + 0.5 \times (\frac{\partial^2 SSM}{\partial NMDI^2}) \times (NMDI_{1km} - \langle NMDI \rangle_{36km})^2$$
(5)

In the above relationship,  $\langle \rangle$  denotes the spatial averaging operator for all of the 1-km optical remote sensing input variables within the corresponding 36-km pixel,  $\frac{\partial SSM}{\partial SEE} \left( \frac{\partial^2 SSM}{\partial SEE^2} \right)$  and  $\frac{\partial SSM}{\partial NMDI} \left( \frac{\partial^2 SSM}{\partial NMDI^2} \right)$  respectively denoting the first-(second-) order partial derivative of the linking model described in Equation (2).

It should be noticed that there exist middle-/low-latitude gap regions between seams of neighboring daily AMSR-E(-2) swaths, indicating that  $SSM_{36km}$  in Equation (5) is not always available on the daily basis (Song and Zhang, 2021a). For such PM-seam gaps on a particular date  $t_0$ , the corresponding  $SSM_{36km,t_0}$  in Equation (5) is substituted by  $0.5 \times (SSM_{36km,t_0+1} + SSM_{36km,t_0-1}) + \Delta SSM_{36km,t_0}$ . Herein  $SSM_{36km,t_0-1}$  and  $SSM_{36km,t_0+1}$  respectively denote the SSM estimate before and after the date of  $t_0$ .  $\Delta SSM_{36km,t_0}$  is a component for correcting inter-day bias, with the following expression:

$$\Delta SSM_{36km,t_0} = SSM(SEE_{36km,t_0}, NMDI_{36km,t_0}) - 0.5 \times (SSM(SEE_{36km,t_0-1}, NMDI_{36km,t_0-1}) + SSM(SEE_{36km,t_0+1}, NMDI_{36km,t_0+1})) \quad (6)$$

In the above equation,  $SSM(SEE_{36km}, NMDI_{36km})$  denotes SSM that is directly modelled based on Equation (1) using 36-km SEE and NMDI. The 36-km SEE and NMDI are obtained via averaging the variables spatially from their native resolution at 1-km. If all  $SSM_{36km}$  during the three consecutive days ( $t_0-1$ ,  $t_0$ , and  $t_0+1$ ) are missing due to other extreme conditions like snow, ice, or surface dominated by substantially large water bodies, the downscaling process cannot be fulfilled and all 1-km sub-pixels with the  $SSM_{36km}$  have to be set as null values.

### 2.2.3 Evaluation metrics

We employed the classic metrics of ‘Root Mean Square Difference (RMSD)’ and correlation coefficient ( $r$ -value) for evaluating satellite-based (SSM and LST) estimates

---

against ground measurements. Herein RMSD is not referred to as ‘Root Mean Square Error (RMSE)’, although the latter term shares the same definition and has been used more commonly in previous studies. This is because ~~both the ground observations benchmark data and other benchmark data (i.e. SMAP radiometer-based SSM)~~ may also present measurement uncertainties in practice. For SSM evaluation, the unbiased RMSD, or ubRMSD (Entekhabi et al., 2010a; Molero et al., 2016), is calculated instead of RMSD ~~when validated against ground soil moisture measurements. This can in order to~~ better investigate the time series similarity between satellite and ~~ground soil moisture in situ~~ datasets by eliminating the systematic bias caused by spatial scale mismatch between them.

The above-mentioned classic metrics are primarily suitable to evaluate the absolute reliability of an independent remote sensing product. However, we also require another metric for characterizing the relative improvement of the downscaled SSM estimates against the original PM observations on capturing local soil moisture dynamics. For this purpose, we employed the “gain metric” of  $G_{down}$ , which was developed particularly by Merlin et al. (2015) for assessment of soil moisture downscaling methodology.  $G_{down}$  is a comprehensive indicator for evaluating gains of the downscaled SSM against the original coarse-resolution PM data in terms of their mean bias, bias in variance (slope), and time series correlation with ground benchmark. It has a valid domain between -1 and 1, with positive (negative) value indicating improved (deteriorated) spatial representativeness of the downscaled SSM against the

---

original PM data. Detailed definition and introduction of  $G_{down}$  are given in Equation (8) and Section 3.3 of Merlin et al. (2015).

### 3. Results

#### 3.1 Evaluation on reconstructed thermal-infrared LST under cloud

The meteorological-station-based validation of reconstructed 1-km thermal-infrared LST under cloud were preliminarily fulfilled, to ensure the high quality of input dataset variables for SSM downscaling. Since disadvantageous effects might be brought to this validation campaign by the potentially existing heterogeneity of the validated 1-km thermal-infrared remote sensing pixels, we firstly analyzed correlations between estimated and benchmark datasets at each station, only based on satellite remote sensing observations obtained under clear sky. Stations that have their correlation coefficients ( $r_{clr}$ ) lower than 0.9 herein have to be screened out because there exist higher chances of cross-scale spatial mismatch within and around these stations in terms of the land surface thermal properties. Among all 2417 stations (see Section 2.1.3) where 0-cm in-situ top-ground temperature measurements were available, we finally preserved 2107 stations characterized by  $r_{clr} > 0.9$ . In the subsequent step, remote sensing LST under cloud and under clear-sky conditions were respectively validated at these stations, with the results revealed in [Fig. 3](#). It is manifested through [Fig. 3\(a\)](#) and [3\(b\)](#) that very close performances have been achieved between the clear-sky and the cloudy scenarios, especially considering their almost equally high

---

466 validating correlations between 0.94-0.96. For each independent station, we calculated  
467 the “RMSD difference (RMSD\_diff)” between the two scenarios, based on the formula  
468 of “ $RMSD_{clr} - RMSD_{cld}$  (the subscripts of ‘*clr*’ and ‘*cld*’ denote clear-sky and cloudy  
469 conditions separately)”. The statistical distribution of this RMSD difference with regard  
470 to different stations is shown in ~~Fig. 3~~Fig. 3-(c). Apparently, 1942 stations all over the  
471 country have obtained an RMSD difference value below 2.6 K, and the mean RMSD  
472 difference is about 1.9 K. All above results have indicated that the uncertainty of our  
473 night-time LST reconstruction algorithm proposed for cloudy conditions is not very  
474 significant. The corresponsive uncertainty that could be propagated to downscaled SSM  
475 in this stage is analyzed below in Section 3.2.

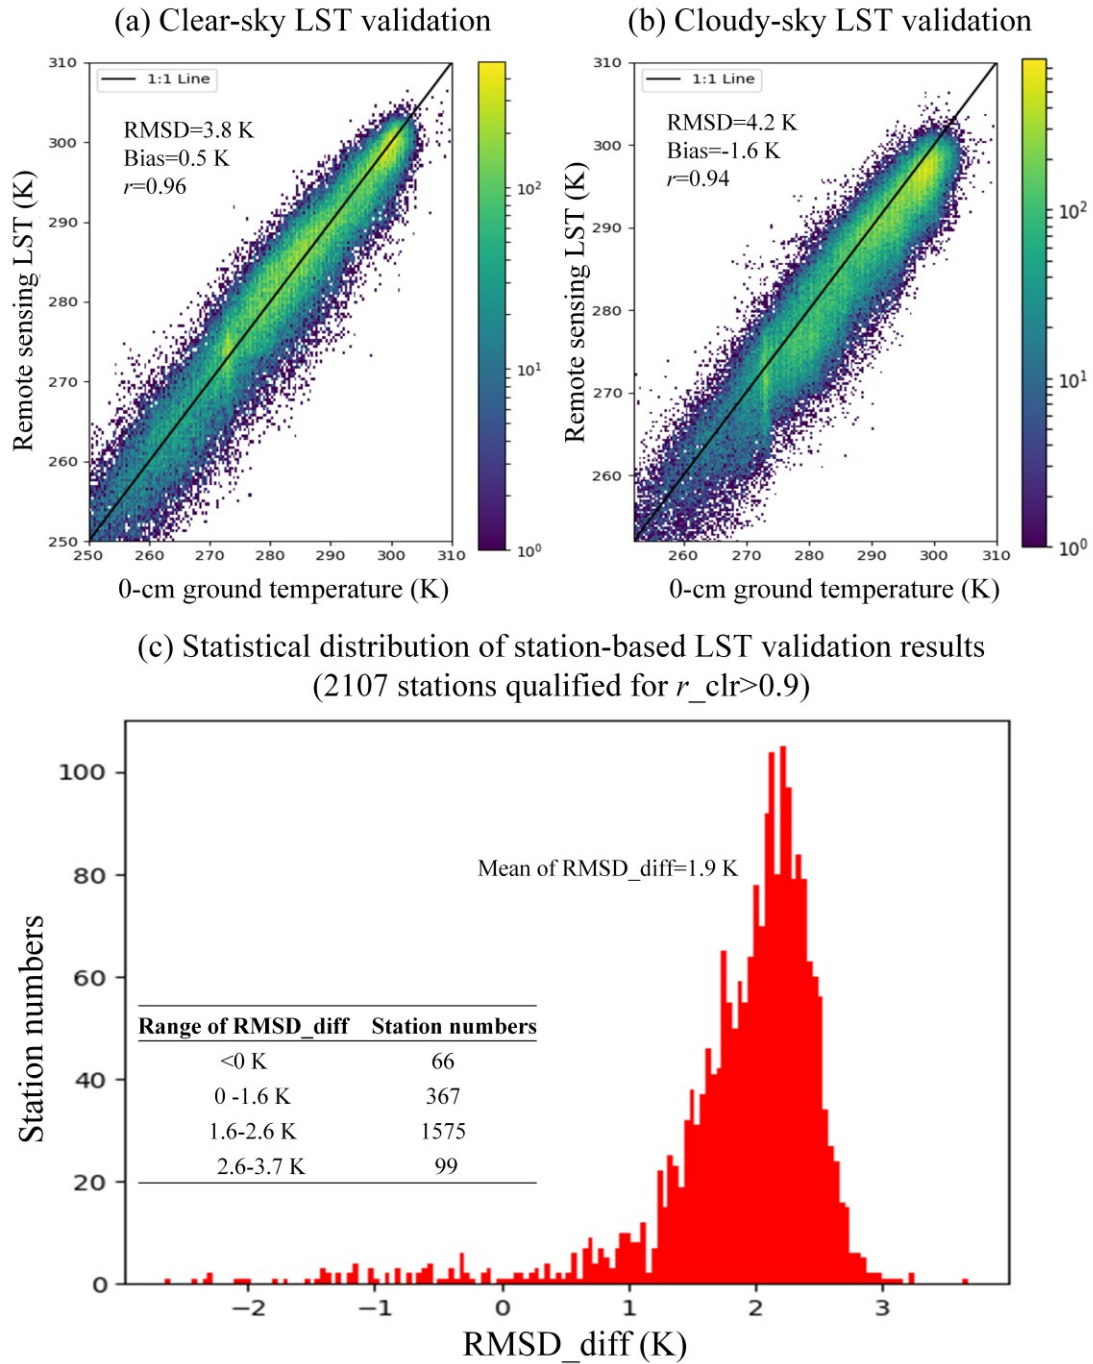


Fig. 3 validation results of the cloud gap-filled LST in China. (a) Density plot of thermal infrared LST under clear-sky condition compared to the 0-cm ground temperature measurements for all stations. (b) Same to (a) but for thermal infrared LST under cloudy conditions. (c) Statistical distribution of difference between RMSD of clear-sky LST and RMSD of gap-filled LST under cloudy condition with regard to different meteorological stations over the study region.




### 3.2 Evaluation on the final 1-km SSM product

The overall validation results of the finally downscaled 1-km SSM product against ground soil moisture data is demonstrated in Fig. 4. Fig. 4(a) shows that about 85% (N: 1833) of the total 2154 stations (the remaining 263 stations are located in pixels with no effective PM observations and are thus removed) have obtained significantly positive downscaling gains ( $G_{down} > 0.03$ ). This hints that the 1-km SSM product can better capture the dynamic behaviors of local ground soil moisture data than the original 36-km PM NN-SM data, revealing higher spatial representativeness of the downscaled SSM data product over the country. According to Fig. 4(b), the mean ubRMSD of all stations is about 0.054 vol/vol, while 90% of those stations have the number lower than 0.088 vol/vol. In addition, we made another analysis concerning the possible influence of land cover types on SSM downscaling performance in Fig. 4(c). The spatial information of land cover types was derived from the MODIS MCD12Q1 ([10.5067/MODIS/MCD12Q1.006](https://modis.gsfc.nasa.gov/data/modis031/modis031_q1.shtml)) IGBP-based land use image in 2019. For stations that experienced land use change throughout the years of the study period, the ubRMSD is only reported for data in the year of 2019. Clearly, better accuracies are observed mainly in grassland, cropland and bare soil surface, whilst relatively poorer performances (with averages of ubRMSD higher than 0.06 vol/vol) are seen in urban regions, (woody) savanna, and crop-to-natural-vegetation mosaic areas. Such a relative performance across land covers is logical because all the land cover types with their average ubRMSD higher than 0.06 vol/vol are characterized

---

504 by lower hydrologic homogeneity in terms of their definition, e.g. savanna, which is a  
505 mixture of grass and tall trees, and urban areas, which are composed of impervious  
506 underlying surface.



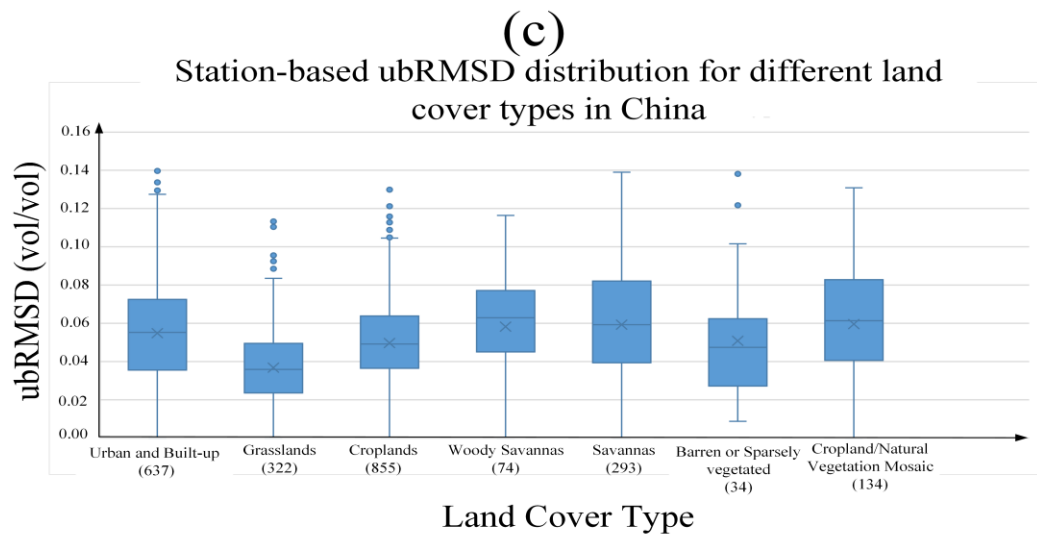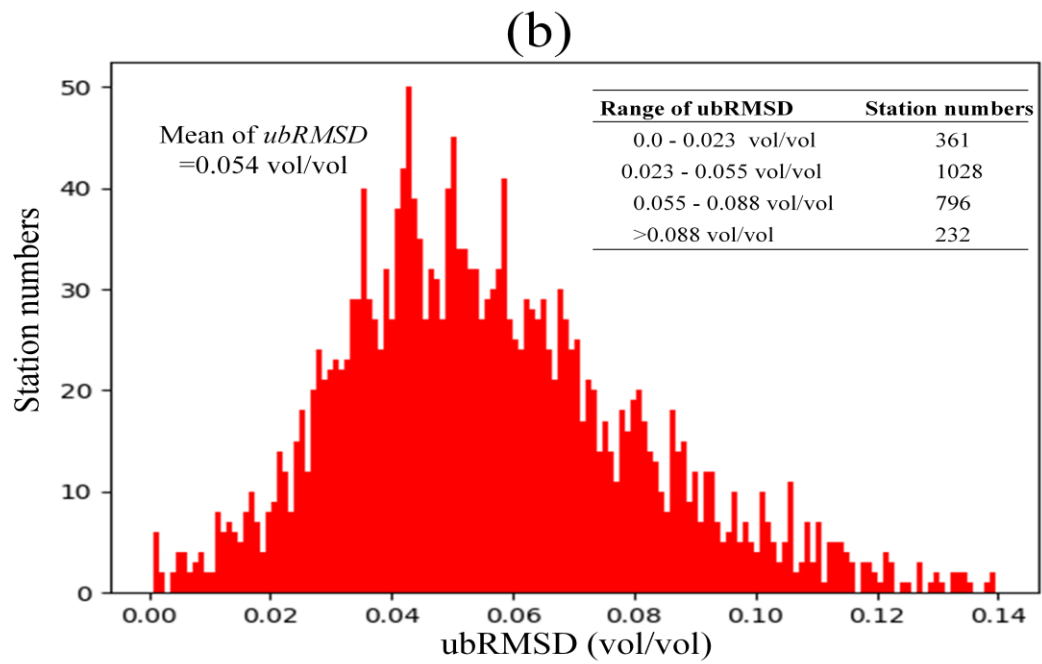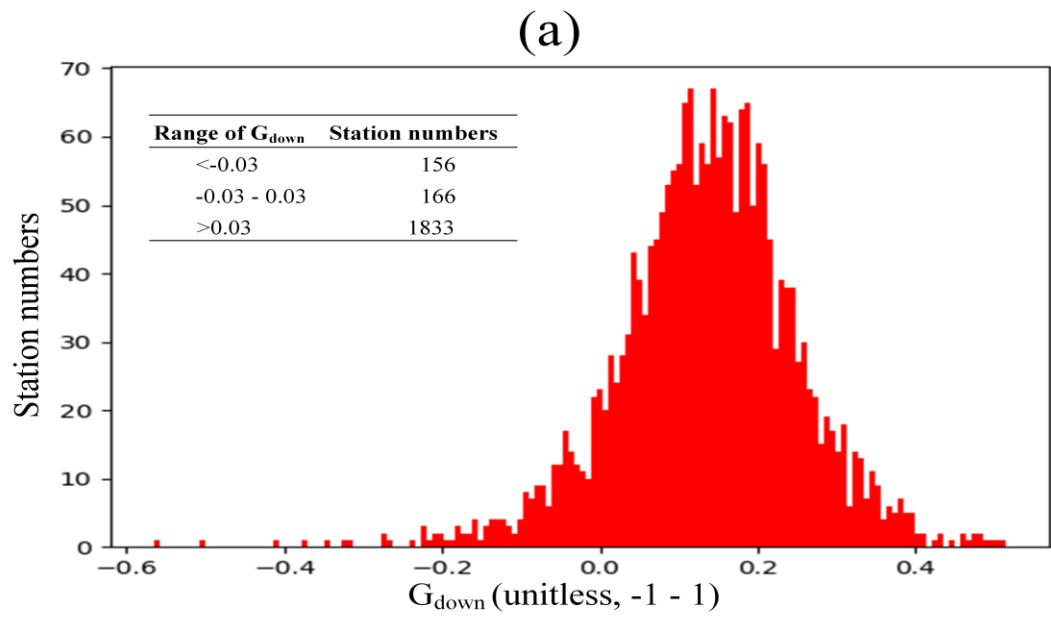

---

Fig. 4 General validation results of the currently developed SSM product. (a)  $G_{down}$  distribution for different stations over China. (b) ubRMSD distribution for different stations over China. (c) ubRMSD statistics reported for different land covers. The numbers in the parentheses of the x-axis labels represent the amount of meteorological stations corresponding to that specific land cover type.

In Fig. 5, we demonstrated compared time series features of regionally aggregated SSM from our developed 1-km SSM product as well as from that from the SMAP 36-km descending SSM, for each of the six different geographic-climate regions (as shown in Fig. 1) from 2016 to 2019. Via this effort, we mainly aim to reveal the consistency degree on reflecting soil moisture temporal dynamics at different geographical settings between the two SSM products. This also provides another view to evaluate the reliability of our developed product. Because the SMAP radiometer has a slightly longer revisit cycle (~2-3 days) than AMSR-2, the time series data are also aggregated and averaged at the temporal dimension, with a displayed revisit cycle equal to three days. Overall, the time series data correlate well with each other for all six regions. The relatively lower RMSDs (<0.02 vol/vol) are found in regions with comparatively sparser vegetation covers including the NWA region, the QTP region, and the NCM region. For other three dense-vegetation regions, the performances of our developed product are slightly worsepoorer. This is especially the case for the SCM region, with a lower  $r$ -value of 0.84. The reason can be attributed to the enlarged difference on penetration depth into the soil layers between L-band (SMAP) and C-/X-/K- band (AMSR-2) emissions under dense vegetation covers (Ulaby and Wilson, 1985).

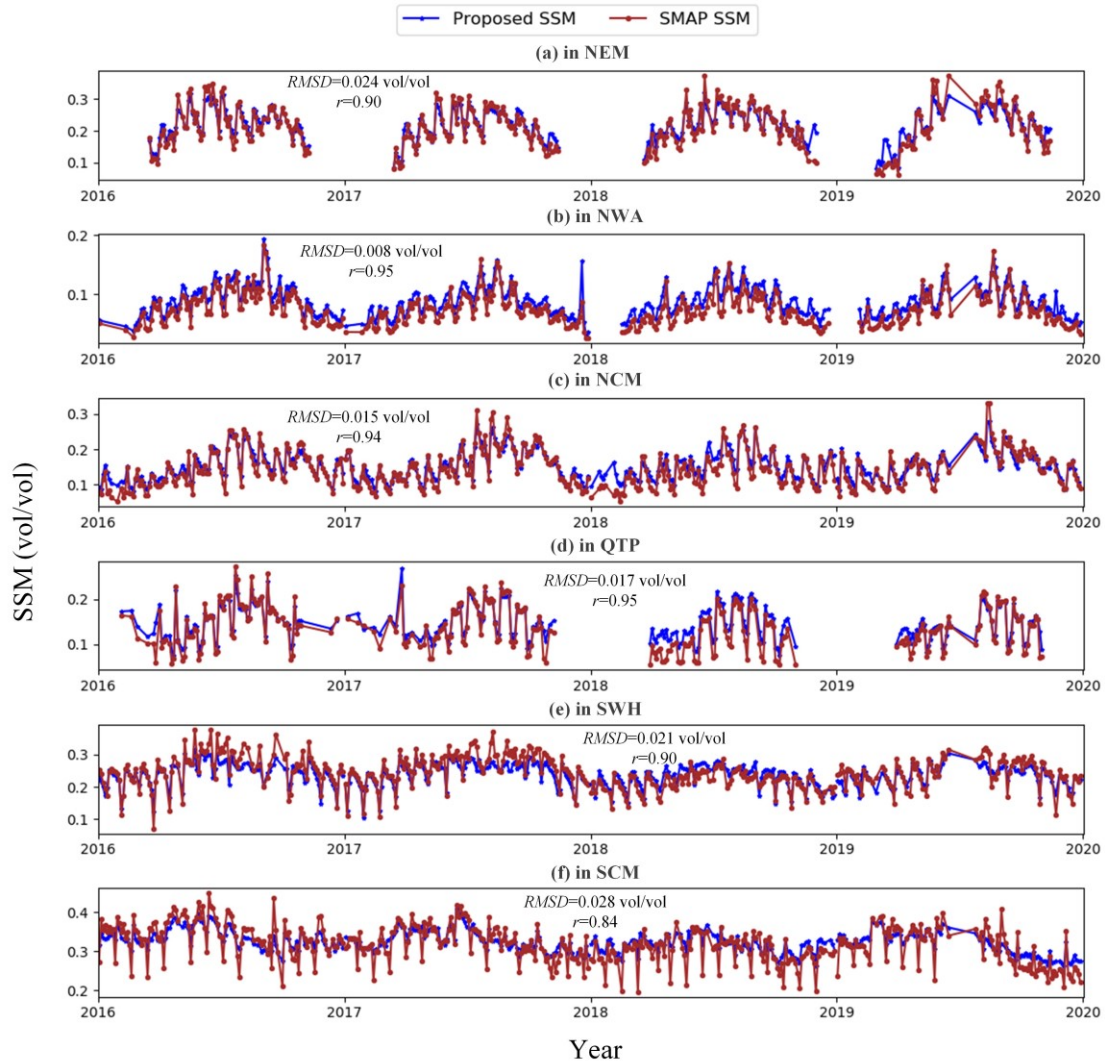


Fig. 5 Time series of SSM aggregated at each of the 6 different geographic-climate regions (as shown in Fig.1) in China for our developed 1-km product as well as for the SMAP 36-km SSM dataset.

The time series range from 2016 to 2019, with a revisit cycle of three days.

In [Fig. 6](#)-(b) we employed the downscaled SSM image on [April-May 29](#), 2018, as an example to demonstrate the spatial features of the developed product. Meanwhile, we also show the map of SMAP/Sentinel combined SSM (SPL2SMAP\_S\_V3) obtained from [MayApril 26](#) to [MayApril 31](#), 2018 in [Fig. 6](#)~~Fig. 5~~-(a), as a contemporaneous comparison reference. Clearly, the SPL2SMAP\_S\_V3 map has a much lower coverage percentage over the study region compared with the map of the currently developed

---


product on one single date, even though the former was generated based on multi-date images. Both maps show similar spatial texture depicting the relatively dry climate in northwestern China compared with the humid climate in the Middle-lower Yangtze River Plain. Nevertheless, there also exist cases where the details in texture differ prominently, like that in the far northeastern end of the country.

For the sake of further analysis on this point, results of the quantitative comparison as proposed in Section 2.1.3 and Section 2.1.44, is demonstrated in Fig. 6Fig. 5-(c), and Fig. 5-(d), -(e), and -(f). Fig. 6-(c) and -(d) show the RMSD maps of the two respective products against SMAP radiometer-based SSM estimates at the 36-km pixel scale. For both products it is manifested that compared with the lower averaged RMSD of 0.04 vol/vol in the NWA region, the uncertainty can increase (shown in yellow) in the densely vegetated NEM and the SCM regions, with averaged RMSDs of 0.07-0.08 vol/vol. However, our developed product has significantlynoticeably lower RMSD (0.05 vol/vol) than the SPL2SMAP\_S\_V3 data (0.07-0.09 vol/vol) in the SWH and part of the QTP regions. Considering their relatively higher elevations, it may be roughly drawn that our downscaled SSM product is more reliable than that downscaled based on active-passive microwave combined datasets in areas with increased topographic effects. -Fig. 6-(e) shows that tThe currently developed SSM product obtained a 0.078 vol/vol ubRMSD and a correlation coefficient of 0.55 against the in-situ soil moisture measurements. -It convergesing more apparently to the 1:1 line when compared with validation result of the SPL2SMAP\_S\_V3 dataset in Fig. 6-(f). As with the area of China, therefore, the currently developed product is generally superior to the global


---

562 SMAP/Sentinel combined SSM in terms of both coverage percentage and estimate  
563 accuracy.


(a)

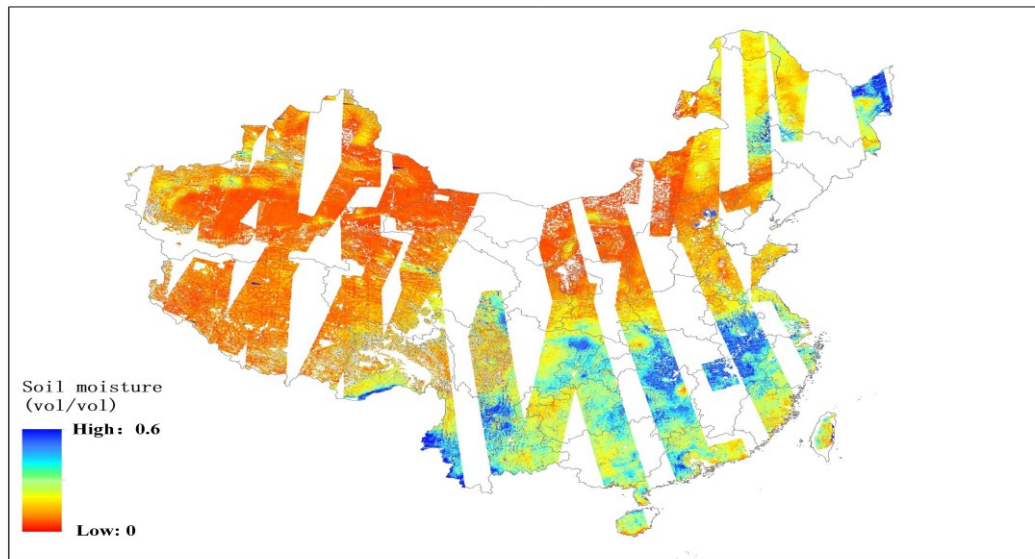


(b)

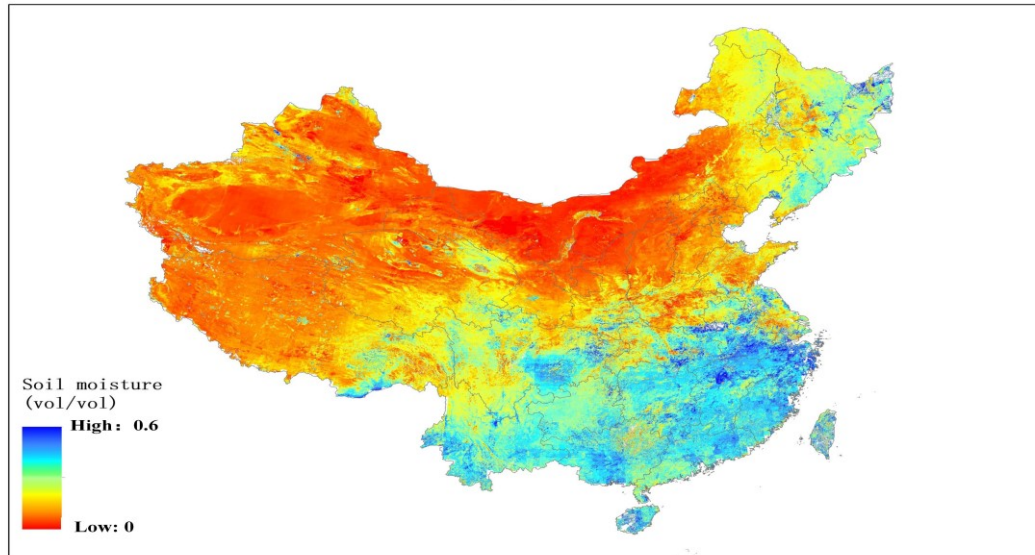

(c)

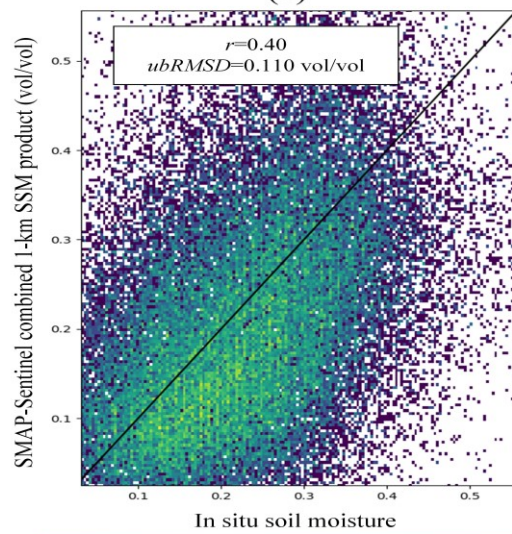

(d)

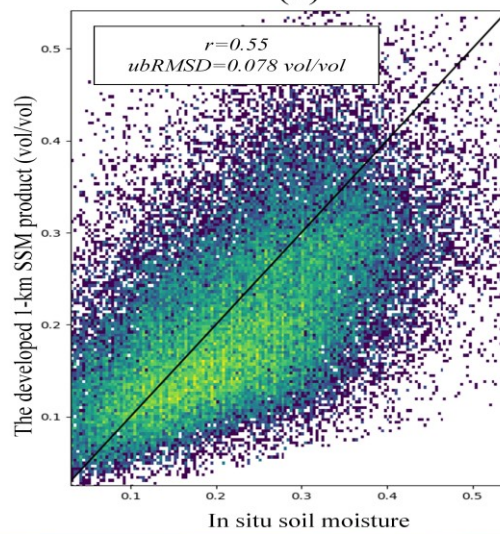



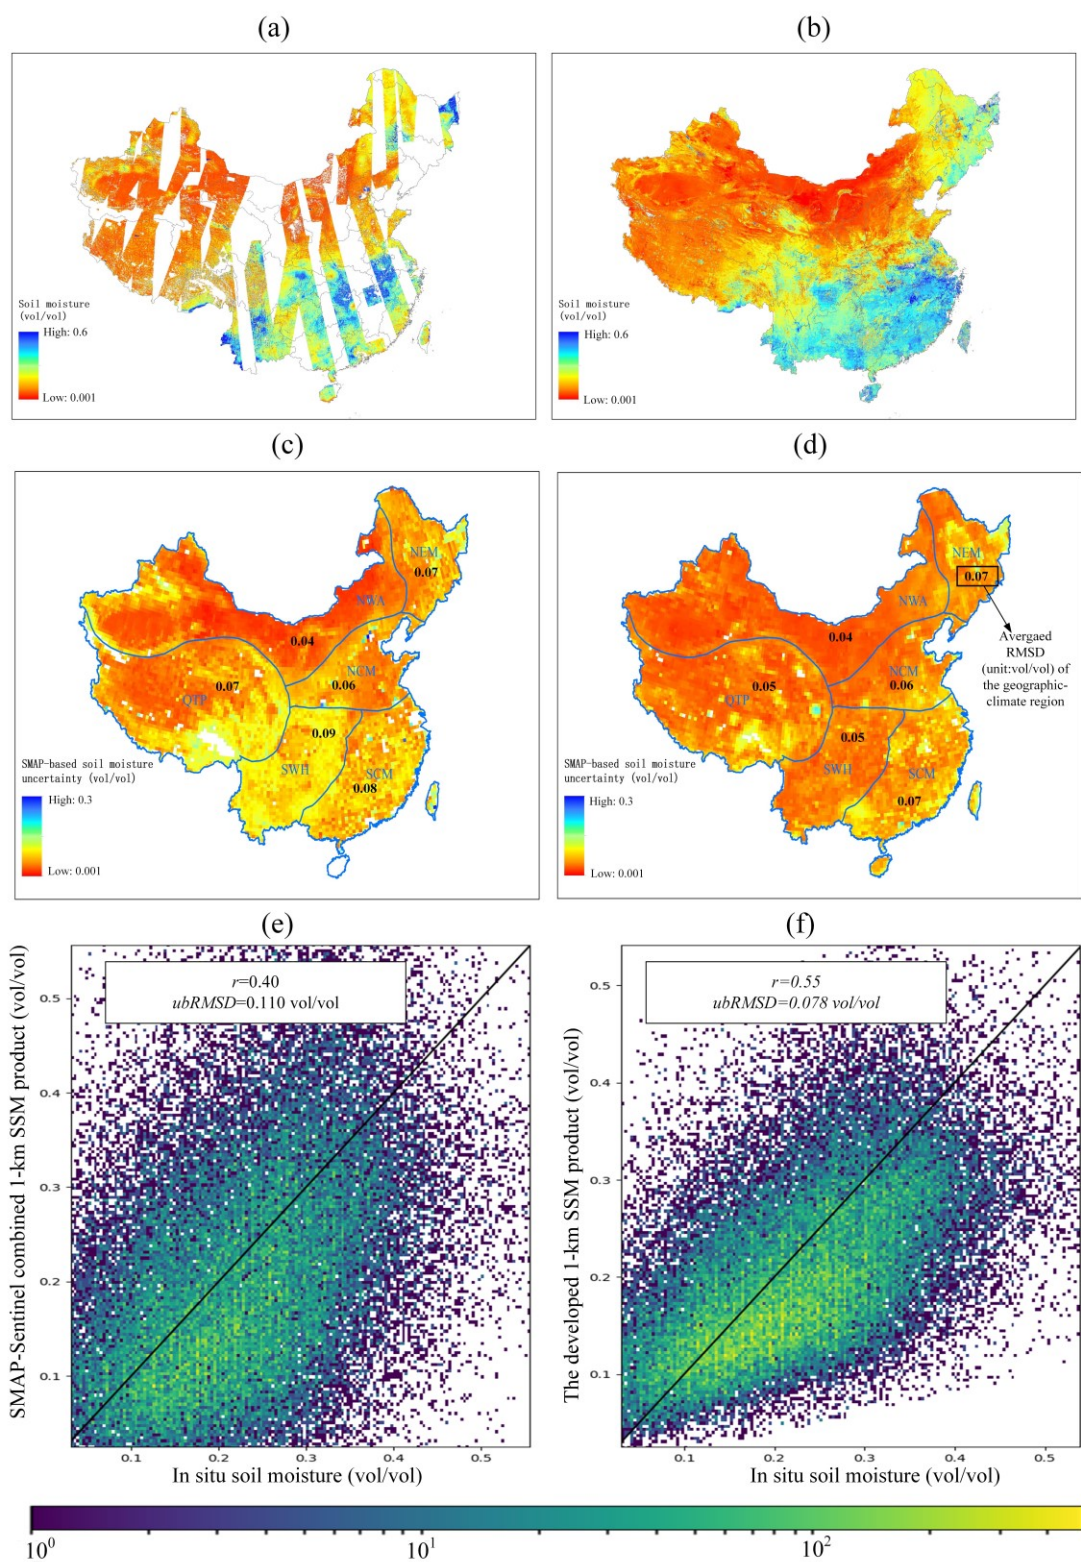



Fig. 6 Comparison results between the currently developed 1-km SSM product and the SMAP/Sentinel combined 1-km SSM (SPL2SMAP\_S\_V3). (a) SPL2SMAP\_S\_V3 SSM images over China at about 6:00 a.m. synthesized by 6 continuous dates from April-May 26, 2018 to May-April 3+1, 2018. (b) The

SSM image at 1:30 a.m. of ~~May~~<sup>April</sup> 29, 2018 from the currently developed product. (c) Spatial uncertainty (RMSD) map of the SPL2SMAP\_S\_V3 product against SMAP radiometer-based SSM retrievals at the 36-km pixel scale over China for years of 2017, 2018, and 2019. (d) Same to (c) but for validation of the currently developed SSM product. The black numbers in each of the geographic-climate regions indicate averaged uncertainty (RMSD, unit: vol/vol) of the region. (ee) Validation results of the SPL2SMAP\_S\_V3 product against in-situ soil moisture measurements over China for years of 2017, 2018, and 2019. The black solid line is the 1:1 line. ~~(fd)~~ Same to ~~(ee)~~ but for validation of the currently developed SSM product.

In ~~Fig. 7~~<sup>Fig. 6</sup>, we display the cumulative distribution frequency of coverage percentages of the downscaled SSM product and of the original PM NN-SM product for each season. We should be noted that in this statistical scheme, pixels identified as static water body by the MODIS MCD12Q1 land cover type product were not considered in the denominator of the coverage percentage. Besides, the gap time between the respective on-orbit period of AMSR-E and of AMSR-2 (from October 2011 to June 2012, during which there are no effective observations from the PM NN-SM product) were also excluded. It is apparent that in ~~Fig. 7~~<sup>Fig. 6</sup>-(b) and -(c), almost all downscaled daily SSM images over the 16-17 years have achieved a coverage percentage higher than 85%. In comparison, the majority of the PM NN-SM daily images have their coverage percentages below 80% over the study region, primarily due to the PM-seam gaps particularly existing in low latitudes (see Section 2.2.2). In ~~Fig. 7~~<sup>Fig. 6</sup>-(a) and -(d), the percentages of effective pixels in both the PM and the downscaled SSM images are far lower than their counterparts in the other two



subfigures. This is mainly ascribed to extreme meteorological conditions including snow, ice, and frozen soils that are typically persistent throughout most of these specified months in the northwestern regions of China. Such conditions can impede reliable estimates of SSM based on all satellite remote sensing techniques in the current time. The above inter-seasonal differences on data coverage are also reflected in [Fig. 8](#) in another manner based on presenting the spatial distributions of number percentages of available dates in each three-month period.

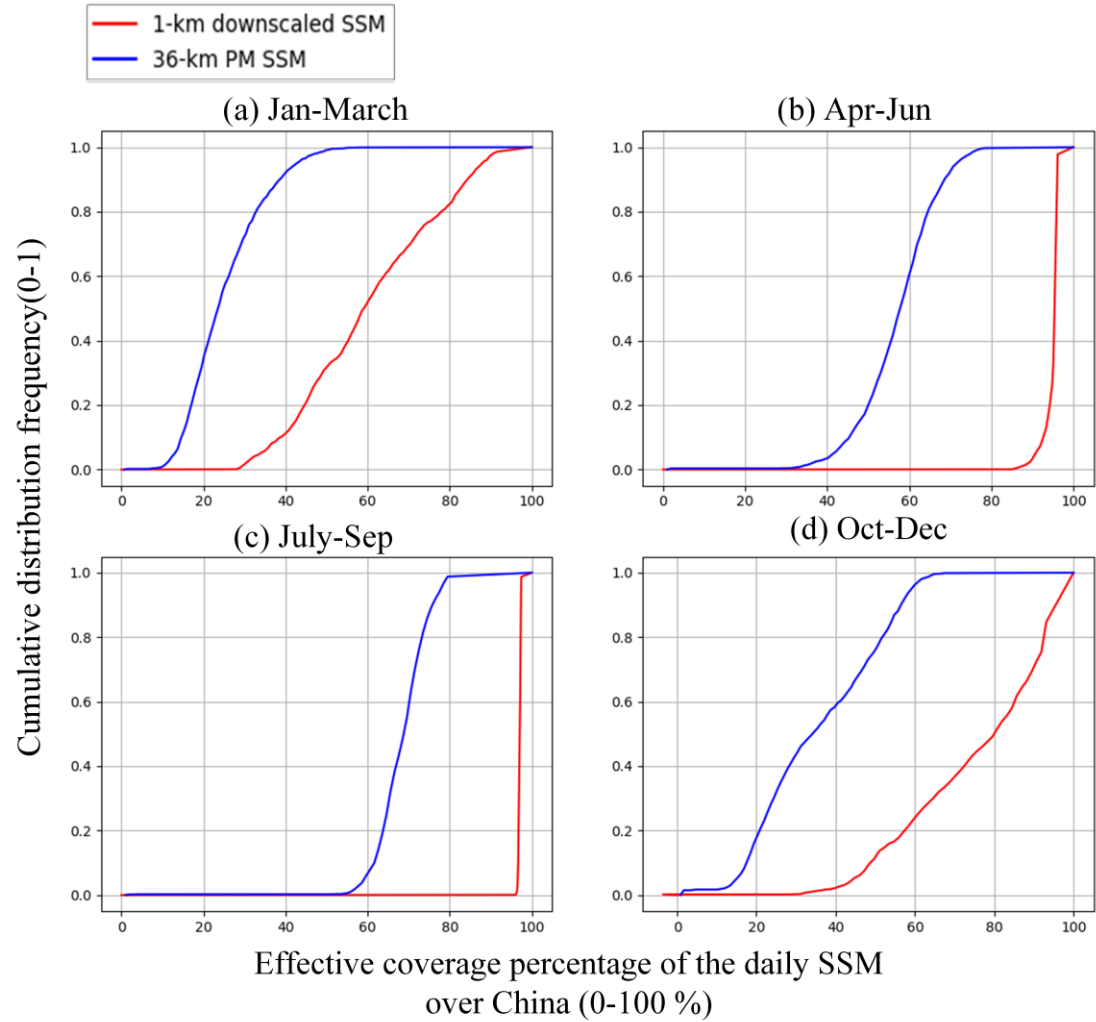

---

**599** Fig. 7 Cumulative distribution frequency of our proposed SSM product against the original 36-km SSM  
**600** product for different seasons. The period between October 2011 and June 2012 is excluded in the  
**601** current statistics.  
**602**

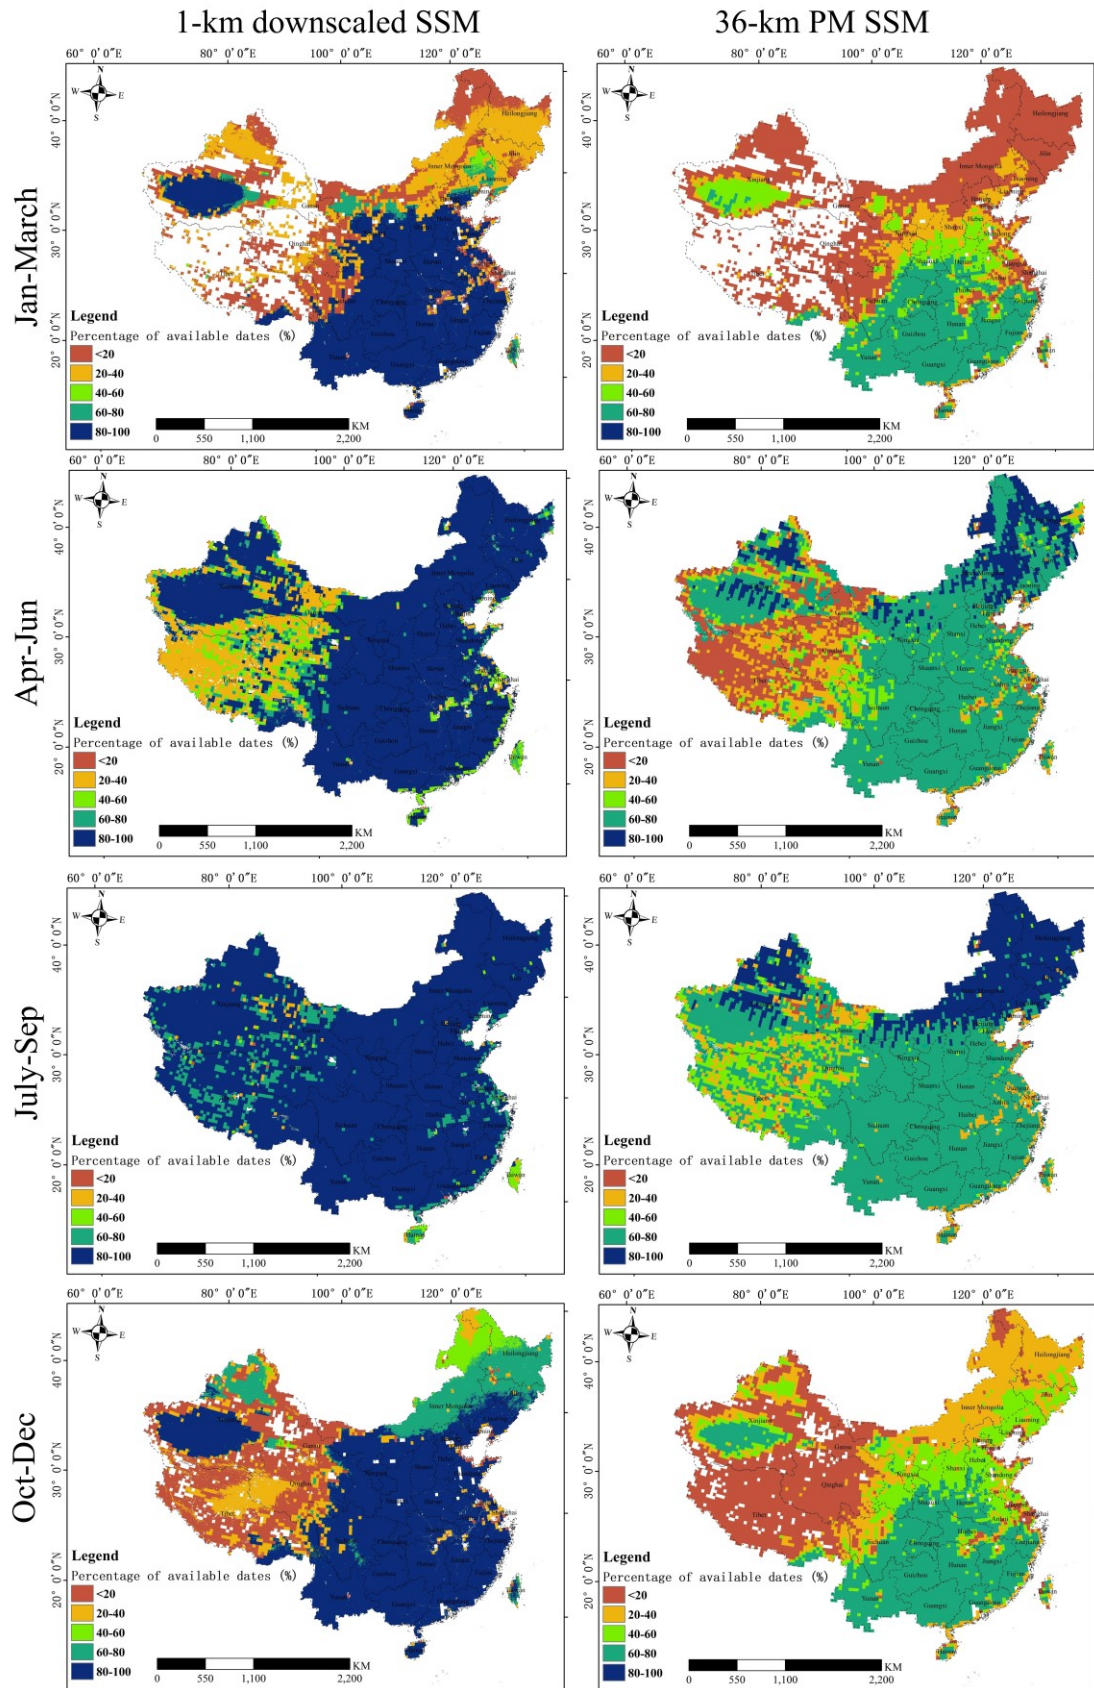


Fig. 8 Spatial distributions on percentage of day numbers with available estimates for the currently developed 1-km SSM product and the original 36-km PM data during 2003-2019. The four different

---

periods (i.e., January-March, April-June, July-September, October-December) of a year are treated respectively. The period between October 2011 and June 2012 is excluded.

The techniques behind coverage improvement of the downscaled SSM (against PM and optical data inputs) can be categorized into two classes, i.e. cloud gap-filling of the input optical datasets (see Section 2.2.1), as well as the filling of downscaled SSM in PM-seam gaps (see Section 2.2.2). [Table 2](#) reports the specific validation results (using averages of [ground measurements at](#) all stations) of downscaled SSM in these coverage-improved conditions, relative to that generated without using any coverage improvement technique, in order to evaluate the propagated effect of such techniques on the final product. The very limited difference for ubRMSD values (0.053 vol/vol versus 0.056 vol/vol) between cloudy and clear-sky conditions suggest that the 1-km SSM estimates from our final product are generally compatible between cloudy and clear-sky conditions. The downscaled SSM estimated for regions of PM-seam gaps have a slightly worse (but still acceptable) accuracy, considering its ubRMSD of 0.059 vol/vol compared to the 0.052 vol/vol ubRMSD of the PM-observed 1-km pixels. In summary of [Fig. 7](#) and [Table 2](#), the currently developed product has achieved a substantially improved spatial coverage against the original remote sensing input datasets, whilst successfully preserved the SSM downscaling accuracy of the observation-covered pixels at the same time.

Evaluation metric*	Comparison between cloudy and clear-sky conditions		Comparison between passive microwave (PM) observed regions and regions of PM-seam gaps	
	Clear-sky condition	Cloudy condition	PM-observed regions	PM-seam gaps
ubRMSD (vol/vol)	0.053	0.056	0.052	0.059
Correlation coefficient	0.49	0.47	0.49	0.44

\*All evaluation metrics in this column indicate the average of all available stations

## **3.4. Discussion**

### **3.4.1 Uncertainty on SSM evaluation between satellite- and ground- scales**

In this study, we made evaluations on remote sensing SSM products at different spatial resolutions, using measurements from 2000+ stations provided by the national-level soil moisture observation network of China as standard benchmark. Through the evaluations, a ubRMSD of 0.074 vol/vol is reported for the original 36-km NN-SM SSM product (Fig.A1-b). We notice that this result is considerably poorer if compared with another previous evaluation campaign targeting at the same product (Yao et al., 2021), which achieved a global RMSE (RMSD) of 0.029 vol/vol. However, this difference is not unexpected because the two campaigns were carried out in different regions of the world. Also, that particular study (Yao et al., 2021) was conducted based on completely different ground soil moisture observations provided by the International

---

Soil Moisture Network (ISMN) (Dorigo et al., 2021). Compared to the observation network employed in this study, the observation sites of ISMN are more intensively distributed as an “integrated soil moisture station” so as to provide spatially average soil moisture within a grid of tens of kilometers. In this regard, we admit that the ISMN is generally more professional in evaluating satellite PM-based SSM retrievals at a coarser resolution. But on the other hand, only a few ( $\leq 4$ ) of such “integrated stations” have been set up sporadically within China, making the ISMN data much less representative of our study region compared with the national-level soil moisture network of China exploited by our current study.

Although the higher RMSD of the national-level soil moisture network of China may indicate larger measurement uncertainty than the ISMN, the negative influence that might be imposed on our study purpose should be inconsequential. This is because we focus more on the relative validation performance of different SSM products, rather than on the absolute value of any evaluation metric including ubRMSD and correlation coefficient calculated against ground measurements. Specifically, the 1-km downscaled SSM obtained an average ubRMSD of about 0.054 vol/vol among different stations according to [Fig. 4](#)(b). Besides, result of the evaluation in [Fig. 5](#)(d) based on combination of multi-station ground measurements shows a global ubRMSD of 0.078 vol/vol for this product. Overall, the above-mentioned results can be identified as at least comparable to the global (multi-station based) ubRMSD of 0.074 vol/vol of the original NN-SM data as they are evaluated against the same benchmark. Therefore, conclusion is safely drawn that the currently developed product preserves the retrieval

---

accuracy of the coarse-resolution NN-SM data, whilst improving the spatial representativeness of the latter product substantially according to the mostly positive  $G_{down}$  values in [Fig. 4](#)(a).

Moreover, one may also argue that the  $r$ -value of 0.55 for the currently developed product in [Fig. 5](#)(d) is not sufficiently high compared with several previous studies (Wei et al., 2019; Sabaghy et al., 2020) obtaining  $r$ -values above 0.7 for temporal analysis of satellite remote sensing soil moisture. However, we should be noticed that these previous studies have conducted analyses respectively at the temporal and the spatial dimensions. Based on their results, the spatial analysis typically derived lower  $r$ -values ( $<0.4$ ) compared to that at the temporal dimension. This is probably because the heterogeneity degree of remote sensing pixels can vary significantly across different sites. Since the evaluation in [Fig. 5](#)(d) was deployed at the ‘spatio-temporal’ integrated dimensions, such an  $r$ -value is expected. This is also close to the global  $r$ -value of 0.6 for validation of the coarse-resolution NN-SM product as reported in Yao et al. (2021).

### **3.2.4.2 Uncertainty on cloud gap-filling and validations of LST**

As mentioned in Section 2.2.1, LST gap-filled based on the STDF method was used alone as one of the main input datasets for SSM downscaling under cloudy weather. Although such LST inputs contain clear-sky bias from the real cloudy condition, it performs better in driving the SSM downscaling model compared with its bias-adjusted counterpart (see Section Appendix-B for details). The reason may be linked to one of the basic theories behind our SSM downscaling methodology, i.e. the “universal

---

triangle feature space (UTFS)” theory (Carlson et al., 1994). In the UTFS, clear-sky LST is employed to implicitly quantify the surface soil wetness degree as it correlates with the dynamics of soil evaporative efficiency and soil thermal inertia when vegetation cover density is fixed. Under cloudy conditions, however, the satellite observed LST is subjected to not only surface soil property, but also to that related to cloud insulation effect from solar incoming radiation and ground long wave outgoing radiation. As a result, the actual relationship between SSM and cloudy LST could be much more complicated than the one that has been described by the UTFS-based SSM downscaling model (i.e. Equation-2). In comparison, LST generated by the STDF alone for assumed clear-sky conditions, as is free from interference of cloud, would be a comparatively more competent input variable for driving the UTFS-based SSM downscaling model under non-rainy clouds. This is especially the case for thin and short-time clouds with marginal direct feedbacks on surface soil wetness.

However, we admit that the STDF-filled LST under rainy clouds is also not suitable for our study purpose. This may explain the slightly higher RMSD for SSM under cloud based on STDF-filled LST (0.056 vol/vol) compared to that under real clear sky (0.053 vol/vol), as shown in [Table 2](#). In reality, the actual negative influence of cloud on the final SSM product may be even more serious than indication from the above RMSD difference (i.e.  $0.056 - 0.053 = 0.003$  vol/vol), due to the portion of “clear/cloudy-weather-mixed” spatial windows during the fitting process of the downscaling model. In these windows, uncertainty in cloud gap-filled LST may affect accuracy of the fitted model coefficients and thus deteriorate the final SSM estimates



---

in clear-sky pixels within the same window. Consequently, the above RMSD difference has been more or less underestimated. Despite all of above, in our study area of China we regard the STDF-filled LST as a more optimal proxy of heat flux for estimating SSM under clouds, compared to the bias-adjusted LST. On the other hand, future efforts are encouraged to further clarify the mechanical relationships between STDF-filled/bias-adjusted LST and soil wetness degree under clouds.

Different from a number of previous studies (Jiménez et al., 2017; Dowling et al., 2021; Yang et al., 2019) validating satellite thermal-infrared-based LST based on longwave radiation observations made at footprint-level observation stations (e.g. flux towers), our study has used 0-cm top ground temperatures as the primary benchmark for this validation campaign instead. Similar to that for SSM validation, the most crucial motivation driving such an experimental design is the significantly intensive distribution of the meteorological stations compared to the very limited number of active and effective flux towers available in China. It is noted that these measurement devices at all of the meteorological stations are required to have been instrumented under open environmental conditions with relatively lower fraction of tall trees and water bodies, in order to conduct efficient monitoring at the physics of near-surface air. This can also be reflected in Fig.4-(c), which reveals no stations built within forest covers. Moreover, as we only focus on the mid-night scenario when the states of all land observations are “most stable” during one diurnal cycle, uncertainties due to the possible temperature inconsistency between bare ground surface and high tree surface as well as due to the temporal mismatch (from about 1:30 to 2:00 A.M.) should have

---

marginal effect on our results. We have carried an extra test that can confirm this discussion, with the detailed procedures described in Section Appendix-C.

### **4.3 Major novelty, unique profit, and future prospect of the developed product**

Compared with the widely known active/passive microwave combined SSM product (e.g. the SPL2SMAP\_S\_V3) and other PM/optical-data combined counterparts which were also published recently but at the monthly scale (Meng et al., 2021), the major novelty of the currently developed product mainly lies in the fact that it has achieved progress on all of the three crucial dimensions of satellite remote sensing, including the temporal revisit cycle (daily), the spatial resolution (1-km), and the quasi-complete coverage under all-weather conditions. To our knowledge, this has rarely been achieved by previously developed satellite soil moisture product at regional scales. For realization of the above-mentioned progresses, we have fused the SSM downscaling framework with other techniques including cloud gap-filling of thermal infrared LST, MWS-based temporal filtering of vegetation indices, as well as reconstruction of seams between neighboring PM swaths in low latitudes. The final SSM estimates under cloudy conditions and intersected with the PM-seam gaps were specially validated against the rest estimates under clear sky and in the regions covered by PM observations, respectively ([Table 2](#)~~Table 2~~). The comparable performances among all treatment groups herein confirm that the accuracy of the product is stable and consistent among all weather conditions.

---

With improvement achieved at the three dimensions, unique profit of the currently developed product can be taken by subsequent studies and various industrial applications. For example, the capability of this product can be investigated on capturing the short-term anomaly of local hydrological signals as well as improved monitoring on drought disasters, which used to be investigated mainly at a coarser resolution by PM SSM (Scaini et al., 2015; Champagne et al., 2011; Albergel et al., 2012). For another, taking advantage of its all-weather daily time series, the product can be utilized together with precipitation data to isolate and quantify the anthropic influence on regional water resources from the natural hydrological dynamics. Examples of such anthropic signals include agricultural irrigation activities, as well as finer-scale information on agricultural crops which was previously interpreted based on PM-driven techniques (Song et al., 2018). In addition, we should realize the important role of soil moisture as a constraint for accurate estimation of surface evapotranspiration and runoff (Zhang et al., 2020; Zhang et al., 2019). Therefore, the profit of this product can be further enhanced if coupled with land-atmosphere coupled models to produce new insights into water-cycle processes of earth surface at a finer spatio-temporal scale.

There are still some limitations on our current version of this developed product to be further improved at the following aspects in the future. First, there may exist concerns with the ‘mosaic effect’ at the original PM (36-km) pixel edge. As mentioned in Section 2.2.2, we have used a parameter of ‘spatial square window ( $w_s$ )’ in Equation- (3) to decline minimize this negative effect to the best of our ability. However, it is still

---

difficult to utterly avoid such negative influenceeffect. This is a challenge for-in all existing SSM downscaling studiesmethods (Molero et al., 2016; Stefan et al., 2020; Peng et al., 2016), especially considering the large spatial scale of our study and all uncertainties discussed in Sections 4.1 and 4.2. Besides, other negative influences can be imposed by potential imperfections identified from the original PM product, e.g. from PM SSM retrievals in the QTP region with complicated topography, melt snow or partially frozen soils that cannot be completely screened out by the original product flag in winter. For these extreme conditions, the accuracy of the downscaled SSM may need further validation campaigns like field surveys and experiments, based on which the data quality flag can be better built for the product's futural version.

The methodological framework proposed in this paper is prospective to be universally applied in other regions of the world to serve for better monitoring of the global surface wetness in the following studies. If applied in continental and global scales, however, the current process for gap-filling of PM seams may require further attention and improvement. In this study, SSM in regions intersected with PM-seam gaps were estimated using TB observations from PM swaths at neighboring dates (see Equation-5). Although the errors in the PM-seam gaps over China as reported by Table 2 are only slightly larger compared to the PM-covered regions, they cannot be ignorable completely and may leave extra concern on the universality of this technique, especially in the low latitudinal tropical regions where the effect of PM-seam gap is more apparent than in our study area. Besides, another imperfection of this data product lies in the gap period between AMSR-E and AMSR-2. Considering the different

---

systematic error patterns of various PM SSM products, we did not generate downscaled SSM based on other PM products (e.g. the SMOS SSM product) during this period but just left the period as null values. We suggest a more rigorous and universal inter-calibration framework on different PM SSM products to be developed in the future for a long-term consistent 1-km downscaled SSM dataset.

## **4.5. Conclusions**

This paper describes the main technical procedures of a recently developed remote sensing surface soil moisture (SSM) product over China covering the recent ten years and more. Based on combination of passive microwave SSM downscaling theory and other related remote sensing techniques, the product achieves multi-dimensional distinctive features including 1-km resolution, daily revisit cycle, and quasi-complete all-weather coverage. These were rarely satisfied completely by other existing remote sensing SSM product at regional scales. Validations were conducted against measurements from 2000+ automatic soil moisture observation stations over China. Overall, an average ubRMSD of 0.054 vol/vol across different stations is reported for the currently developed product. The mostly positive  $G_{down}$  values show this product has significantly improved spatial representativeness against the 36-km PM SSM data (a major source for downscaling). Meanwhile, it generally preserves the retrieval accuracy of the 36-km data product. Moreover, additional validation results show that the currently developed product surpasses the widely used SMAP-sentinel combined global 1-km SSM product, with a correlation coefficient of 0.55 achieved against that

---

815 of 0.40 for the latter product. At the regional scale, time series patterns of our developed  
816 data product are highly correlated with that of the widely recognized SMAP radiometer-  
817 based SSM for all geographic settings. The methodological framework for product  
818 generation is promising to be applied at the continental and global scales in the future,  
819 and the product is potential to benefit various research/industrial fields related to  
820 hydrological processes and water resource management.

821

---

## Appendix

### A. Evaluation on different PM SSM products



We have made evaluations on the various AMSR-based SSM products (as shown in ~~Table 1~~~~Table 1~~) covering the recent 10 years or longer, based on our soil moisture observation network all over China. The ~~L-band-based~~ SMAP radiometer-based SSM dataset, as described in Section 2.1.4, was also evaluated as a reference. The evaluation period covers the three years of 2017, 2018, and 2019. All AMSR-based 25-km grids were re-set to the SMAP 36-km grid system using the nearest resampling method. Only grids that contain equal or more than 4 soil moisture measurement stations were employed, in which, the grid-based PM SSM estimate was compared with average of measurements from all interior stations. Finally, 53 grids were selected, as shown by the green color in Fig.A1-(g). For AMSR-based products, only the mid-night descending datasets were evaluated, whilst for the SMAP product, our evaluation only focused on its descending mode in the early morning.

As manifested by Fig.A1-(a) to -(f), the selected SSM product in the current study, i.e., the NN-SM product has an unbiased RMSD of 0.074 vol/vol and a correlation coefficient of 0.49. This obviously outperforms the other three traditional AMSR-based SSM products (i.e. JAXA-AMSR, LPRM-AMSR, and UMT-AMSR products) and is only inferior to the SMAP SSM retrievals, whilst the later only covers the latest period since 2015. As far as CCI data are concerned, it has a similar performance against the selected NN-SM in general. Nevertheless, the region marked by red circle in Fig.A1-

---

843 (c) indicates that CCI estimates have a considerably larger proportion of overestimated  
844 anomalies. But overall, the primary reason that we have abandoned CCI but selected  
845 NN-SM is because the latter can provide a higher coverage fraction of valid pixels in  
846 our study region, as has been stated in Section 2.1.1.



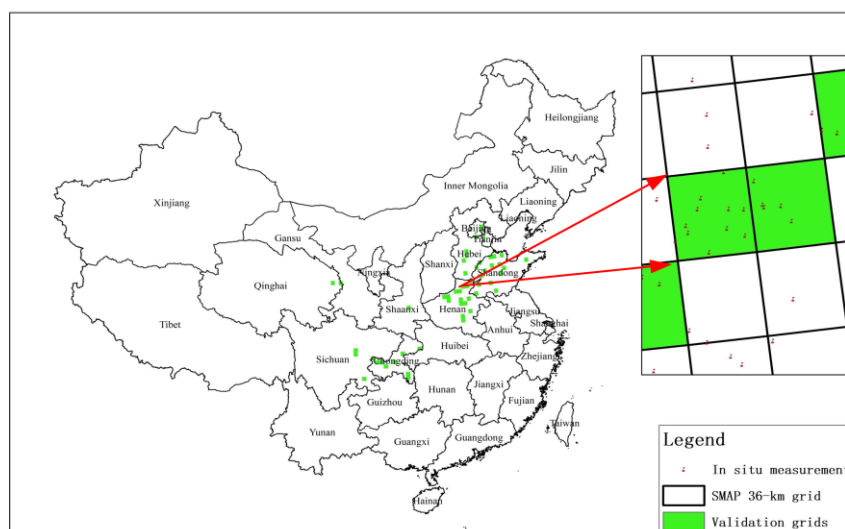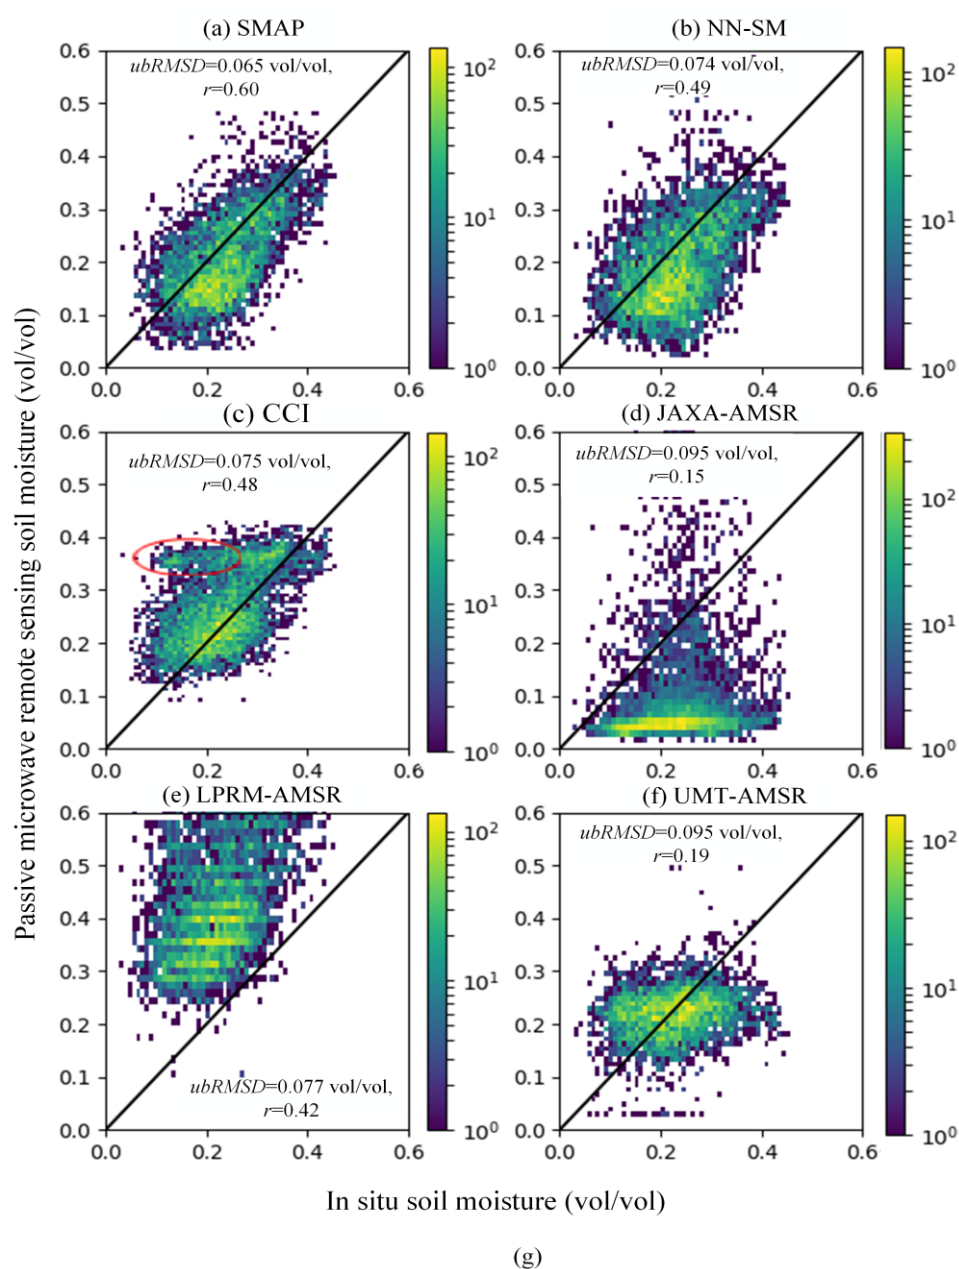

---

Fig. A1 (a)-(f) Comparison of different PM SSM products (as reported in [Table 1](#)~~Table 1~~) against the in situ SSM measurements in China. (g) Locations of the 36-km EASE-GRID-projection based pixels used for this comparison campaign.

## **B. Evaluation on the influence of bias adjustment for reconstructed ‘clear-sky’ LST under cloud**

In Section 2.2.2, we have emphasized that the gap-filled LST for cloudy pixels reflects the theoretical surface temperature of that pixel under a hypothetical clear-sky condition. As this cloud gap-filled LST would suffer from a possible bias against the real surface temperature under cloud (Dowling et al., 2021), we made an additional experiment regarding to further improvement of this cloud gap-filled LST. The follow-up step for bias adjustment of this hypothetical clear-sky LST (but actually under cloudy conditions), as expounded in Section 4.2 of Dowling et al. (2021), was conducted herein using remote sensing and in situ LST data over China but only in 2018. We illustrate the validation results for bias adjusted and non-bias adjusted LST under cloudy conditions in Fig. A2-(b) and -(c), respectively. Similar to [Fig. 3](#)~~Fig. 3~~, validation results for clear-sky LST of that year are also displayed (Fig. A2-(a)) for comparison. The results generally show that the follow-up step is effective in reducing the bias of the originally gap-filled ‘clear-sky LST’ under cloudy conditions (from -1.7 K to 0.4 K).

In the subsequent step, we substituted the original non-bias adjusted LST under cloudy conditions with its bias adjusted counterpart, and used the latter as the input for SSM downscaling. The general validation results of the downscaled SSM are illustrated

---

in Fig. A3 (similar to that presented in ~~Fig. 4~~Fig. 4-a and -b). Contrary to the above-analyzed Fig. A2, the bias adjusted cloudy LST with better gap-filling accuracies, however, obtained inferior performance in SSM downscaling. This final validation result, to some degree, confirms our assumption in Section 2.2.2 that the reconstructed cloudy LST but for the hypothesized clear-sky condition is the better proxy of surface moisture dynamics. But overall, as all LST estimates discussed herein are for the midnight scenario (when the energy interaction between atmosphere and land surface is relatively weak), the RMSD difference for different weather conditions in Fig.A2 is expectedly marginal. As a consequence, the difference in ubRMSD of SSM in Fig.A3 can hardly be identified as ‘very significant’. Therefore, we encourage further tests on this conclusion in specific future studies to confirm its universality, especially for situation of the ‘morning to noon’ time window.

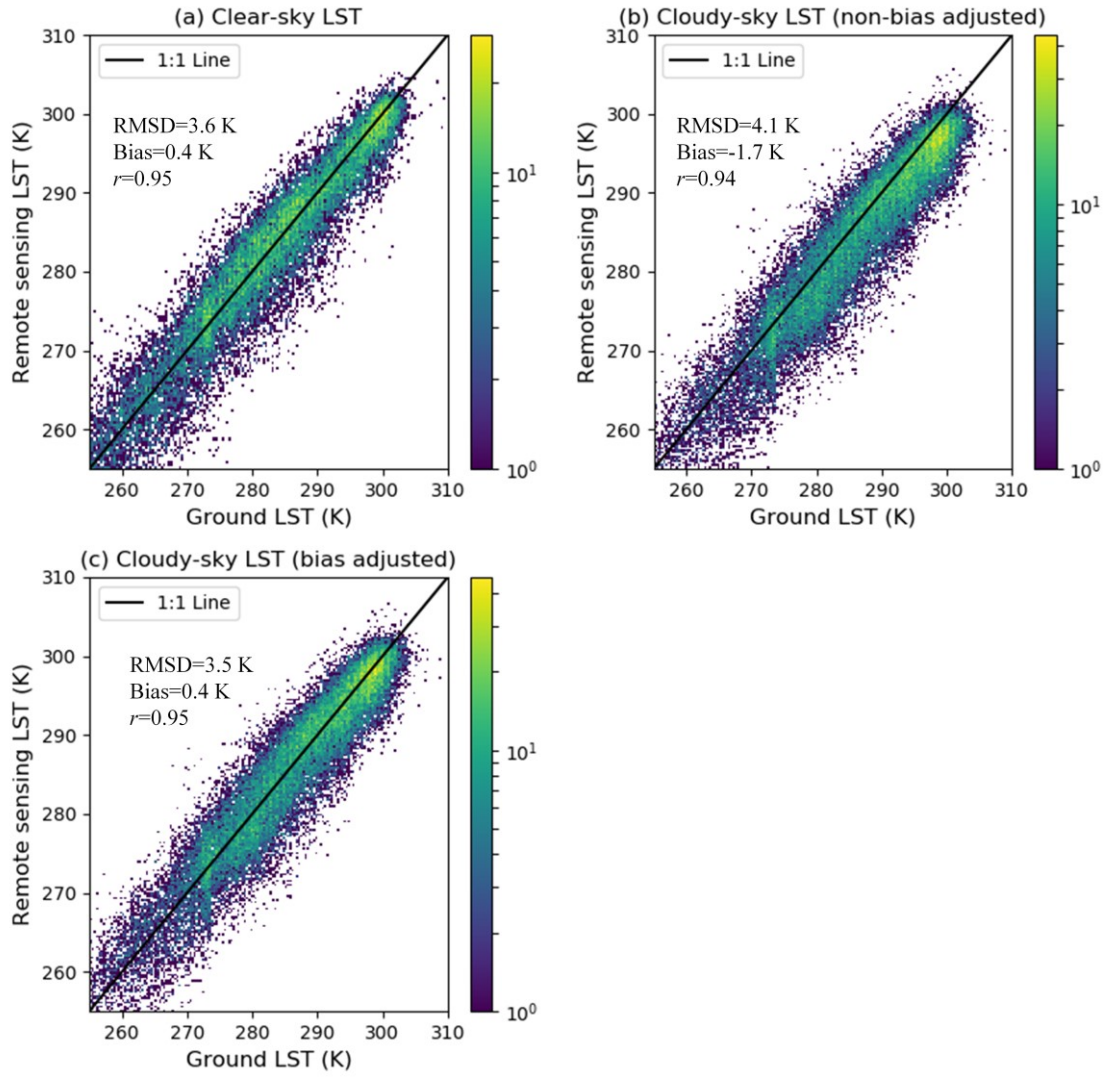


Fig. A2 Validation of the clear sky LST (a), reconstructed LST under cloud but with no passive-microwave based bias adjustment (b), as well as the reconstructed LST under cloud with passive-microwave based bias adjustment (c) respectively, based on the 0-cm ground temperature measurements at meteorological stations.

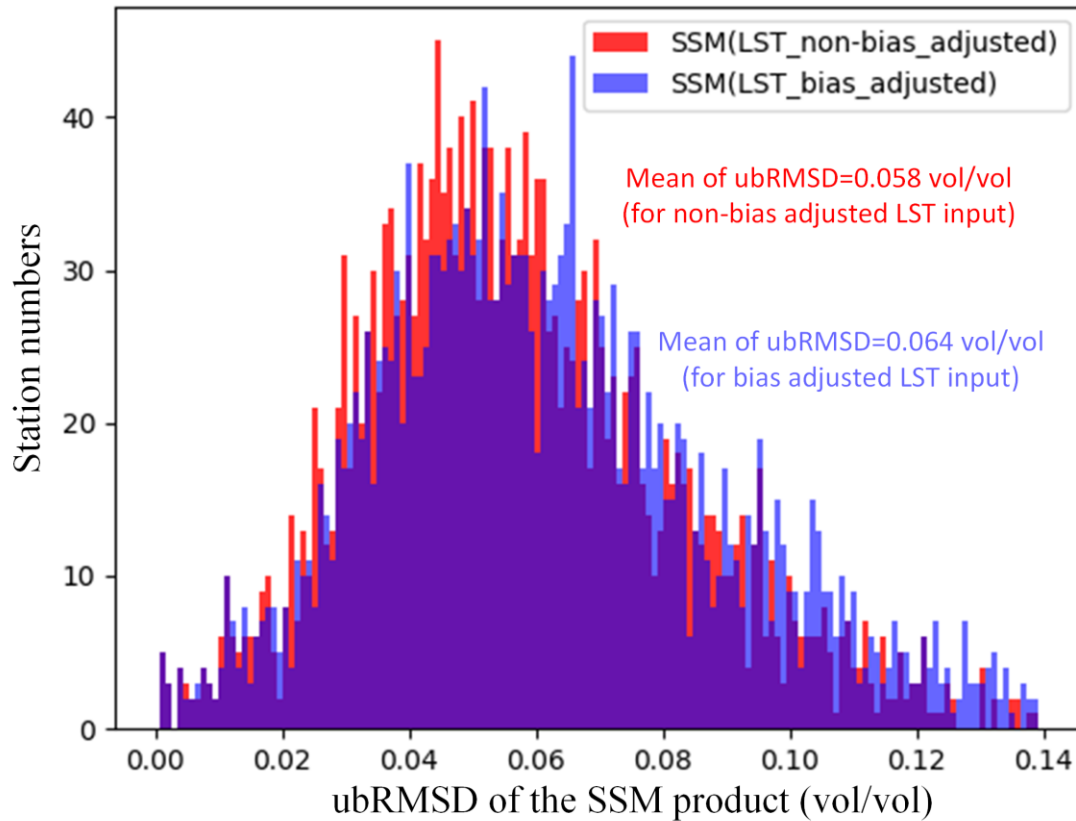


Fig. A3 The statistical distribution of ubRMSD at different stations for SSM estimates driven by two respective kinds of cloudy LST inputs.

### C. Uncertainty test between 0-cm ground temperature observations and flux-tower-derived thermal infrared LST

We herein utilized 4 flux towers to calculate their footprint-level (about 500-1000 m) thermal infrared LST based on long wave radiation measurements, plus broad band emissivity data derived from the MODIS MYD21A1 product (MYD21A1N.V061). The 4 towers are all characterized by moderate or low vegetation (grassland) and are dispersedly located at different eco-regions of China, namely the towers of Changling, Huailai, Yakou, and Naqu (see the inset map in Fig.A4-b). Data from Changling are derived from the FLUXNET community ([FLUXNET2015 Dataset - FLUXNET](#)) in 2010.

---

Data from the other three towers are derived from the National Tibetan Plateau Data Center, with data DOIs of <http://dx.doi.org/10.11888/Meteoro.tpd.c.271094> for Huailai in 2018, <http://dx.doi.org/10.11888/Meteoro.tpd.c.270781> for Yakou in 2018, and <http://dx.doi.org/10.11888/Meteoro.tpd.c.270910> for Naqu in 2016. These data have been preprocessed by their providers to record the dynamics of those variables at a half-hour interval. The algorithm for calculating LST based on flux-tower-derived long wave radiation is inherited from Wang and Liang (2009). We first compared the flux-tower-derived night-time LST estimates between 1:00-1:30 A.M. and 1:30-2:00 A.M.. As shown by Fig.A4-(a), the very slight RMSD of 0.72 K suggests that LST is generally stable between 1:00 and 2:00 A.M. at night. In Fig.A4-(b), we also found marginal bias and RMSD within 1 K between average flux-tower-derived LST of 1:00- 2:00 A.M. and the corresponding 0-cm ground temperature at close meteorological sites (within 1 km and at 2:00 A.M.).

In Fig.A4-(c) we demonstrate time series for monthly average NDVI (derived as in Section 2.2.1) at the 1-km pixels containing each of the four sites from 2003-2019. Clearly, there are very rare cases with NDVI values exceeding 0.5, corroborating the “open environmental conditions” met by the meteorological stations. In view of above, it is feasible for our study to have used the 0-cm ground temperature at pixels of such moderate to low vegetation covers as the evaluation benchmark of the satellite-derived thermal infrared LST.

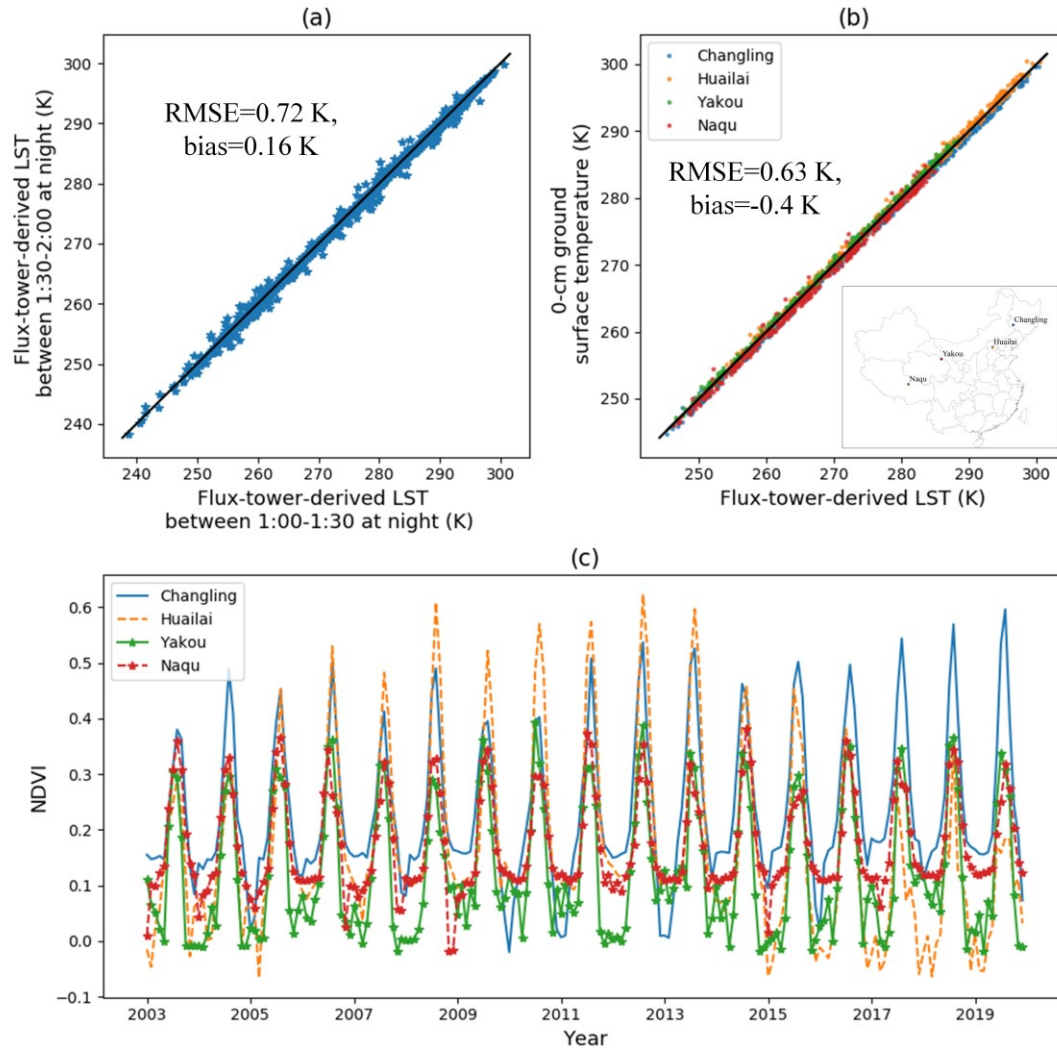


Fig. A4 (a) Comparison of LST between 1:00-1:30 A.M. and 1:30-2:00 A.M. for the four selected flux towers. (b) Comparison of flux-tower-derived LST averaged for 1:00-2:00 A.M. at the four towers and corresponding night-time 0-cm ground temperature at proximal meteorological stations. The inset map shows the location of the four flux towers. (3) Monthly NDVI time series for 1-km pixels containing each of the four flux towers.

## Author contributions

Peilin Song and Yongqiang Zhang designed the research and developed the whole methodological framework; Peilin Song and Yongqiang Zhang supervised the processing line of the 1-km SSM product; Jianping Guo and Bingtong provided in situ



---

soil moisture data for validation; Peilin Song wrote the original draft of the manuscript;  
Yongqiang Zhang, Jiancheng Shi, and Tianjie Zhao revised the manuscript.

## **Competing interests**

The authors declare that they have no conflict of interest.

## **Data availability**

The published SSM dataset is available under the Creative Commons Attribution  
4.0 International License at the following link:  
<http://dx.doi.org/10.11888/Hydro.tpd.271762> (Song and Zhang, 2021b). This dataset  
covers all of China's terrestrial area at a daily revisit frequency (about 1:30 A.M. at  
local time) and a 1km spatial resolution from January 2003 to October 2011 and from  
July 2012 to December 2019.

## **Acknowledgement**

The authors would like to thank the National Aeronautics and Space  
Administration (NASA) for providing all MODIS and DEM data sets free of charge.

## **Financial support**

This study was jointly supported by the National Natural Science Foundation of  
China (Grant No. 42001304), the Open Fund of State Key Laboratory of Remote  
Sensing Science (Grant No. OFSLRSS202117), CAS Pioneer Talents Program, CAS-



---

CSIRO International Cooperation Program, and the International Partnership Program  
of Chinese Academy of Sciences (Grant No. 183311KYSB20200015).

## References

Albergel, C., de Rosnay, P., Gruhier, C., Munoz-Sabater, J., Hasenauer, S., Isaksen, L., . . . Wagner, W.: Evaluation  
of remotely sensed and modelled soil moisture products using global ground-based in situ observations, *Remote Sens.*  
*Environ.*, 118, 215-226, 10.1016/j.rse.2011.11.017, 2012.

Brunsdon, C., Fotheringham, A. S., and Charlton, M. E.: Geographically weighted regression: A method for exploring  
spatial nonstationarity, *Geogr. Anal.*, 28, 281-298, 1996.

Busch, F. A., Niemann, J. D., and Coleman, M.: Evaluation of an empirical orthogonal function-based method to  
downscale soil moisture patterns based on topographical attributes, *Hydrological Processes*, 26, 2696-2709, 2012.

Carlson, T. N., Gillies, R. R., and Perry, E. M.: A method to make use of thermal infrared temperature and NDVI  
measurements to infer surface soil water content and fractional vegetation cover, *Remote sensing reviews*, 9, 161-173, 1994.

Champagne, C., McNairn, H., and Berg, A. A.: Monitoring agricultural soil moisture extremes in Canada using passive  
microwave remote sensing, *Remote Sens. Environ.*, 115, 2434-2444, 2011.

Chauhan, N. S., Miller, S., and Ardanuy, P.: Spaceborne soil moisture estimation at high resolution: a microwave-  
optical/IR synergistic approach, *Int. J. Remote Sens.*, 24, 4599-4622, <http://doi.org/10.1080/0143116031000156837>, 2003.

Chen, Y., Yuan, H., Yang, Y., and Sun, R.: Sub-daily soil moisture estimate using dynamic Bayesian model averaging,  
*J. Hydrol.*, 590, 125445, <https://doi.org/10.1016/j.jhydrol.2020.125445>, 2020.

Choi, M. and Hur, Y.: A microwave-optical/infrared disaggregation for improving spatial representation of soil  
moisture using AMSR-E and MODIS products, *Remote Sens. Environ.*, 124, 259-269,  
<http://doi.org/10.1016/j.rse.2012.05.009>, 2012.

Das, N., Entekhabi, D., Dunbar, R. S., Kim, S., Yueh, S., Colliander, A., . . . Cosh, M.: SMAP/Sentinel-1 L2  
Radiometer/Radar 30-Second Scene 3 km EASE-Grid Soil Moisture, Version 3 [dataset],  
<https://doi.org/10.5067/ASB0EQO2LYJV>, 2020.

Das, N. N., Entekhabi, D., Dunbar, R. S., Chaubell, M. J., Colliander, A., Yueh, S., . . . Thibeault, M.: The SMAP and  
Copernicus Sentinel 1A/B microwave active-passive high resolution surface soil moisture product, *Remote Sens. Environ.*,  
233, 111380, <https://doi.org/10.1016/j.rse.2019.111380>, 2019.

---

979        den Besten, N., Steele-Dunne, S., de Jeu, R., and van der Zaag, P.: Towards Monitoring Waterlogging with Remote  
980        Sensing for Sustainable Irrigated Agriculture, *Remote Sens.*, 13, 2021.

981        Dorigo, W., Himmelbauer, I., Aberer, D., Schremmer, L., Petrakovic, I., Zappa, L., . . . Sabia, R.: The International  
982        Soil Moisture Network: serving Earth system science for over a decade, *Hydrol. Earth Syst. Sci.*, 25, 5749-5804,  
983        10.5194/hess-25-5749-2021, 2021.

984        Dowling, T. P. F., Song, P., Jong, M. C. D., Merbold, L., Wooster, M. J., Huang, J., and Zhang, Y.: An Improved Cloud  
985        Gap-Filling Method for Longwave Infrared Land Surface Temperatures through Introducing Passive Microwave  
986        Techniques, *Remote Sens.*, 13, 3522, 2021.

987        Du, J. Y., Kimball, J. S., and Jones, L. A.: Passive microwave remote sensing of soil moisture based on dynamic  
988        vegetation scattering properties for AMSR-E, *IEEE Trans. Geosci. Remote Sens.*, 54, 597-608, 2016.

989        Duan, S. and Li, Z.: Spatial Downscaling of MODIS Land Surface Temperatures Using Geographically Weighted  
990        Regression: Case Study in Northern China, *IEEE Trans. Geosci. Remote Sens.*, 54, 6458-6469,  
991        <http://doi.org/10.1109/TGRS.2016.2585198>, 2016.

992        Entekhabi, D., Reichle, R. H., Koster, R. D., and Crow, W. T.: Performance Metrics for Soil Moisture Retrievals and  
993        Application Requirements, *J. Hydrometeorol.*, 11, 832-840, 10.1175/2010jhm1223.1, 2010a.

994        Entekhabi, D., Das, N., Kim, S., Jagdhuber, T., Piles, M., Yueh, S., . . . Martínez-Fernández, J.: High-Resolution  
995        Enhanced Product based on SMAP Active-Passive Approach and Sentinel 1A Radar Data, AGU Fall Meeting Abstracts,  
996        H24C-08,

997        Entekhabi, D., Njoku, E. G., O'Neill, P. E., Kellogg, K. H., Crow, W. T., Edelstein, W. N., . . . Van Zyl, J.: The Soil  
998        Moisture Active Passive (SMAP) Mission, *Proc. IEEE*, 98, 704-716, <http://doi.org/10.1109/JPROC.2010.2043918>, 2010b.

999        Fang, B. and Lakshmi, V.: Passive Microwave Soil Moisture Downscaling Using Vegetation and Surface Temperatures,  
1000        *Vadose Zone J.*, 12, 1712-1717, 2013.

1001        Fang, B., Lakshmi, V., Bindlish, R., and Jackson, T.: AMSR2 Soil Moisture Downscaling Using Temperature and  
1002        Vegetation Data, *Remote Sens.*, 10, 2018.

1003        Fang, B., Lakshmi, V., Bindlish, R., Jackson, T. J., Cosh, M., and Basara, J.: Passive Microwave Soil Moisture  
1004        Downscaling Using Vegetation Index and Skin Surface Temperature, 2013.

1005        Fujii, H., Koike, T., and Imaoka, K.: Improvement of the AMSR-E Algorithm for Soil Moisture Estimation by  
1006        Introducing a Fractional Vegetation Coverage Dataset Derived from MODIS Data, *Journal of the Remote Sensing Society*  
1007        of Japan, 29, 282-292, 2009.

---

Im, J., Park, S., Rhee, J., Baik, J., and Choi, M.: Downscaling of AMSR-E soil moisture with MODIS products using machine learning approaches, *Environ Earth Sci*, 75, 1-19, <http://doi.org/10.1007/s12665-016-5917-6>, 2016.

Ines, A. V. M., Das, N. N., Hansen, J. W., and Njoku, E. G.: Assimilation of remotely sensed soil moisture and vegetation with a crop simulation model for maize yield prediction, *Remote Sens. Environ.*, 138, 149-164, 10.1016/j.rse.2013.07.018, 2013.

Jeffrey, P., Walker, Paul, R., and Houser: A methodology for initializing soil moisture in a global climate model: Assimilation of near-surface soil moisture observations, *Journal of Geophysical Research Atmospheres*, 2001.

Jiménez, C., Prigent, C., Ermida, S. L., and Moncet, J. L.: Inversion of AMSR-E observations for land surface temperature estimation: 1. Methodology and evaluation with station temperature, *Journal of Geophysical Research: Atmospheres*, 2017.

Jing, Z. and Zhang, X.: A soil moisture assimilation scheme using satellite-retrieved skin temperature in meso-scale weather forecast model, *Atmos Res*, 95, 333-352, 2010.

Jones, L. A., Kimball, J. S., Podest, E., McDonald, K. C., Chan, S. K., and Njoku, E. G.: A method for deriving land surface moisture, vegetation optical depth, and open water fraction from AMSR-E, *IEEE IGARSS 2009.*, Cape Town, South Africa, 2009, III-916-III-919, <http://doi.org/10.1109/IGARSS.2009.5417921>,

Jung, M., Reichstein, M., Ciais, P., Seneviratne, S. I., Sheffield, J., Goulden, M. L., . . . Zhang, K.: Recent decline in the global land evapotranspiration trend due to limited moisture supply, *Nature*, 467, 951-954, 10.1038/nature09396, 2010.

Kim, J. and Hogue, T. S.: Improving spatial soil moisture representation through integration of AMSR-E and MODIS products, *IEEE Trans. Geosci. Remote Sens*, 50, 446-460, <http://doi.org/10.1109/TGRS.2011.2161318>, 2012.

Koike, T., Nakamura, Y., Kaihotsu, I., Davva, G., Matsuura, N., Tamagawa, K., and Fujii, H.: Development of an Advanced Microwave Scanning Radiometer (AMSR-E) algorithm of soil moisture and vegetation water content (written in Japanese), *Annual Journal of Hydraulic Engineering*, 48, 217-222 2004.

Komatsu, T. S.: Toward a Robust Phenomenological Expression of Evaporation Efficiency for Unsaturated Soil Surfaces, *Journal of Applied Meteorology*, 42, 1330-1334, 10.1175/1520-0450(2003)042<1330:Tarpeo>2.0.Co;2, 2003.

Kong, D., Zhang, Y., Gu, X., and Wang, D.: A robust method for reconstructing global MODIS EVI time series on the Google Earth Engine, *Isprs J Photogramm*, 155, 13-24, 2019.

Koster, R. D., Mahanama, S., Livneh, B., Lettenmaier, D. P., and Reichle, R. H.: Skill in streamflow forecasts derived from large-scale estimates of soil moisture and snow, *Nature Geoscience*, 3, 613-616, 2010.

---

1036 Malbêteau, Y., Merlin, O., Molero, B., Rüdiger, C., and Bacon, S.: DisPATCh as a tool to evaluate coarse-scale remotely  
1037 sensed soil moisture using localized in situ measurements: Application to SMOS and AMSR-E data in Southeastern  
1038 Australia, *Int J Appl Earth Obs*, 45, 221-234, <https://doi.org/10.1016/j.jag.2015.10.002>, 2016.

1039 Meesters, A. G. C. A., De Jeu, R. A. M., and Owe, M.: Analytical derivation of the vegetation optical depth from the  
1040 microwave polarization difference index, *IEEE Geosci. Remote Sens. Lett.*, 2, 121-123, 2005.

1041 Mendoza, P. A., Mizukami, N., Ikeda, K., Clark, M. P., Gutmann, E. D., Arnold, J. R., . . . Rajagopalan, B.: Effects of  
1042 different regional climate model resolution and forcing scales on projected hydrologic changes, *J. Hydrol.*, 541, 1003-1019,  
1043 <https://doi.org/10.1016/j.jhydrol.2016.08.010>, 2016.

1044 Meng, X. J., Mao, K. B. A., Meng, F., Shi, J. C., Zeng, J. Y., Shen, X. Y., . . . Guo, Z. H.: A fine-resolution soil moisture  
1045 dataset for China in 2002-2018, *Earth System Science Data*, 13, 3239-3261, 10.5194/essd-13-3239-2021, 2021.

1046 Merlin, O., Al Bitar, A., Walker, J. P., and Kerr, Y.: An improved algorithm for disaggregating microwave-derived  
1047 soil moisture based on red, near-infrared and thermal-infrared data, *Remote Sens. Environ.*, 114, 2305-2316,  
1048 <https://doi.org/10.1016/j.rse.2010.05.007>, 2010.

1049 Merlin, O., Walker, J. P., Chehbouni, A., and Kerr, Y.: Towards deterministic downscaling of SMOS soil moisture  
1050 using MODIS derived soil evaporative efficiency, *Remote Sens. Environ.*, 112, 3935-3946,  
1051 <http://doi.org/10.1016/j.se.2008.06.012>, 2008.

1052 Merlin, O., Chehbouni, A. G., Kerr, Y. H., Njoku, E. G., and Entekhabi, D.: A combined modeling and  
1053 multipectral/multiresolution remote sensing approach for disaggregation of surface soil moisture: Application to SMOS  
1054 configuration, *IEEE Trans. Geosci. Remote Sens*, 43, 2036-2050, <http://doi.org/10.1109/TGRS.2005.853192>, 2005.

1055 Merlin, O., Escorihuela, M. J., Mayoral, M. A., Hagolle, O., Al Bitar, A., and Kerr, Y.: Self-calibrated evaporation-  
1056 based disaggregation of SMOS soil moisture: An evaluation study at 3 km and 100 m resolution in Catalunya, Spain,  
1057 *Remote Sens. Environ.*, 130, 25-38, 10.1016/j.rse.2012.11.008, 2013.

1058 Merlin, O., Malbeteau, Y., Noffi, Y., Bacon, S., Er-Raki, S., Khabba, S., and Jarlan, L.: Performance Metrics for Soil  
1059 Moisture Downscaling Methods: Application to DISPATCH Data in Central Morocco, *Remote Sens.*, 7, 3783-3807,  
1060 <http://doi.org/10.3390/rs70403783>, 2015.

1061 Molero, B., Merlin, O., Malbêteau, Y., Al Bitar, A., Cabot, F., Stefan, V., . . . Jackson, T. J.: SMOS disaggregated soil  
1062 moisture product at 1km resolution: Processor overview and first validation results, *Remote Sens. Environ.*, 180, 361-376,  
1063 <http://doi.org/10.1016/j.rse.2016.02.045>, 2016.

1064 Montaldo, N., Albertson, J. D., Mancini, M., and Kiely, G.: Robust simulation of root zone soil moisture with  
1065 assimilation of surface soil moisture data, *Water Resour Res*, 37, 2889-2900, 10.1029/2000WR000209, 2001.

---

O'Neill, P. E., Bindlish, R., Chan, S., Chaubell, J., Colliander, A., Njoku, E., and Jackson, T.: SMAP Algorithm Theoretical Basis Document: Level 2 & 3 Soil Moisture (Passive) Data Products, Revision G., Jet Propulsion Laboratory, Pasadena, CA, 2021.

Owe, M., de Jeu, R., and Walker, J.: A methodology for surface soil moisture and vegetation optical depth retrieval using the microwave polarization difference index, *IEEE Trans. Geosci. Remote Sens.*, 39, 1643-1654, 2001.

Pan, H., Chen, Z., Wit, A. D., and Ren, J.: Joint Assimilation of Leaf Area Index and Soil Moisture from Sentinel-1 and Sentinel-2 Data into the WOFOST Model for Winter Wheat Yield Estimation, *Sensors (Basel, Switzerland)*, 19, 2019.

Peng, J., Loew, A., Zhang, S. Q., Wang, J., and Niesel, J.: Spatial downscaling of satellite soil moisture data using a vegetation temperature condition index, *IEEE Trans. Geosci. Remote Sens.*, 54, 558-566, <http://doi.org/10.1109/TGRS.2015.2462074>, 2016.

Piles, M., Entekhabi, D., and Camps, A.: A Change Detection Algorithm for Retrieving High-Resolution Soil Moisture From SMAP Radar and Radiometer Observations, *IEEE Trans. Geosci. Remote Sens.*, 47, 4125-4131, 10.1109/TGRS.2009.2022088, 2009.

Sabaghy, S., Walker, J. P., Renzullo, L. J., Akbar, R., Chan, S., Chaubell, J., . . . Yueh, S.: Comprehensive analysis of alternative downscaled soil moisture products, *Remote Sens. Environ.*, 239, 111586, <https://doi.org/10.1016/j.rse.2019.111586>, 2020.

Sanchez-Ruiz, S., Piles, M., Sanchez, N., Martinez-Fernandez, J., Vall-Ilosera, M., and Camps, A.: Combining SMOS with visible and near/shortwave/thermal infrared satellite data for high resolution soil moisture estimates, *J. Hydrol.*, 516, 273-283, 10.1016/j.jhydrol.2013.12.047, 2014.

Scaini, A., Sanchez, N., Vicente-Serrano, S. M., and Martinez-Fernandez, J.: SMOS-derived soil moisture anomalies and drought indices: a comparative analysis using in situ measurements, *Hydrological Processes*, 29, 373-383, 10.1002/hyp.10150, 2015.

Song, P. and Zhang, Y.: An improved non-linear inter-calibration method on different radiometers for enhancing coverage of daily LST estimates in low latitudes, *Remote Sens. Environ.*, 264, 112626, <https://doi.org/10.1016/j.rse.2021.112626>, 2021a.

Song, P. and Zhang, Y.: Daily all weather surface soil moisture data set with 1 km resolution in China (2003-2019), National Tibetan Plateau Data Center [dataset], 10.11888/Hydro.tpdc.271762, 2021b.

Song, P., Huang, J., and Mansaray, L. R.: An improved surface soil moisture downscaling approach over cloudy areas based on geographically weighted regression, *Agr Forest Meteorol.*, 275, 146-158, 10.1016/j.agrformet.2019.05.022, 2019a.

---

1095 Song, P., Zhang, Y., and Tian, J.: Improving Surface Soil Moisture Estimates in Humid Regions by an Enhanced  
1096 Remote Sensing Technique, *Geophys Res Lett*, 48, e2020GL091459, <https://doi.org/10.1029/2020GL091459>, 2021.

1097 Song, P., Mansaray, L. R., Huang, J., and Huang, W.: Mapping paddy rice agriculture over China using AMSR-E  
1098 time series data, *Isprs J Photogramm*, 144, 469-482, 10.1016/j.isprs.2018.08.015, 2018.

1099 Song, P., Huang, J., Mansaray, L. R., Wen, H., Wu, H., Liu, Z., and Wang, X.: An Improved Soil Moisture Retrieval  
1100 Algorithm Based on the Land Parameter Retrieval Model for Water-Land Mixed Pixels Using AMSR-E Data, *IEEE Trans.*  
1101 *Geosci. Remote Sens*, 1-15, 10.1109/TGRS.2019.2915346, 2019b.

1102 Stefan, V. G., Merlin, O., Escorihuela, M.-J., Molero, B., and Er-Raki, S.: Temporal Calibration of an Evaporation-  
1103 Based Spatial Disaggregation Method of SMOS Soil Moisture Data, *Remote Sens.*, 12, 1671, 2020.

1104 Sui, D. Z.: Tobler's First Law of Geography: A Big Idea for a Small World?, *Annals of the Association of American*  
1105 *Geographers*, 94, 269-277, <https://doi.org/10.1111/j.1467-8306.2004.09402003.x>, 2004.

1106 Ulaby, F. T. and Wilson, E. A.: Microwave Attenuation Properties of Vegetation Canopies, *IEEE Trans. Geosci.*  
1107 *Remote Sens*, GE-23, 746-753, 10.1109/TGRS.1985.289393, 1985.

1108 Vergopolan, N., Xiong, S. T., Estes, L., Wanders, N., Chaney, N. W., Wood, E. F., . . . Sheffield, J.: Field-scale soil  
1109 moisture bridges the spatial-scale gap between drought monitoring and agricultural yields, *Hydrol. Earth Syst. Sci.*, 25,  
1110 1827-1847, 2021.

1111 Verstraeten, W. W., Veroustraete, F., van der Sande, C. J., Grootaers, I., and Feyen, J.: Soil moisture retrieval using  
1112 thermal inertia, determined with visible and thermal spaceborne data, validated for European forests, *Remote Sens.*  
1113 *Environ.*, 101, 299-314, 2006.

1114 Wang, K. and Liang, S.: Evaluation of ASTER and MODIS land surface temperature and emissivity products using  
1115 long-term surface longwave radiation observations at SURFRAD sites, *Remote Sens. Environ.*, 113, 1556-1565,  
1116 <https://doi.org/10.1016/j.rse.2009.03.009>, 2009.

1117 Wang, L. and Qu, J. J.: NMDI: A normalized multi-band drought index for monitoring soil and vegetation moisture  
1118 with satellite remote sensing, *Geophys Res Lett*, 34, L20405, 10.1029/2007GL031021, 2007.

1119 Wei, Z., Meng, Y., Zhang, W., Peng, J., and Meng, L.: Downscaling SMAP soil moisture estimation with gradient  
1120 boosting decision tree regression over the Tibetan Plateau, *Remote Sens. Environ.*, 225, 30-44, 2019.

1121 Wu, D., Liang, H., Cao, T., Yang, D., Zhou, W., and Wu, X.: Construction of operation monitoring system of automatic  
1122 soil moisture observation network in China, *Meteorological Science and Technology*, 42, 278-282, 2014

1123 Yang, G., Sun, W. W., Shen, H. F., Meng, X. C., and Li, J. L.: An Integrated Method for Reconstructing Daily MODIS  
1124 Land Surface Temperature Data, *IEEE J. Sel. Top. Appl. Earth Observ. Remote Sens.*, 12, 1026-1040, 2019.

---

1125 Yao, P., Lu, H., Shi, J., Zhao, T., Yang, K., Cosh, M. H., . . . Entekhabi, D.: A long term global daily soil moisture  
1126 dataset derived from AMSR-E and AMSR2 (2002–2019), *Scientific Data*, 8, 143, 10.1038/s41597-021-00925-8, 2021.

1127 Zeng, Y., Feng, Z., and Xiang, N.: Assessment of soil moisture using Landsat ETM+ temperature/vegetation index in  
1128 semiarid environment, *IEEE International Geoscience & Remote Sensing Symposium*, Piscataway NJ, 2004, 4306-4309  
1129 vol.4306, 10.1109/IGARSS.2004.1370089,

1130 Zhang, J., Zhou, Z., Yao, F., Yang, L., and Hao, C.: Validating the Modified Perpendicular Drought Index in the North  
1131 China Region Using In Situ Soil Moisture Measurement, *IEEE Geoscience & Remote Sensing Letters*, 12, 542-546, 2014.

1132 Zhang, Y., Kong, D., Gan, R., Chiew, F. H. S., Mcvicar, T. R., Zhang, Q., and Yang, Y.: Coupled estimation of 500 m  
1133 and 8-day resolution global evapotranspiration and gross primary production in 2002-2017, *Remote Sens. Environ.*, 222,  
1134 165-182, 2019.

1135 Zhang, Y. Q., Chiew, F. H. S., Liu, C. M., Tang, Q. H., Xia, J., Tian, J., . . . Li, C. C.: Can Remotely Sensed Actual  
1136 Evapotranspiration Facilitate Hydrological Prediction in Ungauged Regions Without Runoff Calibration?, *Water Resour*  
1137 *Res*, 56, 2020.

1138 Zheng, J. Y., Lu, H. S., Crow, W. T., Zhao, T. J., Merlin, O., Rodriguez-Fernandez, N., . . . Gou, Q. Q.: Soil moisture  
1139 downscaling using multiple modes of the DISPATCH algorithm in a semi-humid/humid region, *Int J Appl Earth Obs*, 104,  
1140 10.1016/j.jag.2021.102530, 2021.

1141 Zhou, S., Williams, A. P., Lintner, B., Berg, A. M., and Gentile, P.: Soil moisture–atmosphere feedbacks mitigate  
1142 declining water availability in drylands, *Nature Climate Change*, 11, 2021.

1143 Zhu, Z. and Shi, C.: Simulation and Evaluation of CLDAS and GLDAS Soil Moisture Data in China (written in  
1144 Chinese), *Science Technology and Engineering*, 32, 138-144, 2014.

1145