



1 **A comprehensive geospatial database of nearly 100,000 reservoirs in China**

2 Chunqiao Song^{1*}, Chenyu Fan^{1, 2*}, Jingying Zhu^{1, 2*}, Jida Wang³, Yongwei Sheng⁴, Kai Liu¹,
3 Tan Chen¹, Pengfei Zhan^{1, 2}, Shuangxiao Luo^{1, 2}, Linghong Ke⁵

4 ¹ Key Laboratory of Watershed Geographic Sciences, Nanjing Institute of Geography and
5 Limnology, Chinese Academy of Sciences, Nanjing 210008, China.

6 ² University of Chinese Academy of Sciences, Beijing 100049, China

7 ³ Department of Geography and Geospatial Sciences, Kansas State University, Manhattan, KS
8 66506, USA.

9 ⁴ Department of Geography, University of California, Los Angeles, CA 90095, USA.

10 ⁵ College of Hydrology and Water Resources, Hohai University, Nanjing 210098, China.

11 * Correspondence to cqsong@niglas.ac.cn, fanchenyu21@mailsucas.ac.cn, or

12 zhujingying18@mailsucas.ac.cn



13 **Abstract**

14 With rapid population growth and socioeconomic development over the last century, a great
15 number of dams/reservoirs have been constructed globally to meet various needs. China has
16 strong economical and societal demands for constructing dams and reservoirs. The official
17 statistics reported more than 98,000 dams/reservoirs in China, including nearly 40% of the
18 world's large dams. Despite the availability of several global-scale dam/reservoir databases
19 (e.g., the Global Reservoir and Dam database (GRanD), the GIObal geOreferenced Database
20 of Dams (GOODD), and the Georeferenced global Dams And Reservoirs (GeoDAR)), these
21 databases have insufficient coverage of reservoirs in China, especially for small and newly
22 constructed ones. The lack of reservoir information impedes the estimation of water budgets
23 and evaluation of dam impacts on hydrologic and nutrient fluxes for China and its downstream
24 countries. Therefore, we presented the China Reservoir Dataset (CRD), which contains 97,435
25 reservoir polygons as well as fundamental attribute information (e.g., name and storage capacity)
26 based on existing dam/reservoir products, national basic geographic datasets, multi-source open
27 map data, and multi-level governmental yearbooks and databases. The reservoirs in compiled
28 CRD have a total maximum water inundation area of 50,085.21 km² and a total storage capacity
29 of about 979.62 Gt (924.96-1060.59 Gt). The quantity of reservoirs decreases from the
30 southeast to the northwest, and the density hotspots mainly occur in hilly regions and large
31 plains, with the Yangtze River Basin dominating in reservoir count, area, and storage capacity.
32 We found that these spatial accumulations of reservoirs are closely related to China's
33 socioeconomic development and the implementation of major policies. Finally, we discussed
34 the improvements of CRD in comparison with GOODD, GeoDAR, and GRanD datasets. CRD
35 has significantly improved the reservoir count, area, and storage capacity in China, especially
36 for reservoirs smaller than 1 km². The CRD database provides more comprehensive reservoir
37 spatial and attribute information and is expected to benefit water resources managements and
38 the understanding of ecological and environmental impacts of dams across China and its
39 affected transboundary basins.



40 **1 Introduction**

41 Reservoirs and their dams play a crucial role in green energy generation and water resources
42 management. Since the mid-20th century, the ever-growing human demands for water use and
43 hydropower has driven an unprecedented boom in reservoir construction worldwide (Chao et
44 al., 2008; Wada et al., 2017). The dam construction and reservoir impoundment can lead to
45 many potential environmental and socio-economic impacts (Jiang et al., 2018; Zarfl et al., 2019).
46 These concerned consequences mainly include threat to biodiversity and ecosystems
47 (Winemiller et al., 2016), change in the hydrological regime (Zhang et al., 2019; Vörösmarty
48 et al., 2003), degradation of water quality (Zarfl et al., 2019; Barbarossa et al., 2020),
49 modification of the geochemical cycle (Maavara et al., 2020), alternation of the river
50 morphology (Bednarek, 2001; Nilsson and Berggren, 2000; Winemiller et al., 2016; Grill et al.,
51 2019; Latrubesse et al., 2017; Bond and Cottingham, 2008; Nilsson et al., 2005; Wang et al.,
52 2017a; Wang et al., 2013), disturbance in climate regimes (Pekel et al., 2016; Degu et al., 2011;
53 Wang et al., 2017b; Van Manh et al., 2015), migration of human settlement (Tilt et al., 2009),
54 and changes in the land-use patterns (Stoate et al., 2009; Carpenter et al., 2011).

55 Despite these controversial effects, artificial reservoirs have been constructed widely across
56 many basins of the world, serving a variety of purposes such as hydropower generation, water
57 supply, irrigation, navigation, flood control, recreation, and navigation (Belletti et al., 2020;
58 Biemans et al., 2011; Döll et al., 2009; Grill et al., 2019; Boulange et al., 2021). In addition,
59 reservoirs assist water managers in converting natural flow conditions into flow conditions that
60 meet human demands, which is especially important in locations where water resources are
61 restricted due to the hydrologic seasonality or the growing influences of climate change and
62 variability (Richter et al., 2006).

63 The solution to balance the benefits and consequences of reservoirs should not be a simple
64 decision on whether or not to construct them. The significant benefits and the additional effects
65 highlight the importance and necessity for a holistic picture of the reservoir distributions and
66 continuous monitoring of them to understand the impacts better. Information and data regarding
67 reservoirs are rather crucial for scientists, practitioners, and policymakers owing to various
68 purposes, for instance, estimation of water budgets and impacts on hydrologic and nutrient
69 fluxes on regional or global scales (Chao et al., 2008; Bakken et al., 2013; Bakken et al., 2016;
70 Popescu et al., 2020; Postel, 2000), water availability projection or flood/drought risk
71 mitigation (Di Baldassarre et al., 2017; Ehsani et al., 2017; Elmer et al., 2012; Veldkamp et al.,
72 2017; Metin et al., 2018), assessment of hydropower station construction (Bertoni et al., 2019;
73 Gernaat et al., 2017; Xu et al., 2013; Moran et al., 2018; Winemiller et al., 2016), and



74 investigation of biotic disturbance (Latrubesse et al., 2017; Maavara et al., 2020; Dorber et al.,
75 2020; Sabo et al., 2017). Considering reservoirs in physical models can significantly improve
76 the modeling performance (Gutenson et al., 2020). The modeling requires knowing a minimum
77 set of the reservoir characteristics, including their spatial location, abundance, area, and storage
78 capacity. Besides, the reservoirs are considered a key source of greenhouse gases (GHGs),
79 partly offsetting the carbon sink of continents (St. Louis et al., 2000; Aufdenkampe et al., 2011;
80 Barros et al., 2011; Raymond et al., 2013; Deemer et al., 2016). There is thus an increasing
81 concern about the true GHGs fluxes from reservoirs. Answering these questions requires a
82 comprehensive database depicting reservoir distributions and properties, especially for
83 hydropower-boom regions in Asia, South America, and Africa.

84 China has a strong economical and societal demand for hydroelectric development, flood
85 control, and agricultural irrigation. In 2007, China's Medium-and Long-Term Plan for
86 Renewable Energy Development projected constructing 300 GW of gross installed hydropower
87 capacity by 2020, exceeding the doubled capacity in 2007. The installed hydropower capacity
88 target has been reset to 420×10^6 kW by 2020, representing a 70% increase in 2012. In China,
89 more than 60% of total water consumption is taken by the agricultural water sector, among
90 which 90% of the quota is shared by the irrigation water use (Jiang et al., 2018). Therefore,
91 reservoir construction in China has experienced a drastic growth. The number of Chinese
92 reservoirs increased slowly after the 1980s and soared to the count of 98,000 around 2015
93 (MWR, 2016). According to the register of the International Commission on Large Dams
94 (ICOLD and CIGB, 2011), China possesses nearly 40% of the global large dams (storage
95 capacity greater than 0.1 Gt). However, little is known on the spatial locations and related
96 georeferenced information of these constructed reservoirs at the national level for China.

97 There have been multiple efforts to inventory global reservoirs including those of China. The
98 most recognized and comprehensive database is the World Register of Dams (WRD), hosted
99 and maintained by ICOLD, which reports 23,841 dams for China. However, as this database is
100 not georeferenced, its utility is severely limited. The Global Reservoir and Dam database
101 (GRanD) (Lehner et al., 2011) was an initiative database that can provide global geospatial
102 details about reservoirs and their attributes. Its latest version, v1.3, contains 7,320
103 dams/reservoirs, with a cumulative capacity of $6,881 \text{ km}^3$, while only 921 Chinese reservoirs
104 were included. In recent, the GLObal geOreferenced Database of Dams (GOODD) (Mulligan et
105 al., 2020) and the Georeferenced global Dams And Reservoirs dataset (GeoDAR) (Wang et al.,
106 2022) were published, containing more than 38,000 and 20,214 reservoirs in a global scale,
107 respectively. GOODD was manually digitized from high-resolution Google Earth imagery
108 whereas GeoDAR was georeferenced from ICOLD WRD with a full harmonization with



109 GRanD. For the Chinese territory, the GOODD and GeoDAR databases contain 9,238 and
110 4,859 reservoirs, respectively, still significantly below the scales of WRD and MWR. Given the
111 lacked information, a comprehensive and spatially-explicit database of reservoirs in China is
112 required.

113 This study aims to share, as comprehensively as possible, fundamental open-access information
114 on reservoirs in China. We have compiled the database based on a variety of data sources,
115 including the national 1:250,000 public basic geographic database, the Almanac of China's
116 Water Power, three global reservoir inventories (GeoDAR v1.1, GRanD v1.3, GOODD V1.0),
117 and other published documents and online maps (e.g., Open Street Map (OSM) and Tianditu
118 Map). A comparison with GeoDAR, the GRanD, and GOODD was conducted to assess the
119 database. Our inventory contains significantly more reservoirs than the currently available
120 databases. This database can provide researchers with basic information on reservoir locations,
121 spatially-explicit inundation areas, water storage, and related details in China, with the goal of
122 advancing research on water resources, ecological and environmental consequences, global
123 change impacts, and socioeconomic sector assessments on a national and worldwide scale.

124 **2 Data description**

125 **2.1 Multi-source data for compiling national reservoir locations**

126 2.1.1 Existing reservoir or dam databases

127 Before constructing the reservoir database in China, the data of existing dams and reservoirs
128 are preliminarily compiled as the basis for determining the location of reservoirs. Existing
129 dam/reservoir databases containing geographical information are one of the key spatial data
130 sources for reservoirs, including GRanD, GOODD, GeoDAR, and Future Hydropower Dams
131 (FHReD).

132 GRanD is a data product of the Global Water System Project and was released firstly in 2011
133 (Lehner et al., 2011). GOODD (Mulligan et al., 2020) is a comprehensive global dam database
134 provided by manual inspection and digitization based on multi-source remote sensing satellite
135 observations and Google Earth images. FHReD database collects spatial locations of reservoirs
136 that are currently being built or those are planned in the future (Zarfl et al., 2015). GeoDAR is
137 a global dam and reservoir geographic database based on the multi-source data fusion and
138 online geocoding of the ICOLD reservoir records (Wang et al., 2022). The FHReD database
139 provides information on 3,700 planned and under construction reservoirs worldwide, of which
140 251 reservoirs are located in China and 97 have been dammed by 2020.

141 In this study, these above-mentioned databases were used to provide location information on



142 part of China's reservoirs, particularly those of large size. We integrated the spatial information
143 of existing reservoirs in China and eliminated duplicate information. This way, the CRD retains
144 the spatial information of each unique Chinese reservoir in these three global databases.

145 2.1.2 National basic geographic databases

146 The national 1:250,000 public basic geographic database covers the whole land area of China
147 and major islands. Overall, the map elements represent the landscape's situation around 2015.
148 The database, which contains nine element layers such as waterbody (point, line, and surface
149 layer), is treated with the security technology of spatial location accuracy and attribute content.
150 Reservoir information is contained in the waterbody layer provided by the basic topographic
151 map and the layers of natural place names (notes), most of which have name attributes and
152 spatial positioning information. Although the national surveying authorities provide the basic
153 terrain data, the spatial coordinates are biased due to the confidential processing of the map.
154 Therefore, we carried out rigorous data correction and quality control by referring to the high-
155 resolution Google Earth imagery. Finally, the database provided the spatial information
156 references of 27,047 reservoirs for the CRD database.

157 The Tiandi Map is an online-map system developed by the State Bureau of Surveying and
158 Mapping of China (<https://map.tianditu.gov.cn/>, only in Chinese), which provides the
159 geographic information services in two forms: portal and service interface. It integrates public
160 geographic information resources from national, provincial, and prefecture (county)-level
161 mapping and geographic information departments, relevant government departments,
162 enterprises and institutions, social groups, and the public. In addition, users can use the service
163 interface to call the authoritative, standard, unified online geographic information
164 comprehensive service of the Tiandi Map. In this study, the Tiandi Map was mainly used in two
165 aspects: firstly, as a base map for visual interpretation and supplementing the potentially
166 missing reservoirs. In this process, we initially identified about 60,000 potential reservoirs;
167 secondly, the map was used to provide the reservoir name attribute. According to the locations
168 of the reservoir checked by manual inspection based on the Tiandi Map, the name of the
169 reservoir was queried by calling its reverse geocoding API.

170 2.1.3 Open-source map data

171 Open-source maps such as OSM were another key source of obtaining reservoir locations. OSM
172 is a platform for users, organizations, or countries worldwide to organize and maintain multi-
173 source geographic information data. Map vector data is available for download under an open
174 database license. Due to OSM data's open-source and shared characteristics, the collected
175 multi-source geographic information data can be used as a supplement to other time-limited



176 databases. They can better reflect the changes in land surface information promptly. OSM
177 contains data such as water system, road traffic, natural boundary, land use, and construction.
178 Water system data provides part of reservoir polygon data with names, mainly compiled
179 manually by OSM users. Finally, the spatial locations of 89 reservoirs were obtained from the
180 OSM.

181 **2.2 Data sources for reservoir inundation area mapping**

182 Water inundation area is an important indicator of the reservoir and a variable for modeling
183 reservoir storage capacity. Since the reservoir area is dynamically changing, we considered the
184 maximum water area of the reservoir over the last several decades in this study. Moreover, the
185 maximum water area of the reservoir can indirectly reflect its water storage capacity. Therefore,
186 we merged two water occurrence datasets, the Global Surface Water v1.0 (GSW) and Global
187 Land Analysis and Discovery (GLAD), to obtain long-term historical maximum water areas of
188 each of the compiled reservoirs.

189 GSW is a remote sensing big data computing platform developed by Pekel et al. (2016) using
190 Google Earth Engine (GEE). Based on all available Landsat 5, 6, 7, and 8 data acquired from
191 1984 to present, Pekel et al. (2016) used the expert classification system to divide each available
192 pixel into water bodies and non-water bodies and integrated the results into the data of monthly,
193 annual, and decadal timescales. The maximum water boundary, water inundation frequency,
194 water change intensity, water transition, water recurrence, seasonal water, monthly water range,
195 monthly water recurrence, and annual water range are provided. GLAD is the global water body
196 map from 1999 to 2019 obtained by Pickens et al. (2020) using GEE remote sensing big data
197 computing platform based on Landsat 5, 7, and 8 images. The surface water range changes
198 during this period were highlighted, and the water was classified into several categories based
199 on water probability, including permanent water area, seasonal water area, lost water area, new
200 water area, temporary land area, and temporary water area, and high change area.

201 Considering that both the GSW and GLAD datasets are at 30 m resolution, we also applied
202 FROM-GLC10 at 10 m resolution based on Sentinel-2 data in 2017 (Gong et al., 2019) to
203 handle the incomplete mapping of extremely narrow boundaries for a few reservoirs located in
204 deep valleys. This database takes the existing land cover data as training samples. It combines
205 the data of the Space Shuttle Radar Terrain Mission (SRTM) on the GEE big data computing
206 platform to classify the data by random forest method to obtain the maps of alpine and swamp
207 areas with overall accuracy loss rate less than 1%. The training samples were classified based
208 on Landsat 8 original images and eight important indices commonly used in remote sensing
209 monitoring, such as normalized vegetation index, modified water index, and normalized



210 building index.

211 **2.3 Data sources for reservoir storage capacity estimation**

212 The reservoir storage capacity records were retrieved from various yearbook and documents,
213 including the Almanac of China's Water Power and other government documents. The Almanac
214 of China's Water Power is a professional industry yearbook for hydropower in China, providing
215 detailed information on China's mega reservoirs, including the reservoir location, the dam
216 purpose, the basin area, the storage capacity, and water level data of various types, and the dam
217 construction and impoundment time. Other government documents used in the study mainly
218 include the "List of Persons responsible for the safety of Large reservoirs in China in 2020"
219 issued by the Ministry of Water Resources, the "List of persons responsible for the safety of
220 large and medium-sized reservoirs" issued by different provinces and prefectures of China, and
221 the "List of Reservoirs in Hunan Province" issued by the Water Resources Department of
222 Hunan Province. The documents provide information on the type and location of the
223 dam/reservoir and the storage capacity of reservoirs of different sizes. Finally, from the
224 Almanac of China's Water Power and some other government documents, we collected
225 authoritative information on the locations and storage capacities of 5,143 reservoirs.


226 **3 Methodology**

227 **3.1 Reservoir location extraction**

228 To build this database, we started with a preliminary compilation of the location information of
229 Chinese dams and reservoirs from three types of data sources (see Figure 1a). The first type of
230 sources is the published georeferenced databases for dams and reservoirs, including GRand,
231 GOODD, FHReD, and GeoDAR. We combined China's reservoir location information of the
232 four published dam/reservoir products. After removing duplicates by manual inspection, we
233 obtained the names and locations of about 7,400 unique reservoirs. The second type of sources
234 are national basic geographic databases (including the national 1:250,000 public basic
235 geographic database and Tiandi Map), the Almanac of China's Water Power, and other
236 government documents. We checked the national 1:250,000 public basic geographic database,
237 and its drainage layer data and natural place name layer contained most reservoir information.
238 Here, the Tiandi Map was used a base map for visual interpretation to supplement missing
239 reservoirs in the national public basic geographic database. Moreover, we made a list of
240 reservoirs from the Almanac of China's Water Power and documents from local governments,
241 which only provided the county level address for each reservoir. We then employed the Tiandi
242 Map geocoding API to query the latitudes and longitudes of these reservoirs. Based on the
243 second type of data sources, we obtained the location information of about 90,000 reservoirs.



244 The third type of data sources is open map database, the OSM. From the OSM, we obtained the
 245 location information of 89 reservoirs. After harmonizing the three types of sources, we
 246 concluded with the locations of a total of 97,435 unique reservoirs in China.

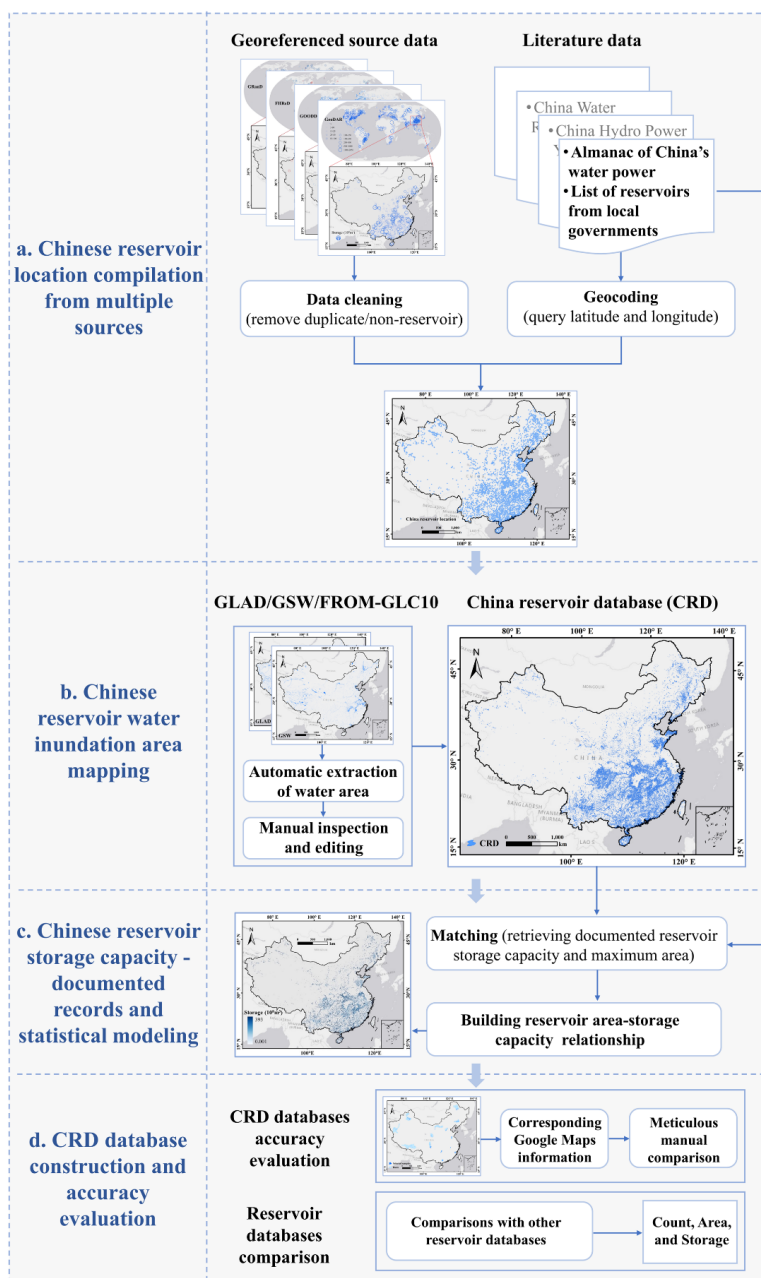

247

248

Figure 1. Flow chart of constructing China reservoir database



249 **3.2 Reservoir water inundation extent mapping**

250 After determining the spatial location of all reservoirs, we extracted the historical maximum
251 water inundation extent (from the mid-1980s to 2020) of the corresponding reservoirs based on
252 GSW, GLAD, and FROM-GLC10 data (Figure 1b). GSW data can provide the maximum water
253 area of reservoirs with a long-time series from 1984 to 2020. GLAD only maps images over
254 the last 20 years, but it combines Landsat with Sentinel-1 and Sentinel-2 to provide higher
255 temporal resolution to describe ephemeral surface water better. Through comparative inspection,
256 we found that GLAD could describe the water area details more completely for some reservoirs,
257 especially narrow river-channel reservoirs. Therefore, we merged GSW and GLAD datasets to
258 obtain the maximum water area of all reservoirs. In addition, the FROM-GLC10 is based on
259 the Sentinel 10-m resolution imagery data, which can identify relatively small reservoirs
260 (reservoir area smaller than 0.01 km²). Therefore, we also supplemented a few narrow river-
261 channel reservoirs, especially those in mountainous regions of Zhejiang, Fujian, Sichuan,
262 Jiangxi, and Guangxi provinces. The automatically-extracted water masks by intersecting with
263 our compiled reservoir point locations were visually inspected and if necessary, manually edited
264 (such as to separate the reservoir from the river segment) to form quality-controlled reservoir
265 boundaries. Up to now, there are still reservoirs that have not been collected except those
266 identified in Section 3.1. So, all the remaining water bodies were manually checked by
267 overlapping with the Google Earth high-resolution images to minimize the number of missed
268 reservoirs. Finally, a total of 97,435 reservoir polygons were extracted.

269 For reservoirs without corresponding names, the reverse geocoding API of Tiandi Map was
270 used to query the names of corresponding reservoirs. Here, the reverse geocoding API refers to
271 entering the reservoir's coordinate and then returning the relevant name information of the
272 corresponding reservoir. Eventually, 66,253 reservoirs were identified and supplemented with
273 the name attribute.

274 **3.3 Reservoir storage capacity estimation**

275 Reservoir storage capacity is one of the basic information about reservoirs. As shown in Figure
276 1c, the source of reservoir storage capacity in the CRD database is mainly divided into two
277 types: the recorded values obtained from the yearbook and government documents as
278 mentioned in Section 2.2, and statistical estimations by an empirical model.

279 According to the yearbook and other documents (Section 2.2), we collected the storage capacity
280 records for 5,143 reservoirs in various sizes, among which 162 Type-I super-large reservoirs
281 (storage capacity greater than 1 Gt), 580 Type-II large reservoirs (0.1-1 Gt), and 4,407 small
282 and medium-sized reservoirs (smaller than 0.1 Gt). As super-large reservoirs (mostly canyon




283 type reservoirs) tend to have different hypsometric (area-storage relationship) characteristics
284 from small and medium-sized reservoirs (mostly in plain and hilly areas), we excluded the 742
285 large reservoirs from model calibration. In addition, we removed 84 reservoirs that do not
286 conform small and medium-sized reservoirs class (storage capacity smaller than 0.1 Gt). The
287 statistical relationship between inundation area and storage of a total of 4,323 reservoirs was
288 established to estimate and supplement the capacity estimation of the remaining unrecorded
289 small and medium-sized reservoirs. The empirical model was used to fit the storage capacity
290 and area of the existing recorded reservoirs (Figure 2). The fitting equation is as follows and
291 the R^2 is 0.844.

$$292 \quad \log_{10} V = 1.096 \times \log_{10} S + 0.349 \quad (1)$$

$$293 \quad \text{SMAPE} = 100 \times \frac{1}{N} \sum \frac{|\text{observed value} - \text{predicted value}|}{(\text{observed value} + \text{predicted value})/2} \quad (2)$$

294 where V represents the reservoir storage capacity in the unit of m^3 , and S represents the reservoir
295 maximum area in the unit of m^2 . We calculated the SMAPE of estimated storage capacity was
296 biased of 32.62-32.64% at the 95% confidence interval based on the fitted model. Finally, the
297 recorded values from yearbook and other documents are regarded as the storage capacity of
298 5,143 reservoirs, totaling about 803.29 Gt. The other 92,292 reservoirs storage capacity were
299 estimated by using their maximum inundation areas as in equation (1), with a total of 176.33
300 Gt, ranging from 121.67 Gt to 257.30 Gt. Therefore, the total storage capacity of Chinese
301 reservoirs is 979.62 Gt (924.96-1060.59 Gt).

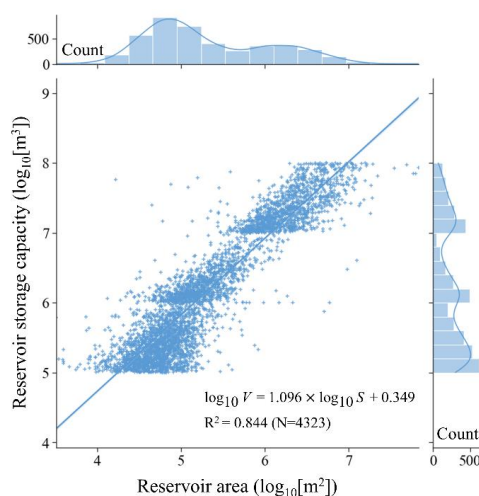

302
303 Figure 2. Fitting relationship of area and storage capacity of small and medium-sized reservoirs.
304 The bars and broken lines in the subgraph respectively represent the count of scattered points



305 and kernel density in the corresponding interval. The upper and right subplots correspond to the
306 count of reservoir area and storage capacity values, respectively.

307 **4 Results**

308 **4.1 Description of the CRD database**

309 This database catalogs the location information of 97,435 reservoirs in China, with an
310 aggregated area of 50,085.21 km² and an estimated total storage capacity of 979.62 Gt (924.96-
311 1060.59 Gt). The 5,143 reservoirs in the CRD database were directly derived from the yearbook
312 and other documents data, accounting for 59% and 82% of the total reservoir area and storage
313 capacity of the CRD database, respectively. This reservoir information was mainly obtained
314 through manual compilation. The attributes of the recorded reservoirs include the longitude and
315 latitude of the reservoir, name, province, prefecture, and county where the reservoir is located,
316 water area, normal water level, storage capacity, reservoir class, main use, and regulation type
317 (Table 1). The attributes of all the CRD reservoirs (in all cases) include location information
318 (longitude, latitude, province, prefecture, and county), inundation area, and estimated storage
319 capacity, as shown in Table 2.

320 Table 1. Attributes in the recorded (5,143) reservoirs from yearbook and document data.

Attribute	Description
ID	Reservoir ID in this database (type: integer).
Name	Name of the reservoir.
Lat	Latitude of the reservoir point (type: float, datum: World Geodetic System (WGS) 1984, unit: °).
Lon	Longitude of the reservoir point (type: float, datum: WGS 1984, unit: °).
Province	Province in which the reservoir is located.
Prefecture	Prefecture in which the reservoir is located.
County	County in which the reservoir is located.
Area	Maximum water area of the reservoir (unit: km ²).
Normal elevation	Normal elevation of the reservoir (unit: m).
STOR_Recor	Total storage capacity of values from yearbook and literature records (unit: Gt).
ResvClass	Reservoir class (1: large Type-I, 2: large Type-II, 3: medium, 4: small Type-I, 5: small Type-II, 6: pumped storage type).
Comprehensive utilization	Main uses of the reservoir (mainly including power generation, water supply, shipping, flood control, and irrigation).
Type of regulation	Regulation types of reservoirs (mainly including day, week, season, and year).




321

Table 2. Attributes in all (97,435) reservoirs from CRD.

Attribute	Description
ID	Reservoir ID in this database (type: integer).
Name	Name of the reservoir.
Lat	Latitude of the reservoir point (type: float, datum: World Geodetic System (WGS) 1984, unit: °).
Lon	Longitude of the reservoir point (type: float, datum: World Geodetic System (WGS) 1984, unit: °).
Province	Province in which the reservoir is located.
Prefecture	Prefecture in which the reservoir is located.
County	County in which the reservoir is located.
Area	Maximum water area of the reservoir (unit: km ²).
STOR	Total storage capacity (unit: Gt).

322

323 The Pareto distribution can describe the global distribution abundance of artificial reservoirs
324 and their inundation areas (sizes) (Lehner et al., 2011; Downing et al., 2006). In Figure 3, we
325 applied such a statistical fitting distribution to the CRD database and inferred the count of
326 smaller reservoirs and their total inundation area. Assuming that our data for reservoirs smaller
327 than 0.01 km² are complete, trend lines can be fitted and extrapolated from the Pareto
328 distribution to estimate smaller reservoirs not included in the CRD database. As a result, there
329 is an overall good fitting in the Pareto model for the CRD reservoirs in the scale of 0.01-10 km²
330 (Figure 3a). In addition, the Pareto distributions in each basin are similar to that on the national
331 scale (Figure 3b-k).

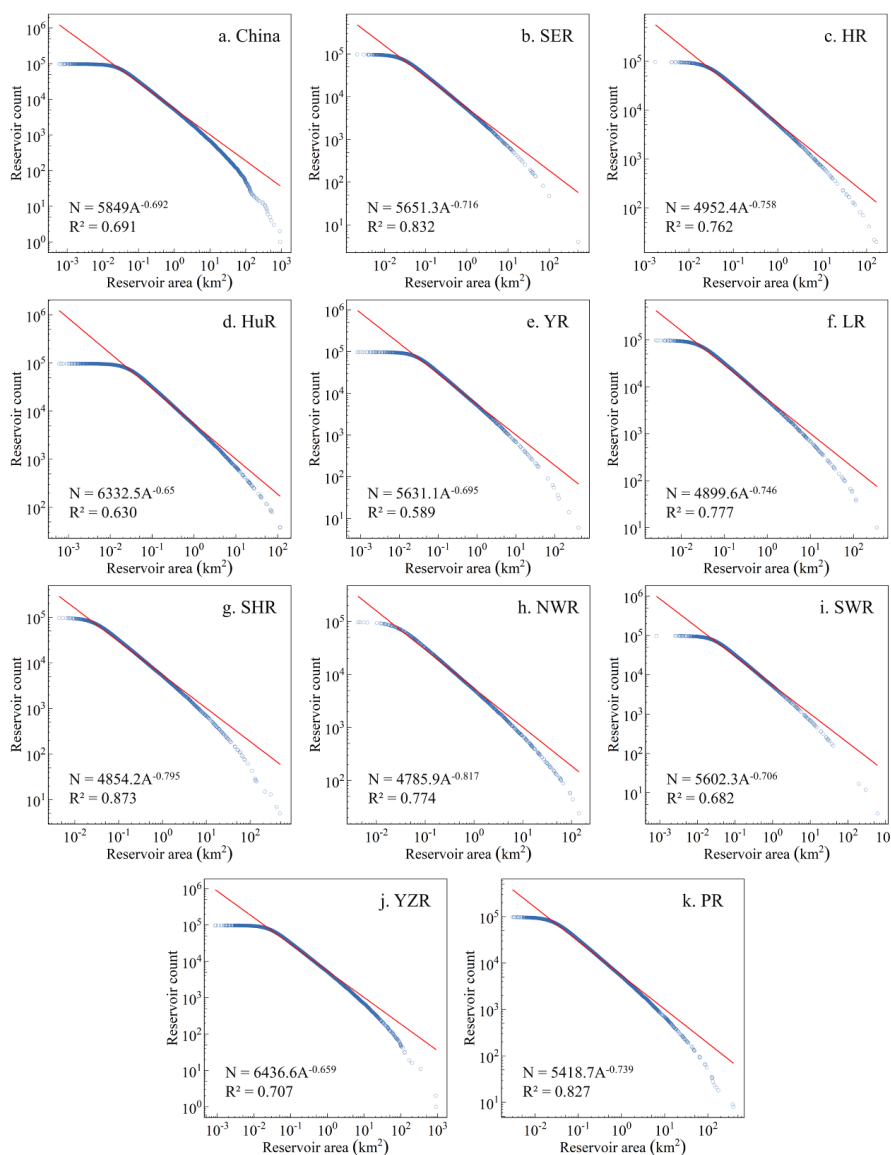

332
 333 Figure 3. China reservoir area and count using a Pareto model. Distributions are plotted as the
 334 total number of reservoirs larger than a given surface area in China (a) and ten first-level water
 335 resources divisions (b-k). Blue circles intersecting the fitting lines represent the values used for
 336 model fitting.

337 **4.2 Accuracy evaluation of the CRD database**

338 To evaluate the commission and omission accuracy of the CRD database, we randomly selected



339 subbasin areas in each first-level river basin across China and manually checked 1,882
340 reservoirs. Most of them are third-level river basins. However, for the Yangtze River (YZR)
341 and the Yellow River (YR) basins with more reservoirs, three sub-watersheds were selected to
342 evenly distribute the sampled reservoirs. For each sampled reservoir, we manually confirmed
343 its relevant information with the recorded in the Tiandi Map. We overlapped 1,882 selected
344 samples with Tiandi Map for validating the geo-matching accuracy of the CRD. Then, we
345 manually checked whether the spatial coordinates of each sample are consistent with those
346 recorded in the Tiandi Map. In addition, we conducted a second round quality control to check
347 if any reservoirs were missing.

348 As shown in Table 3, the overall evaluation accuracy for the CRD database is 96.55%, ranging
349 from 95.47% to 98.15% in different basins. The main cause of errors in most basins is the
350 misclassification of “false” reservoirs (commission error), such as ponds and paddy fields. In
351 comparison, the accuracy was lowest in the Yangtze River basin due to the omission error of
352 reservoirs located in complex topographic or landscape conditions.

353 Table 3. Accuracy validation in each river basin.

Region	Sample	Commission error	Omission error	Total error	Accuracy (%)
SER	125	0	3	3	97.60
HR	81	0	3	3	96.30
HuR	151	0	4	4	97.35
YR	161	5	1	6	96.27
LR	162	2	1	3	98.15
SHR	69	2	0	2	97.10
NWR	177	5	0	5	97.18
SWR	45	1	0	1	97.78
YZR	685	4	27	31	95.47
PR	226	3	4	7	96.90

354 Note: SER-Southeastern River, HR-Haihe River, HuR-Huaihe River, YR-Yellow River, LR-Liaohe River,
355 SHR-Songhua River, NWR-Northwest River, SWR-Southwest River, YZR-Yangtze River, PR-Pearl
356 River. “Commission error” represents geocoding errors where the CRD information is inconsistent with
357 the validation reference. “Omission error” indicates the number of missing reservoirs in the samples.


358 4.3 Spatial distribution of reservoirs in China

359 The total area of reservoirs in China is 50,085.21 km², and the total storage capacity is estimated
360 to be 979.62 Gt. The spatially divergent pattern is generally characterized by the topographic
361 division of the Hengduan Mountains in the east-west direction and the Qinling Mountains and
362 the HuR in the north-south direction. The overall distribution of the reservoirs is bounded by
363 the Heihe-Tengchong Line that is widely recognized as a separated line for the contrasting



364 pattern of population, industrial development and landscape characteristics, decreasing from
365 southeast to northwest. Latitudinally, reservoirs in China are dominantly distributed in the belt
366 between 20-30°N, both in terms of count and area, whereas longitudinally, reservoirs in China
367 are concentrated between 100-120°E.

368 Chinese reservoirs are widely distributed and have obvious agglomeration characteristics.
369 Reservoirs are distributed not only from the hot and humid southern areas to the arid desert
370 areas but also from the eastern coastal areas to the Qinghai-Tibet Plateau. From Figure 4,
371 reservoirs are mainly distributed in China's major "Commodity Grain Production Bases" that
372 have a relatively great demand for agricultural irrigation, such as the Poyang Lake and Dongting
373 Lake Plain, HuR basin, Songnen Plain, and Sanjiang Plain. Moreover, many large reservoirs
374 are accumulated in areas with large elevation drops and abundant water resources. For example,
375 reservoirs in Sichuan province are clustered along the main stems of Fujiang River, Jialing
376 River, and YZR. In addition, as a major water supply, many reservoirs are concentrated in urban
377 areas such as the Shandong Peninsula urban agglomerations. In the Shandong Peninsula,
378 reservoirs are mainly concentrated in Yimeng Mountain and the Bohai Rim area.

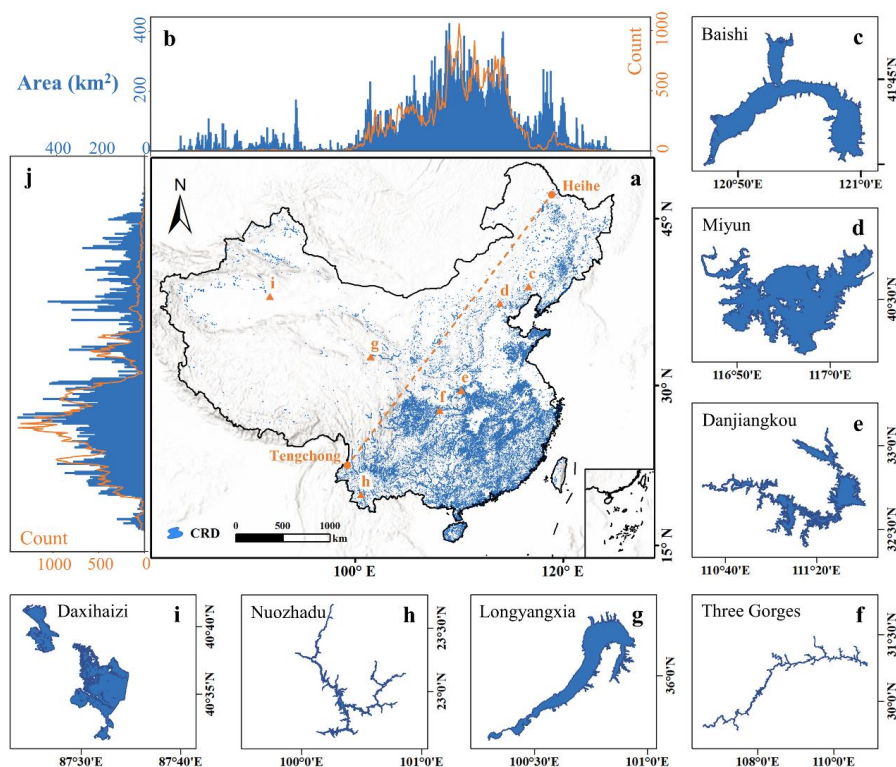

379
380 Figure 4. Spatial distribution of reservoirs in China (a). The histogram and lines represent the




381 area and count of reservoirs in China by 0.1° latitude (b) and longitude (j), respectively. The c-
382 i subgraphs show the details of Baishi Reservoir, Miyun Reservoir, Danjiangkou Reservoir,
383 Three Gorges Reservoir, Longyangxia Reservoir, Nuozhadu Reservoir, and Daxihaizi Reservoir.

384 4.4 Distribution characteristics of reservoir storage capacity in China

385 In terms of storage capacity spatial distribution, reservoirs with substantial storage capacity are
386 mostly found in the YZR and the PR. Many major reservoirs have been built in the SWR in
387 recent years, primarily in the upper stages of the Lancang, Yuan, and Nujiang rivers. The HuR
388 and HR basins, on the other hand, have several reservoirs, although their storage capabilities
389 are limited, owing to the flat terrain's minimal elevation changes. While the YR has no evident
390 benefit in terms of count or storage capacity, it has the biggest reservoir regulation of any basin,
391 and its total reservoir capacity has reached three times its annual runoff.


392 The distribution of reservoir storage capacity in China is shown in Figure 5. There are 135
393 reservoirs with a storage capacity of above 1 Gt (see Figure 5b), accounting for 60.81% of the
394 total. Among them, there are 15 reservoirs with a storage capacity of more than 10 Gt in China,
395 accounting for 29.39% of the total reservoir capacity. Also, the top 10 reservoirs (Three Gorges
396 Reservoir, Danjiangkou Reservoir, Longtan Reservoir, Longyangxia Reservoir, Nuozhadu
397 Reservoir, Xin'anjiang Reservoir, Xiaowan Reservoir, Shuifeng Reservoir, Xinfengjiang
398 Reservoir, and Xiluodu Reservoir) are mainly distributed in the YZR, PR, and SWR, which are
399 rich in water resources. These ten reservoirs alone account for 23.51% of the total storage
400 capacity of the CRD.

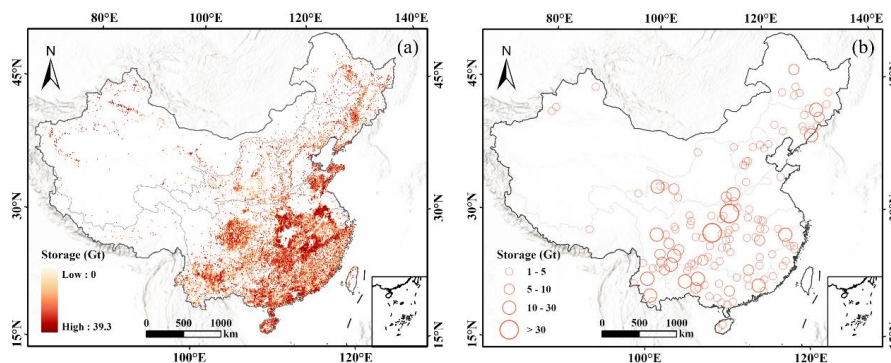

401
402 Figure 5. Distribution of reservoir storage capacity in China. Panel a shows all 97,435 reservoirs
403 in CRD, which are displayed in gradient color according to the total storage capacity of
404 reservoirs in the $0.1^\circ \times 0.1^\circ$ gridded statistics. Panel b shows the 135 reservoir larger than 1Gt.
405 Furthermore, we analyzed the distribution characteristics of reservoir number, area, and storage
406 capacity in each primary and secondary watershed of the water resources division. The big



407 bubbles illustrated in Figure 6 represent basins with a large count, large area, and large storage
408 capacity, which belong to the YZR. Almost all the second-level river basins with relatively large
409 storage capacity are distributed in the middle and upper reaches of the YZR, including the
410 Dongting Lake Basin, Poyang Lake Basin, the Jinsha River Basin, and the Han River Basin.

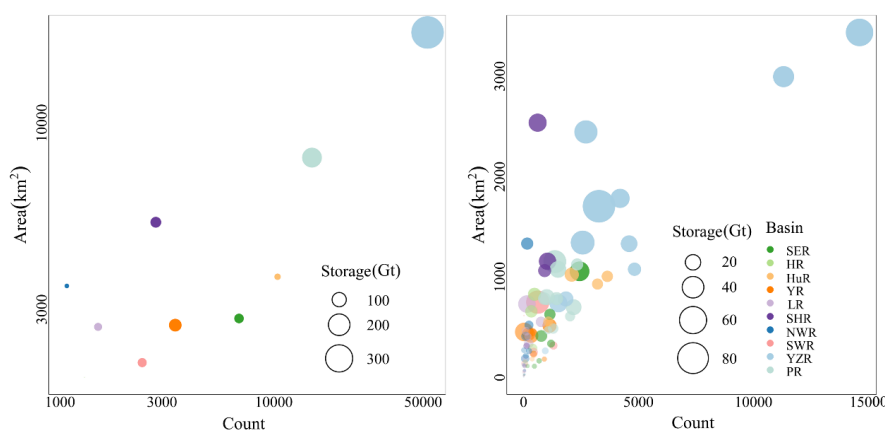

411
412 Figure 6. Bubble chart of reservoir count, area, and storage capacity of each basin in the first-
413 level (a) and second-level (b) hydrologic basins. Different colors represent the ten first-level
414 basin units. Bubble size represents the size of reservoir capacity.

415 5 Discussions


416 5.1 Comparisons with other reservoir databases

417 To verify the reliability of the CRD database, we compared the CRD reservoirs with the widely
418 recognized and publicly available reservoir/dam databases, including GOODD, GeoDAR v1.1,
419 and GRanD v1.3. Figure 7 shows the contrasts among these four databases. Since GOODD
420 does not provide reservoir attribute information (except locations and catchment areas), it is
421 only compared with CRD in reservoir count. The quantity of reservoirs in CRD (97,435)
422 exceeds those of the Chinese subsets of the global databases (from 9,238 in GOODD to 921 in
423 GRanD) by one to two orders of magnitude. CRD increased the total reservoir area by about
424 169% and 194% compared with GeoDAR and GRanD, respectively. In comparison, the total
425 storage capacity of CRD exceeds the GeoDAR and GRanD by 249.23 Gt and 293.51 Gt in
426 China, respectively. Notably, although GeoDAR still largely exceeds GRanD in dam count,
427 their total storage capacity was comparable, with GeoDAR increasing its reservoir storage
428 capacity by approximately 6% (44 Gt). This is because GRanD has included the largest
429 reservoirs in China.


430 We also compared CRD with the three global databases at different levels of reservoir areas. As



431 shown in Figure 8a, the advantage of CRD is most evident in the improvement of reservoirs
 432 with an area less than 1 km², particularly reservoirs with an area less than 0.1 km². Therefore,
 433 the total reservoir areas of the corresponding CRD database with an area smaller than 0.1 km²
 434 and 0.1-1 km² are also higher than those of other databases. For larger reservoirs (1-10 km², 10-
 435 100 km², and larger than 100 km²), the counts of CRD, GeoDAR, and GRanD have little
 436 difference, but the CRD area is slightly higher, mainly because the reservoir polygons applied
 437 in this study represent the maximum water extents. In addition, we found that the storage
 438 capacity of CRD reservoirs increased at different area levels, with an average increase of 54.28
 439 Gt. In general, CRD databases have greatly improved in terms of reservoir count, area, and
 440 storage capacity compared with other databases in China.

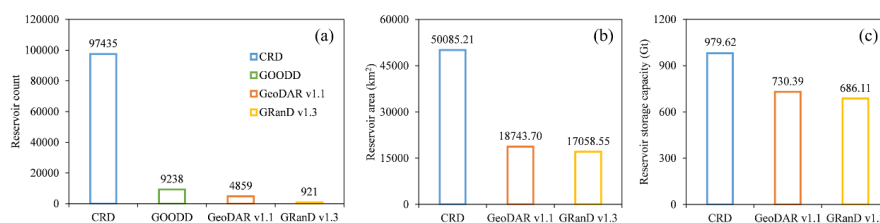

441
 442 Figure 7. Comparison of reservoirs in count (a), area (b), and storage capacity (c) between the
 443 CRD database, GOODD, GeoDAR v1.1, and GRanD v1.3 database.

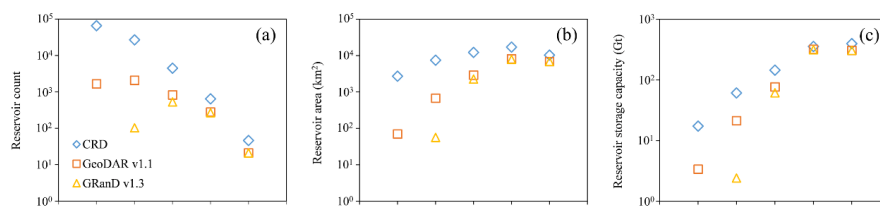

444
 445 Figure 8. Comparison of reservoirs in count (a), area (b), and storage capacity (c) between the
 446 CRD database, GeoDAR v1.1, and GRanD v1.3 database with different area levels.

447 5.2 Analysis on the accumulation hotspots of the CRD reservoir distribution


448 The construction of hydropower stations alleviates the energy shortage in China, reduces the
 449 consumption of non-renewable coal energy, and makes a great contribution to the sustainable
 450 development of China's economy and society. To further understand the characteristics of
 451 reservoir accumulation distribution in China, we quantified the degree of reservoir
 452 accumulation from the dimensions of the count, area, and storage, respectively.

453 Figure 9 shows the reservoir accumulation degree in the count, area, and storage capacity of the
 454 CRD reservoirs. High reservoir density hotspots can be observed in the YZR's middle and lower
 455 reaches, mainly in the Poyang Lake and Dongting Lake basins. These two-lake basins have



456 rugged terrains, which provide topographic convenience for constructing reservoirs. Besides,
457 the basins are densely populated and is an important commodity grain base, so reservoirs are
458 critical to meeting the agricultural irrigation water demand. The large labor force also facilitated
459 the reservoir construction. The construction of small and medium-sized reservoirs in China
460 reached a peak era under the impact of the new and old “three pillars” policy from the founding
461 of the People’s Republic of China in 1949 to the reform and openness in 1978.

462 Figure 9b shows that the hotspots in the reservoir area are mainly distributed in YZR, Northeast
463 China, and HuR, where the terrain is relatively flat. Combined with the boom of building small
464 reservoirs throughout the country during the “Great Leap Forward” period, the practice of “one
465 piece of land for one piece of sky” even appeared in the Huaibei Plain, resulting in many
466 reservoirs and a large total area in the HuR. In comparison with the storage accumulation
467 hotspots shown in Figure 8c, we found that large reservoirs are mostly localized in the upper
468 reaches of the YZR and the PR. It is mainly because the Chinese reservoir construction entered
469 the era of big hydropower project in the 21st century. With the construction of Xiaolangdi
470 Reservoir, Three Gorges Reservoir, and other large hydropower stations as examples, China has
471 built a series of large reservoirs in the southwest of China, where there are large elevation drops
472 and abundant stream powers, such as the Jinsha River (the upper reaches of the YZR), the upper
473 reaches of the PR, and the upper reaches of the Lancang River.

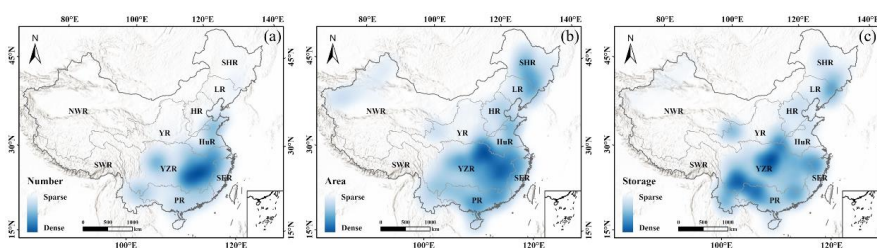

474
475 Figure 9. Distribution map of the accumulation degree of the reservoir count (a), area (b), and
476 storage capacity (c) in CRD.

477 6 Data availability

478 The China Reservoir Database (CRD) is publicly available for download from the Zenodo
479 repository <https://zenodo.org/record/6569049> (Song et al., 2022). The database is supplied as
480 both shapefile format and the comma-separated values (csv) format.

481 7 Conclusions

482 In this study, the location information of a total of 97,435 reservoirs in China has been identified
483 and collected in the China Reservoir Dataset (CRD) by compiling multiple existing



484 dam/reservoir products, national basic geographic datasets, multi-source open map data, and
485 multi-level government yearbooks and database. Then, by merging three remote sensing
486 waterbody products, the maximum water inundation area was extracted for each of the
487 identified reservoirs. Based on a collection of 5,143 reservoirs with official storage capacity
488 records, an empirical model fitting the reservoir area-storage relationship was established to
489 estimate the storage capacities of other unrecorded reservoirs in CRD. The compiled reservoirs
490 in CRD have a total maximum inundation area of 50,085.21 km² and a total storage capacity of
491 about 979.62 Gt (924.96-1060.59 Gt).

492 Based on the CRD database, the spatial distribution characteristics of reservoir count, area, and
493 storage capacity were comprehensively analyzed and compared. In addition, we discussed the
494 improvement of CRD over other commonly-used global dam/reservoir databases and the
495 potential causes of several hotspots of the reservoir concentration on the context of China's
496 socioeconomic development and major policy implementations. The results show that
497 reservoirs are widely distributed across China, yet there are strong spatial heterogeneities with
498 several concentration hotspots. The YZR basin has the most dominant distribution in terms of
499 reservoir count, area, and storage capacity. Specifically, the reservoirs are mainly concentrated
500 in the basins of Dongting Lake, Poyang Lake, and the Han River, the middle and lower reaches
501 of the HuR and the YZR, the Shandong Peninsula, the Sichuan Basin, and the Yunnan-Guizhou
502 Plateau. The CRD database has greatly improved the reservoir mapping in terms of count, area,
503 and storage capacity compared with existing dam/reservoir products over the territorial area of
504 China. The prominent advantage of CRD could be a complete map of reservoirs smaller than 1
505 km². The CRD database can be used for a wide range of reservoir impact assessments and is
506 expected to benefit water resources management, river system investigation, hydrological
507 modeling, and other aspects in scientific research and sector practices.

508 **8 Author contribution**

509 CS: Conceptualization, Data curation, Formal analysis, Funding acquisition, Investigation,
510 Methodology, Programming, Project administration, Quality assurance, Quality control,
511 Supervision, Validation, Visualization, Writing – original draft preparation, and Writing –
512 review and editing. CF: Data curation, Formal Analysis, Investigation, Methodology,
513 Programming, Validation, Visualization, Quality control, Writing – original draft preparation,
514 and Writing – review and revision. JZ: Conceptualization, Data curation, Formal Analysis,
515 Investigation, Methodology, Programming, Quality control, and Writing – review and revision.
516 JW: Methodology, Quality control, Supervision, Validation, Writing – review and revision. YS:
517 Quality control, Supervision, and Writing – review and revision. KL: Quality control,



518 Validation, and Writing – review and revision. TC: Quality control, Validation, and Writing –
519 review and revision. PZ: Quality control and Validation. SL: Quality control and Validation.
520 LK: Quality control, Validation, and Writing – review and editing.

521 **9 Competing interests**

522 The authors declare no conflict of interest.

523 **10 Acknowledgements**

524 The authors express their gratitude to the support from the GRanD, GOODD, GeoDAR, Future
525 FHReD, and the national 1:250,000 public basic geographic datasets. The authors would like
526 to acknowledge Tiandi Map for providing a base map and the geocoding API
527 (<https://map.tianditu.gov.cn/>). The authors are also grateful to the GSW, GLAD, and FROM-
528 GLC10 data for providing reservoir water inundation extent, and the Almanac of China’s Water
529 Power and other Chinese government documents for providing the reservoir storage capacity
530 records. This work was partly funded by the National Key Research and Development Program
531 of China (Grant No. 2019YFA0607101, 2018YFD0900804, 2018YFD1100101), the Strategic
532 Priority Research Program of the Chinese Academy of Sciences (Grant No. XDA23100102),
533 and the National Natural Science Foundation of China (No. 41971403).



534 **References**

- 535 Aufdenkampe, A. K., Mayorga, E., Raymond, P. A., Melack, J. M., Doney, S. C., Alin, S. R., Aalto, R.
536 E., and Yoo, K.: Riverine coupling of biogeochemical cycles between land, oceans, and atmosphere,
537 *Frontiers in Ecology and the Environment*, 9, 53-60, 2011.
- 538 Bakken, T. H., Killingtveit, Å., Engeland, K., Alfredsén, K., and Harby, A.: Water consumption from
539 hydropower plants—review of published estimates and an assessment of the concept, *Hydrology and Earth
540 System Sciences*, 17, 3983-4000, 2013.
- 541 Bakken, T. H., Modahl, I. S., Raadal, H. L., Bustos, A. A., and Arnøy, S.: Allocation of water consumption
542 in multipurpose reservoirs, *Water Policy*, 18, 932-947, 2016.
- 543 Barbarossa, V., Schmitt, R. J., Huijbregts, M. A., Zarfl, C., King, H., and Schipper, A. M.: Impacts of
544 current and future large dams on the geographic range connectivity of freshwater fish worldwide,
545 *Proceedings of the National Academy of Sciences*, 117, 3648-3655, 2020.
- 546 Barros, N., Cole, J. J., Tranvik, L. J., Prairie, Y. T., Bastviken, D., Huszar, V. L., Del Giorgio, P., and
547 Roland, F.: Carbon emission from hydroelectric reservoirs linked to reservoir age and latitude, *Nature
548 geoscience*, 4, 593-596, 2011.
- 549 Bednarek, A. T.: Undamming rivers: a review of the ecological impacts of dam removal, *Environmental
550 management*, 27, 803-814, 2001.
- 551 Belletti, B., Garcia de Leaniz, C., Jones, J., Bizzi, S., Börger, L., Segura, G., Castelletti, A., Van de Bund,
552 W., Aarestrup, K., and Barry, J.: More than one million barriers fragment Europe's rivers, *Nat.*, 588, 436-
553 441, 2020.
- 554 Bertoni, F., Castelletti, A., Giuliani, M., and Reed, P.: Discovering dependencies, trade-offs, and
555 robustness in joint dam design and operation: An ex-post assessment of the Kariba Dam, *Earth's Future*,
556 7, 1367-1390, 2019.
- 557 Biemans, H., Haddeland, I., Kabat, P., Ludwig, F., Hutjes, R., Heinke, J., von Bloh, W., and Gerten, D.:
558 Impact of reservoirs on river discharge and irrigation water supply during the 20th century, *Water Resour.
559 Res.*, 47, 2011.
- 560 Bond, N. and Cottingham, P.: Ecology and hydrology of temporary streams: implications for sustainable
561 water management, Canberra (Australia): eWater Technical Report, 29, 2008.
- 562 Boulange, J., Hanasaki, N., Yamazaki, D., and Pokhrel, Y.: Role of dams in reducing global flood
563 exposure under climate change, *Nat. Commun.*, 12, 1-7, 2021.
- 564 Carpenter, S. R., Stanley, E. H., and Vander Zanden, M. J.: State of the world's freshwater ecosystems:
565 physical, chemical, and biological changes, *Annual review of Environment and Resources*, 36, 75-99,
566 2011.
- 567 Chao, B. F., Wu, Y.-H., and Li, Y.: Impact of artificial reservoir water impoundment on global sea level,
568 *Sci.*, 320, 212-214, 2008.
- 569 Deemer, B. R., Harrison, J. A., Li, S., Beaulieu, J. J., DelSontro, T., Barros, N., Bezerra-Neto, J. F.,
570 Powers, S. M., Dos Santos, M. A., and Vonk, J. A.: Greenhouse gas emissions from reservoir water
571 surfaces: a new global synthesis, *BioScience*, 66, 949-964, 2016.
- 572 Degu, A. M., Hossain, F., Niyogi, D., Pielke Sr, R., Shepherd, J. M., Voisin, N., and Chronis, T.: The
573 influence of large dams on surrounding climate and precipitation patterns, *Geophys. Res. Lett.*, 38, 2011.
- 574 Di Baldassarre, G., Martinez, F., Kalantari, Z., and Viglione, A.: Drought and flood in the Anthropocene:
575 feedback mechanisms in reservoir operation, *Earth System Dynamics*, 8, 225-233, 2017.
- 576 Döll, P., Fiedler, K., and Zhang, J.: Global-scale analysis of river flow alterations due to water
577 withdrawals and reservoirs, *Hydrology and Earth System Sciences*, 13, 2413-2432, 2009.
- 578 Dorber, M., Arvesen, A., Gernaat, D., and Veronesi, F.: Controlling biodiversity impacts of future global
579 hydropower reservoirs by strategic site selection, *Scientific reports*, 10, 1-13, 2020.
- 580 Downing, J. A., Prairie, Y., Cole, J., Duarte, C., Tranvik, L., Striegl, R. G., McDowell, W., Kortelainen,



- 581 P., Caraco, N., and Melack, J.: The global abundance and size distribution of lakes, ponds, and
582 impoundments, *Limnology and Oceanography*, 51, 2388-2397, 2006.
- 583 Ehsani, N., Vörösmarty, C. J., Fekete, B. M., and Stakhiv, E. Z.: Reservoir operations under climate
584 change: Storage capacity options to mitigate risk, *J. Hydrol.*, 555, 435-446, 2017.
- 585 Elmer, F., Hoymann, J., DÜthmann, D., Vorogushyn, S., and Kreibich, H.: Drivers of flood risk change
586 in residential areas, *Natural Hazards and Earth System Sciences*, 12, 1641-1657, 2012.
- 587 Gernaat, D. E., Bogaart, P. W., Vuuren, D. P. v., Biemans, H., and Niessink, R.: High-resolution
588 assessment of global technical and economic hydropower potential, *Nature Energy*, 2, 821-828, 2017.
- 589 Gong, P., Liu, H., Zhang, M., Li, C., Wang, J., Huang, H., Clinton, N., Ji, L., Li, W., Bai, Y., Chen, B.,
590 Xu, B., Zhu, Z., Yuan, C., Ping Suen, H., Guo, J., Xu, N., Li, W., Zhao, Y., Yang, J., Yu, C., Wang, X.,
591 Fu, H., Yu, L., Dronova, I., Hui, F., Cheng, X., Shi, X., Xiao, F., Liu, Q., and Song, L.: Stable
592 classification with limited sample: transferring a 30-m resolution sample set collected in 2015 to mapping
593 10-m resolution global land cover in 2017, *Science Bulletin*, 64, 370-373, 10.1016/j.scib.2019.03.002,
594 2019.
- 595 Grill, G., Lehner, B., Thieme, M., Geenen, B., Tickner, D., Antonelli, F., Babu, S., Borrelli, P., Cheng, L.,
596 and Crochetiere, H.: Mapping the world's free-flowing rivers, *Nat.*, 569, 215-221, 2019.
- 597 Gutenson, J. L., Tavakoly, A. A., Wahl, M. D., and Follum, M. L.: Comparison of generalized non-data-
598 driven lake and reservoir routing models for global-scale hydrologic forecasting of reservoir outflow at
599 diurnal time steps, *Hydrology and Earth System Sciences*, 24, 2711-2729, 2020.
- 600 ICOLD and CIGB: Commission Internationale des Grands Barrages-International Comission on Large
601 Dams, Recuperado el, 17, 2011.
- 602 Jiang, W., Wang, H., Liu, Y., Lei, B., Xia, J., and Zuo, Q.: China's Agricultural Water Security, Hu Bei
603 Science & Technology Press 2018.
- 604 Latrubesse, E. M., Arima, E. Y., Dunne, T., Park, E., Baker, V. R., d'Horta, F. M., Wight, C., Wittmann,
605 F., Zuanon, J., and Baker, P. A.: Damming the rivers of the Amazon basin, *Nat.*, 546, 363-369, 2017.
- 606 Lehner, B., Liermann, C. R., Revenga, C., Vörösmarty, C., Fekete, B., Crouzet, P., Döll, P., Endejan, M.,
607 Frenken, K., and Magome, J.: High-resolution mapping of the world's reservoirs and dams for
608 sustainable river-flow management, *Frontiers in Ecology and the Environment*, 9, 494-502, 2011.
- 609 Maavara, T., Chen, Q., Van Meter, K., Brown, L. E., Zhang, J., Ni, J., and Zarfl, C.: River dam impacts
610 on biogeochemical cycling, *Nature Reviews Earth & Environment*, 1, 103-116, 2020.
- 611 Metin, A. D., Dung, N. V., Schröter, K., Guse, B., Apel, H., Kreibich, H., Vorogushyn, S., and Merz, B.:
612 How do changes along the risk chain affect flood risk?, *Natural Hazards and Earth System Sciences*, 18,
613 3089-3108, 2018.
- 614 Moran, E. F., Lopez, M. C., Moore, N., Müller, N., and Hyndman, D. W.: Sustainable hydropower in the
615 21st century, *Proceedings of the National Academy of Sciences*, 115, 11891-11898, 2018.
- 616 Mulligan, M., van Soesbergen, A., and Sáenz, L.: GOODD, a global dataset of more than 38,000
617 georeferenced dams, *Scientific Data*, 7, 1-8, 2020.
- 618 MWR: Hydrologic Data Yearbook, Ministry of Water Resources (MWR), 2016.
- 619 Nilsson, C. and Berggren, K.: Alterations of riparian ecosystems caused by river regulation: Dam
620 operations have caused global-scale ecological changes in riparian ecosystems. How to protect river
621 environments and human needs of rivers remains one of the most important questions of our time,
622 *BioScience*, 50, 783-792, 2000.
- 623 Nilsson, C., Reidy, C. A., Dynesius, M., and Revenga, C.: Fragmentation and flow regulation of the
624 world's large river systems, *Sci.*, 308, 405-408, 2005.
- 625 Pekel, J.-F., Cottam, A., Gorelick, N., and Belward, A. S.: High-resolution mapping of global surface
626 water and its long-term changes, *Nat.*, 540, 418-422, 2016.
- 627 Pickens, A. H., Hansen, M. C., Hancher, M., Stehman, S. V., Tyukavina, A., Potapov, P., Marroquin, B.,
628 and Sherani, Z.: Mapping and sampling to characterize global inland water dynamics from 1999 to 2018



- 629 with full Landsat time-series, *Remote Sens. Environ.*, 243, 10.1016/j.rse.2020.111792, 2020.
- 630 Popescu, V. D., Munshaw, R. G., Shackelford, N., Montesino Pouzols, F., Dubman, E., Gibeau, P., Horne,
631 M., Moilanen, A., and Palen, W. J.: Quantifying biodiversity trade-offs in the face of widespread
632 renewable and unconventional energy development, *Scientific reports*, 10, 1-12, 2020.
- 633 Postel, S.: Human alterations of Earth's fresh water, In: *Proceedings of a Conference on Sustainability of*
634 *Wetlands and Water Resources*, May 23-25, Oxford, Mississippi, eds. Holland, Marjorie M., Warren,
635 Melvin L., Stanturf, John A., p. 1-3,
- 636 Raymond, P. A., Hartmann, J., Lauerwald, R., Sobek, S., McDonald, C., Hoover, M., Butman, D., Striegl,
637 R., Mayorga, E., and Humborg, C.: Global carbon dioxide emissions from inland waters, *Nat.*, 503, 355-
638 359, 2013.
- 639 Richter, B. D., Warner, A. T., Meyer, J. L., and Lutz, K.: A collaborative and adaptive process for
640 developing environmental flow recommendations, *River research and applications*, 22, 297-318, 2006.
- 641 Sabo, J. L., Ruhi, A., Holtgrieve, G. W., Elliott, V., Arias, M. E., Ngor, P. B., Räsänen, T. A., and Nam,
642 S.: Designing river flows to improve food security futures in the Lower Mekong Basin, *Sci.*, 358,
643 eaao1053, 2017.
- 644 Song, C., Fan, C., Zhu, J., Wang, J., Sheng, Y., Liu, K., Chen, T., Zhan, P., Luo, S., and Ke, L.: A
645 comprehensive geospatial database of nearly 100,000 reservoirs in China, in: *Earth System Science Data*,
646 Zenodo [Data set], <https://doi.org/10.5281/zenodo.6569049>, 2022.
- 647 St. Louis, V. L., Kelly, C. A., Duchemin, É., Rudd, J. W., and Rosenberg, D. M.: Reservoir Surfaces as
648 Sources of Greenhouse Gases to the Atmosphere: A Global Estimate: Reservoirs are sources of
649 greenhouse gases to the atmosphere, and their surface areas have increased to the point where they should
650 be included in global inventories of anthropogenic emissions of greenhouse gases, *BioScience*, 50, 766-
651 775, 2000.
- 652 Stoate, C., Baldi, A., Beja, P., Boatman, N., Herzon, I., Van Doorn, A., De Snoo, G., Rakosy, L., and
653 Ramwell, C.: Ecological impacts of early 21st century agricultural change in Europe—a review, *Journal*
654 *of environmental management*, 91, 22-46, 2009.
- 655 Tilt, B., Braun, Y., and He, D.: Social impacts of large dam projects: A comparison of international case
656 studies and implications for best practice, *Journal of environmental management*, 90, S249-S257, 2009.
- 657 Van Manh, N., Dung, N. V., Hung, N. N., Kumm, M., Merz, B., and Apel, H.: Future sediment dynamics
658 in the Mekong Delta floodplains: Impacts of hydropower development, climate change and sea level rise,
659 *Global and Planetary Change*, 127, 22-33, 2015.
- 660 Veldkamp, T., Wada, Y., Aerts, J., Döll, P., Gosling, S. N., Liu, J., Masaki, Y., Oki, T., Ostberg, S., and
661 Pokhrel, Y.: Water scarcity hotspots travel downstream due to human interventions in the 20th and 21st
662 century, *Nat. Commun.*, 8, 1-12, 2017.
- 663 Vörösmarty, C. J., Meybeck, M., Fekete, B., Sharma, K., Green, P., and Syvitski, J. P.: Anthropogenic
664 sediment retention: major global impact from registered river impoundments, *Global and planetary*
665 *change*, 39, 169-190, 2003.
- 666 Wada, Y., Reager, J. T., Chao, B. F., Wang, J., Lo, M.-H., Song, C., Li, Y., and Gardner, A. S.: Recent
667 changes in land water storage and its contribution to sea level variations, *Surveys in Geophysics*, 38,
668 131-152, 2017.
- 669 Wang, J., Sheng, Y., and Wada, Y.: Little impact of Three Gorges Dam on recent decadal lake decline
670 across China's Yangtze Plain, *Water Resour Res*, 53, 3854-3877, 10.1002/2016WR019817, 2017a.
- 671 Wang, J., Sheng, Y., Gleason, C. J., and Wada, Y.: Downstream Yangtze River levels impacted by Three
672 Gorges Dam, *Environ. Res. Lett.*, 8, 10.1088/1748-9326/8/4/044012, 2013.
- 673 Wang, J., Walter, B. A., Yao, F., Song, C., Ding, M., Maroof, A. S., Zhu, J., Fan, C., Xin, A., McAlister,
674 J. M., Sikder, S., Sheng, Y., Allen, G. H., Crétaux, J.-F., and Wada, Y.: GeoDAR: Georeferenced global
675 dam and reservoir dataset for bridging attributes and geolocations, *Earth Syst. Sci. Data*, 10.5194/essd-
676 2021-58, 2022.
- 677 Wang, W., Lu, H., Ruby Leung, L., Li, H. Y., Zhao, J., Tian, F., Yang, K., and Sothea, K.: Dam



- 678 construction in Lancang-Mekong River Basin could mitigate future flood risk from warming-induced
679 intensified rainfall, *Geophys. Res. Lett.*, 44, 10,378-310,386, 2017b.
- 680 Winemiller, K. O., McIntyre, P. B., Castello, L., Fluet-Chouinard, E., Giarrizzo, T., Nam, S., Baird, I.,
681 Darwall, W., Lujan, N., and Harrison, I.: Balancing hydropower and biodiversity in the Amazon, Congo,
682 and Mekong, *Sci.*, 351, 128-129, 2016.
- 683 Xu, X., Tan, Y., and Yang, G.: Environmental impact assessments of the Three Gorges Project in China:
684 Issues and interventions, *Earth-Science Reviews*, 124, 115-125, 2013.
- 685 Zarfl, C., Lumsdon, A. E., Berlekamp, J., Tydecks, L., and Tockner, K.: A global boom in hydropower
686 dam construction, *Aquatic Sciences*, 77, 161-170, 10.1007/s00027-014-0377-0, 2015.
- 687 Zarfl, C., Berlekamp, J., He, F., Jähnig, S. C., Darwall, W., and Tockner, K.: Future large hydropower
688 dams impact global freshwater megafauna, *Scientific reports*, 9, 1-10, 2019.
- 689 Zhang, L., Xiao, T., He, J., and Chen, C.: Erosion-based analysis of breaching of Baige landslide dams
690 on the Jinsha River, China, in 2018, *Landslides*, 16, 1965-1979, 2019.