

1 **Argo salinity: bias and uncertainty evaluation**

2 Annie P. S. Wong¹, John Gilson², Cécile Cabanes^{3,4}

3 ¹School of Oceanography, University of Washington, Seattle, WA, United States

4 ²Scripps Institution of Oceanography, La Jolla, CA, United States

5 ³University of Brest, CNRS, Ifremer, IRD, Laboratoire d'Océanographie Physique et Spatiale
6 (LOPS), IUEM, Brest, France

7 ⁴University of Brest, CNRS, IRD, UAR 3113, IUEM, Brest, France

8

9 *Correspondence to:* Annie P. S. Wong (apsw.uw@gmail.com)

10

11 **Abstract.** Argo salinity is a key set of in-situ ocean measurements for many scientific applications.

12 However, use of the raw, unadjusted salinity data should be done with caution as they may contain

13 bias from various instrument problems, most significant being from sensor calibration drift in the

14 conductivity cells. For example, inclusion of biased but unadjusted Argo salinity has been shown

Deleted: raw,

15 to lead to spurious results in the global sea level estimates. Argo delayed-mode salinity data are

16 data that have been evaluated and, if needed, adjusted for sensor drift. These delayed-mode data

17 represent an improvement over the raw data because of the reduced bias, the detailed quality

18 control flags, and the provision of uncertainty estimates. Such improvement may help researchers

19 in scientific applications that are sensitive to salinity errors. Both the raw data and the delayed-

20 mode data can be accessed via <https://doi.org/10.17882/42182> (Argo, 2022). In this paper, we first

21 describe the Argo delayed-mode process. The bias in the raw salinity data is then analyzed by

22 using the adjustments that have been applied in delayed-mode. There was an increase in salty bias

23 in the raw Argo data beginning around 2015 and peaked in 2017-2018. This salty bias is expected

24 to decrease in the coming years as the underlying manufacturer problem has likely been resolved.

25 The best ways to use Argo data to ensure that the instrument bias is filtered out are then described.

Deleted: in order

26 Finally, a validation of the Argo delayed-mode salinity dataset is carried out to quantify residual

27 errors and regional variations in uncertainty. These results reinforce the need for continual re-

28 evaluation of this global dataset.

29

30

33 **1. Introduction**

34 In-situ ocean salinity can be measured accurately by well-calibrated conductivity-temperature-
35 depth (CTD) sensors. By using CTDs mounted on autonomous floats, the global Argo Program
36 has collected over two million vertical profiles of temperature-salinity (T/S) versus pressure (P) in
37 the past 20 years. Many of these floats receive pre-deployment CTD accuracy checks to ensure
38 that the sensor calibrations are within the manufacturer's specifications. However, over time these
39 sensors can become affected by contamination, or undergo physical changes that alter their
40 accuracy. Recalibration of these CTDs involves retrieval of the floats, which can occur when
41 opportunities arise. However, such retrieval occasions are infrequent and not extensive. To
42 determine if post-deployment adjustment of its data is necessary, Argo uses a set of delayed-mode
43 procedures that makes use of reference data. These Argo delayed-mode salinity data are typically
44 available about 12 to 18 months after the vertical profiles are collected.

Deleted: Since recalibration of these CTDs involves retrieval of the floats, which is impractical for such a large-scale program, Argo uses a set of delayed-mode procedures to determine if post-deployment adjustment of its data is necessary. ...

45 Argo data are used in many oceanographic applications, forecasting services, climate
46 research, ocean modeling, and data products. However, using the data without post-deployment
47 adjustment can lead to spurious scientific results. This effect has been shown to be especially
48 impactful when using Argo salinity data collected after 2015, when a higher-than-average number
49 of CTDs on Argo floats developed sensor drift towards higher salinity values (Wong et al., 2020).
50 Ponte et al. (2021) compared estimates of in-situ global mean salinity S from 5 different data
51 products that included Argo data. They found a spurious increase in S after 2015 in all the products,
52 except the Roemmich and Gilson (2009) climatology. The spurious increase in S after 2015 was
53 postulated to be the result of inclusion of biased Argo salinity data that have not been adjusted in
54 delayed-mode, while the absence of this artificial increase in S in Roemmich and Gilson (2009),
55 was attributed to stricter quality control of the affected data. Similar discrepancies were seen in
56 comparisons between global ocean mass change (Chen et al., 2020) and global mean sea level
57 budget (Barnoud et al., 2021) derived from GRACE/GRACE-FO and Altimeter-Argo. In both
58 studies, the discrepancies become substantially larger after 2015 and are likely related to using
59 biased but unadjusted Argo salinity.

Deleted: calibration

Deleted: &

Deleted: (hereafter referred to as RG2009)

Deleted:

Deleted: using unadjusted Argo salinity

Deleted: RG2009

60 The Joint Committee for Guides in Metrology (2008) defines *measurement error* as the
61 difference between the measured and the true value of a variable. It has two components: a random
62 component and a systematic component. The random component is influenced by unpredictable
63 effects and cannot be corrected. The systematic component, or bias, arises from recognized effects

75 and thus can be corrected. When all the components of error have been evaluated and corrected,
76 *uncertainty* refers to the doubt about the validity of the evaluation and the correction. Quantifying
77 the uncertainties of an ocean dataset increases its usefulness to scientists and other stakeholders
78 (Elipot et al., 2022).

79 The instruments used in Argo and the impacts that their respective technical limitations
80 have on the data have been described in Wong et al. (2020). The uncertainties of Argo data have
81 been assessed by comparison with high-quality shipboard measurements, and are concluded to be
82 near the manufacturer instrument accuracy specifications of 0.002°C for temperature and 2.4 dbar
83 for pressure. For salinity, even though the manufacturer specified initial instrument accuracy is
84 0.0035 psu (0.0003 Siemens per meter at 2°C and 2000 dbar), the uncertainties of Argo salinity
85 have been assessed to be around 0.01 psu (Riser et al., 2008; Wong et al., 2020).

Deleted: are

86 This paper aims to improve understanding of the treatment and uncertainty of Argo salinity
87 data. Section 2 describes the evolution of Argo's salinity adjustment method and its
88 implementation. Section 3 describes the temporal and spatial distribution of bias in the raw Argo
89 salinity. The best ways to use Argo data are described in Sect. 4. Lastly, an evaluation of the
90 uncertainty in Argo's delayed-mode salinity data against a shipboard CTD reference database is
91 discussed in Sect. 5.

Deleted: behind

93 2. Argo salinity adjustment method and implementation

94 2.1. Argo's salinity adjustment method

96 Measurement stability refers to an instrument's ability to repeat the same measurement over time.

97 The change in the instrument's bias over time is referred to as sensor drift. A system for adjusting
98 sensor drift in Argo salinity data was originally developed by Wong et al. (2003). The system uses
99 an objective mapping technique to estimate the background salinity field along the trajectory of
100 each float. Mapping is done on a set of fixed θ surfaces and relies on nearby reference data. Salinity
101 data from each float are fitted to the objectively mapped field in potential conductivity space by
102 weighted least squares. The time-varying component is smoothed out by another least squares fit
103 over multiple profiles to filter out the transient oceanic noise in the float data and the reference
104 data. The result is a multiplicative correction in conductivity, or an additive correction in salinity,
105 for each vertical profile. Böhme and Send (2005) improved on the original method by using float-

Deleted: correcting

Deleted: potential temperature

Deleted: from

Deleted: Float s

112 observed θ surfaces and introduced potential vorticity as a factor for selecting reference data in
113 areas affected by topographic constraints. Owens and Wong (2009) combined the original method
114 with the improvements of Böhme and Send (2005) and introduced a piecewise linear fit with the
115 Akaike Information Criteria in the treatment of the time series. [Moreover, the analysis was done](#)
116 [on 10 best float-observed \$\theta\$ surfaces that had minimum salinity variance.](#) More recently, Cabanes
117 et al. (2016) suggested modifications to better account for interannual variability and provide more
118 realistic error estimates.

Deleted: the

119 As these methods evolve, their authors have maintained a set of computational code that
120 can be used by all Argo float providers. Transparency and reproducibility of the salinity
121 adjustments are achieved via this provision of code that operates on the raw measurement inputs
122 to produce the delayed-mode adjusted data. Currently, the code used for salinity adjustment in
123 Argo is a combined set from Owens and Wong (2009) and Cabanes et al. (2016). See
124 github.com/ArgoDMQC/matlab_owc.

125 These salinity adjustment methods rely on accurate reference data. To that end, two
126 reference databases are provided internally in Argo for salinity adjustment: 1. a reference database
127 which consists of shipboard CTD data (internally named CTD_for_DMQC, maintained by
128 Coriolis Data Center), and 2. a reference database which consists of Argo data that have been
129 verified as having good quality without needing adjustments (internally named Argo_for_DMQC,
130 maintained by Scripps Institution of Oceanography). These two reference databases are updated
131 [approximately once a year](#) to account for the constantly changing oceans.

Deleted: yearly

133 2.2. How is salinity adjustment implemented in Argo?

134 Delayed-mode salinity evaluation in Argo is carried out by each data-providing group, and not by
135 a central institution. Each data-providing group in Argo has a team of delayed-mode operators who
136 manually inspect the data. As both pressure and temperature are required to measure salinity, all 3
137 parameters (P , T , S) are evaluated together in delayed-mode. Random point-wise errors, such as
138 spikes, are flagged as bad data. Sensor drifts are identified and either adjusted or flagged as
139 unadjustable data. Evaluation of sensor drifts, not to be confused with real ocean signals, requires
140 significant oceanographic knowledge, scientific judgment, and insights based on experience. To
141 ensure all data-providing groups are consistent in following best practices, two technical
142 documents are maintained internally in Argo to describe the data processing procedures and to

145 provide examples. These are: 1. Argo Quality Control Manual for CTD and Trajectory data (Wong
146 et al., 2022), and 2. DMQC Cookbook for core Argo parameters (Cabanes et al., 2021). These are
147 living documents, modified and updated as the data processing procedures develop and evolve.

148 Due to the need to accumulate a time series for reliable evaluation of sensor drifts, delayed-
149 mode data [for a float](#) may not be available until a sufficiently long time series [from that float](#) has
150 been accumulated. The timeframe for availability of delayed-mode data is therefore dependent on
151 the nature of the sensor drift, as well as the availability of the delayed-mode operators. In general,
152 most Argo delayed-mode salinity data are available about 12–18 months after the raw
153 measurements are collected. These data are re-evaluated periodically to reduce inconsistencies
154 between the various data-providing groups. Therefore, Argo delayed-mode data are "dynamic"
155 data that continually change and improve over time.

157 3. Bias in Argo raw salinity data

158 Bias in raw Argo salinity can contain effects from three different sources:

- 159 1. error from the pressure measurements (Barker et al., 2011);
- 160 2. error from conductivity cell thermal inertia, due to the lag between the temperature and
161 conductivity measurements (Johnson et al., 2007; Martini et al., 2019; Dever et al., 2022);
- 162 3. error from conductivity cell sensor drift (Wong et al., 2020).

163 The effect of pressure error on salinity is not negligible. For example, assuming standard
164 seawater properties of $S = 35$ and $T = 15^\circ\text{C}$, a pressure error of 10 dbar will result in a salinity error
165 of about 0.004 psu. However, less than 1% of Argo vertical profiles have identifiable pressure
166 error of greater than 10 dbar. The effect of the conductivity cell thermal inertia error on salinity
167 [can exceed 0.01 psu](#) in regions of strong temperature gradients, such as the base of the mixed layer,
168 but is negligible (<0.002 psu) elsewhere.

169 The bias caused by conductivity cell sensor drift is the most significant error in Argo
170 salinity. Some of this bias cannot be corrected, as severe sensor drift (and other CTD malfunctions)
171 can cause data corruption that is beyond salvage. The remaining adjustable bias, ∂S , can be
172 estimated by using the salinity adjustments that have been applied in delayed-mode:

173

$$174 \quad \partial S = \overline{S_{raw}} - \overline{S_{adjusted}}$$

175

Moved down [1]: Some Argo data centers can extract the most recent delayed-mode salinity adjustment and apply it to later, newly collected profiles. This near-real-time procedure can result in some improvement over the original reported data, but some bias can remain. Nonetheless, it provides intermediate-quality salinity data to users in near-real-time.

Deleted: ¶

Deleted: is pronounced

185 where S_{raw} are the raw Argo measurements and $S_{adjusted}$ are the corresponding delayed-mode
186 adjusted values. Here, we compute δS for each Argo vertical profile that has delayed-mode
187 adjusted data, but only use measurements deeper than 600 dbar to exclude the effects of the cell
188 thermal inertia error. Profiles with identifiable pressure error greater than 10 dbar
189 ($|P_{raw} - P_{adjusted}| > 10 \text{ dbar}$) are excluded to factor out the effects of pressure error on
190 salinity. We consider the profiles with $|\delta S| < 0.002$ as good data that have not been affected
191 significantly by sensor drift. Thus, the remaining δS represents the typical bias magnitude
192 identified mostly from conductivity cell sensor drift. Here, a positive δS means the raw values are
193 higher than true, or drifted towards saltier values (salty drift). Similarly, a negative δS means the
194 raw values are lower than true, or drifted towards fresher values (fresh drift).

195 Salty drift is the dominant mode of sensor drift in Argo salinity, with about 10% of all Argo
196 profiles having a positive adjustable bias (Fig. 1a, blue bars). Most of the physical causes of salty
197 drift are unknown. One known cause was determined to be due to the early deterioration of the
198 encapsulant material in CTDs manufactured by Sea-Bird Scientific starting in 2015. Changes at
199 the manufacturing level were introduced in 2018 to reduce such occurrences. The number of Argo
200 profiles with adjustable salty drift increased steadily from 2000 and peaked in 2017-2018 at about
201 17% of the annual profiles count. This 2017-2018 peak (Fig. 1a), as well as the annual average of
202 adjustable bias (Fig. 1b), may shift slightly as more delayed-mode evaluated profiles become
203 available in the future, but the present result is consistent with the timeline of the CTD encapsulant
204 issue.

205 On the other hand, fresh drift occurred more frequently in the early years of Argo (Fig. 1a,
206 red bars), reaching a peak of about 28% of annual profile count in 2001-2002. The subsequent
207 decline is broadly coincident with the introduction of Iridium in 2005 for data communication.
208 Fresh drifts are mostly caused by contamination of the CTD while the floats remain at the sea
209 surface for communication with satellites. Earlier floats that used the ARGOS System, which was
210 the predominant telecommunication system before Iridium, typically spent between 6 to 18 hours
211 at the sea surface for data telemetry. With Iridium, the time spent at the sea surface is reduced to
212 about 30 minutes, thus reducing the risk of CTD contamination. The number of Argo profiles with
213 adjustable fresh drift accounts for about 4% of all Argo profiles.

214

Deleted: <

Deleted:


Deleted: P

Deleted: are considered

Deleted: because we consider them to not

Deleted: vertical

Deleted: 2

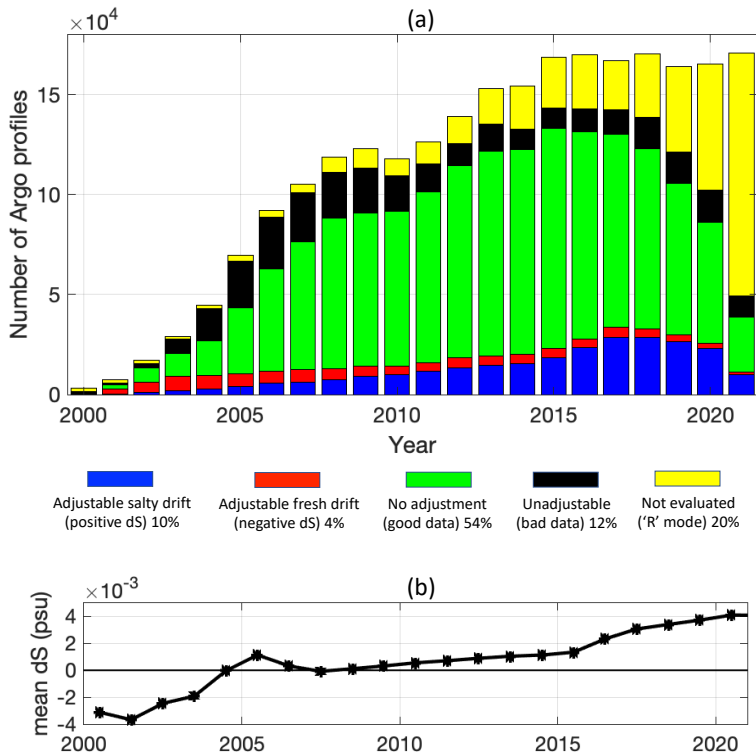

222
 223 Figure 1: (a) Temporal distribution of Argo salinity delayed-mode evaluation. Values are from
 224 April 2022. (b) Annual average of all delayed-mode salinity adjustments, which is an estimate of
 225 the adjustable bias in the raw Argo salinity data.

226
 227 The magnitude of adjustable bias can be an indicator of sensor limitation. Amongst all the
 228 salinity profiles with adjustable sensor drift, salty or fresh, about 90% have magnitude < 0.03 (Fig.
 229 2). Only 2-3% of adjustable sensor drift have magnitude > 0.05 . Some of the larger-magnitude
 230 adjustments were concentrated in the Atlantic and the North Pacific in the early years of Argo
 231 before 2010 (Fig. 3), when delayed-mode efforts were focused in those areas that had more
 232 reference data, and when delayed-mode operators had less experience evaluating larger-magnitude


Deleted: , Fig.3

Deleted: ier



235 adjustments. Indeed, beyond the 0.05 limit, salinity data with sensor drift usually show signs of
 236 unrecoverable damage, and applying such large adjustments to the exceptional cases should only
 237 be done with sound judgement. For the unrecoverable profiles, no adjustment is applied, and the
 238 data are flagged as bad in the Argo data files (Wong et al., 2022). These unadjustable salinity data,
 239 plus those corrupted by other CTD or float malfunctions, account for about 12% of all Argo
 240 profiles. As of time of analysis, about 54% of Argo profiles were considered to be of good quality
 241 and with no identifiable bias, and about 20% of Argo profiles remained in waiting for delayed-
 242 mode evaluation.

- Deleted: were less judicious in applying larger adjustments
- Deleted: B
- Deleted: at
- Deleted: the
- Deleted: os
- Deleted: vertical
- Deleted: contain

(a) Adjustable salty drift
 (positive dS, 10% of Argo profiles)




(b) Adjustable fresh drift
 (negative dS, 4% of Argo profiles)



244

252 Figure 2: Magnitude of Argo delayed-mode salinity adjustments, as of April 2022. (a) Adjustable
 253 salty drift. (b) Adjustable fresh drift.

254
 255

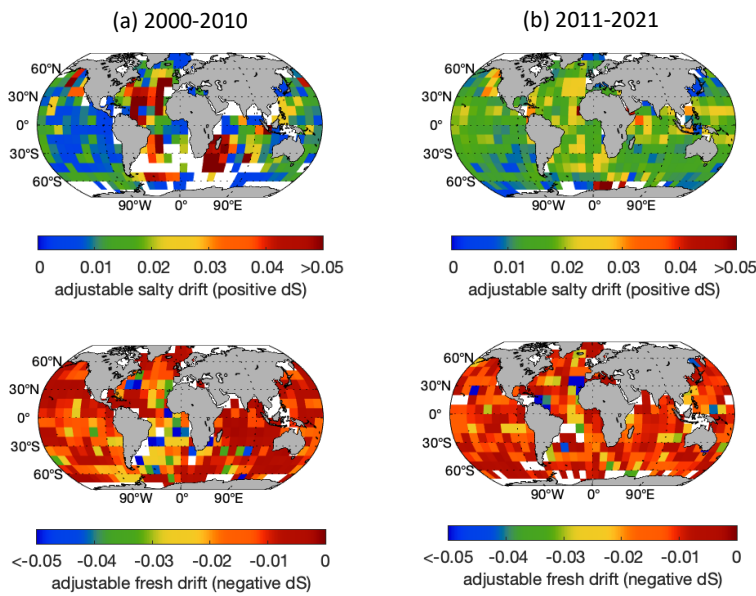

256
 257 Figure 3: Spatial distribution of Argo delayed-mode salinity adjustments, as of April 2022. (a)
 258 2000-2010, (b) 2011-2021. Top panels show adjustable salty drift (positive dS). Bottom panels
 259 show adjustable fresh drift (negative dS). Colors indicate the mean of dS in each 10°×10° grid
 260 square. White color denotes areas with no Argo data or no appropriate dS at the time of this
 261 analysis.

262

263 **4. How to use Argo data: raw data, adjusted data, data products**


264 In all the Argo data files, parameter values are stored in two variables: PARAM and
 265 PARAM_ADJUSTED. Data from the CTDs are stored in PARAM = PRES, TEMP, PSAL. For

Deleted:
 Deleted: Adjustable salty drift
 Deleted: Adjustable fresh drift
 Deleted:
 Deleted: adjustment > ±0.002

271 [biogeochemical data, please refer to Bittig et al. \(2019\)](#). The PARAM variables store the original
272 raw measurements, while the PARAM_ADJUSTED variables store the corresponding
273 evaluated/adjusted values. Both the raw data and the corresponding evaluated/adjusted data are
274 available in the same Argo data files as a practice of good data stewardship. Since the
275 evaluated/adjusted data are based on the original raw measurements, archival of the original raw
276 measurements are important to allow checking of the data processing procedures. Therefore, the
277 raw data are preserved as originally received, to serve as a record if questions arise later.

278 [Argo data files that contain data evaluated/adjusted in delayed-mode are denoted by](#)
279 [DATA_MODE = 'D'. Some Argo data centers can extract the most recent delayed-mode salinity](#)
280 [adjustment and apply it to later, newly collected profiles in real-time. This procedure can provide](#)
281 [intermediate-quality salinity data to users in real-time, and the data files are denoted by](#)
282 [DATA_MODE = 'A'. When neither delayed-mode nor real-time adjustment is available, only the](#)
283 [raw data are available, and the data files are denoted by DATA_MODE = 'R'. Figure 4 illustrates](#)
284 [the general meaning of these variables.](#) Each data point, raw and evaluated/adjusted, has an
285 associated quality control flag ([PARAM_QC and PARAM_ADJUSTED_QC](#)) that provides
286 qualitative assessment of the value (Table 1). In addition, each delayed-mode evaluated/adjusted
287 data point has an associated variable, PARAM_ADJUSTED_ERROR, that records the
288 quantitative uncertainty of the evaluated/adjusted value. Scientific users should use the
289 evaluated/adjusted values [in PARAM_ADJUSTED](#), together with their QC flags [in](#)
290 [PARAM_ADJUSTED_QC](#), and uncertainty values [in PARAM_ADJUSTED_ERROR](#), whenever
291 possible. The highest quality data are obtained by selecting PARAM_ADJUSTED with
292 PARAM_ADJUSTED_QC = '1' and DATA_MODE = 'D'.
293

- Deleted: The
- Deleted: data
- Deleted: are generated
- Moved (insertion) [1]
- Deleted: (
- Deleted: near-real-time
- Deleted: result in some improvement over the original reported data, but some bias can remain. Nonetheless, it
- Deleted: s
- Deleted: near-
- Deleted: .
- Deleted:), and sometimes in real-time (DATA_MODE = 'A' if available;...
- Deleted: if not available), as described in Sect. 2.2 and illustrated in Fig. 4.
- Deleted: (QC)
- Deleted: (
- Deleted:)
- Deleted: (
- Deleted:)
- Deleted: (
- Deleted:)

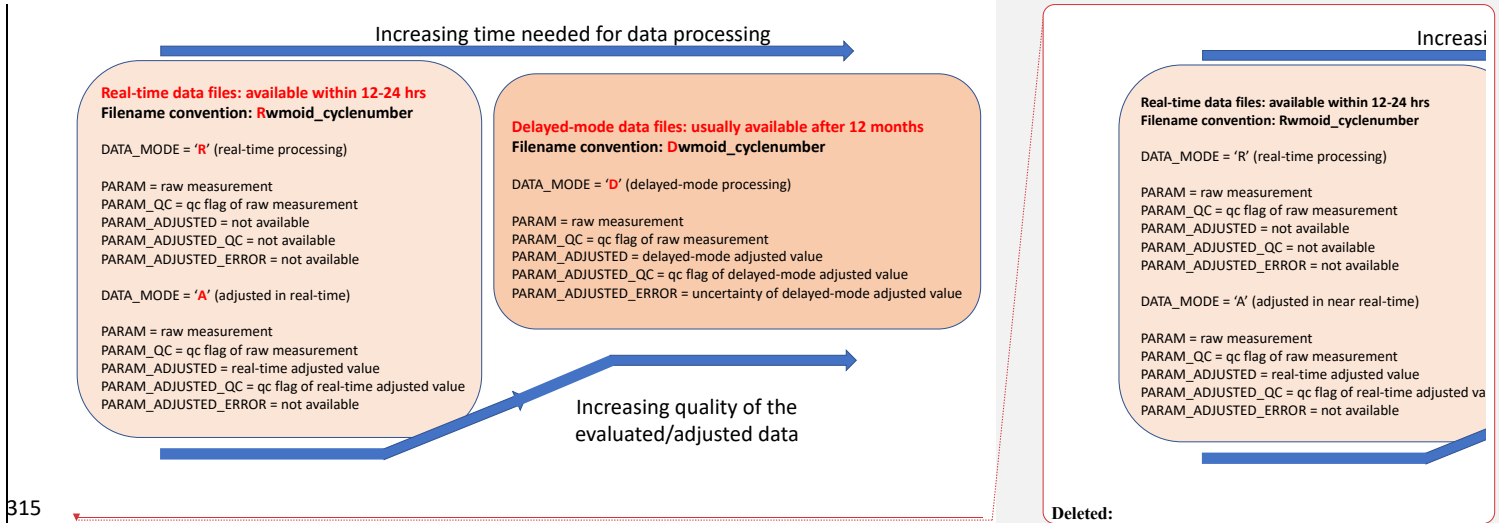

315
316
317
318
319
320
321

Figure 4: The variables in an Argo data file and their different timeframe of availability. Data from CTDs are stored with PARAM = PRES, TEMP, PSAL. For biogeochemical data, please refer to Bittig et al. (2019). The highest quality Argo data are those stored in PARAM_ADJUSTED, with PARAM_ADJUSTED_QC = '1' and DATA_MODE = 'D' (delayed-mode).

QC Flag	Meaning	Real-time comment (applicable to <PARAM>_QC in 'R' mode and <PARAM>_ADJUSTED_QC in 'A' mode)	Delayed-mode comment (applicable to <PARAM>_ADJUSTED_QC in 'D' mode)
'0'	No QC is performed	No QC is performed.	No QC is performed.
'1'	Good data	Good data. All Argo real-time QC tests passed. These measurements are good within the limits of the Argo real-time QC tests.	Good data. No adjustment is needed, or the adjusted value is statistically consistent with good quality reference data. An error estimate is supplied.
'2'	Probably good data	Probably good data. These measurements are to be used with caution.	Probably good data. Delayed-mode evaluation is based on insufficient information. An error estimate is supplied.

'3'	Probably bad data that are potentially adjustable	Probably bad data. These measurements are not to be used without scientific adjustment, e.g. data affected by sensor drift but may be adjusted in delayed-mode.	Probably bad data. An adjustment may (or may not) have been applied, but the value may still be bad. An error estimate is supplied.
'4'	Bad data	Bad data. These measurements are not to be used. A flag '4' indicates that a relevant real-time qc test has failed. A flag '4' may also be assigned for bad measurements that are known to be not adjustable, e.g. due to sensor failure.	Bad data. Not adjustable. Adjusted data are replaced by FillValue.
'5'	Value changed	Value changed	Value changed
'6'	Not used	Not used	Not used
'7'	Not used	Not used	Not used
'8'	Estimated value	Estimated value (interpolated, extrapolated, or other estimation)	Estimated value (interpolated, extrapolated, or other estimation)
'9'	Missing value	Missing value. Data parameter will record FillValue.	Missing value. Data parameter will record FillValue.
' '	FillValue	Empty space in netcdf file.	Empty space in netcdf file.

323

324 Table 1. Argo quality control (QC) flags. [Additional information on these QC flags can be found](#)
 325 [in "Notes on the Argo QC flags" in Argo Quality Control Manual for CTD and Trajectory data](#)
 326 [\(Wong et al., 2022, Section 6.1\).](#)

327

328 The two Argo Global Data Assembly Centers (Argo GDACs, at Coriolis France and at
 329 FNMOG USA) hold a "grey list", which contains a list of active Argo floats that are suspected of
 330 malfunctioning. This grey list is a means for the Argo real-time data centers to automatically flag
 331 incoming data from suspicious floats with lower-quality QC flags. However, the grey list is not a
 332 comprehensive list of problematic floats, as some malfunctioning floats may not be detected early
 333 enough to be grey-listed, and those that are grey-listed are removed from the list when they become
 334 inactive. Therefore, users should not rely on the Argo grey list alone to filter out bad data, but
 335 should use the QC flags. The most complete information regarding the quality of Argo data is
 336 contained in the Argo QC flags.

Deleted: When these suspicious floats reach their end of life and become inactive, they are removed from the grey list.

Deleted: As such

Deleted: the

341 Since Argo delayed-mode data can become available at different times and are subject to
342 revisions, users should refresh their data holdings periodically from the Argo GDACs to obtain
343 the most recent evaluation and adjustments. There are currently many scientific data products that
344 include Argo data. However, these data products are not part of the Argo data system and are not
345 held accountable by Argo. When using scientific data products derived from Argo data, users are
346 urged to check to what extent raw data are used, what data quality control is done beyond those
347 provided by Argo, and how often reanalysis is done that includes the most recent Argo delayed-
348 mode data.

349

350 5. Uncertainty in Argo delayed-mode salinity data

351 As described in Sect. 3, Argo delayed-mode salinity data consist of three different evaluation
352 outcomes:

- 353 1. data are considered to be of good quality and contain no identifiable bias, hence no adjustment
354 is applied;
- 355 2. data are considered to be affected by sensor drift that are adjustable, hence adjustments are
356 applied;
- 357 3. data are considered to be bad and unadjustable.

358 The uncertainty in Argo delayed-mode salinity data is therefore a combination of uncertainties in
359 the evaluation and in the applied adjustments, both of which are due to incomplete knowledge of
360 the true value of the measurements. Such is the nature of oceanographic data collected by
361 autonomous instruments operating without contemporaneous and co-located reference data.

362 As described in Sect. 4, the highest quality Argo salinity data are those stored in the
363 variables `PSAL_ADJUSTED`, with `PSAL_ADJUSTED_QC = '1'` and `DATA_MODE = 'D'`
364 (`delayed-mode`). Here, we evaluate the uncertainty in these highest quality Argo delayed-mode
365 salinity data from 2000 to 2021 by comparing them to the shipboard CTD reference database,
366 `CTD_for_DMQC`. The `CTD_for_DMQC` reference database contains data from the World Ocean
367 Database and GO-SHIP, which are considered the best estimates of the true ocean salinity field.
368 This same database is also used as part of the Argo delayed-mode salinity evaluation and
369 adjustments (*with some evaluation aided by a second reference database, Argo_for_DMQC*).
370 *However, while the Argo delayed-mode process considers data from each float separately, this*
371 *analysis considers data from all floats collectively. Moreover, the CTD_for_DMQC reference*

Deleted: 's

Deleted: 's

Deleted: correction

Deleted: PARAM

Deleted: PARAM

Deleted: , where PARAM = PRES, TEMP, PSAL

Deleted: Hence

379 ~~database is enriched over time, and may contain more data today than when the delayed-mode~~
380 ~~evaluation was done. We do note that~~ this analysis may not satisfy the standard of a rigorous
381 regression validation, where a completely independent dataset is needed. Nonetheless it provides
382 a means to examine ~~the uncertainties in~~ the global ~~Argo salinity~~ dataset.

Deleted: for any egregious residuals

383 This analysis ~~was~~ focused on Argo profiles that ~~extended~~ to 2000 dbar. Additional visual
384 inspection was done on the delayed-mode salinity profiles to remove gross outliers that remained.
385 These ~~were~~ generally contaminated profiles that ~~had~~ not been adjusted or flagged properly, and
386 amount~~ed~~ to <1% of the delayed-mode dataset as of the time of this analysis. The remaining Argo
387 delayed-mode profiles and reference CTD profiles were grouped into grid squares of 10° latitude
388 by 10° longitude. In each square, an isotherm with relatively uniform salinity (small salinity
389 variance) was selected. In the upper 2000 dbar of the world's oceans, this isotherm is usually at
390 >1000 dbar. But in regions where there is a confluence of multiple water masses at >1000 dbar,
391 this isotherm can be from shallower pressures ([Owens and Wong, 2009](#)). For example, in the
392 subtropical South Atlantic, Upper Circumpolar Water overrides the warmer but saltier Upper
393 North Atlantic Deep Water, thus creating a slight temperature inversion at around 1600 dbar
394 (Mémery et al. 2000). Hence the isotherm with lesser salinity variance in the subtropical South
395 Atlantic is in the mode water or central water pressure range of 400-1000 dbar. Comparison of
396 salinity is better done on isotherms than on isobars, because differences on isobars can contain
397 effects of the vertical movement of isotherms over time.

Deleted: i

Deleted: a

Deleted: ve

398 In each square, each Argo delayed-mode profile was compared against the nearest
399 reference CTD profile within a 3° radius circle and 15 years of age. Argo/refCTD salinity
400 difference, $\Delta S_{\text{Argo-refCTD}}$, ~~was~~ then computed ~~for each Argo/refCTD pair~~ on the selected isotherm
401 ~~in that square~~. This comparison method is limited by the spatial and temporal availability of the
402 ~~reference~~ CTD data. For example, with the search criteria of 3° radius circle and 15 years of age,
403 only about 20% of Argo delayed-mode profiles had nearby reference CTD profiles with which to
404 compare at the time of this analysis. ~~The comparison results will contain effects of spatial and~~
405 ~~temporal variabilities of the water masses, but these are minimized by using isotherms with~~
406 ~~relatively uniform salinity~~.

Deleted: s

Deleted: ere

Deleted: s

Deleted: shipboard


407 The statistical distribution of $\Delta S_{\text{Argo-refCTD}}$ provides a measure of the overall uncertainty
408 (Fig. 5). The mean and the median of the distribution of $\Delta S_{\text{Argo-refCTD}}$ are at approximately 0 (mean
409 = -0.0003, median = -0.0007), with the standard deviation $\sigma = 0.017$. This means the Argo

418 delayed-mode [salinity data](#), selected in this comparison agree with nearby [reference](#) CTD data on
419 average. About 64% of $\Delta S_{\text{Argo-refCTD}}$ are within ± 0.01 .

Deleted: profiles

Deleted: shipboard

420

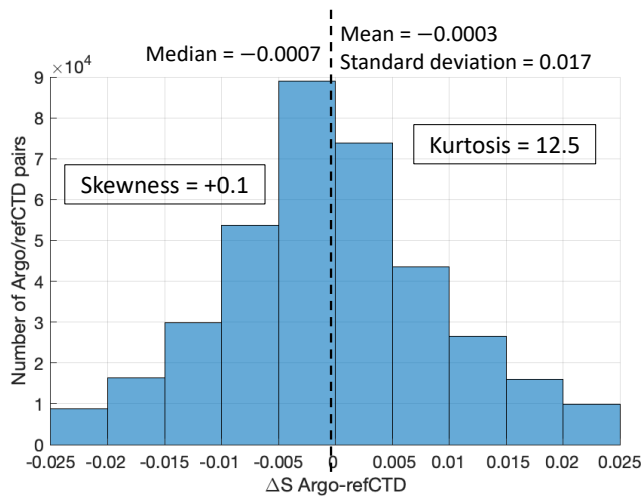

421

422 Figure 5: Statistical distribution of $\Delta S_{\text{Argo-refCTD}}$, as of April 2022. [The Argo data used in this](#)
423 [analysis are delayed-mode salinity data from PSAL_ADJUSTED, with PSAL_ADJUSTED_QC](#)
424 [= '1' and DATA_MODE = 'D'](#). Note that this analysis only accounts for about 20% of the Argo
425 delayed-mode [salinity data](#). [For comparison](#), a normal distribution has skewness = 0 and kurtosis
426 = 3.

Deleted: As a reference

427

428 The kurtosis of the statistical distribution of $\Delta S_{\text{Argo-refCTD}}$ is 12.5. [Kurtosis is a measure of](#)
429 [the heaviness of the tails of a distribution, or, how large the outliers are.](#) (For [comparison](#), a normal
430 distribution has a kurtosis of 3). About 18% of $\Delta S_{\text{Argo-refCTD}}$ are outside the range of ± 0.017 ($\pm 1\sigma$).
431 These are regions with higher uncertainties in delayed-mode evaluation (Fig. 6), due to either
432 inadequate reference CTD data, or higher regional salinity variability, or both. The main high-
433 uncertainty regions are the western Indian Ocean, the subtropical North and South Atlantic Ocean,
434 and other near-coast areas that are influenced by coastal processes. [The Southern Ocean does not](#)
435 [show up as a high uncertainty region in this analysis because Circumpolar Deep Water, which is a](#)

Deleted: reference

440 water mass in the Southern Ocean with relatively uniform salinity, usually provides robust results
441 in delayed-mode analysis. Overall, these uncertainties can be reduced if more contemporaneous
442 and co-located reference CTD data are available for delayed-mode analysis. These can be bottle-
443 calibrated CTD casts from deployment, or from research cruises that sample regions not covered
444 by GO-SHIP.

445 The statistical distribution of $\Delta S_{\text{Argo-refCTD}}$ is slightly skewed to the fresh side (skewness =
446 +0.1). Skewness is a measure of the asymmetry of the distribution, with positive skewness meaning
447 a longer tail on the positive side, or, that the distribution leans more to the negative (fresh) side.

448 Figure 6 shows that the Argo delayed-mode profiles that are slightly fresher than reference CTD
449 data are mostly located in the equatorial band 10°S to 10°N in the Pacific and Atlantic oceans, and
450 in the circumpolar Southern Ocean south of 60°S. The selected isotherms for estimating $\Delta S_{\text{Argo-}}$
451 refCTD typically have potential density anomalies $\sigma_\theta > 27.6 \text{ kg m}^{-3}$ in the equatorial Pacific, > 27.7
452 in the equatorial Atlantic, and > 27.8 south of 60°S. Hence these are deep water masses that do not
453 show much decadal change. We speculate that this minor fresh skewness is instrument noise that
454 has remained in the Argo delayed-mode dataset. During delayed-mode evaluation, it is often easier
455 to identify strong sensor drifts than mild instrument calibration offsets, as the latter requires
456 verification from contemporaneous, co-located reference data, which are often lacking. It is
457 therefore possible that many mild instrument offsets, fresh or salty, have not been adjusted. The
458 residual fresh bias is more apparent in regions such as the equatorial Pacific and Atlantic, where
459 the deep T/S relations allow for easier delayed-mode adjustment of sensor drifts, and which then
460 emphasize the unadjusted fresh offsets. In other regions where delayed-mode evaluation is more
461 difficult, this residual fresh bias could be masked by the surrounding variability, and so is not as
462 apparent.

463


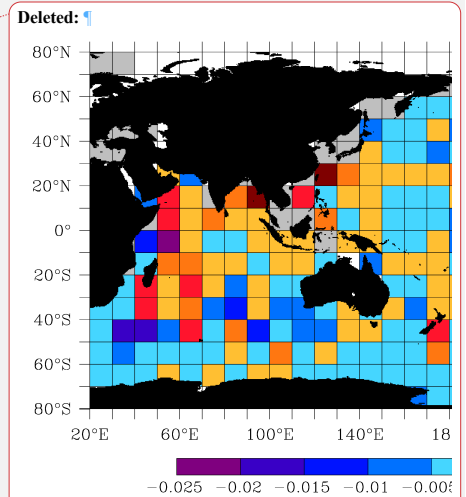


Figure 6: Spatial distribution of $\Delta S_{\text{Argo-refCTD}}$, averaged in $10^\circ \times 10^\circ$ grid squares, as of April 2022. Grey color denotes areas where no Argo/refCTD match was found. White color denotes areas with no Argo data.

Deleted: shipboard

Deleted: high quality

Deleted: fresh

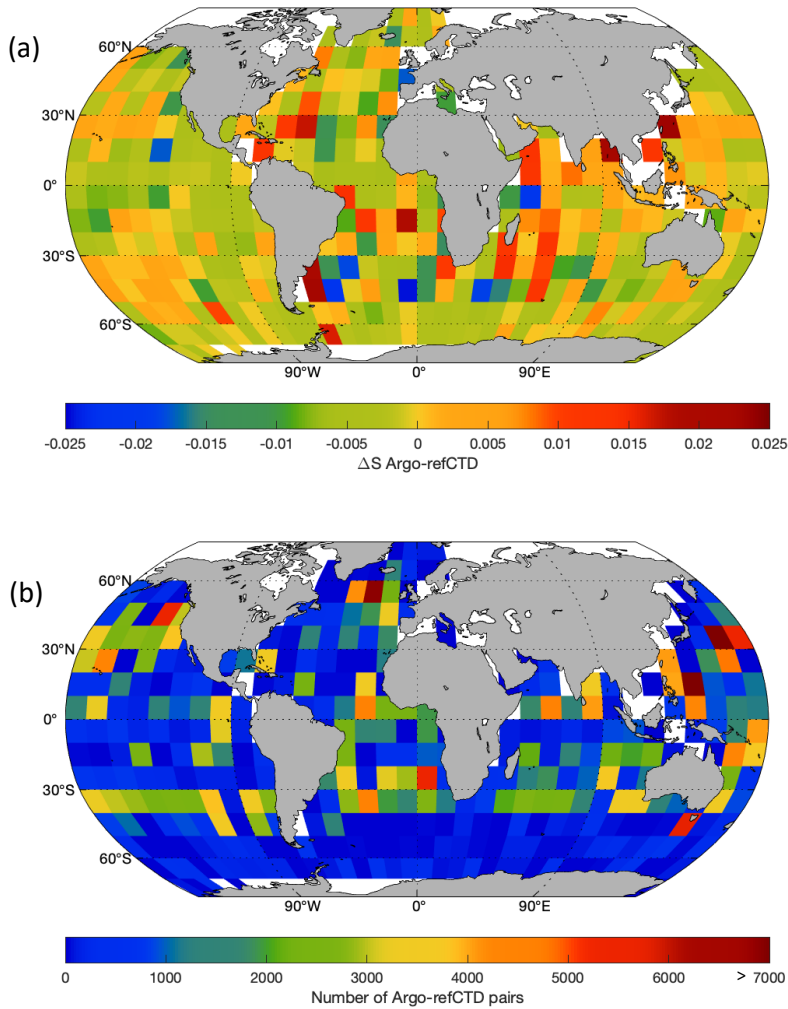

474

475

476 Figure 6: (a) Spatial distribution of $\Delta S_{\text{Argo-refCTD}}$, averaged in $10^\circ \times 10^\circ$ grid squares, and (b) number
 477 of Argo-refCTD pairs in each $10^\circ \times 10^\circ$ grid square. The Argo data used in this analysis are delayed-
 478 mode salinity data from PSAL_ADJUSTED, with PSAL_ADJUSTED_QC = '1' and

479 DATA_MODE = 'D', as of April 2022. Note that this analysis only accounts for about 20% of the
480 Argo delayed-mode salinity data. White color denotes areas with no Argo data or no Argo-refCTD
481 match at the time of this analysis.
482
483

484 **6. Discussions and Summary**

485 This paper uses the salinity adjustments that have been applied in delayed-mode to estimate the
486 bias in the raw, unadjusted Argo salinity data from 2000 to 2021. There is an increase in the annual
487 average of adjustable bias since 2015, due to the disproportionately high number of salty-drifting
488 CTDs since 2015. The amount of salinity data that have been declared as bad and unadjustable has
489 also increased during that period. While Argo salinity data that are adjustable typically have bias
490 of magnitude < 0.05 , those that are unadjustable can have bias with magnitude > 0.05 . Inclusion
491 of these raw [biased](#) data in scientific applications, such as gridded ocean salinity products, has
492 been demonstrated to create spurious results (e.g. Liu et al., 2022).

493 This salty bias in the raw Argo salinity data is expected to decrease in the coming years as
494 the underlying manufacturer problem has likely been resolved. We note that even though the
495 period 2015–2020 saw a large percentage of data loss due to the CTD problem that caused the
496 increased salty drifts, historically there was a larger percentage of data loss from the period 2004–
497 2011 (Fig. 1a, black bars). Those earlier CTD failures were partly the results of the Druck
498 "snowflakes" and the Druck "oil microleak" problems (Wong et al, 2020). These instrument issues
499 emphasize the importance of improving sensor stability, especially in light of the increase in float
500 lifetime. As the average lifetime of an Argo float increases, the sensors will be required to spend
501 more time in the ocean, which will increase the likelihood of sensor drift or malfunction. Hence
502 sensor reliability needs to be improved to ensure a healthy return of good quality data.

503 In all Argo data files, both the raw data and the delayed-mode data are available as a
504 practice of good data stewardship. The delayed-mode data represent an improvement over the raw
505 data because of the reduced bias, the detailed quality control flags, and the provision of uncertainty
506 estimates. Scientific applications that are sensitive to salinity errors should therefore use the
507 delayed-mode data provided by Argo. When accessing data from Argo data files, the highest
508 quality Argo delayed-mode salinity data are obtained by selecting values in PSAL_v ADJUSTED.

Deleted: PARAM

510 with [PSAL](#), ADJUSTED_QC = 'I' and DATA_MODE = 'D' (delayed-mode). We analyzed these
511 highest quality Argo salinity data (as of April 2022) to 2000 dbar against a shipboard CTD
512 reference database to assess their uncertainty. The statistical distribution of $\Delta S_{\text{Argo-refCTD}}$, computed
513 on isotherms [with small salinity variance](#), showed mean and median values close to zero,
514 suggesting good agreement on average between the selected Argo delayed-mode data and nearby
515 [reference](#) CTD data. The distribution had a kurtosis of 12.5 and a skewness of +0.1. Hence it is
516 not exactly a normal distribution, which has a kurtosis of 3 and a skewness of 0. We note that such
517 statistics are dependent on sample sizes, and this analysis only accounts for about 20% of all Argo
518 delayed-mode salinity data as of April 2022, being limited by the availability of nearby [reference](#)
519 CTD data.

520 Our analysis of $\Delta S_{\text{Argo-refCTD}}$ shows that there are significant regional variations in the
521 uncertainty of the Argo delayed-mode salinity dataset. In addition, there may be some residual
522 bias that remains, possibly due to the difficulty in verifying small instrument calibration offsets in
523 the absence of contemporaneous [and co-located reference](#) CTD data. These findings highlight
524 several important points:

525 1. Even after delayed-mode [evaluation and](#) adjustment, some residual uncertainty can still remain
526 in Argo salinity data. Historically, Argo's expected accuracy for salinity is 0.01 ([Argo Science](#)
527 [Team, 1998](#)). This is not a metrologically-derived value, but is based on our experience, [gained by](#)
528 [data analysis \(e.g. Riser et al., 2008; Wong et al., 2020\)](#), regarding the limitations of a delayed-
529 mode system where data quality is assessed against sparse reference data and a changing ocean.
530 Users should therefore take into account these residual uncertainties when using Argo delayed-
531 mode salinity data.

532 2. There is a need for continual re-evaluation of the delayed-mode outcome against other
533 independent references. These re-evaluation efforts need to be coordinated with the Argo delayed-
534 mode community, and accompanied by collaborative efforts to update the data files and the
535 relevant manuals to ensure common best practices.

536 3. Synergy between Argo and other ocean observing systems is vital in ensuring good data quality.
537 Argo floats can provide good spatial and temporal coverage of the world's oceans, but high-quality
538 reference data from independent platforms are needed to adjust and validate the data from floats.

Deleted: PARAM

Deleted: These delayed-mode data represent an improvement over the raw data because of the reduced bias, the detailed quality control flags, and the provision of uncertainty estimates. ...

Deleted: PARAM = PSAL

Deleted: s

Deleted: shipboard

Deleted: s

Deleted: (

Deleted:)

Deleted: shipboard

Deleted: fresh

Deleted: shipboard

Deleted:

554 4. Argo delayed-mode data can become available at different times and are subject to revisions as
555 more reference data become available. Users should therefore refresh their data holdings
556 periodically to obtain the most recent evaluation and adjustments.

557
558

559 **Data availability.** The Argo data used in this study are those available from the Argo Global
560 Data Assembly Center in April 2022, <https://doi.org/10.17882/42182#93132>.

561

562 **Author contributions.** AW developed the concept for the manuscript, analyzed the data, wrote
563 the manuscript, and produced the figures. JG compiled the data for analysis, and contributed to
564 the writing and discussions of the results. CC contributed to the writing and discussions of the
565 results.

Deleted: , produced one of the figures,

566

567 **Competing interests.** The authors have no competing interests to declare.

Deleted: ¶

568

Formatted: Left, Add space between paragraphs of the same style

569 **Acknowledgements.** The authors wish to thank all the Argo delayed-mode operators for their
570 work in improving this global dataset. [Special thanks go to Christine Coatanoan for her work in](#)
571 [maintaining the CTD for DMQC reference database.](#) [Comments from Birgit Klein and Mathieu](#)
572 [Dever greatly improved the manuscript.](#) Argo data are collected and made freely available by the
573 International Argo Program and the national programs that contribute to it. Argo is part of the
574 Global Ocean Observing System.

575

576 **Financial support.** AW was supported by the NOAA Global Monitoring and Observing
577 Program via CICOES at the University of Washington through the project titled "The Argo
578 Program - Global Observations for Understanding and Prediction of Ocean and Climate
579 Variability". JG was supported by US Argo through NOAA Grant NA20OAR4320278
580 (CIMEAS/SIO Argo). CC was supported by the French National Centre for Scientific Research
581 (CNRS).

582

583 **References**

584

587 Argo: Argo float data and metadata from Global Data Assembly Centre (Argo GDAC).
588 SEANOE, <https://doi.org/10.17882/42182>, 2022.
589
590 [Argo Science Team: On the Design and Implementation of Argo - a global array of profiling](#)
591 [floats. *International CLIVAR Project Office Report*, 21, 32pp., 1998.](#)
592
593 Barker, P.M., Dunn, J.R., Domingues, C.M., and Wijffels, S.E.: Pressure Sensor Drifts in Argo
594 and Their Impacts. *Journal of Atmospheric and Oceanic Technology*, 28, 1036-1049,
595 <http://dx.doi.org/10.1175/2011JTECHO831.1>, 2011.
596
597 Barnoud, A., Pfeffer, J., Guérou, A., Frery, M.-L., Siméon, M., Cazenave, A., et al.: Contributions
598 of altimetry and Argo to non-closure of the global mean sea level budget since 2016. *Geophysical*
599 *Research Letters*, 48, e2021GL092824, <https://doi.org/10.1029/2021GL092824>, 2021.
600
601 Bittig, H.C., Maurer, T.L., Plant, J.L., Schmechtig, C., Wong, A.P.S., Claustre, H., et al.: A BGC-
602 Argo Guide: Planning, Deployment, Data Handling and Usage. *Frontiers in Marine Science*, 6,
603 <https://doi.org/10.3389/fmars.2019.00502>, 2019.
604
605 Böhme, L., and Send, U.: Objective analyses of hydrographic data for referencing profiling float
606 salinities in highly variable environments. *Deep-Sea Research Part II*, 52, 651–664, 2005.
607
608 Cabanes, C., et al.: DMQC Cookbook for core Argo parameters. Brest: Ifremer. doi:
609 1013155/78994, 2021.
610
611 Cabanes, C., Thierry, V., and Lagadec, C.: Improvement of bias detection in Argo float
612 conductivity sensors and its application in the North Atlantic. *Deep-Sea Research Part I*, 114, 128-
613 136, 2016.
614
615 Chen, J., Tapley, B., Wilson, C., Cazenave, A., Seo, K.-W., and Kim, J.-S.: Global ocean mass
616 change from GRACE and GRACE Follow-On and Altimeter and Argo measurements.

Formatted: Font: Italic

617 *Geophysical Research Letters*, 47(22), e2020GL090656. <https://doi.org/10.1029/2020GL090656>,
618 2020.
619
620 Dever, M., Owens, B., Richards, C., Wijffels, S., Wong, A., Shkvorets, I., Halverson, M., and
621 Johnson, G.: Static and dynamic performance of the RBRargo³ CTD. *Journal of Atmospheric and*
622 *Oceanic Technology*. DOI: <https://doi.org/10.1175/JTECH-D-21-0186.1>, 2022.
623
624 Elipot, S., Drushka, K., Subramanian, A., and Patterson, M.: Overcoming the challenges of ocean
625 data uncertainty, *Eos*, 103, <https://doi.org/10.1029/2022EO220021>, 2022.
626
627 Liu, C., Liang, X., Ponte, R., and Chambers, D.: Global ocean salinity measurements have some
628 serious issues after 2015. *ResearchSquare*, <https://doi.org/10.21203/rs.3.rs-1836193/v1,2022>.
629
630 Johnson, G. C., Toole, J.M., and Larson, N.G.: Sensor corrections for Sea-Bird SBE-41CP and
631 SBE-41 CTDs. *Journal of Atmospheric and Oceanic Technology*, 24, 1117-1130,
632 <http://dx.doi.org/10.1175/jtech2016.1>, 2007.
633
634 Joint Committee for Guides in Metrology: Guide to the expression of uncertainty in measurement,
635 *Rep. 100:2008*, Bur. Int. des Poids et Mesures, Sèvres, France,
636 https://www.bipm.org/documents/20126/2071204/JCGM_100_2008_E.pdf, 2008.
637
638 Martini, K. I., Murphy, D. J., Schmitt, R. W., and Larson, N. G.: Corrections for Pumped SBE
639 41CP CTDs Determined from Stratified Tank Experiments. *Journal of Atmospheric and Oceanic*
640 *Technology*, 36, 733–744, 2019.
641
642 Mémery, L., Arhan, M., Alvarez-Salgado, X.A., Messias, M.-J., Mercier, H., Castro, C.G., and
643 Rios, A.F.: The water masses along the western boundary of the south and equatorial Atlantic.
644 *Progress in Oceanography*, 47, 69-98, 2000.
645

Deleted: a

Deleted:
www.bipm.org/utis/common/documents/jcgm/JCGM_100_2008_E.pdf...

650 Owens, W.B. and Wong, A.P.S.: An improved calibration method for the drift of the conductivity
651 sensor on autonomous CTD profiling floats by θ -S climatology. *Deep-Sea Research Part I*, 56,
652 450–457. doi:10.1016/j.dsr.2008.09.008, 2009.

Deleted: q

653
654 Ponte, R. M., Sun, Q., Liu, C., and Liang, X.: How salty is the global ocean: Weighing it all or
655 tasting it a sip at a time? *Geophysical Research Letters*, 48, e2021GL092935,
656 <https://doi.org/10.1029/2021GL092935>, 2021.

657
658 [*Riser, S. C., Ren, L., and Wong, A.: Salinity in Argo: A Modern View of a Changing Ocean. Oceanography, 21, 56-67. https://dx.doi.org/10.5670/oceano.2008.67.2008.*](#)

Formatted: Font: Italic

660
661 Roemmich, D., and Gilson, J.: The 2004–2008 mean and annual cycle of temperature, salinity, and
662 steric height in the global ocean from the Argo Program. *Progress in Oceanography*, 82(2), 81–
663 100, <https://doi.org/10.1016/j.pocean.2009.03.004>, 2009.

664
665 Wong, A., Keeley, R., Carval, T., and Argo Data Management Team: Argo Quality Control
666 Manual for CTD and Trajectory Data. Brest: Ifremer. doi: 10.13155/33951, 2022.

667
668 Wong, A.P.S., Johnson, G.C., and Owens, W.B.: Delayed-mode calibration of autonomous CTD
669 profiling float salinity data by θ -S climatology. *Journal of Atmospheric and Oceanic Technology*,
670 20, 308–318, 2003.

Deleted: q

671
672 Wong, A. P. S., Wijffels, S. E., Riser, S. C., Pouliquen, S., Hosoda, S., Roemmich, D., et al. (2020):
673 Argo data 1999–2019: Two million temperature-salinity profiles and subsurface velocity
674 observations from a global array of profiling floats. *Frontiers in Marine Science*, 7, 700.
675 <https://doi.org/10.3389/fmars.2020.00700>, 2020.

676
677

678 **Short Summary (500 character non-technical text)**

679 This article describes the instrument bias in the raw Argo salinity data from 2000 to 2021. The
680 main cause of this bias is sensor drift. Using Argo data without filtering out this instrument bias

683 has been shown to lead to spurious results in various scientific applications. We describe the Argo
684 delayed-mode process that evaluates and adjusts such instrument bias, and estimate the uncertainty
685 of the Argo delayed-mode salinity dataset. The best ways to use Argo data are illustrated.
686