

Dams in the Mekong: A comprehensive database, spatiotemporal distribution, and hydropower potentials

Wei Jing Ang¹, Edward Park^{1,2}, [Yadu Pokhrel](#)³, Dung Duc Tran^{2, 5,4}, Ho Huu ~~Loe~~³, ~~Yadu Pokhrel~~⁴ [Loc](#)⁵

¹Asian School of the Environment, Nanyang Technological University, Singapore.

5 ²National Institute of Education and Earth Observatory of Singapore, Nanyang Technological University, Singapore.

~~³Wageningen University & Research, Netherlands.~~

~~⁴Department~~³[Department](#) of Civil and Environmental Engineering, Michigan State University, [East Lansing, Michigan, USA.](#)

~~⁵Center~~⁴[Center](#) of Water Management and Climate Change, ([WACC](#)), [Institute for Environment and Water Resources \(IER\)](#), Vietnam National University- ([VNU](#)), Ho Chi Minh City, Vietnam.

10 ⁵[Earth Systems and Global Change, Wageningen University & Research, Netherlands.](#)

Correspondence to: Edward Park (edward.park@nie.edu.sg)

Abstract. Dams have proliferated along the Mekong, spurred by energy demands from economic development and capital from private companies. Swift dam evolution has rendered many databases outdated, in which mismatches arise from differing compilation methods. Without a comprehensive database, up-to-date spatial assessment of dam growth is unavailable. Looking at future development, hydropower potential specifically within the Mekong remains to be systematically evaluated. In this paper, we offer (1) an open-access and unified database of 1,055 dams, (2) a spatiotemporal analysis of dams on a sub-basin and country level from the 1980s to the post-2020s, and (3) a grid-based assessment of the theoretical basin-wide hydropower potential, using present-day discharge from the CaMa-Flood model (2011-2015, 0.05 degree), and future discharge from the WaterGAP2 model used for ISIMIP2b (2021-~~2030~~[2040](#), 0.5 degree). The dam count of 1,055 is more than twice the largest existing database, with 608 hydropower dams generating a boom in hydropower capacity from 1,242 MW in the 1980s to 69,199 MW post-2020s. While China had the largest capacity increase from the 2000s to the 2010s (+16,854 MW), Laos has the most planned dams and the highest projected growth post-2020s (+18,223 MW). Based on present-day discharge, we estimate a basin-wide hydropower potential of 1,334,683 MW, where Laos is the highest at 514,887 MW. Based on future discharge modeled with climate change, hydropower potential could grow to over 2,000,000 MW. Laos and China are the highest at around 900,000 MW each, together forming over 80% of the total potential. Our database facilitates research on dam-induced hydrological and ecological alterations, while spatiotemporal analysis of hydropower capacity could illuminate the complex transboundary electricity trade. Through both spatiotemporal and hydropower potential evaluation, we address the current and future vulnerability of countries to dam construction, highlighting the need for better planning and management in the future hydropower hotspot Laos. The Mekong dam database is publicly available at <https://doi.org/10.21979/N9/ACZIIN> (Ang et al., 2023).

1 Introduction

Dams have been constructed to control and harness the flow of water for human needs over thousands of years. Within the Mekong Basin, the longest river in Southeast Asia, dams have burgeoned in response to rising energy demands for economic development and growing populations (Hecht et al., 2019; MRC, 2023; Zarfl et al., 2015). Despite being an attractive alternative to depleting fossil fuels, the proliferation of dams comes with environmental and social trade-offs (Schmitt et al., 2018). Dams modify water flow and block migratory pathways, fragmenting habitats and disrupting the breeding and feeding patterns of aquatic species (Barbarossa et al., 2020; Grill et al., 2014). This has crippled the world's largest inland fishery and threatened the income of over four million Laotians and Cambodians in the fishing industry (Dugan et al., 2010). Dams reduce sediment and freshwater discharge downstream, and when coupled with rising sea levels, lead to erosion and saltwater intrusion in the Mekong Delta (Li et al., 2017; Park et al., 2022; Yoshida et al., 2020). Considering that the Mekong is home to two of the global top five rice exporters – Vietnam and Thailand – where the Vietnam Delta and the Khorat Plateau in Thailand produce 75% of the rice in the Lower Mekong Basin (LMB), dam-induced agricultural losses are jeopardizing regional food security (Kang et al., 2021; The Anh et al., 2020). The livelihoods of locals are further affected by forced resettlements to make way for dams, especially with insufficient policies to assist locals in adapting to new living environments and finding alternative sources of income (Soukhaphon et al., 2021). This multitude of dam impacts, alongside disputes over water resources, have created a complex geopolitical landscape across the six countries that share the Mekong Basin (Cooley et al., 2009; Cronin, 2009; Hirsch, 2016).

The dam distribution in the Mekong is constantly evolving. Dams are a relatively low-cost electricity source, making them an attractive fuel for economic development (IRENA, 2022). Nevertheless, poor planning and management, together with embezzlement of construction funds, leave dams just as easily canceled as they were approved (Matthews, 2012). The dam network therefore changes erratically, yet data on it is necessary to assess the socio-environmental implications of dams, manage operations across the network, and guide policy making regarding water and energy resources (Galelli et al., 2022; Speckhann et al., 2021). Various databases have been published to track the dams. Globally, the AQUASTAT database by the United Nations Food and Agricultural Organization (FAO) contains 14,000 dams, of which only 31 lie in the Mekong, as updated in 2015 (X. Wang et al., 2022). More recently, the Global Reservoir and Dam Database (GRanD) updated in 2019 consists of detailed information on 7,320 dams, although only 38 are in the Mekong (Lehner et al., 2011). The Global georeferenced Database of Dams (GOODD) contains 38,667 dams (319 in the Mekong), but the increase in quantity is compromised by a lack of dam attributes (Mulligan et al., 2020). With both quantity and details, the Georeferenced global Dams and Reservoirs (GeoDAR) consists of 24,783 dams (105 in the Mekong), yet its attributes from the paid-access World Register of Dams are not openly available (J. Wang et al., 2022). On the regional and national scales, numerous databases are made available by Open Development Mekong (ODM, 2023; Tiwari et al., 2023). Even so, they are from different sources, resulting in mismatches across databases. As such, while much information on dams exists, they are scattered across different

65 platforms, spatial scales, and time frames, complicating data collection and analysis. The mismatches across six main databases
are illustrated as a Venn diagram in Fig. [+1A](#), emphasizing the need for an organized and integrated database.


Without a comprehensive database, dam evolution over space and time up-to-date remains to be assessed. Some studies have
investigated the spatiotemporal impacts of dams, such as on land cover in the Lower Mekong (Cho and Qi, 2021) and
70 geomorphological changes in the Mekong Delta (Li et al., 2017). However, such studies are limited by the availability and
recency of dam data, and no existing study focuses directly on dam growth, which would highlight regions most concentrated
with dams and encourage targeting management efforts towards those regions, as well as illuminate connectivity across the
dam network, especially the cumulative impacts of cascades (Kummu and Varis, 2007). Spatiotemporal analysis of planned
dams projects upcoming dam development, but understanding distributions in hydropower potential could further highlight
75 sites with greater potential for continued dam construction and provide insights on future dam growth. Hydropower potential
has been estimated globally and regionally through grid-based assessments (e.g., Pokhrel et al., 2008; Tefera and
Kasiviswanathan, 2022). Nonetheless, it has yet to be systematically evaluated across the Mekong, where only general
estimates from a decade ago are available – 30,000 MW in the Lower Mekong and 28,930 MW in the Upper Mekong (Lebel
et al., 2007; MRC, 2011).


80

In this paper, we offer (1) a publicly available and integrated database of 1,055 dams in the Mekong, (2) a spatiotemporal
analysis of dams on a decadal timescale, and (3) a grid-based assessment of the theoretical hydropower potential along the
river network. We compile data across global, regional, and national databases, validated using satellite imagery in Google
Earth and public literature like reports and news articles (Lehner et al., 2011; Mulligan et al., 2020; J. Wang et al., 2022; Zarfl
85 et al., 2015). Using our database and a GIS analysis of geographic and hydrological dam attributes, we evaluate the distribution
of the dams on a sub-basin and country level from the 1980s to the post-2020s. With 608 hydropower dams, the hydropower
capacity soars from 1,242 MW in the 1980s to 69,199 MW post-2020s. While China had the most substantial expansion in
installed capacity from the 2000s to the 2010s, Laos has the most planned dams and is expected to have the greatest increase
post-2020s. We estimate a basin-wide hydropower potential of 1,334,683 MW, based on discharge from the CaMa-Flood
90 model (2011-2015, 0.05 degree) (Dang et al., 2022), where Laos is the highest at 514,887 MW (Meijer et al., 2012; Pokhrel et
al., 2008). Hydropower potential could grow to over 2,000,000 MW with climate change, based on future discharge from the
WaterGAP2 model used for ISIMIP2b (2021-~~2030~~[2040](#), 0.5 degree) (Gosling et al., 2023). Laos and China are the highest at
around 900,000 MW each, together forming over 80% of the total potential.

95 The significance of this study lies in three aspects. *Firstly*, our database provides a one-stop access to data for research on dam-
induced hydrological alterations, such as sediment trapping and river-bed incision associated with “hungry waters”, and its
implications on the hydrological modeling of parameters like discharge and water level (Ang et al., 2022; Dang et al., 2022;
Kondolf et al., 2014; Shin et al., 2020). Comprehensive dam data is needed to calculate trapped sediments, and hence the rate

of erosion of the delta, which would affect agriculture and food security (Li et al., 2017). *Secondly*, we provide the first detailed and spatially-explicit evaluation of dam evolution over time, which showcases the complications in managing the Mekong Basin, due to its transboundary nature and complex regional electricity trade amidst high energy demands for economic growth (Galelli et al., 2022; Soukhaphon et al., 2021). The Mekong is a representative case study of a major river being transformed by anthropogenic activities, thus evaluating the evolution of dam patterns in the Mekong holds similar implications as large river basins worldwide. *Thirdly*, this paper illustrates vulnerability at the sub-basin and country levels, identifying dam hotspots that require stronger management and policies, such as more evidence-based dam planning, stricter criteria for project approval, more comprehensive environmental impact assessments, and proper resettlement of displaced locals (Zawahri and Hensengerth, 2012).

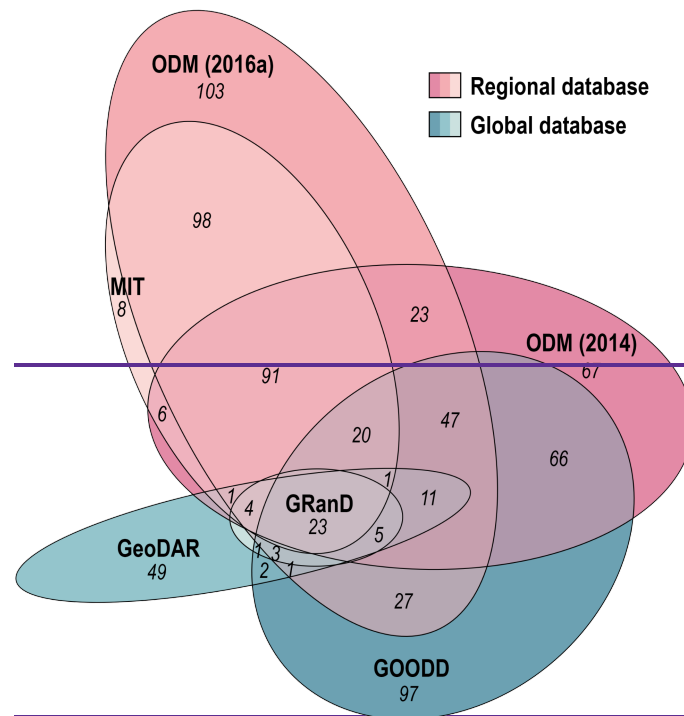

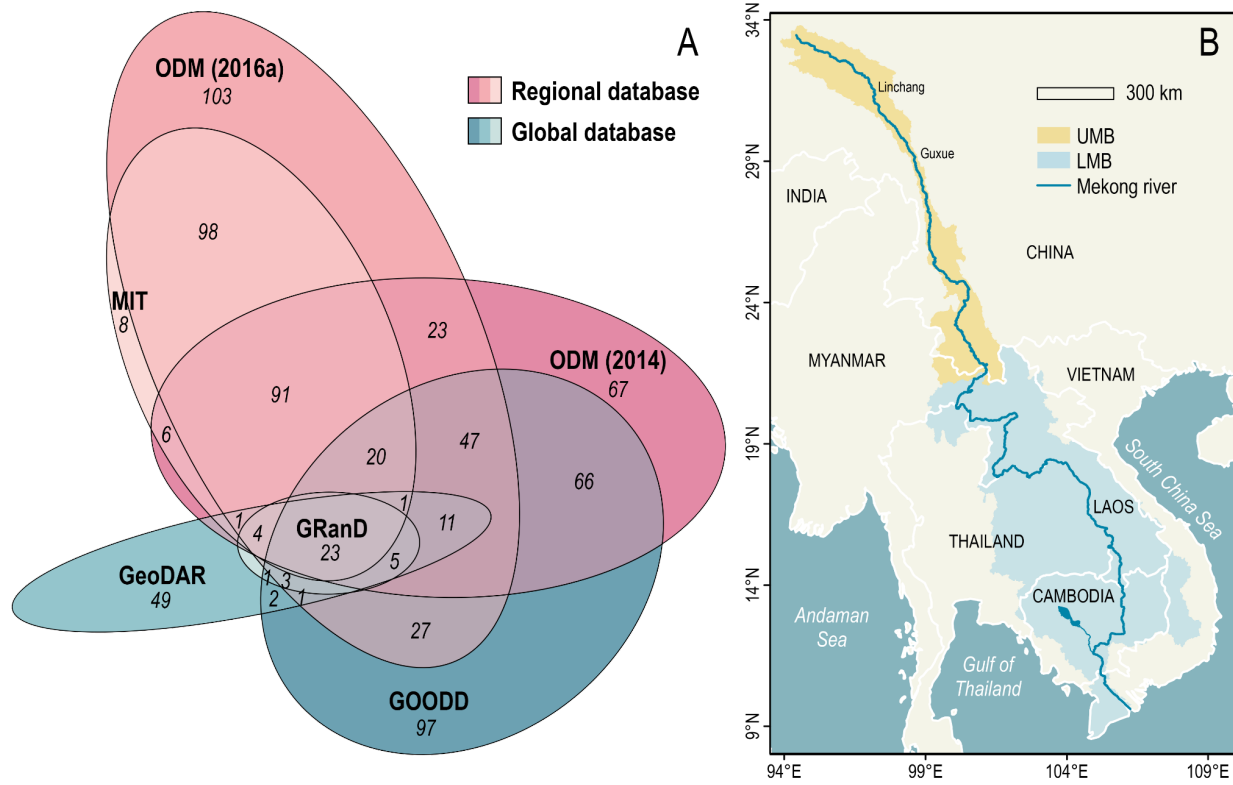

110

Figure 1: A. Venn diagram illustrating the overlaps and differences across six main databases. The pink ellipses are regional databases, while the blue ellipses are global databases, corresponding to the color scheme in Fig. 2. B. Map of the Mekong Basin, split into the Upper Mekong Basin (UMB) and Lower Mekong Basin (LMB).

2 The Mekong Basin: Hydrology and Development of Dams

115 Flowing 4,800km from the Tibetan Plateau into the South China Sea, the Mekong is the third largest in Asia in terms of sediment load, emptying 160 million tons of sediment into the sea annually (Lu et al., 2014). The Mekong Basin of 795,000 km² is shared across six countries (Gao et al., 2022) (Fig 1B). China (21% of the basin area) and Myanmar (3%) lie in the Upper Mekong Basin (UMB), while four countries lie in the Lower Mekong Basin (LMB): Laos (25%), Thailand (23%), Cambodia (20%) and Vietnam (8%) (Hecht et al., 2019). The monsoonal rainfall in the LMB controls the annual flood pulse, with 85% of flow taking place in the wet season (May to October) (Li et al., 2017). The remaining 15% of flow occurs in the dry season (November to April) from snow melt in the UMB (Binh et al., 2020). The Mekong can be divided into six physiographic homogenous subregions, with the (1) Tibetan Plateau and (2) Lancang Basin located in the UMB, the (3) Mekong Highlands mostly in Laos, the (4) Mekong Lowlands largely in Cambodia, (5) Intensive Cultivation mainly in Thailand, and (6) Tonle Sap/Mekong Delta at the southernmost tip of the basin (Leinenkugel et al., 2013). The Mekong Delta

120

125 is the third largest delta on earth, contributing to 27% of Vietnam’s GDP and 40% of agricultural production, as well as 15%
of international rice export (Tri, 2012; Xue et al., 2010).

Dam planning and construction began to intensify in the Mekong in the 1990s to 2000s due to energy demands from economic
expansion, population growth, and rural-urban migration, as well as a shift from public funding to commercial partnerships
130 between governments and private companies that brought in capital supply for dam projects (Grumbine et al., 2012; Kondolf
et al., 2014; Pearse-Smith, 2012). The dam cascade that first began construction on the mainstem is in the UMB in China (P.
Wang et al., 2014). While two dams are under construction and one has been canceled, 11 operational dams now make up the
cascade. The cascade will be expanded, with another canceled dam and seven planned dams lying further upstream (Grünwald
et al., 2022). Downstream in the LMB, a cascade of 11 mainstem dams has been planned (MRC, 2011, 2016). Two of the dams
135 are in Cambodia, while nine dams are in Laos, with two already operational (IR, 2023). Laos exports the majority of its energy
to neighboring countries, aiming to become the “Battery of Southeast Asia” (Galelli et al., 2022; Soukhaphon et al., 2021). In
2020, Laos was the third largest exporter of electricity globally, exporting \$1.93 billion in electricity, of which \$1.76 billion
was imported by Thailand (Observatory of Economic Complexity, 2023). Laos’ current cross-border export of 6,000 MW
(90% from the hydropower sector) is set to increase to 20,000 MW by 2030 (Chowdhury et al., 2020; Energy Market Authority,
140 2022; ODM, 2020).

3 Methodological Framework

3.1 Initial compilation of dam databases

Dams across the Mekong are first compiled from georeferenced data. We accessed six global databases – the FAO
AQUASTAT (FAO, 2015), the Future Hydropower Reservoirs and Dams (FHReD) (Zarfl et al., 2015), the Georeferenced
145 global Dams and Reservoirs (GeoDAR) (J. Wang et al., 2022), the Global georeferenced Database of Dams (GOODD)
(Mulligan et al., 2020), the Global Reservoir and Dam Database (GRanD) (Lehner et al., 2011), and the Open Street Map
Dams (OSM). Regional and national databases used include the Stimson Mekong Infrastructure Tracker (MIT) (MIT, 2021),
International Rivers (IR) (IR, 2014), and the datasets in the Open Development Mekong Datahub (ODM) (ODM, 2023). We
extract dams within the Mekong and standardize file formats for cleaning, excluding entries with missing or duplicate
150 coordinates. Considering that 0.0001 decimal degrees is approximately 11m and dams are larger than that, we standardize all
coordinates to four decimal degrees. The databases reviewed and their respective dams count (excluding duplicates within the
same database) are summarized in Table 1.

3.2 Integration of dam coordinates

Extracting unique coordinates, we visualize the dam distribution in ArcGIS. Groups of coordinates are found close by, where
155 each database records slightly different coordinates of the same dam. These differences are possibly due to (1) updates in

satellite imagery used for georeferencing over the years, (2) variations in information sources used for each database (e.g., International Commission on Large Dams versus CGIAR's Research Program on Water, Land, and Ecosystems) (Table 1) and (3) human discretion in positioning dam points, such as at the center of the dam, side of the dam, or the center of the associated reservoir. To account for such differences, points lying within 100m of one another are merged and their average taken. 100m was ~~visually~~ chosen after plotting buffers of different sizes and comparing them against the sizes of coordinate clusters-, and to avoid the merging of closely spaced irrigation dams and small dam cascades.

Subsequently, we extracted key attributes for inspection: name, country, year of operation, status, and purpose. Dam entries are merged based on same/similar names through a manual check in excel. If the same name is correlated with different coordinates, one coordinate was extracted based on one of the following: the most common coordinate, the coordinate from the most up-to-date database, or the average of all unique coordinates, excluding coordinates over one decimal degree away. We corrected any spelling mismatches in the names and standardized the naming conventions, such as for the attribute column headers, countries, and dam purposes. Dam statuses are simplified into five: operational, under construction, planned, canceled, and closed, where dams under study and proposed are considered planned. Should attributes across databases differ, the most common entry or information from the most up-to-date databases are prioritized.

3.3 Validation of dam coordinates

Coordinates of operational dams are validated using satellite imagery in Google Earth. Unvalidated coordinates are removed, misplaced coordinates are edited, while multiple coordinates referring to the same dam are merged. For reservoirs with multiple dams, all dams are considered as one, as similarly done for GeoDAR (J. Wang et al., 2022). Dam statuses are validated or updated, confirming operational dams, and changing planned dams to under construction should construction works with barren ground be visible. Two dams are deemed closed, with the dam structure no longer visible and dam breach reported online (VietNamNet, 2013; VnExpress, 2017). At this stage, 776 unique dams are obtained.

Based on the coordinates, six representative databases (763 dams) – three global and three regional – are illustrated using a Venn diagram (Fig. [11A](#)). Only 3.0% of the 763 dams are in all six databases, yet nearly half are only in one database, suggesting the lack of corroboration across existing databases. Moreover, the scattered overlaps and differences in dam entries complicates data collection, thus a unified one-stop database is needed. The diagram illustrates six out of 18 dam databases to minimize visual complexity and to keep the error low at 2.1%, while still representing 97.2% of dams at this stage (755 dams). The slight error is due to the inherent limitations of Venn diagrams, but such figures are still the simplest and most intuitive to interpret (Chen & Boutros, 2011; Larsson & Gustafsson, 2018).

3.4 Incorporation of dam attributes

Including the remaining attributes in the 18 dam databases, such as dam height, dam length, ~~and~~ reservoir volume, ~~and~~ [plant factor \(ratio between actual and theoretical hydropower output\)](#), the dam attributes are verified with information from public literature: reports (e.g., IR, 2013; MRC, 2016), research papers (e.g., Schmitt et al., 2018; Souter et al., 2020), news articles (e.g., Ezell, 2021; Poindexter, 2018), and websites (e.g., EDL-Generation Public Company, 2023; Hobo Maps, 2023; Power Technology, 2023). During the online search, 34 new dam entries were added, bringing the total dam count to 810. For dams with minimal information, attributes are estimated using Google Earth. The dam name is taken from the label of the dam, reservoir or nearby locality, the river name is taken from the nearest labeled river (if any), and the year of completion (and year of closure, if any) is taken from the earliest imagery the dam structure is visible (and no longer visible). To estimate the dam's purpose, if hydropower infrastructure is visible (e.g., powerhouse, penstock), the dam is deemed for hydropower. Nearby farmlands indicate an irrigation dam, a reservoir suggests a dam meant for water supply, while settlements downstream imply flood control (Yuen et al., 2023).

Additional attributes are added through GIS. We extract elevation and slope from the 30m SRTM DEM (USGS, 2023), [Strahler stream order](#) from HydroRIVERS, and sub-basin from HydroBASINS, [\(Level 7\), merged](#) with reference to the Mekong River Commission's sub-basin delineation (HydroSHEDS, 2023; MRC, 2023). Although elevation and sub-basin are available in some databases, not all entries have such data and discrepancies exist across databases, hence we use GIS [to compute the attributes of all dams](#) instead. To extract the catchment area of each dam, flow direction and accumulation are derived from the DEM [using the D8 flow method](#), and dam points are snapped to a nearby cell of highest accumulation. The snap distance for each dam is adjusted if necessary – 300 to 400m for smaller dams, and 800 to 2000m for larger dams. Dam catchments delineated are un-nested, hence we sum them to obtain the area of nested catchments. The database includes the [modeled mean annual discharge at each dam over five years \(2011 to 2015\)](#) (Dang et al., 2022), and mean total annual rainfall volume (2011 to 2015) in each dam catchment: mean annual rainfall from CHIRPS, [a widely used rainfall product at 0.05 degree resolution](#) (CHIRPS, 2023), multiplied by the nested catchment area. [Degree of regulation is derived from the ratio between total upstream reservoir volume and discharge at each dam, which represents the impact of the dams on downstream flow regime](#) (Grill et al., 2014; Lehner et al., 2011). The list of attributes compiled in excel is in Table 2.

While compiling from the dam databases and online literature, a portion of the dams were found to lack specific coordinates, but their names, hydropower capacity, status, and nearest locality (e.g., province) are known. These dams are mostly planned dams lying in Laos, as determined from the MIT database and corroborated with reports online (e.g., MRC, 2015; The World Bank, 2017). For the few operational dams, their year of completion was estimated from the year of the report they were found in. We identify the unique dams as much as possible based on their names, and estimate the dam coordinates from the nearest

known locality. 245 dams are obtained, but set aside from the 810 dams with known specific coordinates, totaling to a final count of 1,055 dams in the database.

220 3.5 Spatiotemporal analysis

Using the year of completion (and year of closure, if any), dams are filtered by decade – 1980s, 1990s, 2000s, 2010s, post-2020s—~~with~~. The first four groups include dams that are operational in each decade, while the last group ~~including~~includes dams that began operation in 2020 or later, dams under construction, and planned dams with available information. Canceled dams are excluded from analysis. The total or installed hydropower capacity is calculated per decade, defined as the sum of
225 the hydropower capacity of all hydropower dams in each decade. The spatiotemporal distribution of the dams is evaluated, including comparing the growth in the number of dams and hydropower capacity over the decades across countries and major sub-basins, and identifying key regions with the largest growth thus far and regions with the highest projected growth. We visualize the distribution of dams in each country by their attributes, namely status, purpose, elevation, slope, rainfall, discharge, nested catchment area, stream order, and hydropower capacity. Focusing on the 810 dams with known specific
230 coordinates, we analyze the relationship between hydropower capacity, and the four parameters of elevation, slope, rainfall, and discharge. The nested catchment area of each dam is divided by the total area of the Mekong Basin, to compare the distribution of upstream and downstream dams across countries.

3.6 Calculating hydropower potential


To calculate the theoretical hydropower potential, defined as all hydropower potentially available, including hydropower that
235 has yet to be harnessed, we adopt the approach by Pokhrel et al. (2008),

$$P = \gamma \times Q \times h \times \eta , \quad (1)$$

where P is the hydropower potential in Watts, γ is the weight density of water (9810 N/m^3), Q is the discharge in cubic meters per second, h is the elevation in meters, and η is the overall electrical efficiency. η , which accounts for energy losses from equipment like turbines and generators, ranges from 50% to 95% in studies, thus we use an average efficiency of 70% (Cuya
240 et al., 2013; Zhou et al., 2015). $\gamma \times Q$ can also be understood as the gravitational acceleration (9.81 m/s^2) multiplied by the mass of water flow ($Q \times 1000 \text{ kg/m}^3$, where 1000 kg/m^3 is the density of water).

Elevation is defined relative to the downstream cell to take river flow into consideration. Using the 30m SRTM DEM, we calculate the slope along the stream network, before converting it into a raster matching the resolution and alignment of the
245 discharge data, and multiplying it by the cell length to obtain the elevation difference between each cell and its downstream cell (Meijer et al., 2012). We calculate hydropower potential using present-day discharge ~~from~~simulated by the CaMa-Flood model (2011-2015, 0.05 degree), with inundation mode turned on and driven by runoff simulated by the global hydrological model HiGW-MAT (Dang et al., 2022), ~~as well as future~~; Pokhrel et al., 2017). ~~Future~~ discharge ~~from~~is simulated by the

WaterGAP2 model used for the ISIMIP2b simulation round (2021-2030/2040, 0.5 degree), using the GFDL-ESM2M climate model (Gosling et al., 2023). ISIMIP2b simulations are bias-corrected, and WaterGAP results have been used and validated globally (Gudmundsson et al., 2021; Hempel et al., 2013; Pokhrel et al., 2021), and. Datasets from both datasets the CaMa-Flood model and the WaterGAP2 model consider the effect of dams on total annual discharge. Future discharge is affected by climate change, modeled based on four Representative Concentration Pathways (RCP 2.6, 4.5, 6.0, 8.5), which are greenhouse gas concentration scenarios used by the Intergovernmental Panel on Climate Change (IPCC). For We perform one calculation per RCP, and for each calculation, we sum the grids to obtain the total hydropower potential in each country and across the whole basin. The flow of data processing is outlined in Fig. 2.

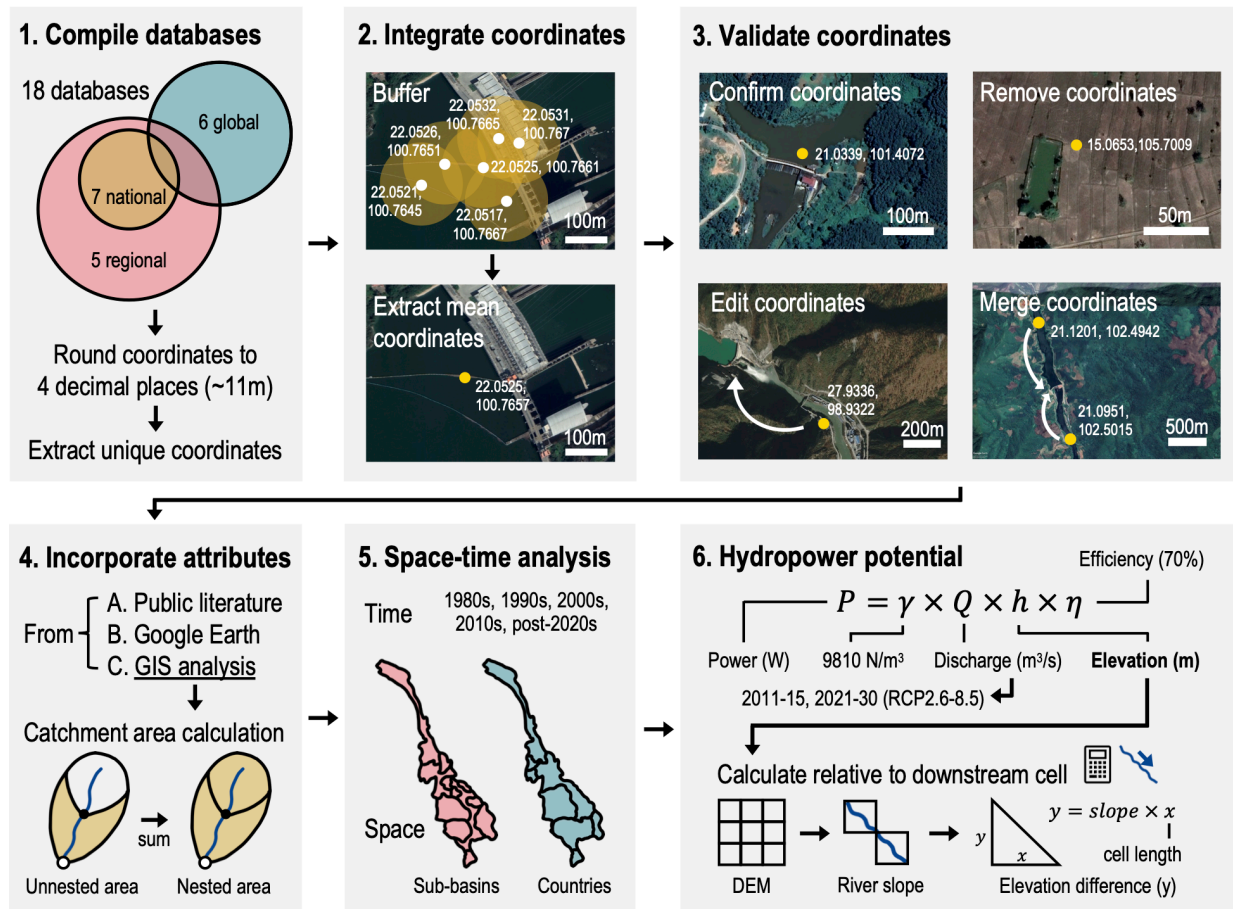

260 **Figure 2: Methodological flowchart outlining the six main steps in data cleaning, compilation, validation, and analysis. The simplified Venn diagram in step 1 reflects the observed hierarchy across the global, regional, and national databases. The images in steps 2 and 3 are taken from Google Earth to exemplify the process. Maps Data: Google, © 2023 Maxar Technologies, CNES / Airbus. For steps 4 to 6, selected key parts of the calculations are shown.**

Table 1. Global, regional, and national dam databases compiled.

Scale	Database	Dams Count	Sources
Global	AQUASTAT (FAO, 2015)	31	ICOLD, national data, public literature
	FHReD (Zarfl et al., 2015)	123	Public data and literature
	GeoDAR v1.1 (J. Wang et al., 2022)	105	ICOLD, GRanD, Google Maps
	GOODD v1.1 (Mulligan et al., 2020)	319	Google Earth
	GRanD v1.3 (Lehner et al., 2011)	38	Public data and literature
	OSM (2017)	10	OSM tags
Mekong	MIT (2021)	313	National data, public data and literature
	ODM (2014)	398	GRanD, WLE, IR, national data
	ODM (2016a)	466	ODM, WLE, IR
	ODM (2020a)	145	GMDO, WLE, MIT, public data
	ODM (2022)	102	Public data and literature
China	IR (2014)	29	National data, public literature
Myanmar	ODM (2017a)	8	IFC
	ODM (2017b)	6	ICEM
	ODM (2018)	8	IFC, WLE
Thailand	ODM (2020b)	6	National data
Cambodia	ODM (2015)	50	National data
	ODM (2016b)	51	National data

Abbreviations: Food and Agriculture Organisation of the United Nations (FAO), International Commission on Large Dams (ICOLD), Future Hydropower Reservoirs and Dams (FHReD), Georeferenced global Dams and Reservoirs (GeoDAR), Global Reservoir and Dam Database (GRanD), Global georeferenced Database of Dams (GOODD), Open Street Map (OSM), Mekong Infrastructure Tracker (MIT), Open Development Mekong (ODM), CGIAR's Research Program on Water, Land, and Ecosystems (WLE), International Rivers (IR), International Finance Corporation (IFC), International Centre for Environmental Management (ICEM).

270 Table 2. Dam attributes in the database.


Category	Attribute	Description
Name	ID	Identification number
	Name1	Name of dam
	Name2	Alternative name of dam
Location	Lat	Latitude in decimal degrees
	Lon	Longitude in decimal degrees
	Country	Country

	Locality	Nearest locality (for 245 dams with estimated coordinates)
Operation	Status	Operating, under construction, planned, closed or canceled
	Completion	Year of completion
	Closure	Year of closure (if any)
Hydrology	River	Tributary
	Basin	Sub-basin (HydroSHEDS, 2023)
	Order	StreamStrahler stream order (HydroSHEDS, 2023)
	Rain_m3	Mean annual rainfall volume in cubic meters (CHIRPS, 2023)
	Discharge_m3	Mean annual discharge in cubic meters (Dang et al., 2022)
Specifications	Capacity_MW	Dam capacity in megawatts
	Energy_GWh	Mean annual energy in gigawatt hour
	Height_m	Dam height in meters
	Length_m	Dam length in meters
	Area_km2	Reservoir area in square kilometers
	Volume_milm3	Reservoir volume in million cubic meters
	Catch_km2	Unnested upstream catchment area in square kilometers
	Catch_nest_km2	Nested upstream catchment area in square kilometers
	Elevation_m	Dam elevation in meters (USGS, 2023)
	Slope_m	Dam slope in meters
	DOR_pc	Degree of regulation in percentage
PF_pc	Plant factor in percentage	
Purpose	Use1	Primary purpose (e.g., hydropower)
	Use2	Secondary purpose (e.g., irrigation)
Others	Add_Ref_1	Additional online reference 1
	Add_Ref_2	Additional online reference 2
	Add_Ref_3	Additional online reference 3
	From_GE	Dam attributes estimated from GE
	Est_Coord	Y indicated for 245 dams with estimated coordinates

4 Results and Discussion

4.1 Current distribution of dams

Based on our database, there are 1,055 dams in the Mekong, including 661 operational, 54 under construction, 331 planned, 2 closed, and 7 canceled (Fig. 3A). The operational dams are mainly in Thailand and the downstream portion of China, while the planned dams are predominantly in Laos, Cambodia, and the upstream portion of China. The total dam count is more than twice that of the largest existing database of 466 dams last updated in 2016 (Table 1), reflecting the rapid rate at which the dam network is evolving. 79% of dams are found at lower elevations of 1,000m and below, compared to 21% of dams found above 1,000m (Fig. 3B). Dams at lower elevations mostly lie in the Lower Mekong Basin (LMB), while dams at higher elevations are generally in the mountainous Upper Mekong Basin (UMB), with some lying in the Mekong Highlands of Laos (Leinenkugel et al., 2013). The two dams of highest elevation are Longqingxia and Angsai in China, at 4,638m and 4,282m respectively. Most of the dams (84%) are small dams with a hydropower capacity of 50 MW and below (Fig. 3C). These small dams include 447 non-hydropower dams, classified into three purposes: water supply, flood control, and irrigation. Considering the monsoonal climate of the Mekong Basin with a distinct dry and wet season, water supply and flood control dams are used in regulating water flow, to provide water for nearby settlements in the dry season, and to lower flood risk in the wet season (Yuen et al., 2023). Small irrigation dams are concentrated in Thailand, where the Khorat Plateau is intensively cultivated for agricultural exports (Kondolf et al., 2014; Li et al., 2017). As for the remaining hydropower dams, 14% are medium dams of over 50 to 1,000 MW, and 2% are large dams of over 1,000 MW (Fig. 3C). The two dams of highest capacity are Nuozhadu and Xiaowan in China, at 5,850 MW and 4,200 MW respectively. Large dams are mainly located along the mainstream in China, Laos, and Cambodia (Fig. 3A). The dam cascade on the mainstem in the UMB in China has a total operational reservoir volume of 45 billion m³ and hydropower capacity of 21,250 MW, which increases to 63 billion m³ and 30,566 MW respectively should dams under construction and planned dams be considered. Downstream in the LMB in Laos and Cambodia, the two operational mainstem dams have a combined reservoir volume of 2 billion m³ and hydropower capacity of 2,085 MW, which is set to increase to 12 billion m³ and 13,326 MW after the planned cascade is completed.

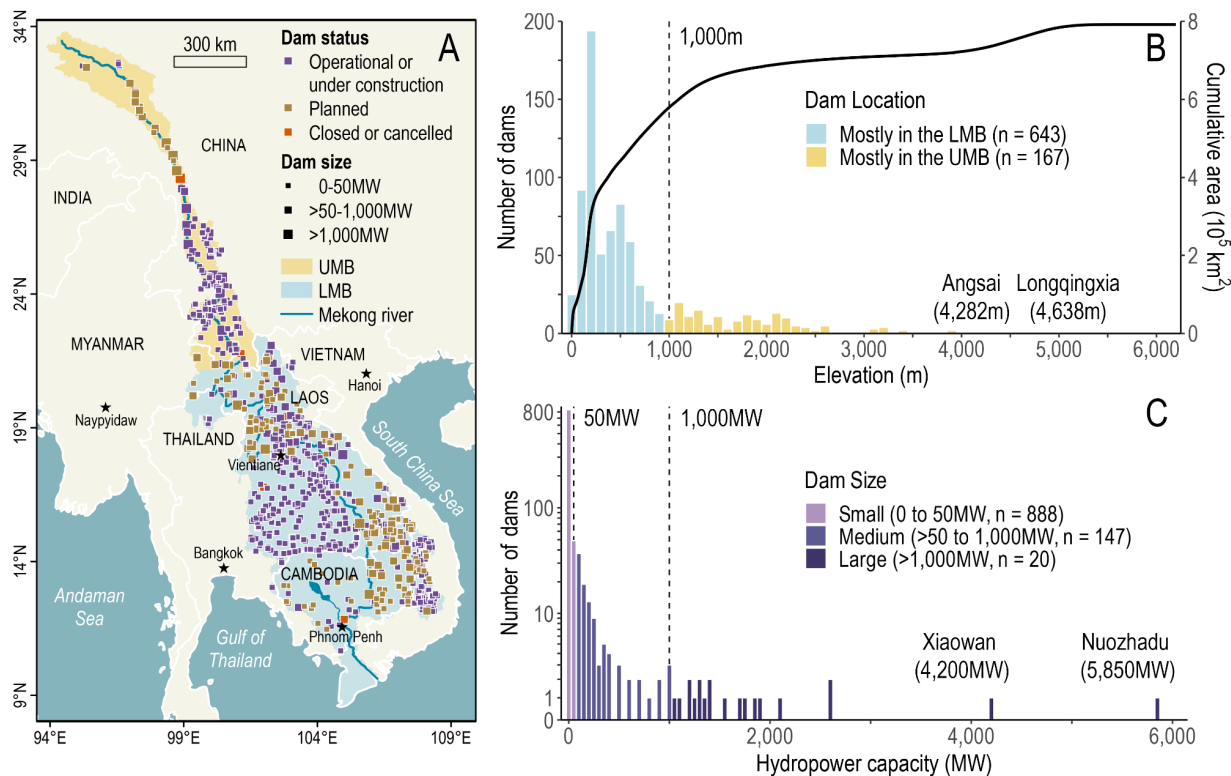

295

Figure 3: A. Map of the current dam network, with operational dams or dams under construction in purple, planned dams in yellow, and closed or canceled dams in red. B. Distribution of dams based on their elevation. Most dams of elevation below 1,000m lie in the Lower Mekong Basin (LMB), while most dams of elevation above 1000m lie in the Upper Mekong Basin (UMB). Around 75% of the Mekong Basin is below 1,000m, as shown by the hypsometric curve of cumulative area in the basin against elevation, derived from the 30m SRTM DEM. C. Distribution of hydropower dams based on their size (hydropower capacity), including the 245 dams without known specific coordinates. Small dams are 0 to 50 MW, medium dams are over 50 to 1,000 MW, while large dams are over 1,000 MW.

300


4.2 Spatiotemporal analysis of dam growth

The total hydropower capacity has expanded exponentially from 1,242 MW in the 1980s to 33,914 MW in the 2010s, with a jump of 24,717 MW from the 2000s to the 2010s (Fig. 4A). This corroborates with a reported spike in hydropower dams after 2005 to 2010, associated with rising energy demands from increased economic development and demographic growth (Binh et al., 2020; Dugan et al., 2010; Hecht et al., 2019; Li et al., 2017). The total hydropower capacity of currently operational dams is 36,058 MW. Since hydropower remains as an attractive low-cost energy source in a region rich in water resources (IRENA, 2022), the growth in dams is expected to continue – hydropower capacity is projected to nearly double to 69,199 MW in the post-2020s, after taking dams under construction and planned dams into consideration (Fig. 4A). China has the largest capacity, with a notable increase from 5,326 MW in the 2000s to 22,180 MW in the 2010s, being the earliest country to start harnessing the Mekong’s hydropower potential (Cronin, 2009). 96% of the capacity stems from the 11-dam cascade along the mainstream. Although China currently has the highest installed capacity, Laos has the most planned dams (61) and

310

is expected to have the greatest growth from 7,525 MW in the 2010s to 25,748 MW post-2020s (Fig. 3A and 4A). The expansion of capacity in Laos is in line with the country's aim to become the "Battery of Southeast Asia" (Galelli et al., 2022; Soukhaphon et al., 2021).

Hydropower capacity relates to geography and hydrology, hence we visualize the distribution of dams by elevation, slope, mean total annual rainfall, and mean annual discharge (Fig. 4C to 4F). Considering that potential energy depends on *height* and *mass*, elevation and slope reflects the *height* of the dam location, while rainfall and discharge reflects the *mass* of the water flowing through the dam (Lehner et al., 2005; Pokhrel et al., 2008). Since slope is a measurement of change in elevation, a fairly similar trend can be observed between elevation and slope. Likewise, since discharge is dependent on the available rainfall, a similar trend can be seen between rainfall and discharge, even though the rainfall data presented is not the rainfall data used to model discharge. This suggests that the trend is not due to any potential bias introduced by modeling, and that the distribution pattern in rainfall on a basin-wide scale is similar across different products. The elevation of dams and the total range in slope (including outliers) is the highest in the UMB in China, which contributes to the large hydropower capacity of the country. The UMB, which includes part of the Tibetan Plateau and Three Rivers Area, is highly mountainous and steep – along the Mekong mainstream in China, elevation drops 700m within just 750km (Biba et al., 2012; MRC, 2023). Significant elevation and slope are also observed in Laos, where the Mekong Highlands (Northern Mountains and Annamite Range/ Eastern Highlands) generally lie in (Leinenkugel et al., 2013). Together with high rainfall and high discharge along the mainstream, the estimates corroborate with the large capacity in Laos. Myanmar also has relatively high slope and discharge, but the hydropower capacity is limited by area: Myanmar only occupies 3% of the 795,000 km² of basin area (Gao et al., 2022; Hecht et al., 2019) (Fig. 4B).

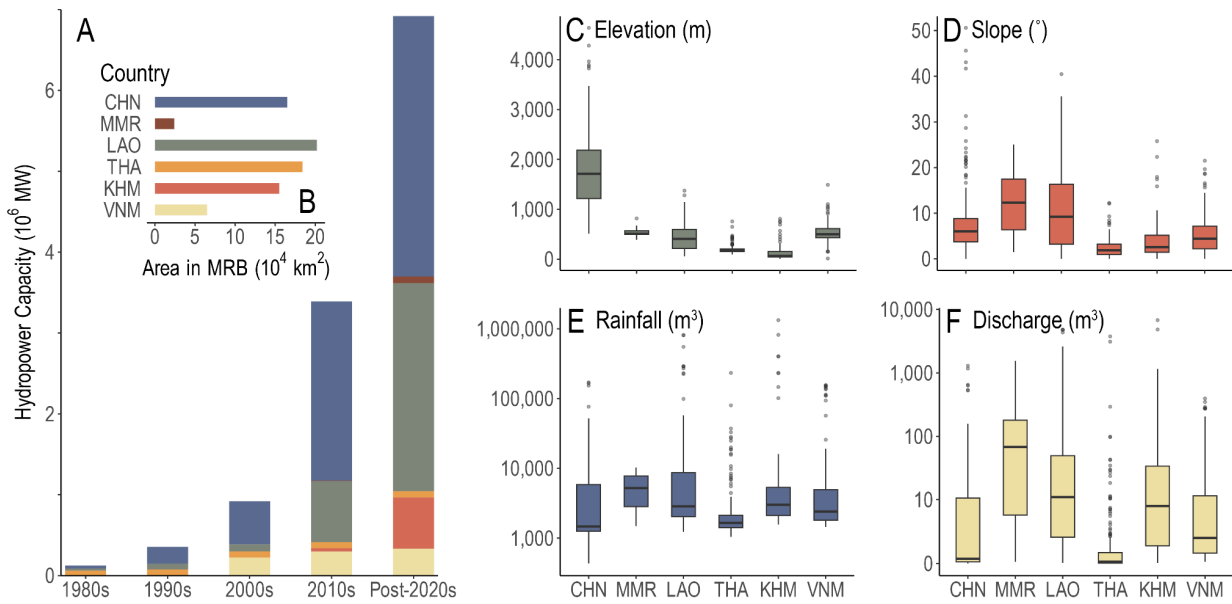

335


Figure 4: A. Total hydropower capacity of dams per country in each decade, from the 1980s to post-2020s, of which 36,058 MW is the total hydropower capacity of currently operational dams. The color and order of each country is indicated in B. B. Area of each country within the Mekong River Basin (MRB) (Rossi et al., 2009). C-F. Box plots per country showing the distribution of dam elevation, dam slope angle, mean total annual rainfall volume within each dam's nested catchment (2011-2015), and mean annual discharge at each dam (2011-2015) (Dang et al., 2022). Countries are labeled by their three-letter codes, ordered from upstream to downstream (similarly in Fig. 6 and 7).

340

The expanding dam network and hydropower capacity in China and Laos are mapped per decade from the 1980s to post-2020s in Fig. 5, a spatial representation of Fig. 4A – each sub-figure in Fig. 5 corresponds to each bar plot in Fig. 4A. Growth is evident in the 2010s and post-2020s, with numerous new large dams along the mainstream indicated in red in Fig. 5D and 5E, and a sudden increase in hydropower capacity of LMB sub-basins, such as Nam Ou (Fig. 5G), indicated in dark purple in Fig. 5I and 5J. Notable growth is also seen in Vietnam from the 2000s to post-2020s, within the upstream portion of the 3S sub-basin (Fig. 5G to 5J), where relatively high elevation and slope contribute to the hydropower capacity (Souter et al., 2020) (Fig. 4C and 4D). Nevertheless, the capacity in Vietnam is restricted by the country's area coverage (8% of the basin) (Fig. 4B). Similarly in Myanmar, area limits the planned dams post-2020s (Fig. 4B and 5E). The dam network and hydropower capacity remain generally the same in Thailand and its major sub-basin Nam Mun (Fig. 5G), given that most of the dams are for irrigation and operational since the 1980s (Fig. 4A and 5). For instance, the Khorat Plateau in Thailand is a key agricultural area, producing large volumes of global exports like rice (Kang et al., 2021; Kondolf et al., 2014). The low capacity in Thailand is associated with its low dam elevation and slope, and mostly low rainfall and discharge (Fig. 4C to 4F). While Cambodia has minimal elevation and slope within the Mekong Lowlands, high rainfall and discharge allows for some hydropower capacity (Leinenkugel et al., 2013) (Fig. 4). Dam growth is concentrated in the downstream portion of the 3S basin, and along the mainstream, where two large dams form part of the LMB cascade (Fig. 5E).

350

355

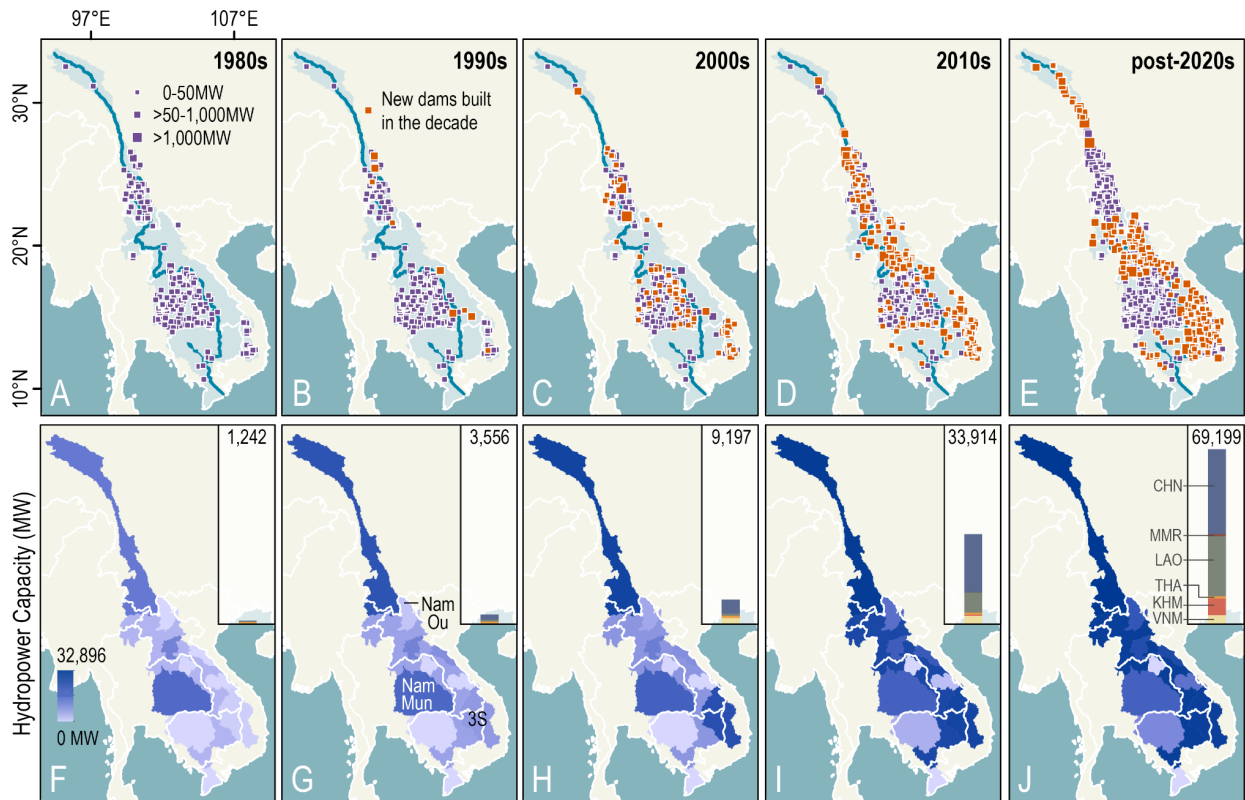

360 **Figure 5: A-E. Distribution of the dams in each decade from the 1980s to post-2020s. Newly built dams in each decade are indicated in red. F-J. Total hydropower capacity of operating dams per major sub-basin, in each decade from the 1980s to post-2020s, with three notable basins labeled (Nam Ou, Nam Mun, 3S). Each sub-figure corresponds to each bar plot in Fig. 4A, labeled with the total hydropower capacity of the Mekong basin per decade.**

4.3 Hydropower potential

The total theoretical hydropower potential in the Mekong basin based on present-day discharge (2011-2015) is an estimated
 365 1,334,683 MW (Fig. 6A). Calculations of hydropower potential in Asia vary quite widely in previous studies, ranging from
 2,402,511 MW to 12,121,000 MW (Meijer et al., 2012; Pokhrel et al., 2008) (Table 3). Asia is the continent richest in
 hydropower, contributing to around half of the world's total potential (Table 3). Considering that the Mekong is the longest
 river in Southeast Asia and third longest in Asia (MRC, 2023), our estimated 1,334,683 MW in the Mekong is largely
 comparable with previous estimates. Hydropower potential that can be harnessed in reality will be lower, given restrictions
 370 such as economic feasibility, legal factors, and socio-political concerns, but our results suggest that the current estimates of
 30,000 MW for the LMB and 28,930 MW for the UMB may be too low (Lebel et al., 2007; MRC, 2011; Tefera and
 Kasiviswanathan, 2022). Should the basin-wide potential be limited to 58,930 MW, more than half is already installed (36,058
 MW), and it will soon be exceeded by the planned capacity post-2020s (69,199 MW). Moreover, just one large dam is over

1,000 MW, and the current largest operational dam is almost 6,000 MW, hence it is likely that the hydropower potential in the
375 Mekong exceeds 58,930 MW (Fig. 3C).

Projecting into the future based on four Representative Concentration Pathways (RCP), 2021-~~2030~~2040 discharge data from
the ISIMIP2b WaterGAP2 model is observed to be of higher values than the present-day discharge data, and hydropower
potential may grow correspondingly to over 2,000,000 MW under the influence of climate change (Fig. 6B to 6E) (Gosling et
380 al., 2023). This value may be exaggerated by the difference in resolution between the discharge data currently available for
present-day and future calculations. The finer resolution (0.05 degree) of present-day calculations shows more localized
differences, while the coarser resolution (0.5 degree) of future calculations obscures details, is not perfectly aligned with the
Mekong basin boundary, and introduces a larger elevation difference between each cell and its downstream cell. Nevertheless,
385 the projected increase in hydropower potential suggests that the Mekong basin may be even more vulnerable to dam
construction and its associated environmental and social trade-offs in the future (Grill et al., 2014; Park et al., 2022; Schmitt
et al., 2018).

Comparing across the countries, almost 40% (514,887 MW) of the present-day potential lies in Laos, while more than 80% of
the future potential lies in China and Laos (Fig. 6F to 6J). China has a mountainous terrain with high elevations and a steep
390 slope along the UMB mainstream, while Laos has high discharge along the LMB mainstream and relatively significant
elevation and slope in the Mekong Highlands (Fig. 4C to 4F) (Biba, 2012; Leinenkugel et al., 2013). The hydropower potential
distribution appears to be similar across the RCPs, but the total hydropower potential varies slightly with RCP – lower in
RCP4.5 and 8.5, but higher in RCP2.6 and ~~even higher in~~ 6.0 (Fig. 6B to 6E). Matching this trend, hydropower potential ~~is~~
~~slightly higher~~ in China ~~and Laos are similar~~ for RCP4.5 and 8.5, but higher in Laos for RCP2.6 and 6.0, ~~especially in 6.0~~ (Fig.
395 6I). These observations could be associated with the greenhouse gas concentration in each RCP scenario during 2021 to
~~2030~~2040 – higher in RCP4.5 and 8.5, but lower in RCP2.6 and ~~lowest in~~ 6.0 (IPCC, 2014; Hanna et al., 2019). Interestingly,
hydropower potential across the RCP scenarios remains generally constant in most of the countries, but changes significantly
in Laos, ~~peaking in RCP6.0~~ (Fig. 6G to 6J). The large hydropower potential in Laos and its fluctuation with RCP suggest that
Laos may be more vulnerable to climate change, and the most implicated by future dam expansion.

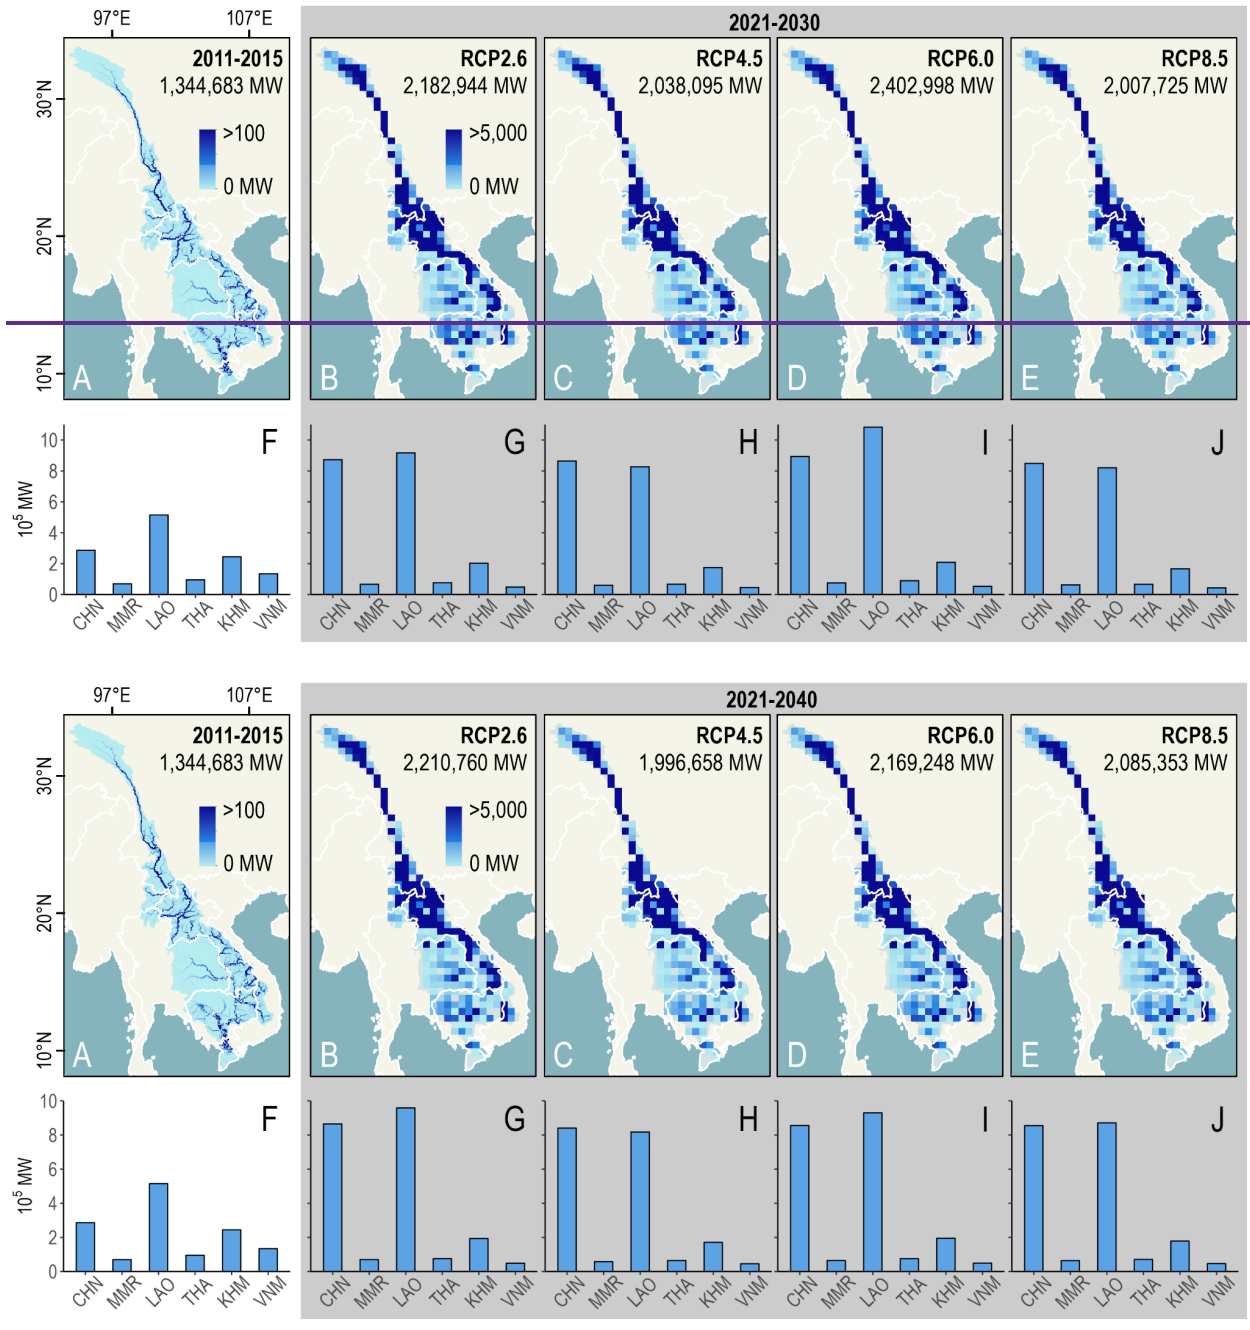


Figure 6: A. Theoretical hydropower potential in the Mekong Basin, estimated from gravity, elevation (relative to the downstream cell), and average annual discharge in 2011 to 2015. B-E. Hydropower potential estimated from average annual discharge in 2021 to 2030, modeled based on four Representative Concentration Pathways (B: 2.6, C: 4.5, D: 6.0, E: 8.5). F-J. Bar graph of the total hydropower potential in each country, corresponding to A-E.

Table 3. Literature values of theoretical hydropower potential (MW) globally and in Asia.

Scale	Pokhrel et al. (2008)	Meijer et al. (2012)	Zhou et al. (2015)	Tefera and Kasiviswanathan (2022)	This study
Mekong	–	–	–	–	1,344,683
Asia	2,402,511	12,121,000	5,901,941	10,559,361	–
Global	6,568,493	19,943,000	14,563,356	21,023,973	–


4.4 Comparison of stream order of dams

Visualizing the distribution of dams by Strahler stream order, the number of dams generally decreases as stream order increases (Fig. 7A). Dams of low stream order are found in small tributaries, whereas dams of high stream order are along major tributaries and the Mekong mainstream, suggesting that the dams in the basin are predominantly smaller tributary dams. This corroborates with Fig. 3C, where 84% of the dams are small dams with a hydropower capacity of 50 MW and below. Some of the dams of lower stream order are in Vietnam and China, but most are irrigation dams in the Nam Mun sub-basin of Thailand – the largest tributary to the Mekong based on area and the site of the largest irrigation scheme in the basin (Cochrane et al., 2014; MRC, 2023). Dams of high stream order are mainly in China and Laos, as China has the most mainstream dams, while Laos has a significant number of both mainstream and major tributary dams. Few dams are of the highest stream order eight, which are only located along the LMB mainstream in Laos and Cambodia. Comparing the nested catchment area of each dam to the total area of the Mekong Basin, the derived ratios reflect the relative position of each dam in the basin, where dams with larger ratios are of higher stream order and likely located further downstream (Fig. 7B). Dams of highest ratios are along the mainstream, identified by the same colors in Fig. 7B and 7C. The 11 dams in the LMB mainstream cascade are of ratios 0.28-0.81, with the ratio increasing downstream from Pak Beng in Laos to Sambor in Cambodia. The next group with high ratios (0.05-0.18) are the 23 dams in the UMB mainstream cascade in China, where the planned dams upstream are of lower ratios. Similar to how most dams are of low stream order (Fig. 7A), most of the dams are of low ratio, especially in Thailand and Vietnam.

This prevalence of tributary dams was first driven by energy needs and public funding (Hirsch, 2010). Thailand's electricity demands surged in the 1990s, while Laos endeavored to profit from selling its natural resources, spurring the development of tributary dams in Laos. Many of the dam projects were financed by public institutions like the Asian Development Bank, and the electricity produced was imported by Thailand. The situation likely served as a trigger, encouraging the spread of tributary dams across the basin. Nevertheless, with a continued growth in regional energy demands, the construction of the mainstream dam cascade in China, and a shift towards investment from private and Chinese institutions, there is now a renewed focus on building mainstream dams in the LMB (Grumbine et al., 2012; Pearse-Smith, 2012; Urban et al., 2013). Mainstem dams are usually perceived to have more devastating environmental and socioeconomic repercussions across the region, causing river fragmentation and threatening the species richness found at higher stream order, in turn jeopardizing the agricultural and fishing industry dependent on the mainstream (Grill et al. 2014; Reyes-Gavilán et al., 1996). Yet, some suggest that tributary

435 dams are also highly damaging, blocking alternative habitats crucial for fish migration, reproduction, and biodiversity – 169
out of 245 fish species decreased in population or disappeared upstream of the tributary Pak Mun Dam in Thailand
(Amornsakchai et al., 2000; Tang et al., 2021). Small tributaries include headwater streams that make up 60% to 80% of the
basin, and damming them could diminish important water and nutrient supplies from headwaters (MacDonald and Coe, 2007).
These implications could be amplified through the cumulative effect of the widespread tributary dams (Sun et al., 2023; Ziv
440 et al., 2012).

Similarly, such discussions exist when comparing the impacts of upstream and downstream dams. Concerns have traditionally
focused on the transboundary effect of upstream dams on lower riparian countries. For example, upstream dams modify the
volume and seasonality of discharge downstream, which reduces natural floods that give fishes access to floodplain habitats
445 and replenish floodplains with nutrients for agriculture (Biba et al., 2012; Grill et al., 2019; Poff et al., 2002). By trapping
sediments, upstream dams can also cause far-reaching hydrological alterations like channel incision, bank retreat, and riverbed
coarsening (Li et al., 2021). However, dams of the LMB cascade in Laos and Cambodia regulate the largest upstream area, as
they are located on the Mekong mainstem of Strahler stream order eight (Fig. 7). These dams could together contribute to the
capture of up to 96% of river sediments, before they can be deposited at the delta (Kondolf et al., 2014). The decrease in
450 sediment supply could lead to the shrinking of the Mekong delta, threatening agricultural production and livelihoods (Li et al.,
2017). Perhaps there is a tradeoff no matter where the dam is along the river network, and ultimately, the scale of a dam's
impact is not only dependent on its location, but also on other factors like how it is operated, whether mitigation efforts like
fish ladders are in place, and its proximity to critical river junctions (Gao et al., 2022; Grill et al. 2014; P. Wang et al., 2014).

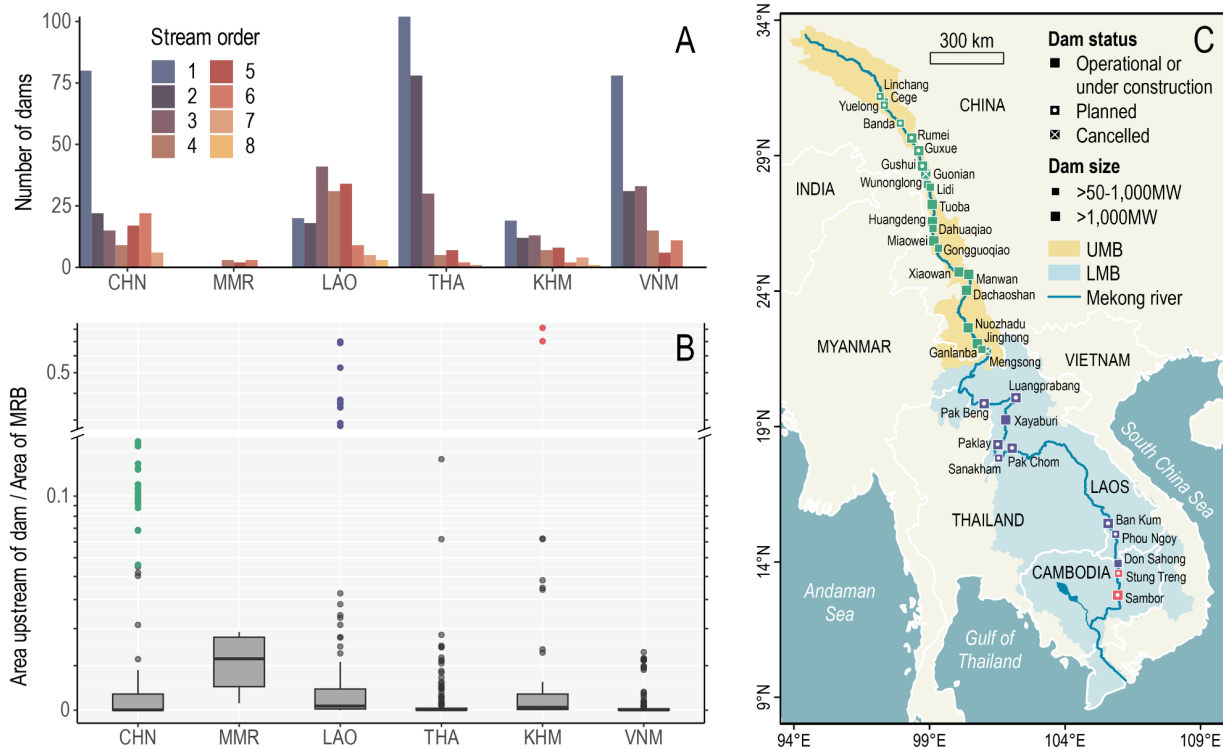

455 **Figure 7: A. Distribution of dams based on the Strahler stream order per country. B. Box plots per country showing the ratio of**
area upstream of each dam to the total area of the Mekong River Basin (MRB) (Xu et al., 2021). The mainstream dams (as colored)
have the highest ratios, located in China (green), Laos (purple), and Cambodia (red). C. Map of dams along the mainstream, with
colors corresponding to B. Dam symbols are differentiated by status and size (capacity).

4.5 Implications: hydrology, ecology, and dam management

460 Our free-access database strives to improve both the quantity of dams identified, and the quality of dam attributes recorded in
the Mekong. With an extensive record of 1,055 dams, and detailed attributes including nested catchment area and rainfall
provided, the database can facilitate further research on the hydrology of the basin, such as quantifying the impact of dams on
sediment loss, river fragmentation, downstream channel incision, and delta erosion (Grill et al. 2014; Li et al, 2021). These
hydrological impacts implicate the livelihoods of people in the region, such as the rice-based farmers in the Vietnam Delta
465 (Kang et al., 2021; Yoshida et al., 2020). Through our spatiotemporal analysis of dams, including planned dams post-2020s,
the impacts on hydrology and local communities could be projected into the future to inform decisions made regarding
sustainable dam planning, construction, and operation. The dam database can also be used in the hydrological modeling of
river discharge and water level, taking into account the modification of discharge volume and seasonality by dams (Dang et
al., 2022; Kondolf et al., 2014; Shin et al., 2020). This could aid in the prediction of extreme events and the adoption of
470 mitigation approaches against droughts and floods (Le et al., 2007; W. Wang et al., 2017).

Hydrological impacts are closely tied with ecological impacts of dams. River fragmentation disrupts migratory pathways for fish species and isolates populations, reducing breeding, gene flow, and biodiversity (Tang et al., 2021). Modified discharge seasonality and downstream river-bed incision alters the feeding patterns of aquatic species and limits river-floodplain connectivity, separating fishes in the main channel from floodplain habitats (Ang et al., 2022; Barbarossa et al., 2020; Poff et al., 2002). Our comprehensive dam database contributes to further understanding of the impacts of damming on the basin-wide river connectivity (upstream and downstream, and between river and floodplain), especially with the inclusion of smaller tributary dams, which are less represented in global dam databases (Grill et al., 2019; Sun et al., 2023). This could assist in fish monitoring, conservation, and mitigation measures like fish ladders and barrier removal, not only for regional ecology, but also to safeguard food security and the livelihoods of locals in the world's largest inland fishing industry (Dugan et al., 2010).

Besides facilitating research on dam impacts, this paper contributes to water resource and dam management in the basin, by identifying vulnerable dam hotspots for targeted management. Through our spatiotemporal analysis of projected dam growth and hydropower potential assessment, Laos is likely the most vulnerable to future dam development. Thailand has the most operational (irrigation) dams and China has the highest hydropower capacity, and many discussions focus on the impact of upstream dams in China on the lower riparian states (Biba, 2012; Zawahri and Hensengerth, 2012). However, Laos has the most planned dams and largest expected growth in capacity. With high hydropower potential, even more dams could be commissioned in Laos (Pholsena and Phonekeo, 2004). Compared to the 16% of the Mekong River flow originating from China, Laos makes up 25% of the total basin area and 35% of the river flow, thus intensive dam construction in Laos could devastate regional hydrology and ecology (Baird, 2007; MRC, 2011). [Our results](#) [With the highest projected dam growth in Laos and the environmental importance of Laos in the Mekong Basin, we](#) suggest focusing planning and management in Laos, such as stricter protocols enforcing environmental impact assessments and proper resettlement of affected locals prior to construction, in order to harness the advantages of dams while protecting ecosystems and native communities (Barbarossa et al., 2020; Yoshida et al., 2020). Regionally, our spatiotemporal assessment could shed light on the complex power trade driven by high energy demands (Galelli et al., 2022; Soukhaphon et al., 2021). The electricity market involves partnerships between governments and companies, hydropower exports for national revenue, and cross-border investments in dam construction, while downstream countries are subjected to the impacts of upstream dams, entangling the countries in a mix of shared interests and water conflicts (Binh et al., 2020; Cronin, 2009). The Mekong is a characteristic example of a complex transboundary basin, where understanding of the electricity trade, water politics, and dam patterns could be applied to other large river basins worldwide.

5 Data Availability

The dam database of the Mekong Basin is available to the public at <https://doi.org/10.21979/N9/ACZIIN> (Ang et al., 2023), including 1 file of the dam database, and 5 files for the spatiotemporal analysis, with each file corresponding to the dams in each decade from the 1980s to post-2020s. All files are in comma-separated values (CSV) format. The dam attributes are detailed in Table 2.

6 Conclusion

This study presents (1) a comprehensive free-access database of 1,055 dams in the Mekong, (2) a spatiotemporal analysis of the dams over sub-basins and countries by decade from the 1980s to post-2020s, and (3) a grid-based theoretical hydropower potential of the basin. We extracted unique dam records from six global, five regional, and seven local databases, visually validated using Google Earth. The dam records and attributes are supplemented with online information (e.g., reports, papers, articles), and a GIS analysis of hydrological characteristics (e.g., catchment area, stream order, rainfall). The final dam count of 1,055 is more than twice the largest existing database, of which 661 are operational, 54 under construction, 331 planned, 2 closed, and 7 canceled. With 608 hydropower dams, hydropower capacity has surged from 1,242 MW in the 1980s to 33,914 MW in the 2010s, and is expected to double to 69,199 MW post-2020s. Although capacity expanded by 16,854 MW in China from the 2000s to the 2010s, Laos has the most planned dams and is projected to have the highest growth of 18,223 MW post-2020s. Using present-day discharge from the CaMa-Flood model (2011-2015, 0.05 degree), we estimate a basin-wide hydropower potential of 1,334,683 MW, of which 514,887 MW lies in Laos. Using discharge from the ISIMIP2b WaterGAP2 model (2021-~~2030~~2040, 0.5 degree) based on four Representative Concentration Pathways (RCP 2.6, 4.5, 6.0, 8.5), future hydropower potential could grow to over 2,000,000 MW with climate change, where Laos and China are the highest at around 900,000 MW each. China's hydropower potential largely stems from high elevations and steep river slopes, while Laos has high discharge along the lower mainstream, and relatively high elevation and slope in the Mekong Highlands. Considering the large projected hydropower capacity and potential of Laos, it will likely become the country most vulnerable to dam construction, highlighting the need for better dam planning and mitigation measures in Laos. Our unified database aids in research on the implications of dams on the hydrology, ecology, and people in the region, and contributes to sustainable water resource and dam management in the basin. The spatiotemporal analysis potentially furthers understanding on the dam patterns, electricity trade, and water politics in the Mekong, which could be applied to other transboundary basins fragmented by human water infrastructure.

Author Contribution

Wei Jing Ang: Data curation, Formal analysis, Investigation, Methodology, Visualization, Writing – original draft, Writing – review & editing. **Edward Park:** Conceptualization, Data curation, Funding acquisition, Methodology, Project administration,

Resources, Supervision, Writing – original draft, Writing – review & editing. ~~Dung Due Tran; Yadu Pokhrel~~: Data curation, Resources. Writing – review & editing. ~~Ho Huu Loc; Dung Duc Tran~~: Writing – review & editing. ~~Yadu Pokhrel~~: Data curation, Resources. ~~Ho Huu Loc~~: Writing – review & editing.

535 Declaration of Competing Interest

The authors declare that they have no conflict of interest.

Acknowledgement

This research was supported by various grants from the Ministry of Education, Singapore, under its Academic Research Tier1 (RG142/22), Tier1 (2021-T1-001-056), Tier2 (MOE-T2EP402A20-0001), Tier2 (MOE-T2EP50222-0007), NIE AcRF (RI 540 10/22 EP) and the Earth Observatory of Singapore (EOS) via its funding from the National Research Foundation Singapore and the Singapore Ministry of Education under the Research Centres of Excellence initiative. This work comprises EOS contribution number xxx. Any opinion, finding and conclusions or recommendations expressed in this research are those of the authors and do not reflect the views of the Ministry of Education, Singapore. This work is part of the Final Year Project of WJA, under supervision of EP. YP acknowledges funding from the National Science Foundation (Award #: 1752729).

545 References

- Amornsakchai, S., Annez, P., Vongvisessomjai, S., Choowaew, S., Thailand Development Research Institute (TDRI), Kunurat, P., Nippanon, J., Schouten, R., Sripapatprasite, P., Vaddhanaphuti, C., Vidthayanon, C., Wirojanagud, W., Watana, E. (2000). Pak Mun Dam, Mekong River Basin, Thailand. A WCD Case Study prepared as an input to the World Commission on Dams. Cape Town. http://www2.centre-cired.fr/IMG/pdf/F8_PakMunDam.pdf
- 550 Ang, W. J., Park, E., & Yang, X. (2022). Geomorphic control on stage-area hysteresis in three of the largest floodplain lakes. *Journal of Hydrology*, 614, 128574. <https://doi.org/10.1016/j.jhydrol.2022.128574>
- Ang, W. J., Park, E., [Pokhrel, Y.](#), Tran D. D., & [Loc, H. H.](#), & [Pokhrel, Y.](#) (2023). Replication Data for: Dams in the Mekong: A comprehensive database, spatiotemporal distribution, and hydropower potentials [data set]. DR-NTU. <https://doi.org/10.21979/N9/ACZIJN>
- 555 Baird, I. G. (2007). Local Ecological Knowledge and Small-scale Freshwater Fisheries Management in the Mekong River in Southern Laos. In N. Haggan, B. Neis, & I. G. Baird (Eds.), *Fishers' Knowledge in Fisheries Science and Management* (pp. 247–266). UNESCO.
- Barbarossa, V., Schmitt, R. J. P., Huijbregts, M. A. J., Zarfl, C., King, H., & Schipper, A. M. (2020). Impacts of current and

- 560 future large dams on the geographic range connectivity of freshwater fish worldwide. *Proceedings of the National Academy of Sciences*, 117(7), 3648–3655. <https://doi.org/10.1073/pnas.1912776117>
- Biba, S. (2012). China's Continuous Dam-building on the Mekong River. *Journal of Contemporary Asia*, 42(4), 603–628. <https://doi.org/10.1080/00472336.2012.712257>
- 565 Binh, D. V., Kantoush, S. A., Saber, M., Mai, N. P., Maskey, S., Phong, D. T., & Sumi, T. (2020). Long-term alterations of flow regimes of the Mekong River and adaptation strategies for the Vietnamese Mekong Delta. *Journal of Hydrology: Regional Studies*, 32, 100742. <https://doi.org/10.1016/j.ejrh.2020.100742>
- Chen, H., & Boutros, P. C. (2011). VennDiagram: A package for the generation of highly-customizable Venn and Euler diagrams in R. *BMC Bioinformatics*, 12(1), 35. <https://doi.org/10.1186/1471-2105-12-35>
- CHIRPS. (2023). *CHIRPS: Rainfall Estimates from Rain Gauge and Satellite Observations*. <https://www.chc.ucsb.edu/data/chirps>
- 570 Cho, M. S., & Qi, J. (2021). Quantifying spatiotemporal impacts of hydro-dams on land use/land cover changes in the Lower Mekong River Basin. *Applied Geography*, 136, 102588. <https://doi.org/10.1016/j.apgeog.2021.102588>
- Chowdhury, A. F. M. K., Dang, T. D., Bagchi, A., & Galelli, S. (2020). Expected Benefits of Laos' Hydropower Development Curbed by Hydroclimatic Variability and Limited Transmission Capacity: Opportunities to Reform. *Journal of Water Resources Planning and Management*, 146(10), 05020019. [https://doi.org/10.1061/\(ASCE\)WR.1943-5452.0001279](https://doi.org/10.1061/(ASCE)WR.1943-5452.0001279)
- 575 Cochran, T. A., Arias, M. E., & Piman, T. (2014). Historical impact of water infrastructure on water levels of the Mekong River and the Tonle Sap system. *Hydrology and Earth System Sciences*, 18(11), 4529–4541. <https://doi.org/10.5194/hess-18-4529-2014>
- 580 Cooley, H., Christian-Smith, J., Gleick, P., Allen, L., & Cohen, M. (2009). *Understanding and Reducing the Risks of Climate Change for Transboundary Waters*. Pacific Institute.
- Cronin, R. (2009). Mekong Dams and the Perils of Peace. *Survival*, 51(6), 147–160. <https://doi.org/10.1080/00396330903461716>
- 585 Cuya, D. G. P., Brandimarte, L., Popescu, I., Alterach, J., & Peviani, M. (2013). A GIS-based assessment of maximum potential hydropower production in La Plata basin under global changes. *Renewable energy*, 50, 103–114. <https://doi.org/10.1016/j.renene.2012.06.019>
- Dang, H., Pokhrel, Y., Shin, S., Stelly, J., Ahlquist, D., & Du Bui, D. (2022). Hydrologic balance and inundation dynamics of Southeast Asia's largest inland lake altered by hydropower dams in the Mekong River basin. *Science of The Total Environment*, 831, 154833. <https://doi.org/10.1016/j.scitotenv.2022.154833>
- 590 Dugan, P. J., Barlow, C., Agostinho, A. A., Baran, E., Cada, G. F., Chen, D., Cowx, I. G., Ferguson, J. W., Jutagate, T., Mallen-Cooper, M., Marmulla, G., Nestler, J., Petrere, M., Welcomme, R. L., & Winemiller, K. O. (2010). Fish Migration, Dams, and Loss of Ecosystem Services in the Mekong Basin. *AMBIO*, 39(4), 344–348. <https://doi.org/10.1007/s13280-010-0036-1>

- EDL-Generation Public Company. (2023). *Nam Mang 3 Hydro Power Plant*.
595 <https://edlgen.com.la/project/nam-mang3-hpp/?lang=en>
- Energy Market Authority. (2022, June 23). *Singapore commences first renewable energy electricity import via regional multilateral power trade* [Press Release].
https://www.ema.gov.sg/cmsmedia/News/Media%20Release/2022/20220623_MediaRelease_Singapore-commences-first-renewable-energy-electricity-imports-100MW.pdf
- 600 Ezell, S. (2021, May 5). *4 Dams on the Upper Mekong in Yunnan, China: 2011-2019*. The Diplomat.
<https://thediplomat.com/2021/05/4-dams-on-the-upper-mekong-in-yunnan-china-2011-2019/>
- FAO. (2015). *AQUASTAT - FAO's Global Information System on Water and Agriculture*.
<https://www.fao.org/aquastat/en/databases/dams>
- Galelli, S., Dang, T. D., Ng, J. Y., Chowdhury, A. F. M. K., & Arias, M. E. (2022). Opportunities to curb hydrological alterations via dam re-operation in the Mekong. *Nature Sustainability*, 5(12), 1058–1069.
605 <https://doi.org/10.1038/s41893-022-00971-z>
- Gao, Y., Sarker, S., Sarker, T., & Leta, O. T. (2022). Analyzing the critical locations in response of constructed and planned dams on the Mekong River Basin for environmental integrity. *Environmental Research Communications*.
<https://doi.org/10.1088/2515-7620/ac9459>
- 610 Gosling, S.N., Schmied, H.M., Burek, P., Chang, J., Ciais, P., Döll, P., Eisner, S., Fink, G., Flörke, M., Franssen, W., Grillakis, M., Hagemann, S., Hanasaki, N., Koutroulis, A., Leng, G., Liu, X., Masaki, Y., Mathison, C., Mishra, V., ... Zhao, F. (2023): ISIMIP2b Simulation Data from the Global Water Sector (v1.0). ISIMIP Repository.
<https://doi.org/10.48364/ISIMIP.626689>
- Grill, G., Ouellet Dallaire, C., Fluet Chouinard, E., Sindorf, N., & Lehner, B. (2014). Development of new indicators to evaluate river fragmentation and flow regulation at large scales: A case study for the Mekong River Basin. *Ecological Indicators*, 45, 148–159. <https://doi.org/10.1016/j.ecolind.2014.03.026>
- 615 Grill, G., Lehner, B., Thieme, M., Geenen, B., Tickner, D., Antonelli, F., ... & Zarfl, C. (2019). Mapping the world's free-flowing rivers. *Nature*, 569(7755), 215-221. <https://doi.org/10.1038/s41586-019-1111-9>
- Grumbine, R. E., Dore, J., & Xu, J. (2012). Mekong hydropower: Drivers of change and governance challenges. *Frontiers in Ecology and the Environment*, 10(2), 91–98. <https://doi.org/10.1890/110146>
- 620 Grünwald, R., Wang, W., & Feng, Y. (2022). Politicization of the hydropower dams in the Lancang-Mekong Basin: A review of contemporary environmental challenges. *Energies*, 15(5), 1682. <https://doi.org/10.3390/en15051682>
- Gudmundsson, L., Boulange, J., Do, H. X., Gosling, S. N., Grillakis, M. G., Koutroulis, A. G., ... & Zhao, F. (2021). Globally observed trends in mean and extreme river flow attributed to climate change. *Science*, 371(6534), 1159-1162. <https://doi.org/10.1126/science.aba3996>
- 625 Hanna, J. W., Kim, M. S., Ramsey, A. C., Omdal, D. W., Mulvey, R. L., Goodrich, B. A., ... & Klopfenstein, N. B. (2019,

- June). Maximum entropy-based bioclimatic models predict areas of current and future suitable habitat for *Armillaria* species in western Oregon and western Washington. In *66th Annual Western International Forest Disease Work Conference*.
- 630 Hecht, J. S., Lacombe, G., Arias, M. E., Dang, T. D., & Piman, T. (2019). Hydropower dams of the Mekong River basin: A review of their hydrological impacts. *Journal of Hydrology*, 568, 285–300. <https://doi.org/10.1016/j.jhydrol.2018.10.045>
- [Hempel, S., Frieler, K., Warszawski, L., Schewe, J., & Piontek, F. \(2013\). A trend-preserving bias correction—the ISI-MIP approach. *Earth System Dynamics*, 4\(2\), 219-236. <https://doi.org/10.5194/esd-4-219-2013>](#)
- 635 Hirsch, P. (2010). The Changing Political Dynamics of Dam Building on the Mekong. *Water Alternatives*, 3(2). <https://www.water-alternatives.org/index.php/volume3/v3issue2/95-a3-2-18/file>
- Hirsch, P. (2016). The shifting regional geopolitics of Mekong dams. *Political Geography*, 51, 63–74. <https://doi.org/10.1016/j.polgeo.2015.12.004>
- Hobo Maps. (2023). *Home Page*. <https://hobomaps.com/>
- 640 HydroSHEDS. (2023). *Data Products*. <https://www.hydrosheds.org/products>
- IPCC. (2014). *Climate Change 2014: Synthesis Report. Contribution of Working Groups I, II and III to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change* [Core Writing Team, R.K. Pachauri and L.A. Meyer (eds.)]. IPCC, Geneva, Switzerland, 151 pp.
- IR. (2013). *Lancang River Dams: Threatening the Flow of the Lower Mekong*. https://archive.internationalrivers.org/sites/default/files/attached-files/ir_lacang_dams_2013_5.pdf
- 645 IR. (2014). *Spreadsheet of Major Dams in China*. <https://archive.internationalrivers.org/resources/spreadsheet-of-major-dams-in-china-7743>
- IR. (2023). *Pak Beng Dam*. <https://archive.internationalrivers.org/node/10852>
- IRENA. (2022). *Renewable Power Generation Costs in 2021*, International Renewable Energy Agency, Abu Dhabi. <https://www.irena.org/publications/2022/Jul/Renewable-Power-Generation-Costs-in-2021>
- 650 Kang, H., Sridhar, V., Mainuddin, M., & Trung, L. D. (2021). Future rice farming threatened by drought in the Lower Mekong Basin. *Scientific Reports*, 11(1), 9383. <https://doi.org/10.1038/s41598-021-88405-2>
- Kummu, M., & Varis, O. (2007). Sediment-related impacts due to upstream reservoir trapping, the Lower Mekong River. *Geomorphology*, 85(3-4), 275-293. <https://doi.org/10.1016/j.geomorph.2006.03.024>
- 655 Kondolf, G. M., Rubin, Z. K., & Minear, J. T. (2014). Dams on the Mekong: Cumulative sediment starvation. *Water Resources Research*, 50(6), 5158–5169. <https://doi.org/10.1002/2013WR014651>
- Larsson, J., & Gustafsson, P. (2018). A Case Study in Fitting Area-Proportional Euler Diagrams with Ellipses using eulerr. *Proceedings of International Workshop on Set Visualization and Reasoning*, 2116, 84–91.
- Le, T. V. H., Nguyen, H. N., Wolanski, E., Tran, T. C., & Haruyama, S. (2007). The combined impact on the flooding in

- 660 Vietnam's Mekong River delta of local man-made structures, sea level rise, and dams upstream in the river catchment. *Estuarine, Coastal and Shelf Science*, 71(1-2), 110-116. <https://doi.org/10.1016/j.ecss.2006.08.021>
- Lebel, L., Dore, J., Daniel, R., & Koma, Y. S. (2007). Democratizing water governance in the Mekong Region. Mekong Press. http://www.mpowernetwork.org/Knowledge_Bank/Our_Books/PDF/Water_Governance.pdf
- 665 Lechner, B., Czisch, G., & Vassolo, S. (2005). The impact of global change on the hydropower potential of Europe: A model-based analysis. *Energy Policy*, 33(7), 839–855. <https://doi.org/10.1016/j.enpol.2003.10.018>
- Lechner, B., Liermann, C. R., Revenga, C., Vörösmarty, C., Fekete, B., Crouzet, P., Döll, P., Endejan, M., Frenken, K., Magome, J., Nilsson, C., Robertson, J. C., Rödel, R., Sindorf, N., & Wisser, D. (2011). High-resolution mapping of the world's reservoirs and dams for sustainable river-flow management. *Frontiers in Ecology and the Environment*, 9(9), 494–502. <https://doi.org/10.1890/100125>
- 670 Leinenkugel, P., Kuenzer, C., Oppelt, N., & Dech, S. (2013). Characterisation of land surface phenology and land cover based on moderate resolution satellite data in cloud prone areas—A novel product for the Mekong Basin. *Remote Sensing of Environment*, 136, 180–198. <https://doi.org/10.1016/j.rse.2013.05.004>
- Li, X., Liu, J. P., Saito, Y., & Nguyen, V. L. (2017). Recent evolution of the Mekong Delta and the impacts of dams. *Earth Science Reviews*, 175, 1–17. <https://doi.org/10.1016/j.earscirev.2017.10.008>
- 675 Li, J., Xia, J., & Ji, Q. (2021). Rapid and long-distance channel incision in the Lower Yellow River owing to upstream damming. *Catena*, 196, 104943. <https://doi.org/10.1016/j.catena.2020.104943>
- Lu, X., Kumm, M., & Oeurng, C. (2014). Reappraisal of sediment dynamics in the Lower Mekong River, Cambodia. *Earth Surface Processes and Landforms*, 39(14), 1855–1865. <https://doi.org/10.1002/esp.3573>
- MacDonald, L. H., & Coe, D. (2007). Influence of headwater streams on downstream reaches in forested areas. *Forest Science*, 53(2), 148-168.
- 680 Matthews, N. (2012). Water Grabbing in the Mekong Basin-An Analysis of the Winners and Losers of Thailand's Hydropower Development in Lao PDR. *Water Alternatives*, 5(2). <https://www.water-alternatives.org/index.php/volume5/v5issue2/176-a5-2-12/file>
- Meijer, L. J. J., van der Ent, R. J., Hoes, A. C., Mondeel, H., Pramana, K. E. R., van de Giesen, N. C. (2012). *World hydropower capacity evaluation*. Netherlands. http://repository.tudelft.nl/assets/uuid:49d8d013-9a48-4222-85a1-0ebb53f83dc8/paper_hydropower_Lourens_Meijer_.pdf
- 685 MIT. (2021). *Stimson Mekong Infrastructure Tracker*. <https://www.stimson.org/project/mekong-infrastructure/>
- MRC. (2011). *Assessment of Basin-Wide Development Scenarios (Main Report)*. <https://www.mrcmekong.org/resource/ajhykw>
- 690 MRC. (2015). *Briefing Notes Package 6th RTWG Meeting*. <https://www.mrcmekong.org/assets/Publications/Council-Study/6th-RTWG-Briefing-Notes-Package.pdf>
- MRC. (2016). *Consultancy to assist the Hydropower Thematic in Council Study Development Scenarios*. <https://www.mrcmekong.org/assets/Publications/Council-Study/018-Hydropower-Development-Scenarios.pdf>

- MRC. (2023). *Mekong Basin*. <https://www.mrcmekong.org/about/mekong-basin/>
- 695 Mulligan, M., van Soesbergen, A., & Sáenz, L. (2020). GOODD, a global dataset of more than 38,000 georeferenced dams. *Scientific Data*, 7(1), 31. <https://doi.org/10.1038/s41597-020-0362-5>
- Observatory of Economic Complexity. (2023). *Electricity in Laos*. OEC - The Observatory of Economic Complexity. <https://oec.world/en/profile/bilateral-product/electricity/reporter/laos>
- ODM. (2020). *Laos to export 20,000 MW of electricity by 2030*.
700 <https://opendevlopmentmekong.net/news/laos-to-export-20000-mw-of-electricity-by-2030/>
- ODM. (2023). *Open Development Mekong Datahub*. <https://data.opendevlopmentmekong.net/dataset>
- Park, E., Loc, H. H., Van Binh, D., & Kantoush, S. (2022). The worst 2020 saline water intrusion disaster of the past century in the Mekong Delta: Impacts, causes, and management implications. *Ambio*, 51(3), 691–699. <https://doi.org/10.1007/s13280-021-01577-z>
- 705 Pearse-Smith, S. W. D. (2012). The Impact of Continued Mekong Basin Hydropower Development on Local Livelihoods. *Consilience*, 7, 73–86. <https://www.jstor.org/stable/26167837>
- Pholsena, S., & Phonekeo, D. D. (2004, October 27). *Lao hydropower potential and policy in the GMS context*. United Nations Symposium on Hydropower and Sustainable Development, Beijing International Convention Centre.
- Poff, N. L., & Hart, D. D. (2002). How dams vary and why it matters for the emerging science of dam removal: an
710 ecological classification of dams is needed to characterize how the tremendous variation in the size, operational mode, age, and number of dams in a river basin influences the potential for restoring regulated rivers via dam removal. *BioScience*, 52(8), 659-668. [https://doi.org/10.1641/0006-3568\(2002\)052\[0659:HDVAWI\]2.0.CO;2](https://doi.org/10.1641/0006-3568(2002)052[0659:HDVAWI]2.0.CO;2)
- Poindexter, G. (2018, January 26). *86-MW Nam Phay hydropower project in Lao PDR officially commissioned*. Hydro Review. [https://www.hydroreview.com/world-regions/86-mw-nam-phay-hydropower-project-in-laos-officially-](https://www.hydroreview.com/world-regions/86-mw-nam-phay-hydropower-project-in-laos-officially-commissioned/)
715 [commissioned/](https://www.hydroreview.com/world-regions/86-mw-nam-phay-hydropower-project-in-laos-officially-commissioned/)
- Pokhrel, Y. N., Oki, T., & Kanae, S. (2008). A Grid Based Assessment of Global Theoretical Hydropower Potential. 水工学
論文集, 52, 7–12. <https://doi.org/10.2208/prohe.52.7>
- Pokhrel, Y. N., Felfelani, F., Shin, S., Yamada, T. J., & Satoh, Y. (2017). Modeling large-scale human alteration of land
surface hydrology and climate. *Geoscience Letters*, 4(1), 1-13. <https://doi.org/10.1186/s40562-017-0076-5>
- 720 Pokhrel, Y., Felfelani, F., Satoh, Y., Boulange, J., Burek, P., Gädeke, A., ... & Wada, Y. (2021). Global terrestrial water storage and drought severity under climate change. *Nature Climate Change*, 11(3), 226-233. <https://doi.org/10.1038/s41558-020-00972-w>
- Reyes-Gavilán, F. G., Garrido, R., Nicieza, A. G., Toledo, M. M., & Brana, F. (1996). Fish community variation along physical gradients in short streams of northern Spain and the disruptive effect of dams. *Hydrobiologia*, 321, 155-163.
725 <https://doi.org/10.1007/BF00023171>
- Rossi, C. G., Srinivasan, R., Jirayoot, K., Le Duc, T., Souvannabouth, P., Binh, N., & Gassman, P. W. (2009). Hydrologic

evaluation of the Lower Mekong River Basin with the soil and water assessment tool model. *International agricultural engineering journal*, 18, 1–13. <https://handle.nal.usda.gov/10113/48579>

Power Technology. (2023). *Home*. <https://www.power-technology.com/>

- 730 Schmitt, R. J. P., Bizzi, S., Castelletti, A., & Kondolf, G. M. (2018). Improved trade-offs of hydropower and sand connectivity by strategic dam planning in the Mekong. *Nature Sustainability*, 1(2), 96–104. <https://doi.org/10.1038/s41893-018-0022-3>
- Shin, S., Pokhrel, Y., Yamazaki, D., Huang, X., Torbick, N., Qi, J., ... & Nguyen, T. D. (2020). High resolution modeling of river-floodplain-reservoir inundation dynamics in the Mekong River Basin. *Water Resources Research*, 56(5), e2019WR026449. <https://doi.org/10.1029/2019WR026449>
- 735 Soukhaphon, A., Baird, I. G., & Hogan, Z. S. (2021). The Impacts of Hydropower Dams in the Mekong River Basin: A Review. *Water*, 13(3), 265. <https://doi.org/10.3390/w13030265>
- Souter, N. J., Shaad, K., Vollmer, D., Regan, H. M., Farrell, T. A., Arnaiz, M., Meynell, P.-J., Cochrane, T. A., Arias, M. E., Piman, T., & Andelman, S. J. (2020). Using the Freshwater Health Index to Assess Hydropower Development Scenarios in the Sesan, Srepok and Sekong River Basin. *Water*, 12(3), 788. <https://doi.org/10.3390/w12030788>
- 740 Speckhann, G. A., Kreibich, H., & Merz, B. (2021). Inventory of dams in Germany. *Earth System Science Data*, 13(2), 731–740. <https://doi.org/10.5194/essd-13-731-2021>
- Sun, J., Du, W., Lucas, M. C., Ding, C., Chen, J., Tao, J., & He, D. (2023). River fragmentation and barrier impacts on fishes have been greatly underestimated in the upper Mekong River. *Journal of Environmental Management*, 327, 116817. <https://doi.org/10.1016/j.jenvman.2022.116817>
- 745 Tang, L., Mo, K., Zhang, J., Wang, J., Chen, Q., He, S., ... & Lin, Y. (2021). Removing tributary low-head dams can compensate for fish habitat losses in dammed rivers. *Journal of Hydrology*, 598, 126204. <https://doi.org/10.1016/j.jhydrol.2021.126204>
- Tefera, W. M., & Kasiviswanathan, K. S. (2022). A global-scale hydropower potential assessment and feasibility evaluations. *Water Resources and Economics*, 38, 100198. <https://doi.org/10.1016/j.wre.2022.100198>
- 750 The Anh, D., Van Tinh, T., & Ngoc Vang, N. (2020). The Domestic Rice Value Chain in the Mekong Delta. In R. Cramb (Ed.), *White Gold: The Commercialisation of Rice Farming in the Lower Mekong Basin* (pp. 375–395). Springer Nature. https://doi.org/10.1007/978-981-15-0998-8_18
- The World Bank (2017). *Small Hydro Resource Mapping in LAO PDR Inception Report (Project ID. 1239196)*. <https://documents1.worldbank.org/curated/en/160621508232662247/pdf/120466-ESM-P163979-PUBLIC-LaoPDRHydropowerMappingInceptionReportWBESMAPJuly.pdf>
- 755 Tiwari, A. D., Pokhrel, Y., Kramer, D., Akhter, T., Tang, Q., Liu, J., ... & Lakshmi, V. (2023). A synthesis of hydroclimatic, ecological, and socioeconomic data for transdisciplinary research in the Mekong. *Scientific Data*, 10(1), 283. <https://doi.org/10.1038/s41597-023-02193-0>
- 760 Tri, V. K. (2012). Hydrology and Hydraulic Infrastructure Systems in the Mekong Delta, Vietnam. In F. G. Renaud & C.

- Kuenzer (Eds.), *The Mekong Delta System: Interdisciplinary Analyses of a River Delta* (pp. 49–81). Springer Netherlands. https://doi.org/10.1007/978-94-007-3962-8_3
- Urban, F., Nordensvärd, J., Khatri, D., & Wang, Y. (2013). An analysis of China's investment in the hydropower sector in the Greater Mekong Sub-Region. *Environment, Development and Sustainability*, 15, 301-324. <https://doi.org/10.1007/s10668-012-9415-z>
- 765 USGS. (2023). *EarthExplorer*. <https://earthexplorer.usgs.gov/>
- VietNamNet (2013). *Hydro-power dam broken in Central Highlands*. <https://vietnamnet.vn/en/hydro-power-dam-broken-in-central-highlands-E76563.html>
- VnExpress (2017). *Confessions of a hydropower calamity in Vietnam*. <https://e.vnexpress.net/projects/confessions-of-a-hydropower-calamity-in-vietnam-3655314/index.html>
- 770 Wang, J., Walter, B. A., Yao, F., Song, C., Ding, M., Maroof, A. S., Zhu, J., Fan, C., McAlister, J. M., Sikder, S., Sheng, Y., Allen, G. H., Crétaux, J.-F., & Wada, Y. (2022). GeoDAR: Georeferenced global dams and reservoirs dataset for bridging attributes and geolocations. *Earth System Science Data*, 14(4), 1869–1899. <https://doi.org/10.5194/essd-14-1869-2022>
- 775 Wang, P., Dong, S., & Lassoie, J. (2014). *The Large Dam Dilemma: An Exploration of the Impacts of Hydro Projects on People and the Environment in China*. Springer Netherlands. <https://doi.org/10.1007/978-94-007-7630-2>
- Wang, W., Lu, H., Ruby Leung, L., Li, H. Y., Zhao, J., Tian, F., ... & Sothea, K. (2017). Dam construction in Lancang-Mekong River Basin could mitigate future flood risk from warming-induced intensified rainfall. *Geophysical Research Letters*, 44(20), 10-378. <https://doi.org/10.1002/2017GL075037>
- 780 Wang, X., Xiao, X., Qin, Y., Dong, J., Wu, J., & Li, B. (2022). Improved maps of surface water bodies, large dams, reservoirs, and lakes in China. *Earth System Science Data*, 14(8), 3757–3771. <https://doi.org/10.5194/essd-14-3757-2022>
- Xu, S., Chen, M., Feng, T., Zhan, L., Zhou, L., & Yu, G. (2021). Use ggbreak to effectively utilize plotting space to deal with large datasets and outliers. *Frontiers in Genetics*, 12, 2122. <https://doi.org/10.3389/fgene.2021.774846>
- 785 Xue, Z., Liu, J. P., DeMaster, D., Van Nguyen, L., & Ta, T. K. O. (2010). Late Holocene Evolution of the Mekong Subaqueous Delta, Southern Vietnam. *Marine Geology*, 269(1), 46–60. <https://doi.org/10.1016/j.margeo.2009.12.005>
- Yoshida, Y., Lee, H. S., Trung, B. H., Tran, H.-D., Lall, M. K., Kakar, K., & Xuan, T. D. (2020). Impacts of Mainstream Hydropower Dams on Fisheries and Agriculture in Lower Mekong Basin. *Sustainability*, 12(6), 2408. <https://doi.org/10.3390/su12062408>
- 790 Yuen, K. W., Park, E., Hazrina, M., Taufik, M., Santikayasa, P., Latrubesse, E., & Lee, J. S. H. (2023). A Comprehensive Database of Indonesian Dams and Its Spatial Distribution. *Remote Sensing*, 15(4), 925. <https://doi.org/10.3390/rs15040925>
- Zarfl, C., Lumsdon, A. E., Berlekamp, J., Tydecks, L., & Tockner, K. (2015). A global boom in hydropower dam construction. *Aquatic Sciences*, 77(1), 161–170. <https://doi.org/10.1007/s00027-014-0377-0>

- 795 Zawahri, N. A., & Hensengerth, O. (2012). Domestic environmental activists and the governance of the Ganges and Mekong Rivers in India and China. *International Environmental Agreements: Politics, Law and Economics*, 12, 269-298. <https://doi.org/10.1007/s10784-012-9179-9>
- Zhou, Y., Hejazi, M., Smith, S., Edmonds, J., Li, H., Clarke, L., ... & Thomson, A. (2015). A comprehensive view of global potential for hydro-generated electricity. *Energy & Environmental Science*, 8(9), 2622-2633. <https://doi.org/10.1039/C5EE00888C>
- 800 Ziv, G., Baran, E., Nam, S., Rodríguez-Iturbe, I., & Levin, S. A. (2012). Trading-off fish biodiversity, food security, and hydropower in the Mekong River Basin. *Proceedings of the National Academy of Sciences*, 109(15), 5609-5614. <https://doi.org/10.1073/pnas.1201423109>