

Climate and ablation observations from automatic ablation and weather stations at A. P. Olsen Ice Cap transect, NE Greenland, May 2008 through May 2022

Signe Hillerup Larsen¹, Daniel Binder^{2,3}, Anja Rutishauser¹, Bernhard Hynek^{3,4}, Robert Fausto¹, and Michele Citterio¹

¹The Geological Survey of Denmark and Greenland, Øster Voldgade 10, 1350 Copenhagen K, Denmark

²Institute for Geosciences, Potsdam University, Potsdam, Germany

³Austrian Polar Research Institute (APRI), Vienna, Austria

⁴GeoSphere Austria, Department Climate Impact Research, Vienna, Austria

Correspondence: Signe Hillerup Larsen (shl@geus.dk)

Abstract. The negative surface mass balance of glaciers and ice caps under a warming climate impacts local ecosystems, influencing the volume and timing of water flow in local catchments, while also contributing to global sea level rise. Peripheral glaciers distinct to the Greenland ice sheet respond faster to climate change than the main ice sheet. Accurate assessment of surface mass balance depends on in-situ observations of near-surface climate and ice ablation, but very few in-situ observations of near-surface climate and ice ablation are freely available for Greenland's peripheral glaciers. The transect of three automated weather and ablation stations on the peripheral A. P. Olsen ice cap in northeast Greenland is an example of this much needed data. The transect has been monitored since 2008, and in 2022 the old weather and ablation stations were replaced by a new standardized setup. In order to ensure comparable data quality from the old and new monitoring station setups, it ~~was~~ is necessary to re-evaluate the data collected between 2008 and 2022. This paper presents the fully reprocessed near-surface climate and ablation data from the A. P. Olsen ice cap transect from 2008 to 2022, with a focus on data quality and the usability for ice ablation process studies. The usability ~~and some quality issues are of the data is~~ exemplified by using the data in an energy balance melt model for two different years. We ~~showed~~ show that the inherent uncertainties of the data ~~resulted~~ result in an accurate reproduction of ice ablation for just one of the two years. A transect of three automatic ablation and weather stations of this length is unique for Greenland's peripheral glaciers and it has a broad scale of usage from input to climate reanalysis to detailed surface ablation studies. The dataset can be downloaded here: <https://doi.org/10.22008/FK2/X9X9GN> (Larsen and Citterio, 2023). ~~Future refinements will be uploaded as new versions and the continuation of the transect time series are available via (How et al., 2022).~~

1 Introduction

Under the influence of the current warming climate, glaciers and ice caps exhibit a pronounced negative surface mass balance, contributing to sea level rise. Ice loss from glaciers distinct from the Greenland ice sheet are on a par with the mass loss of the ice sheet. Globally, the melting of glaciers distinct from the main ice sheets accounts for approximately 25-30% of the sea

[level rise attributed to the melting of land ice](#). Perhaps equally important are the local scale changes occurring in glaciated catchments where the volume and timing of meltwater affects the local environment both on land and in fjords and oceans. In-situ observations of surface mass balance processes are important for understanding the effect of future climate change (e.g. Machguth et al., 2013) and while Greenland ice sheet ablation zone is well monitored by the in-situ network of automatic weather stations run by the Programme for Monitoring the Greenland Ice Sheet (PROMICE, Fausto et al., 2021) and the interior of the ice sheet monitored by the Greenland Climate network (GC-Net, Vandecrux et al., in review), only very few of the peripheral glaciers distinct from the Greenland ice sheet are being monitored. Due to local effects of peripheral glaciers being in coastal areas in complex terrain, there is a strong difference in surface mass balance between peripheral glaciers and the main ice sheet (Abermann et al., 2019) and peripheral glaciers have already passed the tipping point for meltwater retention and runoff that the main ice sheet is yet to experience (Noël et al., 2017). This all sum up to a contribution to sea level rise is from peripheral glaciers and ice caps that is disproportionately high compared to the area and mass of these glaciers in relation to the main ice sheet (Bolch et al., 2013; Hugonnet et al., 2021).

The data presented here ~~is~~ are from a transect of three Automatic Ablation and Weather Stations (AAWSs) located on the A. P. Olsen ice cap (referred to here as APO or the Ice Cap), NE Greenland (Figure 1). The transect is part of the GlacioBasis Zackenberg glaciological monitoring programme, which is a subprogram of the Greenland Ecosystem Monitoring (GEM, g-e-m.dk) at Zackenberg Research station, located in the Northeast Greenland National park. The Greenland Ecosystem Monitoring (GEM) is an integrated monitoring and long-term research programme on ecosystems and climate change effects and feedback mechanisms in the Arctic. GEM covers three sites representing three zones of the Greenland arctic area: Zackenberg in Northeast Greenland (High arctic), Disko island in Central west Greenland (transition zone between high arctic and low arctic) and Nuuk in Southwest Greenland. The Zackenberg site is the longest running site where ecosystem monitoring has been ongoing since 1995, and GlacioBasis Zackenberg is the longest running glaciological monitoring program in GEM. APO was chosen for glaciological monitoring because it is the largest contributor of glacial meltwater into the Zackenberg River, which plays a crucial role in the downstream ecosystem, including the Young Sound ecology (Citterio et al., 2017; Sejr et al., 2022).

The first two AAWSs of the APO transect were installed in late April 2008 in the ablation zone, whereas the third AAWS was installed in August 2009 in the accumulation zone at the Ice Cap summit. These AAWSs have been running with alternating instrumentation until April 2022. In spring 2022 installation of new standardized AAWSs was initiated, these stations are similar to the PROMICE and GC-Net stations (Fausto et al., 2021). With the new standardized setup, the data from the APO transect will be handled as a PROMICE and GC-Net dataset and data processing will be done using the python package pypromice described in How et al. (2023). The purpose of this paper is to describe the dataset collected from the APO transect in the period before the standardized setup: May 2008 through May 2022. The variables published here are: Ice ablation, air temperature, relative humidity, air pressure, wind speed, incoming and outgoing shortwave and longwave radiation as well as AAWS tilt, snow depth and the derived variables cloud cover fraction, surface temperature and albedo. These variables capture the major components of the surface energy balance, and thus the data can be used to study processes governing surface mass balance. Additionally, this dataset can be used to force and calibrate distributed surface ice ablation models such as the

Distributed Surface Energy Balance Model (Hock and Holmgren, 2005) or COSIPY (Sauter et al., 2020). Furthermore, the variables are considered essential climate variables by the the World Meteorological Organization's Global Climate Observing System (GCOS). Most importantly in-situ observations of near surface climate and ablation are available from very few peripheral glaciers distinct from the Greenland ice sheet in Greenland, and a transect of three AAWs is, to the current knowledge of the authors, unique to Greenland. The ~~APO transect contributes to the network of Automatic data from the APO transect~~ has provided valuable insights in combination with on-land climate observations done ~~by GEM~~ in the Zackenberg Valley ~~, and can be used in studies combining data from different surfaces such as the the study of~~ to study temperature slope lapse rates in Shahi et al. (2023) and the spatiotemporal variability in surface energy balance in on different surface types in Lund et al. (2017).

The paper is organized as follows: Section 2 provides an overview of the study area, including logistical conditions for field visits. Section 3 describes the details behind the collection of data and the post-processing done. Section Section 4 describes the quality control and data filtering. Section 5 demonstrates the suitability of these data for energy balance calculations. Sections 6 are concluding remarks summarizing the paper. These sections are followed by information about processing scripts and data availability.

2 Study area and monitoring setup

APO is an ice cap with several glacier catchments extending in elevation from around 200 to 1500 m a.s.l., and covering a total area of about 300 ~~km²~~ km². The glacier catchment in this paper labeled East in Figure 1, for reference the Randolph Glacier Inventory (RGI) ID is: RGI60-05.20098 (RGI Consortium, 2017), is the main contributor of glacial meltwater in the Zackenberg River catchment, and thus the area of focus for the glaciological monitoring (Figure 1). The APO transect consists of three AAWs sites (see Figure 1 and Table 1): the lower site, ZAC_L where L refers to the lower ablation zone, has the longest and the ~~fullest-most complete~~ data record. The middle site, ZAC_U where U refers to the upper ablation zone, is located as close to the equilibrium line altitude as logistically possible. ZAC_U initially had a limited number of instruments. The top site, ZAC_A where A refers to the accumulation zone, is located at the Ice Cap summit at an elevation of 1477 m. The COVID-19 pandemic travel restrictions in 2020 and 2021 resulted in the burial of AAWs at ZAC_A in 2020 and the station has yet not been recovered.

Due to the remote location, the ice cap can mainly be reached by snow scooters traveling from Zackenberg Research ~~station~~ Station, limiting the period where the glacier can be visited to the short period in spring after ~~sunrise~~ the end of polar night and before snow melt, usually the last two weeks of April. This means that the maintenance of the AAWs is sensitive to snow conditions in April, and with the limited access data gaps are inevitable. Please note that ice cap surface mass balance from the AAWs and a transect of stakes in the ablation zone is reported to the World Glacier Monitoring Service (wgms.ch) every year. Due to a discrepancy in the definitions of glacier catchments, ZAC_L and ZAC_U is in the East catchment (RGI ID: RGI60-05.20098) but ZAC_A is attributed to the RGI ID: RGI60-05.20092, labeled the North catchment in Figure 1.

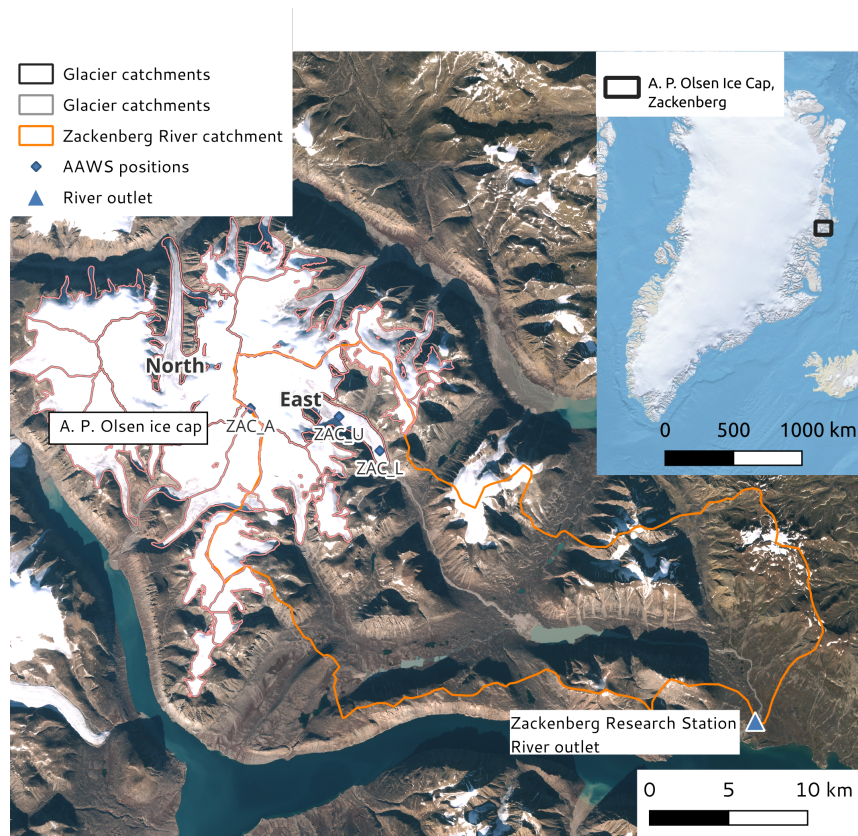


Figure 1. A. P. Olsen ice cap outlined in individual glacier catchments modified slightly but following the Randolph Glacier Inventory (RGI Consortium, 2017) and the hydrological catchment of Zackenberg River (orange outline). The base map is from the European Space Agency (ESA) Sentinel 2 satellite in 2022; the AAWS are marked with blue diamonds; and the hydrometric station close to the river outlet is marked by a blue triangle. [Maps are projected to UTM zone 27N.](#)

Table 1. Elevation, position and monitoring start date of the three AAWSs on the A. P. Olsen transect.

Station	Elevation	Latitude	Longitude	Start year
ZAC_L	694 m a.s.l.	74.6241 N	21.3742 W	2008
ZAC_U	920 m a.s.l.	74.6434 N	21.4619 W	2008
ZAC_A	1477 m a.s.l.	74.6475 N	21.6520 W	2009

Table 2. Variables and their respective names and units in this paper and the data files. Naming convention in the data files follow the names given in the PROMICE/GC-Net data.

Observed variables	Name in this paper	Name in csv file	Unit
Air temperature	T_{air}	t_u	$^{\circ}\text{C}$
Relative humidity	RH_{corr}	rh_{corr}	%
Air pressure	P_{air}	p_u	hPa
Shortwave incoming radiation	SR_{in}, SR_{in_corr}	dsr, dsr_corr	W m^{-2}
Shortwave outgoing radiation	SR_{out}, SR_{out_corr}	usr, usr_corr	W m^{-2}
Longwave incoming radiation	LR_{in}	dlr	W m^{-2}
Longwave outgoing radiation	LR_{out}	ulr	W m^{-2}
Wind speed	WS	$wspd$	m s^{-1}
Surface height (snow depth)	Z_{boom}	z_{boom}	m
Ice ablation, pressure transducer assembly	Z_{pta}	$ice_ablation$	m ice
Ice ablation, sonic ranger	Z_{stake}	not included	m ice
Station tilt	$Tilt_x, Tilt_y$	$tilt_x, tilt_y$	degree
Derived variables			
Albedo	α	$albedo$	unitless
Cloud cover fraction	$cloud_cover$	$cloud_cover$	%
Surface temperature	T_{surf}	t_{surf}	$^{\circ}\text{C}$
Irradiance (top of atmosphere)	I_{toa}	I	W m^{-2}

3 Instruments and methodology

90 In this section we describe the instrumentation on the AAWS as well as the steps taken to go from raw observations to filtered and quality checked data. Table 2 provides an overview of variables and the names used both in the text and in the data files and [Table 3 provides an overview of instrument types and replacement/calibration schedule](#). Variable names in the data files match the names used in PROMICE/GC-Net (How et al., 2023).

3.1 Automatic ablation and weather station design

95 The AAWSs are designed as free floating tripods (Figure 2, left) [and the with instruments mounted on a top boom as well as on the mast \(see Table 3 for a comprehensive list of instruments\)](#). The height of the instruments [above the surface](#) is reduced when snow accumulates during winter (Figure 2, right). ~~In~~ [During the main melt season in](#) the ablation zone ~~the snow melts away completely every summer and thus the distance to the surface annually reaches it's maximum value,~~ [the sensors height above the surface reach maximum as soon as the the snow has melted away and thus in this period the sensor height above the surface](#)

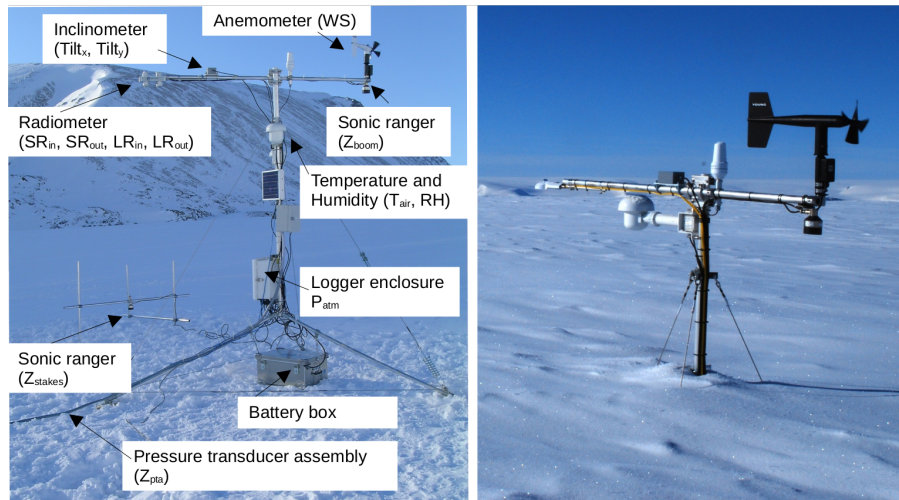


Figure 2. Panel (a): Photo of *ZAC_L* from installation in 2008 with labels showing the location of the instruments collecting the key variables published here. Panel (b): Photo of *ZAC_A* from the field visit in April 2012, illustrating the gradual decrease of sensor height due to snow accumulation. Photo credit: Michele Citterio

100 is equivalent to the sensor height above tripod feet. In the accumulation zone, where snow does not melt away completely every year, and the instruments are lifted manually during field visits ~~and,~~ the distance to the surface is ~~more-variable-variable~~ throughout the year.

To conserve power, ~~the AAWS is dormant and is dormant on the AAWS and set to~~ power up at ~~10-min~~ 10-minute intervals, where instantaneous values for all variables are collected. The only exception to this is wind speeds ~~since~~ winds, ~~since wind~~ speed is measured by the number of rotations of the propeller since the last data collection, and thus the wind speed observation represents an average over the past 10 ~~min.~~ min. ~~The data is published as hourly averages for hours where all six instantaneous observations are available~~ minutes.

3.2 **Temperature and humidity**

3.1.1 Temperature and humidity

110 Air temperature (T_{air}) and relative humidity are measured in a radiation shield equipped with a fan for forced ventilation, the ventilation is turned on 2 minutes prior to measurement to ensure a fully ventilated sensor. The instrument is placed at a height approximately 2.6 m above the tripod feet. Temperature is measured with a PT100 and relative humidity with Rotronic HygroClip with a measuring uncertainty of $\pm 0.8\%$. The HygroClip ~~is has been~~ replaced at each field visit with an instrument re-calibrated in a closed chamber at room temperature with constant relative ~~humidities~~ humidity of 10%, 35% and 80%.

115 3.1.2 Radiation and station tilt

Table 3. Instrument types, uncertainty and average maintenance schedule for the instruments installed at the three AAWs on the A. P. Olsen transect.

Instrument type	Manufacturer	Model	Accuracy	Mai
Barometer	Campbell Scientific	CS100/Setra 278	$\pm 2 \text{ hPa}$	5 ye
Thermometer, aspirated	Rotronic in rotronic assembly	MP100H-4-1-03-00-10DIN	$\pm 0.1 \text{ K}$	5 ye
Hygrometer	Rotronic in rotronic assembly	Hygro Clip HC2	$\pm 0.8\%$	1-2
Anemometer	R. M. Young	05103-5	$\pm 0.2 \text{ ms}^{-1}$ or 1%	3 ye
Radiometer	Kipp and Zonen	CNR1 or CNR4	$\pm 10\%$	4 ye
Sonic ranger	Campbell Scientific	SR50A	$\pm 1 \text{ cm}$ or $0.6-0.8\%$	1-2
Pressure transducer	Ørum & Jensen in GEUS assembly	NT1400	$\pm 2.5 \text{ cm}$	5-3-
Inclinometer	HL Planar in GEUS assembly	NS-25/E2	0.6%	5 ye

120 The four radiation components, incoming and outgoing, short and long wave radiation (SR_{in} , SR_{out} , LR_{in} , LR_{out}) are observed using a Kipp and Zonen CNR1 and CNR4 installed approximately 2.6 m above the tripod feet. Measurement uncertainty according to the manufacturer is $\pm 10\%$ and instruments have been replaced with newly calibrated instruments every 4 years. The AWS tripod is floating freely on the ice surface in the ablation zone and both tilt and direction vary as the surface melts. The movement of the station affects in particular the recorded incoming and outgoing shortwave radiation and thus the radiometer is accompanied by an inclinometer enabling a correction for instrument tilt. The inclinometer has been replaced only when malfunctioning.

3.1.3 Air pressure

125 The air pressure P_{air} is measured with a Campbell Scientific CS100/Setra 2078 barometer placed inside the fiberglass-reinforced polyester logger enclosure located around 1.5 m from the tripod feet. A porous vent filter equalizes pressure inside and outside the logger enclosure. The measurement uncertainty of the instrument is reported to be 2 hPa in the range of -40 to 60°C. The barometer has no fixed calibration schedule and has not been replaced at any of the stations.

3.1.4 Wind speed

130 Wind speed (WS) is measured with a R. M. Young anemometer model 05103-5. The anemometer is placed approximately 3 m above the tripod feet. The accuracy of the instrument is 0.3 ms^{-1} up to wind speeds of 30 ms^{-1} , above the accuracy is 1%. The anemometer has no fixed calibration schedule and has only been replaced when broken by for example the tripod tipping over or being covered in snow.

3.1.5 Snow depth/sensor height

135 The distance between the surface the instruments (Z_{boom}) and effectively the snow height is measured using a sonic ranger manufactured by Campbell Scientific (model SR50A) mounted on the AAWS boom. The sonic ranger detects the distance to the surface by recording the travel time of reflected sonic waves. The accuracy of the instrument was found by Fausto and van As (2012) to be between 0.6 - 0.7 % using observations from the Greenland ice sheet. The manufacturer reports an uncertainty of 0.4 %. The sonic ranger membrane has been replaced every 1 to 2 years.

3.1.6 Ice ablation

140 Ice ablation is observed continuously, mainly using the pressure transducer assembly (PTA) described in detail in (Fausto and van As, 2012). The instrument consists of a pressure transducer installed at the end of a hose filled with antifreeze liquid. The pressure transducer measurement uncertainty is ± 2.5 cm. The hose is drilled into the ice at a usual depth of 10 to 14 m. When the ice melts, the hose coils up on the surface and the liquid column pressure drops and this drop in pressure is converted to surface lowering Z_{pta} . The PTA is replaced every approximately 3 years before melting out completely.

145 Supplementary to the pressure transducer assembly a sonic ranger similar to the sensor measuring sensor height, is mounted on separate stakes drilled into the ice.

3.2 Post processing of data

150 After converting the observations to physical values using instrument calibration coefficients, the data is post-processed in order to remove observational artifacts such as the effect of tilt on the radiation observations and the temperature influence on the sonic wave. As part of the post-processing of radiation cloud cover and albedo are derived and also provided in the final data set. After applying all corrections, hourly averages are calculated for hours where all six instantaneous observations are available.

3.2.1 Relative humidity

155 The relative humidity is measured relative to the maximum saturation of air thus, relative to liquid water which ~~is~~, on glacier ice, is only valid at temperatures above freezing. For temperatures below the freezing point, the observed relative humidity (RH_{obs}) is recalculated relative to ice using the method described in Goff and Gratch (1946):

$$RH_{corr}(T_{air} < 0) = RH_{obs}(T_{air} < 0) \frac{e_{s_{water}}}{e_{s_{ice}}} \quad (1)$$

where $e_{s_{ice/water}}$ is the saturation water vapor pressure over ice or water. Relative humidity is filtered to contain only values between 0 and 100%.

160 The hourly average of relative humidity is calculated from averaging the vapor pressure (e) and then calculating back to relative humidity. The relation between vapor pressure and relative humidity is given by (based on Lowe, 1976):

$$RH = 100 * \frac{e}{e_s} \quad (2)$$

where, RH is relative humidity and e_s is specific humidity relates to air temperature T via

$$e_s = \alpha_0 + \alpha_1 T + \alpha_2 T^2 + \alpha_3 T^4 + \alpha_4 T^4 + \alpha_5 T^5 + \alpha_6 T^6 \quad (3)$$

165 See the given values for α_0 to α_6 in Appendix A.

3.3 Radiation and derived variables

~~The four radiation components, incoming and outgoing, short and long wave radiation are observed using a Kipp and Zonen CNR1 and CNR4 installed approximately 2.6 m above the tripod feet. Instruments are replaced with newly calibrated instruments every 4 years, when logistically possible. The AWS tripod is floating freely on the ice surface in the ablation zone and both tilt and direction vary as the surface melts. The movement of the station affects in particular the recorded incoming and outgoing shortwave radiation and thus the radiometer is accompanied by a tilt meter making us able to correct for the tilt of the instrument.~~

3.2.1 Correction incoming shortwave radiation for tilt and deriving cloud cover

The tilt correction of incoming solar radiation follows van As (2011). Incoming shortwave radiation (SR_{in}) can be split into a
175 diffuse fraction (f_{diff}) and a direct fraction. The diffuse radiation is not affected by the tilt of the instrument and so it is only the direct beam part that is corrected:

$$SR_{in_corr} = SR_{in} \frac{C}{1 - f_{diff} + C f_{diff}} \quad (4)$$

$$\begin{aligned} C = & \cos(SZA) (\sin(d) \sin(lat) \cos(\phi_{sensor}) \\ & - \sin(d) \cos(lat) \sin(\theta_{sensor}) \cos(\phi_{sensor} + \pi) \\ & + \cos(d) \cos(lat) \cos(\theta_{sensor}) \cos(w) \\ & + \cos(d) \sin(lat) \sin(\theta_{sensor}) \cos(\phi_{sensor} + \pi) \cos(w) \\ & + \cos(d) \sin(\theta_{sensor}) \sin(\phi_{sensor} + \pi) \sin(w))^{-1} \end{aligned} \quad (5)$$

180 where SZA is the solar zenith angle, d is the sun declination, w is the hour angle (see procedures for calculating SZA , d and w in Vignola (2019)), lat is the instrument latitude in radians and ϕ_{sensor} and θ_{sensor} are the tilt angle and direction, respectively.

The tilt corrected values are passed through a filter removing spikes exceeding top of atmosphere irradiance given by:

$$I_{toa} = I_0 \cos(SZA) \quad (6)$$

Where $I_0 = 1361 \text{ W m}^{-2}$ ~~$I_0 = 1361 \text{ W m}^{-2}$~~ is the solar constant.

185 The diffuse fraction of the incoming shortwave radiation (f_{diff}) ranges from 0.2 to 1 corresponding to clear skies and fully overcast conditions, respectively, and we assume a linear relationship to the cloud cover fraction ($Cloud_cover$).

The cloud cover fraction is calculated based on its dependence on air temperature (T_{air}) similar to the approach of van As et al. (2005). Firstly, the theoretical clear sky incoming longwave radiation, LR_{clear} , is calculated based on Swinbank (1963):

$$LR_{clear} = 5.31 \cdot 10^{-14} (T_{air} + T_0)^6 \quad (7)$$

190 where $T_0 = 273.15^\circ C$. Secondly, for theoretical overcast conditions, $LR_{overcast}$, black body radiation is assumed:

$$LR_{overcast} = 5.67 \cdot 10^{-8} (T_{air} - T_0) \quad (8)$$

The cloud cover fraction is thus:

$$Cloud_cover = \frac{LR_{in} - LR_{clear}}{LR_{overcast} - LR_{clear}} = \frac{f_{diff}^{-0.2}}{0.8} \quad (9)$$

And hence:

$$195 \quad f_{diff} = 0.2 + 0.8 \cdot Cloud_cover \quad (10)$$

The radiometer is repositioned towards south at every field visit. However, during the melt period the station can change azimuth direction and the exact direction of the instrument is not measured beyond the yearly field visits, which causes an uncertainty that is not quantified. This is addressed in the quality control in a later section.

3.2.2 Deriving albedo

200 The albedo is given by

$$albedo = SR_{out} / SR_{in} \quad (11)$$

and filtered to include only data when the sun is in view of the upper sensor, which is when the angle between the sun and the sensor ($AngleDif$) is below 70° and SZA above 70° . $AngleDif$ is given by:

$$AngleDif = 180/\pi \arccos(\sin(SZA) \cos(w + \pi) \sin(\theta_{sensor}) \cos(\phi_{sensor}) \\ + \sin(SZA) \sin(w + \pi) * \sin(\theta_{sensor}) * \sin(\phi_{sensor}) + \cos(SZA) * \cos(\theta_{sensor})) \quad (12)$$

205 The gaps in the albedo record are filled using a forward fill function in order to use the albedo to correct the outgoing shortwave radiation as described below.

3.2.3 Correcting outgoing shortwave radiation

The radiation sensor has limitations when the sun angle is low and the sun beams hit the lower sensor intended to record outgoing shortwave radiation. When the sun is in the field of view of the outgoing sensor, it is assumed that the incoming sensor only records diffuse radiation. It is assumed that the sun is in view of the outgoing sensor when $AngleDif$ below 90° and SZA above 90° . The outgoing shortwave radiation is in this case calculated using the albedo:

$$SR_{out} = \frac{albedo}{f_{diff}}, \text{ if } AngleDif < 90^\circ \text{ and } SZA > 90^\circ \quad (13)$$

3.3 Air pressure

215 The barometer is a Campbell Scientific CS100/Setra 2078 placed inside the fiberglass-reinforced polyester logger enclosure located around 1.5 m from the ice surface. A porous vent filter equalizes pressure inside and outside the logger enclosure. The measurement uncertainty of the instrument is reported to be 2 hPa in the range of -40 to 60°C.

3.3 Wind speed

The anemometer is the model 05103-5 from R. M. Young. The instrument is placed approximately 3 m above the tripod feet. The accuracy of the instrument is 0.3 ms⁻¹ up to wind speeds of 30 ms⁻¹, above the accuracy is 1%.

220 3.3 Snow depth/sensor height

The distance between the surface the instruments and effectively the snow height is measured using a sonic ranger manufactured by Campbell Scientific (model SR50A) mounted on the AAWS boom. The sonic ranger detects the distance to the surface by recording the travel time of reflected sonic waves.

3.2.1 Correcting snow depth/sensor height for temperature

225 The sonic wave speed in air depends on air temperature and thus the observed distances (Z_{boom_raw}) are corrected for air temperature (T_{air}):

$$Z_{boom} = Z_{boom_raw} \sqrt{\frac{T_{air} + T_0}{T_0}}, \quad (14)$$

where $T_0 = 273.15^\circ C$. The accuracy of the instrument was found by Fausto and van As (2012) to be between 0.6–0.7% using observations from the Greenland Ice Sheet. The manufacturer reports an uncertainty of 0.4%.

230 3.3 Ice ablation

Ice ablation is observed continuously, mainly using the

3.2.1 Ice ablation

235 The pressure transducer assembly (PTA) described in (Fausto and van As, 2012). A pressure transducer is installed at the end of a hose and the hose is filled with antifreeze liquid. The hose is drilled into the ice at a usual depth of 10 to 14 m. When the ice melts the surface lowers and the pressure drop in the liquid column of the hose is converted and can be converted into a surface lowering. The pressure transducer signal, is an open system and the ice ablation signal Z_{pta} , is affected by air pressure and corrected using the following equation is therefore corrected for atmospheric pressure:

$$Z_{pta_corr} = Z_{pta} \frac{P_C - P_{air}}{g\rho_l}, \quad (15)$$

where P_C is the ~~the~~ calibration pressure provided by the manufacturer in hPa , $P_A - P_{air}$ is the air pressure in hPa , $g = 9.81 m s^{-2}$ is the gravitational constant and ρ_l is the density of the antifreeze liquid in the hose. The ~~uncertainty of the instrument is estimated to be 4~~ accuracy of the pressure transducer is 2.5 cm and ~~contains some noise~~ the standard deviation of the signal after the ice melt season has ended is 1.5 cm, with no systematical change relating to the depth of the sensor. For the purpose of making the data easy to use the ice ablation observation is set to zero at the beginning of every melt season. This is done by subtracting the mean of a week prior to the onset of ice melt.

245 ~~Supplementary to the pressure transducer assembly a sonic ranger is mounted on separate stakes drilled into the ice. The surface height measured from sonic ranger is corrected for air temperature and is denoted Z_{stake} .~~ The onset of ice melt is defined manually for each year by combining albedo, Z_{pta} and Z_{boom} .

4 Data quality, uncertainty and filtering

In the subsequent sections, we first detail major station failures, followed by an in-depth discussion on the quality and uncertainties tied to each specific variable. Our quality control process primarily involves a visual inspection of the data to identify outliers and detect data drift. Furthermore, we compare variable gradients across the three AAWSs to pinpoint periods with potentially problematic data. The success rate of our measurements after data filtering is depicted in Figure 3.

~~Quality control~~ Corrections and quality control of the data is done to the best of our current knowledge, but the ~~data dataset~~ is considered living data and should be ~~in a state to be used directly for directly comparable with data from~~ the continued monitoring ~~of at~~ the A. P. Olsen transect. ~~This means that corrections and filtering of data might change in future versions of the dataset.~~ The filtered ~~As an example this means that if a better method for correcting the radiation sensor for tilt is implemented in the continued monitoring, the dataset will be updated to ensure consistency.~~ The unfiltered data could offer significant insights, and this is therefore included as supplementary data.

4.1 Major station failures

260 Reviewing the raw data and field notes, it becomes evident that several major events led to data loss across all variables, as described in the following.

In 2015, ZAC_U tipped over and was subsequently erected in April 2016. This incident is evident in the dataset as poor quality data, and data from all variables are removed for this period. ZAC_U tipped over again in 2020 and was erected and underwent repairs in July 2021. Data from this period has also been filtered out. During the winter of 2010/2011, ZAC_A tilted or got snow covered and part of the data was lost. In January 2015, most instruments at ZAC_A were buried by snow, only to be excavated in April 2015, these data are also filtered out. The ZAC_A record ends in April 2019, marking the final visit before the station was entirely buried in snow and could not be reached due to travel restrictions imposed during the Covid-19 pandemic.

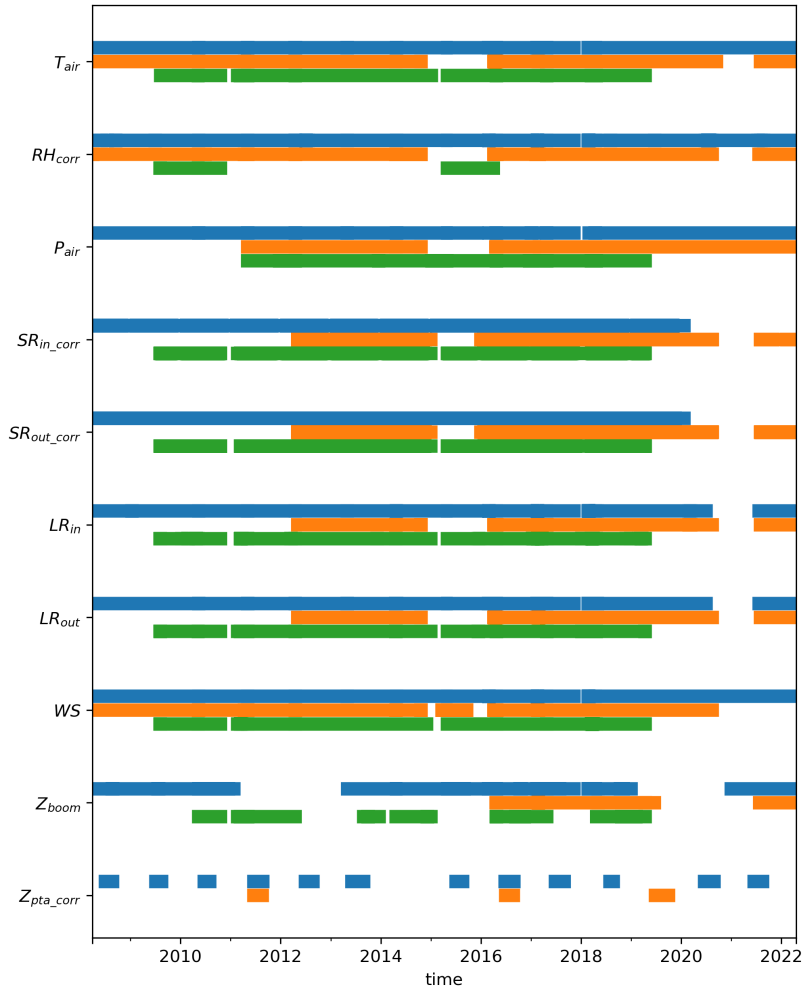


Figure 3. Measurement success rate for the 10 key variables, blue is ZAC_L , orange is ZAC_U and green in ZAC_A

4.2 Temperature

270 Temperature observations rely on the instrument casing being adequately ventilated. However, the ventilation fan consumes a significant amount of power and is deactivated when battery levels are low. This most often happens during winter when the batteries cannot be ~~re-charges~~ re-charged due to the polar night, coinciding with the period where ventilation of the casing is

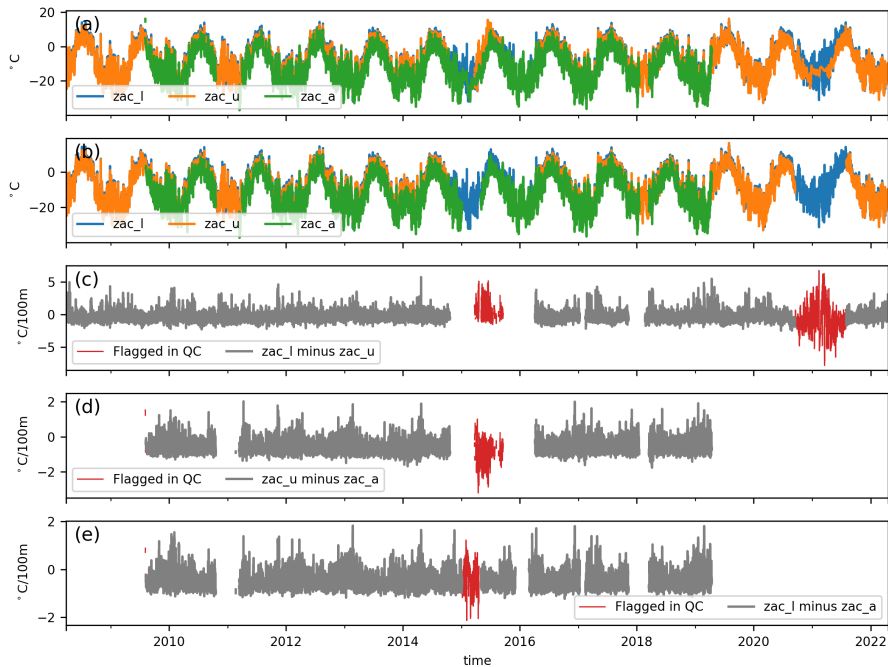


Figure 4. Air temperature quality control. Panel (a) and (b): Unfiltered and filtered data respectively, ZAC_L is blue, ZAC_U is orange and ZAC_A is green. Panel (c) to (e): Gradients-The temperature gradient per 100 m between ZAC_L and ZAC_U , ZAC_U and ZAC_A , ZAC_L and ZAC_A respectively. Gray is data considered to show natural variation and red is flagged data considered to show variability caused by a faulty sensor at one of the stations.

not necessary less important as the casing is not heated by shortwave radiation. Thus, we consider the effect of this to be minor and we have not detected any problems with the data due to this.

275 To evaluate the data quality of temperature readings, we compare data year-over-year and examine the gradients in values between stations, as depicted in Figure 4. This figure highlights the impact of the instrument burial at ZAC_A in 2015, which is evident from an unusual negative temperature gradient between ZAC_L and ZAC_A (see Figure 4, panel (e)). Additionally, the tilting incidents at ZAC_U in 2015 and 2020 manifest as unusually high and low lapse rates between ZAC_U and ZAC_L and ZAC_U and ZAC_A (see Figure 4, panel (c) and (d)). Besides the major station problems we found no quality issues
280 with the air temperature observations.

4.3 Relative humidity

The humidity sensor typically requires recalibration every 1-2 years. However, due to logistical challenges, this was not always feasible and an uncalibrated sensor will drift towards increasingly poorer performance. Drifting values of relative humidity is observed at ZAC_A during 2012-2014 (Figure 5), which we believe is due to an uncalibrated HygroClip. While the HygroClip
285 was replaced in 2015, data from 2016 raised concerns as RH frequently reached 100%, more often than at other stations. The

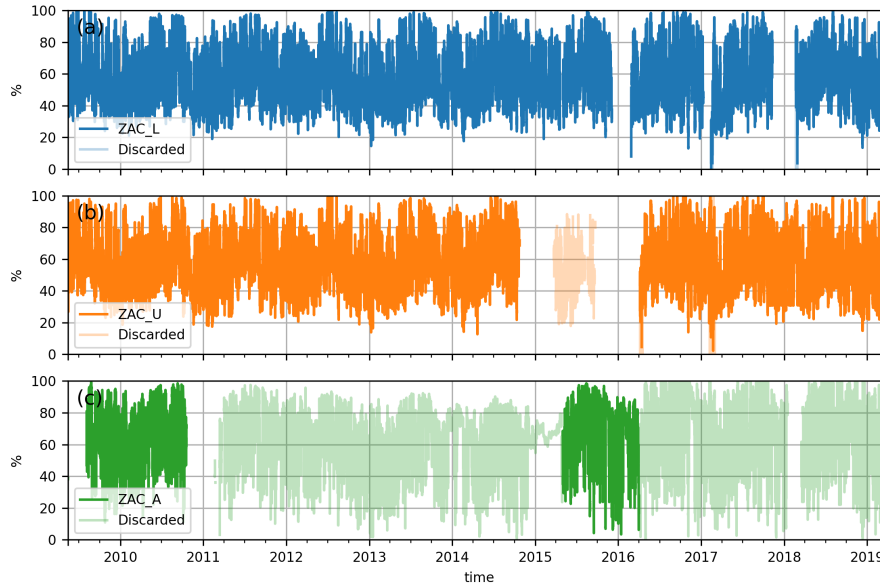


Figure 5. Relative humidity (RH_{corr}) at ZAC_L in panel (a), ZAC_U in panel (b) and ZAC_A in panel (c)

cause of the drift in relative humidity values from 2016 at ZAC_A is unknown, and the ~~affected data has~~ data up until the replacement of the HygroClip (which coincides with the end of the record presented here) been discarded.

4.4 Shortwave radiation and tilt

The radiation sensor can be affected by shorter periods with riming causing outliers which is partly dealt with by removing
 290 outliers beyond fixed thresholds as described for the individual variables. The radiation sensors also face issues related to high
 tilt and azimuth misalignment from south, we assumed that the effect of this is negligible on the longwave radiation component,
 but on the shortwave component tilt can have a significant effect. During each field visit, the AAWS is adjusted to ensure the
 radiometer faces south. However, as the AAWS floats on the surface, it can tilt as well as rotate at varying degrees during
 the melt season. While the shortwave radiation is corrected for tilt, the correction does not take azimuth misalignment into
 295 account. If the sensor turns more towards the west or east, the tilt correction can become inaccurate, as it operates under the
 assumption that the sensor is oriented southward. The uncertainty of the the tilt-corrected shortwave radiation, can be evaluated
 by investigating the total tilt, the size of the correction by comparing SR_{in_corr} with SR_{in} as well as comparing the corrected
 values to potential incoming radiation as done in the following.

Figure 6 displays the x and y components of the measured tilt. Typically, the AAWS tilt does not exceed an absolute value
 300 of 10° . Exceptions to this are instances when a station has been entirely tipped over or buried in snow. The tilt is most variable
 at ZAC_L which is in line with observations of a very uneven surface upon fields visits. ZAC_A is more stable due to the
 fact that it is positioned in the accumulation zone and therefore is stabilized by the snow. In January 2020, a shift in $Tilt_y$

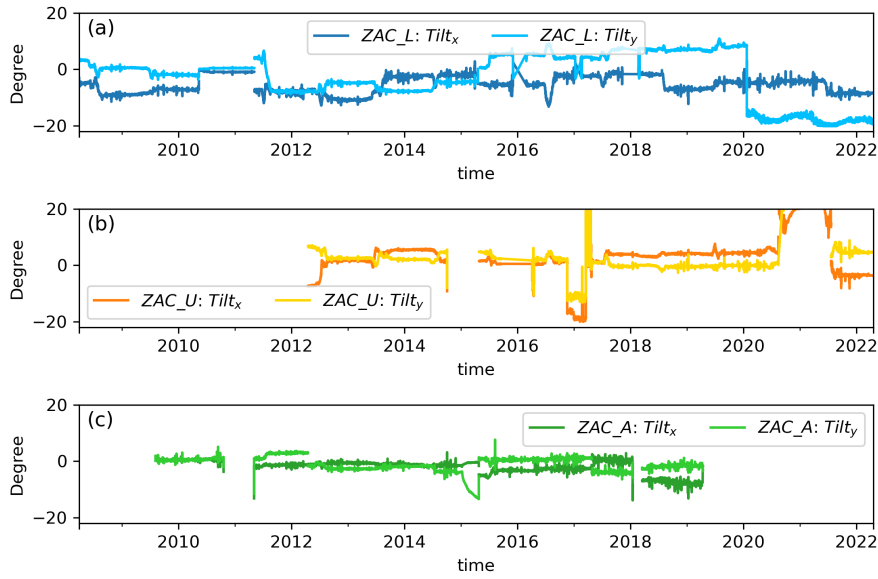


Figure 6. Tilt of the AAWs boom at ZAC_L in panel (a), ZAC_U in panel (b) and ZAC_A in panel (c)

at ZAC_L occurred, from field notes this can be explained by damage to the tripod legs and following loosening of the guy wires, after snow cover. ~~The non-tilt corrected data could potentially provide information discerning cloud cover variations, but using this should be approached with caution as absolute values are not reliable~~ the station being covered with snow. The tilt corrected incoming shortwave radiation is shown in Figure 7. The peak values of the data vary a lot at ZAC_L and while this could be due to natural variations as ZAC_L is located low in a valley that is prone to have low clouds, this might also be due to poor data quality. Thus, in order to evaluate the success of the tilt-correction and the quality/uncertainty of the radiation data we compare corrected and non-corrected shortwave incoming radiation in Figure 8. The top of atmosphere irradiance (I_{toa} , Equation 86) is used as a visual guideline ~~in the comparison~~ where the shaded gray area shows the span of I_{toa} over a day. Panel (a) in Figure 8 with data from ZAC_L in 2009, shows a successful year where the tilt correction modifies the values slightly. Panel (b) in Figure 8 shows a year where the tilt of the station has been more severe and uncertainties must be assumed higher in such years. Specifically at ZAC_L incoming shortwave radiation from the years spanning 2012 to 2016 and 2018 to 2020 needed to be corrected more than in other years, and uncertainty on SR_{in} is expected to be higher for these years. Figure 8 also shows the minimum values of observed SR_{in} are ranging well below the minimum I_{toa} , ~~indicating a substantial diffuse component~~ this is due to the shading of the station in particular during summer nights when the sun angle is low and coming from north.

Finally, the quality of incoming and outgoing shortwave radiation is evaluated by comparison with remotely sensed albedo values. The albedo values used are from the Google Earth Engine Albedo Inspector (<https://www.glacier-hub.com/posts/GEE-toolbox-for-glacier/>) based on the work done by Feng et al. (2023) in Figure 9. The comparison between a point measurement

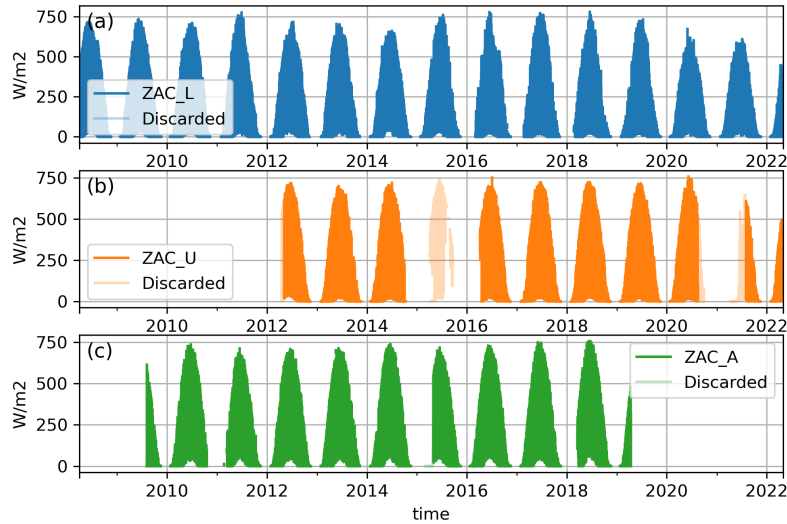


Figure 7. Incoming shortwave radiation corrected for tilt (SR_{in_corr}) at ZAC_L in panel (a), ZAC_U in panel (b) and ZAC_A in panel (c).

from the AAWS with a grid value introduces an uncertainty. There is a generally good correlation between the in-situ and remotely sensed albedo values with a goodness of fit, $R = 0.55$, which is comparable to the values obtained by Feng et al. (2023) when comparing the satellite derived albedo with PROMICE data.

4.5 Longwave incoming and outgoing radiation

325 The incoming ~~longwave radiation~~ and outgoing longwave radiation shows some instances of outliers of unusual low values. We believe these events are caused by riming events. The most extreme cases are filtered out by excluding all incoming longwave radiation data (LR_{in}) ~~is automatically filtered to remove data lower than $120 Wm^{-2}$ and the lower than $120 Wm^{-2}$~~ , and all outgoing longwave radiation (LR_{out}) ~~is filtered to remove data lower than $150 Wm^{-2}$. The outliers are believed to occur on riming events and choice of limits is based on a visual assessment of outliers lower than $150 Wm^{-2}$~~ (Figure 10).

330 There is a period between July 2020 to July 2021 at ZAC_L , where the longwave radiation data look substantially higher than the rest of the period. The cause of this remains elusive, and the data is filtered out.

4.6 Air pressure and wind speed

We saw no quality issues with air pressure and wind speed data, and only data from the periods where the stations have either tipped over or got buried in snow have been filtered out from the air pressure and wind speed data. The air pressure is dependent

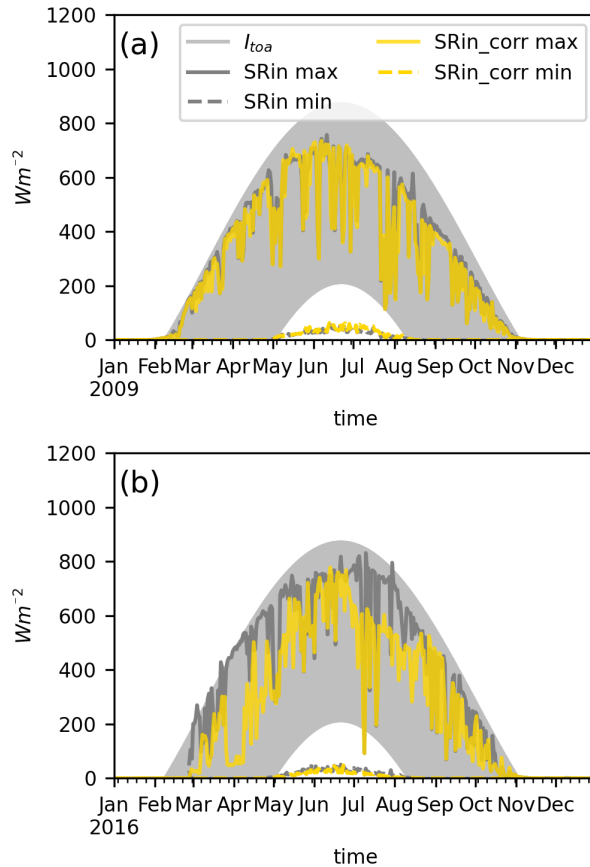


Figure 8. Assessment of the effect of tilt correction (Panel a) and 2016 (Panel b) at ZAC_L: Daily The shaded gray area span the daily calculated maximum and minimum values top of atmosphere incoming short wave radiation (see equation 6). Solid lines represents the daily maximum observed incoming shortwave radiation ,corrected before (gray) and uncorrected for after (yellow) the tilt compared with top of atmosphere irradianee correction . Panel Similarly, the dashed lines represent the daily minimum observed radiation before (agray) is 2009 and panel after (byellow) is 2016 the tilt correction.

335 on absolute elevation of the stations and the elevation values given in this paper are based on a multi-year average of a single frequency GPS on the AAWS.

Incoming and outgoing longwave radiation (LR_{in} , LR_{out}) at **a**: ZAC_L, **b**: ZAC_U, **c**: ZAC_A. Pale colors indicate data that has been filtered out.

4.7 Ice ablation

340 The PTA only records ice melt, and the presence of snow cover over the instrument can influence the data. Consequently, all data from October to March is automatically discarded. Instances when the pressure transducer assembly completely melted out of

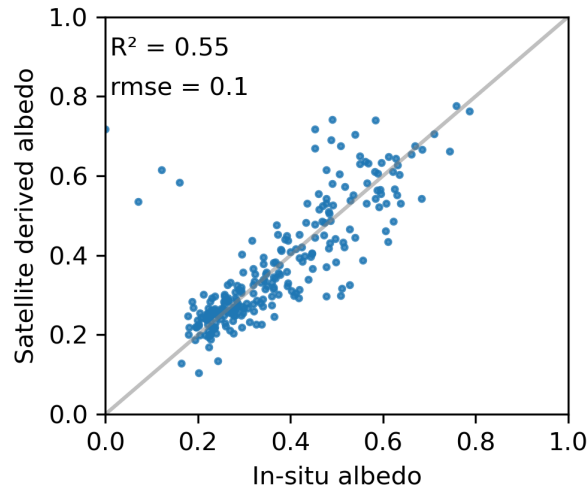


Figure 9. Daily albedo values: in-situ observations compared with the satellite derived based on Feng et al. (2023).

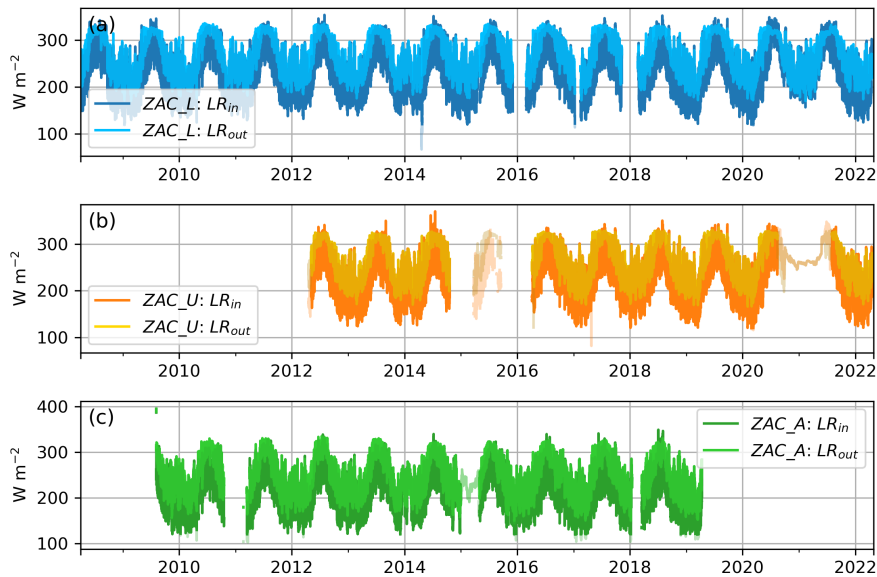


Figure 10. Incoming and outgoing longwave radiation (LR_{in} , LR_{out}) at **a:** ZAC_L , **b:** ZAC_U , **c:** ZAC_A . Pale colors indicate data that has been filtered out.

the ice have also been removed, meaning not every year contains a complete melt season. To assess data quality, we compare the ice ablation observations from the PTA (Z_{pta}) with those from the sonic ranger on stakes (Z_{stake}). This comparison is

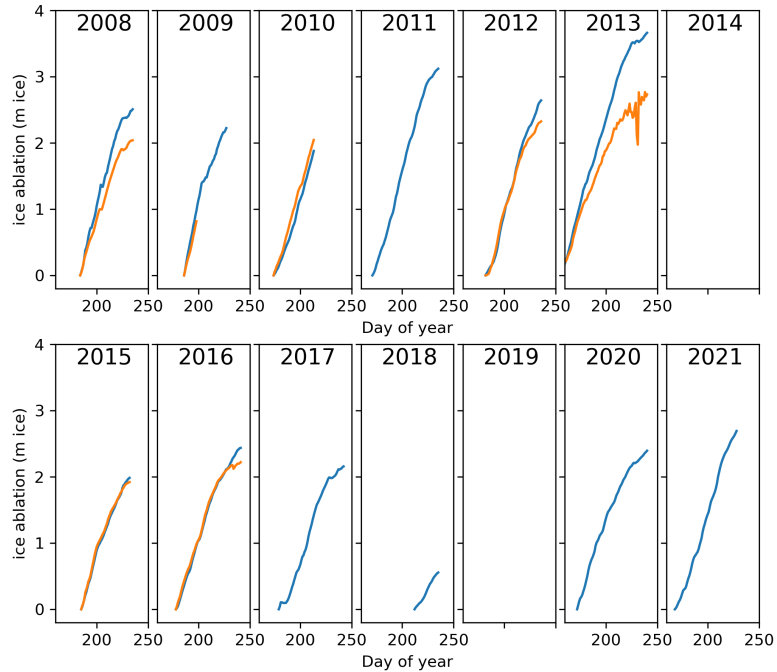


Figure 11. Ice ablation recorded using the pressure transducer assembly (PTA, z_{pta_corr}) and the sonic ranger on stakes (Z_{stake}) at ZAC_L . Note the a-axis is not continuous, but contains only the months June, July and August for each year and the label refer to July-1 of the given year. Subplots with no data are years where both instruments failed.

limited to ZAC_L since ice ablation has only been measured by a PTA at ZAC_U , and since ZAC_A is situated in the accumulation zone.

Overlapping ice ablation data from ZAC_L spans six years, as shown in Figure 11. In 2008 and 2009, the PTA recorded faster ice ablation rates than the sonic ranger. Notably, in July 2009, the stake assembly holding the sonic ranger collapsed according to field notes. This incident with a tilting stake assembly might be the cause for the observed lower melt rates by the sonic ranger. In 2010, the stake assembly was re-established while the PTA setup remained unchanged, and the sonic ranger recorded higher melt rates than the PTA. This indicates no consistent under-catch in the PTA system. The PTA melted out in 2010 and did not capture the late part of the melt season. In 2012, the melt rates of both systems were similar until late July. The discrepancy might be due to another collapse of the sonic ranger stake assembly. glacier melt in 2013 was the highest on the A. P. Olsen record, the variability in sonic ranger observations in particular late in the season could suggest the stake system being almost melted out and unstable. For 2015 and 2016 the melt rates were closely aligned between the two systems. However, by the end of the 2016 melt season, the two curves diverge. This variation could be due to a snow-snowfall event visible in the

sonic ranger data but not in the PTA. Differences between the two data sets could also arise if they represent distinct surface areas with varying darkness or turbulence conditions.

Generally, we trust the ice ablation from the PTA (Z_{pta}) to a higher degree than we trust the sonic ranger observations (Z_{stake}), but discrepancies between the two in for example 2012 and 2016 illustrates the uncertainty in the ice ablation obser-
 360 vation. ~~Snow-Snowfall~~ events during the ice melt season ~~is-are~~ not captured by the PTA. This should be kept in mind when using the data for evaluating for example an energy balance model as seen below.

5 Use case: A point energy budget melt model

The variables collected at the A. P. Olsen transect are key variables in the surface energy budget equations, and can be used for calculating the energy availability for melting ice. ~~We will exemplify here~~ In this use case we exemplify how a point energy
 365 budget melt model ~~is evaluated with the observed ice ablation~~ can be set up using the observed variables. The energy budget model is implemented at ZAC_L and depends on the observed radiation budget (SR_{in_corr} , SR_{out_corr} , LR_{in} , LR_{out}), temperature (T_{air}), wind speed (WS), air pressure (P_{air}) and relative humidity (RH_{corr}). The use case focuses on two years, 2009 and 2016 where the tilt correction on the radiation data was respectively low and high.

The energy budget is the balance between the net shortwave radiation $SR_{net} = SR_{in} - SR_{out}$, the net longwave radiation
 370 $LR_{net} = LR_{in} - LR_{out}$ and the turbulent heat fluxes: latent heat flux H_l and sensible heat flux H_s , as well as the ground heat flux G , thus the energy available for melt is given by:

$$Q_{melt} = SR_{net} + LR_{net} + H_l + H_s + G \quad (16)$$

For the purpose of this example we neglect G ~~and calculate the~~ assuming the contribution from this is minor to the contribution
 375 from other sources as in Abermann et al. (2019). The turbulent heat fluxes are calculated following Monin-Obukhov theory (as done in Hock and Noetzli (1997)) where:

$$H_s = c_p \rho_0 \frac{P_{air}}{P_0} \frac{WS \cdot T_{air}}{\ln(z/z_{0w}) \ln(z/z_{0t})} \quad (17)$$

and

$$H_l = 0.632L\kappa^2 \frac{\rho_0}{P_0} \frac{WS \cdot (e_2 - e_0)}{\ln(z/z_{0w}) \ln(z/z_{0e})}, \quad (18)$$

where e_2 is the vapor pressure at instrument level given by the Clausius–Clapeyron relation:

$$380 \quad e_2 = 611 \exp\left(\frac{17.27T_{air}}{243.04 + T_{air}} \frac{RH_{corr}}{100}\right), \quad (19)$$

and e_0 is the vapor pressure at a melting surface; c_p is the specific heat of dry air; L is the latent heat of sublimation when $e_2 - e_0$ is negative and the latent heat of evaporation when $e_2 - e_0$ is positive and equal to zero; $\kappa = 0.41$ is von Kármán's constant; ρ_0 is the air density at the mean atmospheric level P_0 ; z is the instrument height here assumed to be constant at 2.7 m; z_{0w} , z_{0t} , z_{0e} are the roughness lengths for logarithmic profiles of wind, temperature and water vapor, respectively. z_{0w}

385 is kept as a calibration constant and can be varied while z_{0t} and z_{0e} are assumed to be 100 times smaller than z_{0w} . All three roughness lengths could be varied to calibrate the model, but this is out of the scope of this example.

The energy surplus is converted to melt by dividing with the latent heat of fusion (~~$L_f = 334000 \text{ Jkg}^{-1}$~~ $L_f = 334000 \text{ Jkg}^{-1}$) so that

$$Melt = Q_{melt} / L_f. \quad (20)$$

390 This is only valid for a melting surface ~~and sublimation is not accounted for.~~

The point melt is ~~computed for three values of~~ calibrated by varying the surface roughness factor for wind, z_{0w} ~~within a range between~~ 0.01, 0.001 and 0.0001, as this value has been shown to vary with orders of magnitude (e.g. Smeets and van den Broeke, 2008). ~~The performance of the melt model on a daily timescale is evaluated by summing up modeled melt to daily values and taking the difference between the daily mean Z_{pta} value from the day before to the current day to get observed daily values.~~ All the uncertainties introduced by both model assumptions are in this way summarized in this single static value. For the purpose of this example we define a successful calibration on a seasonal scale thus choosing the value of z_{0w} that gives a total melt over a melt season that best match the total observed ablation over the same season (Figure 12 panel (a) and (b)). ~~The performance of the melt model on a seasonal time scale is evaluated by comparing the accumulated modeled melt with the Z_{pta} with a running daily mean applied to smooth the curve.~~ Model performance is then evaluated on daily timescale by

395 accumulating the modeled melt to daily sums and comparing these to the observed daily melt rates (Figure 12 panel (e) and (d)). ~~The model performance in 2009 shows good agreement with the observed ablation when using observed melt rates are calculated as the difference between the minimum and the maximum value of the Z_{pta_corr} over a day. A value of $z_{0w} = 0.001$, while the model performs poorly in 2016 for all three roughness factors. This could indicate that the quality of the radiation data is questionable in 2016 and/or that the ice ablation data is spurious.~~

400 In conclusion, ~~was found to match the 2009 total ablation, while $z_{0w} = 0.005$ was more appropriate for 2016. The performance of the melt model on a daily scale is affected by both model assumptions as well as observational uncertainty of both the variables used to calculate the energy available for melt as well as the validation data. We suspect that the presented dataset can be used to evaluate the point melt model for years with high confidence in data, but quality issues, that are not well defined can be limiting the use of the data for such high precision modeling.~~ high tilt of the AAWS in 2016 could explain the lower R^2 value in this year compared to 2009.

405

410

6 Conclusions

This paper presented the near surface climate and ice ablation dataset from a transect of three automatic weather and ablation stations on the A. P. Olsen Ice Cap in NE Greenland, for the period 2008 through May 2022. The dataset contains ~~all major components of key components to calculate~~ the surface energy balance: Ice ablation, air temperature, relative humidity, air

415 pressure, wind speed, incoming and outgoing longwave radiation as well as the derived variables cloud cover fraction and albedo. The dataset has gone through rigorous instrument corrections and quality control. It can be used to study surface

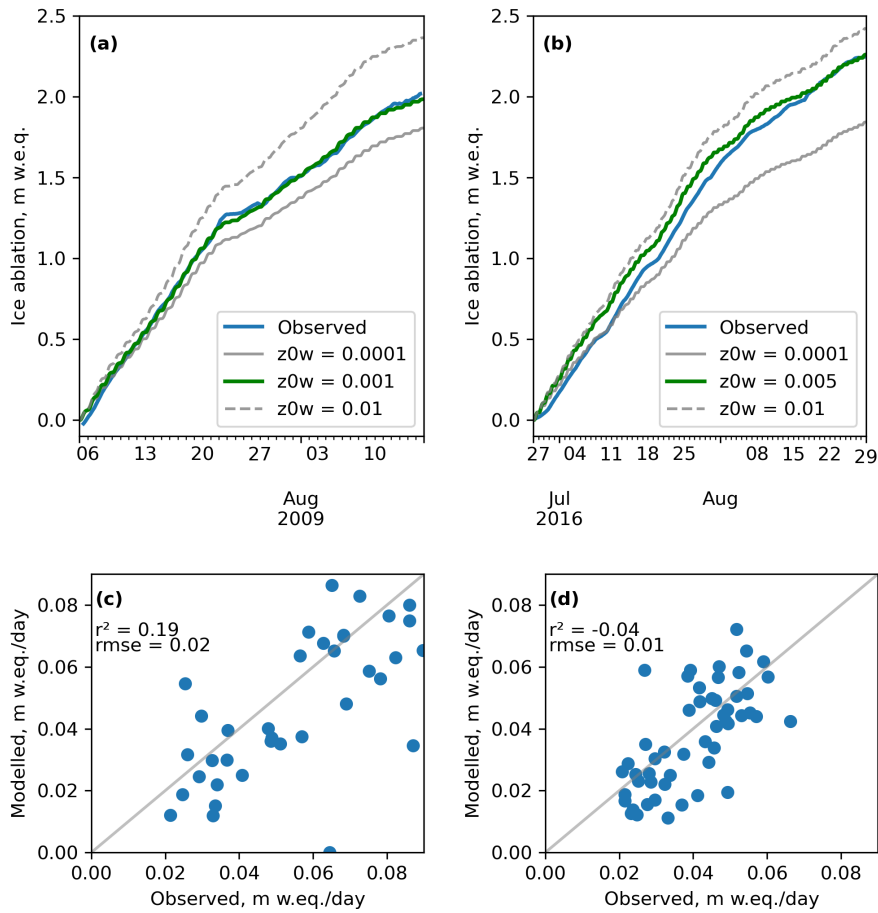


Figure 12. Results from the energy budget ice melt model. Panel (a) and (b): Daily-accumulated modeled ice ablation using the surface roughness for wind: $z_{0w} = 0.001$, melt compared with observed ice ablation from Z_{pta} , melt for the two years 2009 and 2016 respectively. Panel (c) and (d) show accumulated: daily modeled ice melt compared with observed daily ice melt for the three tested values of z_{0w} ablation from Z_{pta_corr} for 2009 and 2016 respectively.

energy budget and ablation processes and to force, calibrate or validate distributed models. Despite the rigorous quality control, uncertainties remain, most importantly for the energy budget calculations are uncertainties in the shortwave radiation and the observed ice ablation. These uncertainties are not quantified in the data set, but exemplified in section 6. The data set is a unique
 420 transect of near surface climate on a local ice cap in Greenland and constitutes the first 15 years of a continuous glaciological monitoring effort in Northeast Greenland as part of the Greenland Ecosystem Monitoring programme.

Code and data availability. The dataset can be found here: <https://doi.org/10.22008/FK2/X9X9GN> (Larsen and Citterio, 2023), and in the GEM database: <https://data.g-e-m.dk/>. Future refinements will be uploaded as new versions and the continuation of the transect time series are available via <https://doi.org/10.22008/FK2/IW73UU> (How et al., 2022). The data processing code, taking the data from raw to usable data is provided as documentation and can be found at the GitHub site: https://GitHub.com/GEUS-Glaciology-and-Climate/GlacioBasis_AWS_processing. The point energy budget model script can be found here: URL https://GitHub.com/GEUS-Glaciology-and-Climate/GlacioBasis_essd_point_energy_balance_model.

Appendix A: Appendix A

The constants used in Equation 3:

$$\alpha_0 = 6.107799961$$

$$\alpha_1 = 4.436518521 * 10^{-1}$$

$$\alpha_2 = 1.428945805 * 10^{-2}$$

$$430 \quad \alpha_3 = 2.650648471 * 10^{-4}$$

$$\alpha_4 = 3.031240396 * 10^{-6}$$

$$\alpha_5 = 2.034080948 * 10^{-8}$$

$$\alpha_6 == 6.136820929 * 10^{-11}$$

Author contributions. Signe Hillerup Larsen, lead the writing of the manuscript and brought the data from raw measurements into the published format, in some parts utilizing the open source code from the PROMICE workflow. Michele Citterio has designed the monitoring program as project manager from 2007 to 2021 and collected most of the data with great help from the other co-authors. Daniel Binder, Bernhard Hynek and Anja Rutishauser have contributed with the collection and correction of data. Robert Fausto has helped with utilizing the knowledge from the PROMICE data workflow. All co-authors have contributed to the writing the manuscript.

Competing interests. There are no competing interests.

Acknowledgements. This work was supported by the Greenland Ecosystem Monitoring programme (g-e-m.dk) via the subprogram GlacioBasis, funded by the Danish Environmental Protection Agency and the Danish Energy Agency via Climate and environmental support. GlacioBasis would not exist if it was not for Andreas Peter Ahlstrøms initiative with the first application. We thank Zackenberg Research Station for support. Many people have helped conducting the field work in particular we thank the GeoBasis sub-programme for support in the field as well as field participants through the years: Horst Machguth, Ylva Sjöberg, Morten Langer Andersen, Cristina Gerli and Marek Stibal. The design and maintenance of the A. P. Olsen transect is not possible without the support from the GlacioLab at GEUS, where the

design, development and building of certain instruments take place in close collaboration with PROMICE and GC-Net. Some errors in the raw data was discovered as part of the collaboration with Sonika Shahi at University of Graz, who meticulously went through the data during
445 the quality control process.

References

- Abermann, J., As, D. V., Wacker, S., Langley, K., Machguth, H., and Fausto, R. S.: Strong contrast in mass and energy balance between a coastal mountain glacier and the Greenland ice sheet, *Journal of Glaciology*, 65, 263–269, <https://doi.org/10.1017/jog.2019.4>, 2019.
- Bolch, T., Sørensen, L. S., Simonsen, S. B., Mölg, N., MacHguth, H., Rastner, P., and Paul, F.: Mass loss of Greenland's glaciers and ice caps 2003-2008 revealed from ICESat laser altimetry data, *Geophysical Research Letters*, 40, 875–881, <https://doi.org/10.1002/grl.50270>, 2013.
- Citterio, M., Sejr, M. K., Langen, P. L., Mottram, R. H., Abermann, J., Larsen, S. H., Skov, K., and Lund, M.: Towards quantifying the glacial runoff signal in the freshwater input to Tyrolerfjord–Young Sound, NE Greenland, *Ambio*, 46, 146–159, <https://doi.org/10.1007/s13280-016-0876-4>, 2017.
- 455 Fausto, R. S. and van As, D.: Ablation observations for 2008 – 2011 from the Programme for Monitoring of the Greenland Ice Sheet (PROMICE), Geological survey of Denmark and Greenland, *Bulletin*, 26, 73–76, 2012.
- Fausto, R. S., As, D. V., Mankoff, K. D., Vandecrux, B., Citterio, M., Ahlstrøm, A. P., Andersen, S. B., Colgan, W., Karlsson, N. B., Kjeldsen, K. K., Korsgaard, N. J., Larsen, S. H., Nielsen, S., Pedersen, A., Shields, C. L., Solgaard, A. M., and Box, J. E.: Programme for Monitoring of the Greenland Ice Sheet (PROMICE) automatic weather station data, *Earth System Science Data*, 13, 3819–3845, <https://doi.org/10.5194/essd-13-3819-2021>, 2021.
- 460 Feng, S., Cook, J. M., Anesio, A. M., Benning, L. G., and Tranter, M.: Long time series (1984-2020) of albedo variations on the Greenland ice sheet from harmonized Landsat and Sentinel 2 imagery, *Journal of Glaciology*, 6, <https://doi.org/10.1017/jog.2023.11>, 2023.
- Goff, J. A. and Gratch, S.: Low-pressure properties of water-from 160 to 212 °F., *Trans. Am. Heat. Vent. Eng.*, 52, 95–121, 1946.
- Hock, R. and Holmgren, B.: A distributed surface energy-balance model for complex topography and its application to Storglaciären, Sweden, *Journal Of Glaciology*, 51, 2005.
- 465 Hock, R. and Noetzli, C.: Areal melt and discharge modelling of Storglaciären, Sweden, *Ann. Glaciol.*, 24, 211–216, 1997.
- How, P., Abermann, J., Ahlstrøm, A., Andersen, S., Box, J. E., C., M., Colgan, W., Fausto, R., Karlsson, N., Jakobsen, J., Langley, K., Larsen, S., Mankoff, K., Pedersen, A., Rutishauser, A., Shield, C., Solgaard, A., van As, D., Vandecrux, B., and Wright, P.: PROMICE and GC-Net automated weather station data in Greenland, *GEUS Dataverse*, V11, <https://doi.org/10.22008/FK2/IW73UU>, 2022.
- 470 How, P. R., Wright, P. J., Mankoff, K. D., Vandecrux, B., Fausto, R. S., and Ahlstrøm, A. P.: pypromice: A Python package for processing automated weather station data, *Journal of Open Source Software*, 8, 5298, <https://doi.org/10.21105/joss.05298>, 2023.
- Hugonnet, R., McNabb, R., Berthier, E., Menounos, B., Nuth, C., Girod, L., Farinotti, D., Huss, M., Dussaillant, I., Brun, F., and Käab, A.: Accelerated global glacier mass loss in the early twenty-first century, *Nature*, 592, 726–731, <https://doi.org/10.1038/s41586-021-03436-z>, 2021.
- 475 Larsen, S. H. and Citterio, M.: GlacioBasis Zackenberg - Level 1 data 2008 - 2022, *GEUS Dataverse*, V1, <https://doi.org/10.22008/FK2/X9X9GN>, 2023.
- Lowe, P. R.: An Approximation Polynomial for the Computation of Saturation Vapor Pressure, *Journal of Applied Meteorology*, 16, 100–103, 1976.
- Lund, M., Stiegler, C., Abermann, J., Citterio, M., Hansen, B. U., and van As, D.: Spatiotemporal variability in surface energy balance across tundra, snow and ice in Greenland, *Ambio*, 46, 81–93, <https://doi.org/10.1007/s13280-016-0867-5>, 2017.
- 480

- Machguth, H., Rastner, P., Bolch, T., Mölg, N., Sørensen, L. S., Aalgeirsdottir, G., Angelen, J. H. V., Broeke, M. R. V. D., and Fettweis, X.: The future sea-level rise contribution of Greenland's glaciers and ice caps, *Environmental Research Letters*, 8, <https://doi.org/10.1088/1748-9326/8/2/025005>, 2013.
- 485 Noël, B., Berg, W. J. V. D., Lhermitte, S., Wouters, B., Machguth, H., Howat, I., Citterio, M., Moholdt, G., Lenaerts, J. T., and Broeke, M. R. V. D.: A tipping point in refreezing accelerates mass loss of Greenland's glaciers and ice caps, *Nature Communications*, 8, <https://doi.org/10.1038/ncomms14730>, 2017.
- RGI Consortium, .: Randolph Glacier Inventory - A Dataset of Global Glacier Outlines, Version 6. Greenland Periphery subset., Boulder, Colorado USA. NSIDC: National Snow and Ice Data Center, <https://doi.org/https://doi.org/10.7265/4m1f-gd79>, 2017.
- Sauter, T., Arndt, A., and Schneider, C.: COSIPY v1.3 – an open-source coupled snowpack and ice surface energy and mass balance model, *Geoscientific Model Development*, 13, 5645–5662, <https://doi.org/10.5194/gmd-13-5645-2020>, 2020.
- 490 Sej, M. K., Bruhn, A., Dalsgaard, T., Juul-Pedersen, T., Stedmon, C. A., Blicher, M., Meire, L., Mankoff, K. D., and Thyrring, J.: Glacial meltwater determines the balance between autotrophic and heterotrophic processes in a Greenland fjord, *Proceedings of the National Academy of Sciences of the United States of America*, 119, <https://doi.org/10.1073/pnas.2207024119>, 2022.
- Shahi, S., Abermann, J., Silva, T., Langley, K., Larsen, S. H., Mastepanov, M., and Schöner, W.: The importance of regional sea-ice variability for the coastal climate and near-surface temperature gradients in Northeast Greenland, *Weather and Climate Dynamics*, 4, 747–771, <https://doi.org/10.5194/wcd-4-747-2023>, 2023.
- 495 Smeets, C. J. and van den Broeke, M. R.: Temporal and spatial variations of the aerodynamic roughness length in the ablation zone of the greenland ice sheet, *Boundary-Layer Meteorology*, 128, 315–338, <https://doi.org/10.1007/s10546-008-9291-0>, 2008.
- Swinbank, W. C.: Long-wave radiation from clear skies, *Q. J. Roy. Meteor. Soc.*, 89, 339–348, 1963.
- 500 van As, D.: Warming, glacier melt and surface energy budget from weather station observations in the melville bay region of northwest greenland, *Journal of Glaciology*, 57, 208–220, <https://doi.org/10.3189/002214311796405898>, 2011.
- van As, D., van den Broeke, M., Reijmer, C., and van de Wal, R.: The summer surface energy balance of the high Antarctic plateau, *Boundary-Layer Meteorology*, 115, 289–317, <https://doi.org/10.1007/s10546-004-4631-1>, 2005.
- Vignola, F.: University of Oregon Solar Radiation Monitoring Laboratory, available at: <http://solardata.uoregon.edu/SolarRadiationBasics.html> (last access: 31 August, 2023), last revised April 6, 2022, 2019.
- 505