

1 **Atmospheric and surface observations during the Saint John**
2 **River Experiment on Cold Season Storms (SAJESS)**

3 Hadleigh D. Thompson¹, Julie M. Thériault¹, Stephen J. Déry², Ronald E. Stewart³, Dominique
4 Boisvert¹, Lisa Rickard², Nicolas R. Leroux¹, Matteo Colli⁵ and Vincent Vionnet⁴

5

6 ¹Department of Earth and Atmospheric Sciences, Centre ESCER, Université du Québec à Montréal, Montréal,
7 Quebec, H3C 3P8, Canada

8 ²Department of Geography, Earth and Environmental Sciences and Natural Resources and Environmental Studies
9 Program, University of Northern British Columbia, Prince George, British Columbia, V2N 4Z9, Canada

10 ³Department of Environment and Geography, University of Manitoba, Winnipeg, Manitoba, R3T 2N2, Canada

11 ⁴Meteorological Research Division, Environment and Climate Change Canada, Dorval, Quebec, H9P 1J3, Canada

12 ⁵Artys Srl, Piazza della Vittoria, 9/3, 16121 Genova, Italy

13 *Correspondence to:* Julie M. Thériault (theriault.julie@uqam.ca)

14 **Running title**

15 Data from the Saint John River Experiment on Cold Season Storms (SAJESS)

16 **Abstract.** The amount and phase of cold season precipitation accumulating in the upper Saint John River (SJR)
17 basin are critical factors in determining spring runoff, ice-jams, and flooding. To study the impact of winter and
18 spring storms on the snowpack in the upper SJR basin, the Saint John River Experiment on Cold Season Storms
19 (SAJESS) was conducted during winter/spring 2020-21. Here, we provide an overview of the SAJESS study area,
20 field campaign, and data collected. The upper SJR basin represents 41% of the entire SJR watershed and
21 encompasses parts of the US state of Maine and the Canadian provinces of Quebec and New Brunswick. In early
22 December 2020, meteorological instruments were co-located with an Environment and Climate Change Canada
23 station near Edmundston, New Brunswick. This included a separate weather station for measuring standard
24 meteorological variables, an optical disdrometer, and a micro rain radar. This instrumentation was augmented
25 during an intensive observation period that also included upper-air soundings, surface weather observations, a
26 multi-angle snowflake camera, and macrophotography of solid hydrometeors throughout March and April 2021.
27 During the study, the region experienced a lower-than-average snowpack that peaked at ~65 cm, with a total of
28 287 mm of precipitation (liquid equivalent) falling between December 2020 and April 2021, a 21% lower amount
29 of precipitation than the climatological normal. Observers were present for 13 storms during which they conducted
30 183 hours of precipitation observations and took more than 4000 images of hydrometeors. The inclusion of local
31 volunteers and schools provided an additional 1700 measurements of precipitation amounts across the area. The
32 resulting datasets are publicly available from the Federated Research Data Repository at
33 <https://doi.org/10.20383/103.0591> (Thompson et al., 2023). We also include a synopsis of the data management
34 plan, and a brief assessment of the rewards and challenges of conducting the field campaign and utilizing
35 community volunteers for citizen science.

36 .


37 **1 Introduction**

38 The Saint John River Experiment on Cold Season Storms (SAJESS) focused on cold region processes related to
39 winter and spring storms over the transboundary upper Saint John River basin, located on the border of Maine
40 (ME) and the provinces of Quebec (QC) and New Brunswick (NB). The Saint John River, known as the Wolastoq
41 by local Indigenous communities, is 673 km long and drops 480 m in elevation from its source at the Little John
42 River (ME) down to the Bay of Fundy (Fig. 1). The Saint John River watershed covers 55,000 km², with 36%
43 located in the U.S., although, here we define the upper Saint John River basin as the area that drains into the Saint
44 John River above Grand Falls, NB. Economically important to the region, the river provides flow for five
45 hydroelectric facilities with development being overseen by the International Joint Commission (Kenny & Secord,
46 2010).

47

48 A concern of emergency managers along the Saint John River is the risk of catastrophic flooding when
49 spring rain coincides with relatively high temperatures, creating significant snow melt. Such flooding events
50 occurred in 2008, 2018, and again in 2019, and were in the annual top 10 Canadian weather disasters identified
51 by Environment and Climate Change Canada (ECCC) (ECCC, 2017, 2019, 2020). Although this sub-catchment
52 covers an area of 22,600 km², most of the research focusing on the Saint John River does so by examining the
53 lower reaches and associated lakes, wetlands, and tidal estuaries. There is therefore a paucity of both hydrological
54 knowledge of the upper basin, as noted by Budhathoki et al. (2022), and meteorological stations (only two within
55 the upper SJR basin) (also see Fortin and Dubreuil, 2020).

56

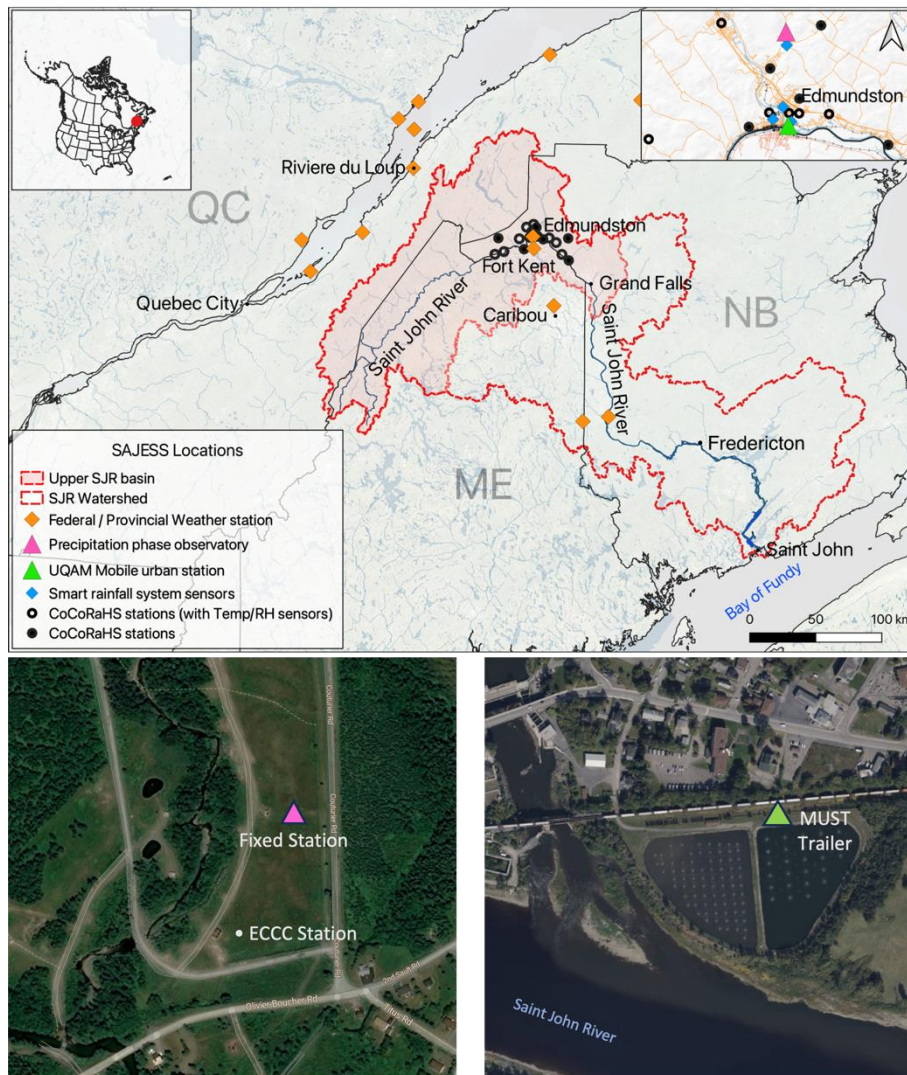

57

58 **Figure 1: Top: The Upper Saint John River Basin (shaded red), straddling the borders of Quebec (QC), Maine (ME,**
 59 **US) and New Brunswick (NB) is a sub-basin of the Saint John River Basin (red line). The Environment and Climate**
 60 **Change Canada (ECCC) and US National Weather Service (NWS) weather stations, SAJESS-supplied CoCoRaHS**
 61 **stations including where Temperature/RH sensors were also co-located, (black circles), the Precipitation Phase**
 62 **Observatory/Fixed Station (pink triangle) and the UQAM Mobile urban station/Must Trailer (green triangle) are**
 63 **shown. Bottom: Aerial photographs of the two main SAJESS sites showing the locations of the Fixed Station, MUST**
 64 **Trailer, and ECCC Station. Microsoft product screenshots reprinted with permission from Microsoft Corporation.**

65

66 There have been several previous cold-season precipitation studies in North America. These include a comparison
67 between orographic winter storms in the San Juan Mountains and Sierra Nevada by Marwitz (1986), the Canadian
68 Atlantic Storms Program (Stewart et al., 1987; Stewart, 1991) that investigated the synoptic and mesoscale
69 structure of Canadian East Coast winter storms, and field campaigns such as the meteorological monitoring
70 network established for the Vancouver 2010 winter Olympics (Joe et al., 2014), and the Olympic Mountains
71 experiment (OLYMPEX) that studied the modification of Pacific storms by coastal mountain ranges (Houze et
72 al., 2017). Notably, the Vancouver Olympics network utilized a first-generation hotplate precipitation gauge, and
73 while OLYMPEX used similar instrumentation to SAJESS such as disdrometers, weighing rain gauges, and micro
74 rain radars, they also employed instrumented aircraft and a greater range of radar options. Ongoing research into
75 East Coast snowstorm-producing cyclones is being undertaken by the Investigation of Microphysics and
76 Precipitation for Atlantic Coast-Threatening Snowstorms (IMPACTS) campaign. Similar to OLYMPEX,
77 IMPACTS combines surface observations and measurements with airborne remote sensing instruments. In terms
78 of field projects, SAJESS compares closest to the recent (2019) Storms and Precipitation Across the continental
79 Divide experiment (SPADE) (Thériault et al., 2021a, 2022), adopting the methods of manual observations,
80 macrophotography, and micro rain radar and disdrometer deployment, although we built on SPADE by adding a
81 distributed network of temperature and precipitation measurements, and upper air observations.

82
83 Locally, previous studies encompassing the Saint John River Basin have focused on flooding (Newton & Burrell,
84 2016), including rain-on-snow events (Buttle et al., 2016), and the analysis and modeling of ice jams that may
85 increase in frequency in future climate scenarios (Beltaos et al., 2003). Despite these hazards, no studies of storms
86 and precipitation and their impact on snowpack evolution have been conducted in this region.

87
88 The SAJESS dataset contains meteorological and precipitation data that were collected at a fixed station from 1
89 December 2020 until 30 April 2021, and an intensive observation period (IOP) that took place from 8 March to
90 30 April 2021. The objective of this paper is to describe the data collected during SAJESS, provide examples of
91 the measurements and how they can be combined to broaden the picture of meteorological conditions observed,
92 and to illustrate to stakeholders and potential users the importance of the field campaign and dataset.

93
94 The paper is organized as follows: the sites used during SAJESS are described in Section 2; the instruments,
95 manual observations, and other sources of data are detailed in Section 3; an overview of data processing,

96 management, and validity, along with examples of data collected throughout SAJESS are presented in Section 4;
97 and a summary, including a discussion on potential future analyses, is given in Section 5.

98 **2 Site Descriptions**

99 **2.1 Overview**


100 To observe the spatial and temporal variability in precipitation amount and phase across the study area, a broad
101 range of techniques was employed: first, a semi-permanent ‘Precipitation Phase Observatory’ was installed to
102 record meteorological data from December 2020 to April 2021. This site became known as the ‘Fixed Station’
103 and was co-located with the permanent ECCC station, north of Edmundston (Fig. 1). Second, the Mobile Urban
104 Station (MUST), a modified enclosed trailer provided by the Université du Québec à Montréal (UQAM), was
105 situated at the confluence of the Madawaska and Saint John rivers for the IOP during April and May 2021. The
106 MUST was located on property provided by the City of Edmundston and was used as a base for graduate students
107 and volunteers to record manual observations, capture macrophotography images of hydrometeors, and release
108 sounding balloons for upper air observations. Finally, community volunteers were engaged by providing locations
109 for either a satellite dish associated with the Smart Rainfall System (SRS) array (Coli et al., 2019), or a
110 precipitation gauge and snow board for the Community Collaborative Rain, Hail, and Snow Network
111 (CoCoRaHS) (Cifelli et al., 2005). Furthermore, 10 grade 6 classes (11-12 years old) from local elementary
112 schools also enrolled as CoCoRaHS observers.

113

114 **2.2 Precipitation Phase Observatory**

115 The Precipitation Phase Observatory (henceforth, the Fixed Station) encompassed a semi-permanent array of
116 meteorological instruments that were installed ~100 m from the Edmundston ECCC station on 30 November 2020
117 (Table 1, Figs. 1 and 2). The site was situated at the southern end of an area of open grassland in a broad valley,
118 152 m above sea level (ASL). The valley is 120-200 m wide by 1 km long, oriented north-south, and bordered by
119 coniferous forest. The 14-ha site acts as the municipal aquifer resupply and was provided by the city of
120 Edmundston for the installation. We provide specific location details in Table 1. This site was chosen to allow for
121 the SAJESS datasets to be supplemented and compared with records from the nearby ECCC station, which was
122 comprised of a Geonor T-200B weighing precipitation gauge with a single Alter shield, three sonic ranger snow
123 depth sensors, three Temperature/RH probes, and a RM Young wind monitor atop a 10-m mast. Additionally, the

124 open field provided an opportunity to install an Infrared Gas Analyzer and Sonic anemometer (IRGASON) to
125 estimate surface turbulent fluxes and compute surface energy balances (Table 2) during the IOP (see Section 2.2).
126

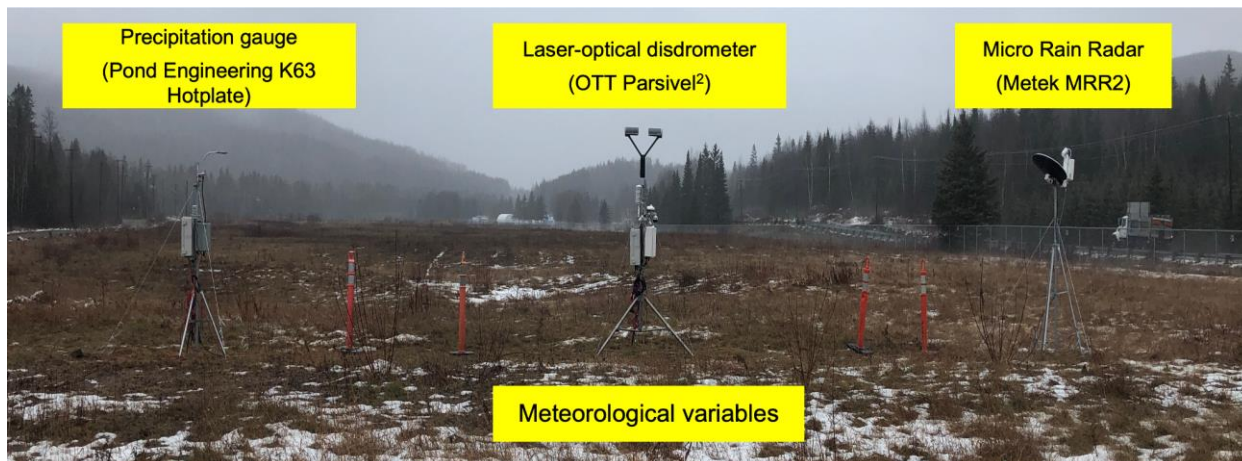


127
128 **Figure 2: The Precipitation Phase Observatory instrumentation, image taken looking north. From left-to-right: The**
129 **K63 Hotplate, a laser-optical disdrometer installed upon the meteorological tripod, and the Micro Rain Radar. This**
130 **station was also to be known as the ‘Fixed Station’. Picture taken 1 December 2020.**

131
132 The identification of precipitation phase was achieved at the Fixed Station by the installation of a laser-optical
133 disdrometer for recording particle size and fall speed, and by a vertically pointing micro rain radar (MRR) to
134 provide information on the atmospheric conditions aloft (see Section 3 and Table 2). A K63 Hotplate Total
135 Precipitation Gauge (henceforth, hotplate) was installed to measure precipitation rate and amount. Aside from
136 periods of missing data (~5%), the Fixed Station dataset, excluding the Flux Tripod (see Section 3.1.2), spans 1
137 December 2020 – 30 April 2021.

138 **2.3 Intensive observation period**

139 Due to limitations at the Fixed Station (e.g., no fuel or generator use), a separate IOP site was established so that
140 the Mobile Urban Weather Station Trailer (MUST) and instruments could frequently be visited by observers (Fig.
141 1). The 6' × 12' enclosed trailer was equipped with heating, AC power, helium cylinders, and instrument storage;
142 it was parked on a fenced parcel of land on the north bank of the Saint John River and the east bank of the mouth
143 of the Madawaska River, 143 m ASL. Although the 3.3-ha site is dominated by the Edmundston wastewater

144 ponds, there was sufficient space for the MUST Trailer and instrumentation to be placed along the northern edge
145 of the site (Figure 4).

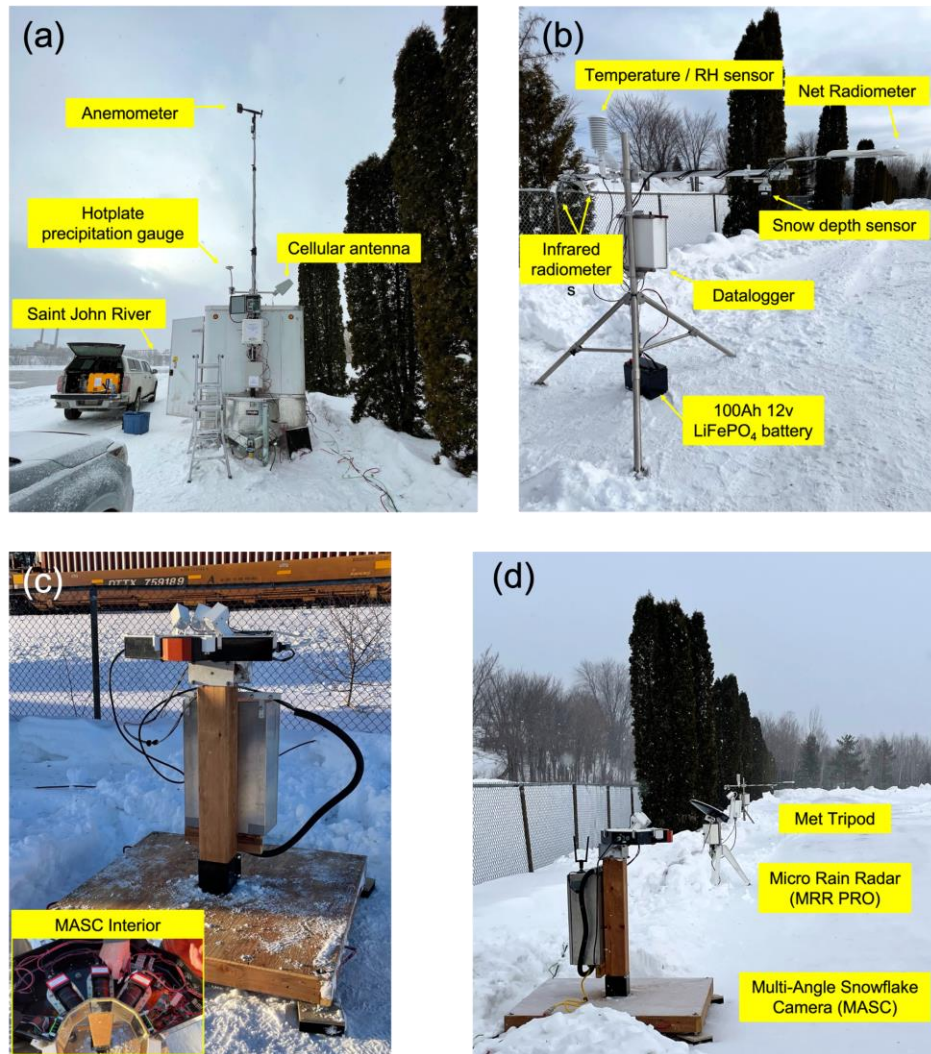

146

147 **Figure 3: Instruments and sensors co-located with the Mobile Urban Station (MUST) trailer. (a) The MUST trailer**
148 **with extended 10 m mast, anemometer (not included in the dataset), and K63 Hotplate, (b) the meteorological tripod,**
149 **(c) the Multi-Angle Snow Camera (MASC) with a top-down view of the internal components and three high-speed**
150 **cameras, and (d) the MASC, MRR Pro, and meteorological tripod lined along the access road to the water treatment**
151 **lagoon. Pictures taken 3 March 2021.**

152

153 The proximity of the instruments to the open ponds, nearby railway, and urban environment, resulted in the focus
154 on manual observations of weather conditions and precipitation type, rather than automated instrumentation, at
155 this location. We therefore stationed equipment that required regular attention or manual operation, such as the
156 multi-angle snowflake camera (MASC) (Figure 3c) and macrophotography equipment (not shown). Manual
157 observations and macrophotography (see Section 3.2) were conducted at the site from 1 March 2021 – 27 April
158 2021.

159 **2.3 Smart Rainfall System (SRS)**

160 The Smart Rainfall System (SRS) was installed at six sites in the Edmundston area to capture the spatial
161 variability of precipitation by exploiting the satellite-to-earth links technology (Colli et al., 2019). Some locations
162 were also chosen to provide measurements upstream and downstream of Edmundston. The SRS system uses a
163 standard parabolic dish to receive satellite telecommunication broadcasting signals and an algorithm converts the
164 signal attenuation to precipitation rate (section 3.4). Locations with parabolic dishes that were already installed
165 by community volunteers for telecommunication purposes, but not being used during the experiment period, were
166 selected. Locations are shown Fig. 1.

167 **2.4 Community involvement (CoCoRaHS)**

168 While the CoCoRaHS network provides a broad array of precipitation measurements across North America
169 (Reges et al., 2016), there were few CoCoRaHS observer sites in the SAJESS study region. With assistance from
170 CoCoRaHS Canada (Colorado Climate Center, 2017), SAJESS students and staff facilitated the distribution of
171 equipment and training to a total of 21 new CoCoRaHS stations (Table 4), including 10 elementary schools, during
172 the 2020-2021 winter season. CoCoRaHS site metadata available to the public can be found at
173 <https://cocorahs.org/Stations/ListStations.aspx>.

174 **3. Field instruments and manual observations**

175 **3.1 Instrumentation**

176 The main consideration when deploying instruments to SAJESS was how to measure the amount, phase, and type
177 of precipitation that occurs during the winter and spring seasons. Particular attention was paid to gathering data
178 throughout as much of the tropospheric column as possible.

179

180 Here we provide an overview of the instrumentation used during SAJESS. Sensor details, parameters, and units
181 are included in Tables 2 and 3. Further details of each sensor, such as the date of manufacture, last calibration,
182 and serial number, are also provided in the readme files.


183 **3.1.1 Meteorological tripod**

184 Standard meteorological variables were measured at each of the two main sites. Common parameters for each
185 site were 2-m air temperature and relative humidity, 4-way net radiation (upwelling and downwelling long-wave
186 and short-wave radiation, LW \uparrow , LW \downarrow , SW \uparrow , and SW \downarrow), surface temperature, and snow depth. Measurements
187 at the Fixed Station also included soil surface temperature and moisture content. Snow at the Fixed Station
188 remained undisturbed for the winter and total snow depth was recorded continuously for December 2020 –
189 April 2021. Due to disturbance of the snowpack surrounding the MUST Trailer by foot traffic, vehicles, and the
190 installation of other instruments, a 30 cm \times 30 cm white snow board was placed underneath the snow depth sensor
191 and cleared after each significant snowfall event. The clearing of the snow boards was consistently performed by
192 the volunteers/students. They were cleared at the beginning of observations before precipitation started, then
193 cleared again once precipitation ended. Through these actions, the ensuing data should be considered by users as
194 a snowfall measurement rather than true snow depth. On each met tripod, the snow depth sensor was installed on
195 the south end of the tripod cross arm so that the legs of the tripod would not be within \sim 1 m diameter cone of
196 detection. For surface temperature, two infrared radiometers (IRRs, henceforth IRR 1 and IRR 2) were mounted
197 to the north end of the cross arm of each met tripod and angled away \sim 30 degrees. At the Fixed Station, IR 1
198 faced slightly west, while IR 2 faced slightly east. At the MUST Trailer site these were reversed. The net
199 radiometer and snow depth sensors were mounted on the south end of each cross arms.

200 **3.1.2 Flux tripod**

201 An Open-path Eddy Covariance system was installed at the Fixed Station for the IOP from 5 March 2021 to 30
202 April 2021. The integrated Infrared Gas analyzer and Sonic Anemometer (IRGASON), temperature/RH probe,
203 net radiometer, infrared radiometer, soil probes, and heat flux plates were installed following the prescribed
204 methods found in Campbell Scientific (2022a), with the IRGASON sensor facing north into the prevailing wind.
205 Winds (in 3-D), air temperature, ambient pressure, and CO₂ and H₂O densities were captured at 10 Hz resolution
206 and averaged over 30 minutes to calculate turbulent fluxes and energy closure balances (Campbell Scientific,
207 2022b). The dataset also includes diagnostic data, data quality values, and coefficients used for the eddy-

208 covariance calculations during each 30-min period so the raw time series data can also be post-processed using a
209 variety of software (US Department of Energy, 2022).
210

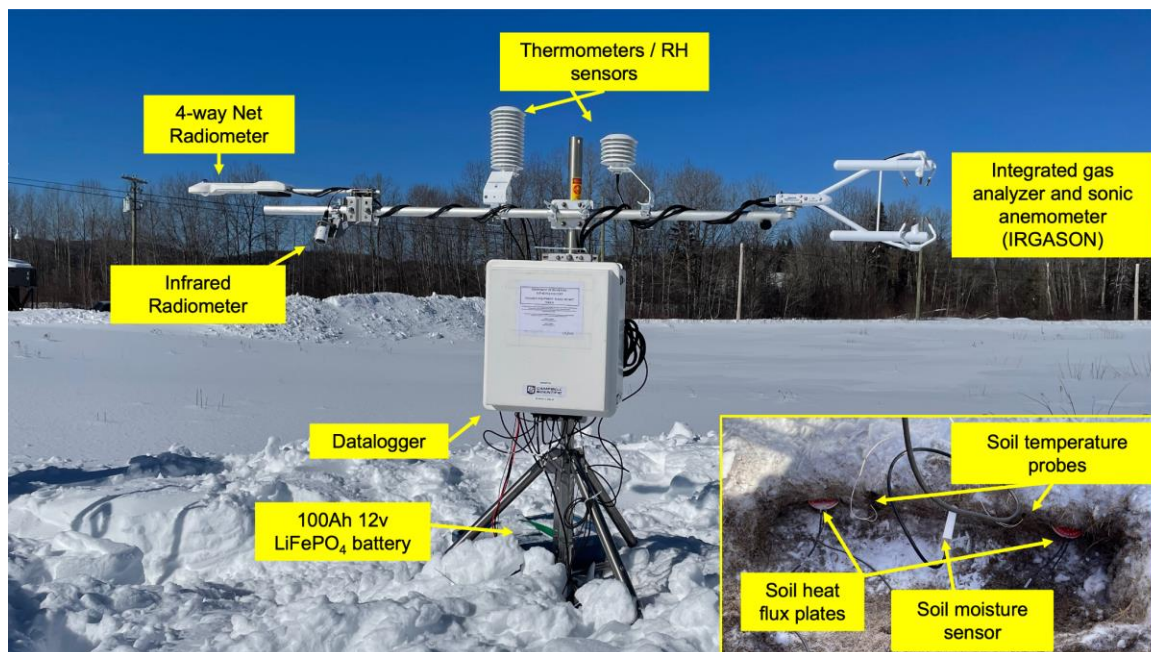

211
212 **Figure 4: The Fixed Station flux tripod. An open-path eddy-covariance system consisting of an Infrared Gas Analyser**
213 **and Sonic Anemometer (IRGASON), soil temperature probes, a soil moisture sensor, a net radiometer, an infrared**
214 **radiometer, and temperature/RH sensors. This tripod was installed for the melt period from 5 March to 30 April 2021.**
215 **Picture taken 5 March 2021.**

216 3.1.3 Hotplate precipitation gauge

217 A hotplate precipitation gauge (henceforth, hotplate) was installed at the eastern end of the Fixed Station
218 instrument array (Fig. 3) (Rasmussen et al., 2011; Thériault et al., 2021b). As outlined by Cauteruccio et al. (2021),
219 the hotplate was tested during the World Meteorological Organization’s Solid Precipitation Intercomparison
220 Experiment (SPICE) (Nitu et al. 2018), and the Global Precipitation Measurement Cold Season Precipitation
221 Experiment (GCPEX) (Skofronick-Jackson et al. 2015). The hotplate measures liquid-equivalent precipitation by
222 recording 1-minute and 5-minute running averages of precipitation rate and wind speed (needed as control for
223 precipitation rate). An accompanying environmental sensor measures air temperature, RH, and atmospheric
224 pressure with the same 1-minute and 5-minute temporal resolution. SAJESS was the first time in Canada that the

225 Pond Engineering version of the hotplate was used in a field campaign. A second one of this type of hotplate was
226 installed for the IOP on the MUST Trailer mast and is detailed in Section 3.1.7.

227 **3.1.4 Disdrometer**

228 A laser-optical disdrometer was deployed at the Fixed Station for the duration of the field campaign on the same
229 tripod as the standard meteorological instruments, at 2.8 m AGL (Fig. 3). The disdrometer provides measurements
230 of the size and speed of falling hydrometeors which, when post-processed accordingly, can provide a classification
231 of hydrometeor type (Hauser et al., 1984; Rasmussen et al., 1999; Löffler-Mang and Joss, 2000; Ishizaka et al.,
232 2013; Thériault et al., 2021a). Included in the dataset are variables derived by the manufacturer's software such as
233 precipitation intensity (mm h^{-1}), number of detected particles, and several national standard present weather
234 codes. The spectrum of particles is provided by 1024 columns representing the 32×32 matrix of particle fall
235 speed and diameter bins. The mid-values and spread of these bins are listed in the readme file supplied with the
236 dataset and in the disdrometer user manual (OTT, 2019).

237 **3.1.5 Micro Rain Radar**

238 A micro rain radar (MRR) at each of the primary sites was used during SAJESS to vertically profile hydrometeor
239 reflectivity and Doppler velocity (Tokay et al., 2009; Souverijns et al., 2017). A METEK MRR-2 was installed at
240 the Fixed Station, 2.6 m AGL, at the western end of the instrument array (Fig. 3). The MRR-2 has 32 range gates
241 (height steps) and we set the height resolution to the maximum of 200 m, giving a maximum height of 6400 m.
242 Raw data from the MRR-2 were post-processed using the IMProToo algorithm from Mahn and Kollias (2012), as
243 outlined in Thériault et al. (2021a). An MRR-Pro was installed at 1.3 m AGL at the MUST Trailer (Fig. 4d).
244 Settings for the MRR-Pro were: 128 range gates, 64 spectral lines, 10 s sampling, 50 m height resolution, and
245 6350-m ceiling. The combination of these parameters results in a velocity range of 12 m s^{-1} , and a velocity
246 resolution of 0.19 m s^{-1} . The 10 s averaging time results in a total of 305 spectra being averaged for each
247 measurement. Both radar units used built-in dish heating to eliminate snow and ice build-up during precipitation
248 events.

249 **3.1.6 Multi-Angle Snowflake Camera**

250 A multi-angle snowflake camera (MASC) was installed at the MUST Trailer (Fig. 4c and d), on a wooden stand
251 ~ 1.4 m above the ground, for the majority of the IOP (5 March 2021 – 27 April 2021). Accumulating snow around
252 the base of the stand was removed by students to prevent the re-suspension of previously captured particles (Fitch

253 et al., 2021; Schaer et al., 2020). The MASC consists of three high-speed cameras housed in a single enclosure,
254 with 36° separation between each camera, and a focal point ~10 cm for each lens. The cameras take images
255 simultaneously when particles are detected within a ring-shaped viewing area (Fig. 4c inset). The three images
256 from each trigger consequently show the hydrometeor(s) from slightly different angles. First introduced by
257 Garret et al. (2012), MASCs have been deployed in Antarctica (Praz et al., 2017), the Colorado Rockies (Hicks
258 & Notaros, 2019), and Alaska (Fitch et al., 2020). Images have been used individually to illustrate the
259 hydrometeors observed, and highlight the riming conditions, crystal habit, size of particles.

260 **3.1.7 MUST Trailer mast**

261 A telescopic pneumatic 10-m mast attached to the MUST trailer supported an anemometer and wind vane (at 10
262 m), a hotplate precipitation gauge at 3.5 m, and the antenna for upper air observations (see Section 3.3) (Figure
263 4a). Due to air leakage, the mast did not always maintain its full extension and therefore required re-extending at
264 times. This, in addition to the proximity of the trailer to trees and a nearby structure has resulted in us excluding
265 the wind data from the publicly available dataset.

266 **3.2 Macrophotography, manual observations, and timelapse images**

267 Observers were present at the MUST Trailer during periods of precipitation to report weather conditions, and to
268 obtain macrophotographs of solid hydrometeors (Gibson and Stewart, 2007; Joe et al., 2014; Thériault et al., 2018;
269 Lachapelle and Thériault, 2021a). This provided a running-record of the weather conditions during storm events
270 and allowed for the field-training of students in manual observations, and identification of precipitation types and
271 snow crystal habits. The recording of manual observations can also remove doubt about precipitation arriving at
272 the surface. This is especially important with respect to hydrometeor type during periods of near-freezing
273 conditions, during which a mixture or changes in precipitation phase or type can occur. This also reduces the
274 potential for misdiagnosis by instrumentation or modeling. Observations of sky condition, cloud type, and
275 precipitation type (solid, liquid, or mixed), and images from a digital single lens reflex (SLR) camera fitted with
276 a macro lens and ring flash, were taken every 10 min. Precipitation was collected on a black velvet collection pad
277 during a short period (5 - 30 seconds), depending on the precipitation rate. The aim was to ensure that there were
278 enough particles to represent the precipitation conditions, while avoiding particles overlapping each other. The
279 collection pad was wiped every time after the series of nine images were taken using a set sequence of movements
280 of the camera upon a sliding frame. Images of a ruler placed across the pad for scale were taken intermittently,
281 for example when the camera was removed/replaced on the stand. Users can assume the scale remains constant

282 between these images (each image is 2 cm across). The scale images are listed in the macrophotography readme
283 file. More details of the method, including images of the equipment, can be found in Thériault et al. (2021a) and
284 Thériault et al. (2018). Other conditions to note were the occurrence of very light precipitation which can be
285 missed by disdrometers, and the presence of blowing snow that could affect analysis of MASC data (Section
286 3.1.6).

287
288 Hourly images of each site, including the surface conditions around the instruments, were captured by a time lapse
289 camera. Similar previous campaigns by the authors have found time-lapse images to be very useful in confirming
290 sky and surface conditions such as snow-on-the-ground onset and they have also provided evidence of wildlife
291 encounters with the instrumentation. Precipitation type diagnoses, however, are not usually possible with these
292 images.

293 **3.3 Upper air observations**

294 Soundings were timed to coincide with the standard synoptic times of 00, 03, 06, 09, 12, 15, 18, or 21 UTC. Some
295 additional launches were attempted to coincide with precipitation phase transitions. Sonde retrieval was not
296 attempted during this experiment. A total of 52 balloons were launched from the MUST Trailer and we include
297 text files for 46 of those launches that resulted in a complete sounding of the troposphere from which profiles of
298 pressure, temperature, dew point and winds (speed and direction) can be produced. Files of each sounding are also
299 available from the authors in other commonly used sounding formats.

300 **3.4 Smart Rainfall System**

301 SAJESS served as the opportunity to deploy an innovative environmental monitoring technique, the Smart
302 Rainfall System (SRS), that has been developed by the University of Genoa, Genoa, Italy and currently distributed
303 by Artys srl. The SRS produces estimations of liquid precipitation, in 1-min rainfall intensity, by processing the
304 attenuation of the satellite microwave link (SML) signal emitted by commercial geosynchronous satellites for
305 Digital Video Broadcasting (DVB-S) and received by common parabolic antennas (Colli et al., 2019). Estimating
306 liquid precipitation using the SRS has been confirmed by several experimental initiatives (Giannetti et al., 2021).
307 In contrast, snowfall intensity retrieval at centimeter wavelengths (the DVB-S signal is transmitted in the Ku
308 frequency band) is more uncertain. It has been demonstrated that higher operating frequencies, and preferably
309 dual-band systems, are needed to successfully retrieve solid precipitation (Falconi et al., 2018; Liao et al., 2016).

310

311 SAJESS provided the experimental conditions for SRS devices to monitor the liquid content in cases of mixed
312 precipitation and wet (melting) snow. The SRS system tested in Edmundston was composed of a set of distributed
313 SML sensors, as described by Colli et al. (2019), connected to a central processing and analysis node to reconstruct
314 the bi-dimensional rainfall field in real time. To an onlooker, the only equipment visible is a small box placed
315 inside the residence that connects inline to the satellite dish coaxial cable. The processor inside the box is then
316 configured to connect to the local Wi-Fi network. To reduce signal noise, it is preferable that the satellite dish no
317 longer be in service. These results will be published once work is complete.

318 **3.5 CoCoRaHS sites**

319 **3.5.1 CoCoRaHS gauges and snowboards**

320 Volunteers from the community and local elementary schools contributed to SAJESS by recording meteorological
321 measurements for the CoCoRaHS network (Cifelli et al., 2005). This provided an opportunity for students to
322 engage in the data collection process, and to learn about the importance (and difficulties) of precipitation
323 determination. A typical CoCoRaHS station includes a manual precipitation gauge to measure liquid and solid
324 precipitation, and a 40 cm × 40 cm white board for measuring snow depth. Daily measurements include the amount
325 of precipitation, depth of snowfall, and snow water equivalent (SWE). Weekly measurements consist of total snow
326 depth, and the total SWE. CoCoRaHS data can be found using the network's online database; station details are
327 provided in Table 4. In addition to the regular CoCoRaHS station equipment, some volunteers hosted dataloggers
328 to record air temperature and relative humidity (see below).

329 **3.5.2 Temperature sensors**

330 HOBO MX2301A data loggers were distributed to 13 community volunteers (Fig. 1, Table 4), and correct
331 installation of each sensor was confirmed by a SAJESS team member. Installed approximately 2 m above the
332 ground, the dataloggers measure air temperature and relative humidity every 5 minutes (Onset Computer
333 Corporation, 2022). These low-cost, robust sensors provided a broad (50-60 km) network to assess spatial
334 variability in near-surface temperature/RH, especially during the passage of fronts and the onset/cessation of
335 precipitation. Data were retrieved from the HOBO devices via a Bluetooth smartphone app that reduced the need
336 to handle the sensor.

337 **4 Data description**

338 **4.1 Data processing and management**

339 Here we provide a short summary of the data processing and archiving strategies. Full details on all data, including
340 specifications of the instruments used, can be found in the readme files uploaded to the FRDR repository.

341

342 Firstly, all instrumentation, camera equipment, observer notes, and computers were set to UTC date and time.
343 Instruments that produce relatively low-volume text-based data such as the disdrometer, meteorological tripods,
344 hotplate precipitation gauge, and temperature sensors, have been processed by concatenating smaller files together
345 to create monthly files. Missing timestamps have been added to ensure every file contains timesteps for each
346 minute of the month. All missing data points have been filled with NANs and no interpolation of missing data
347 points has been attempted for the data uploaded to the FRDR repository. For standard meteorological variables
348 such as temperature, humidity, snow depth, and radiation measurements, values have been quality checked to
349 ensure they fall within the operating range of each instrument, with values outside of these ranges being set to
350 NAN.

351

352 Raw radar data (.raw files) from the Fixed Station radar have been processed into daily NetCDF (.nc) format using
353 the algorithm detailed by Maahn & Kollias (2012). Both .raw and .nc files have been included in this dataset.
354 Hourly data from the MUST Trailer radar (MRR Pro) have been archived as .nc files as these data are produced
355 by the instruments embedded processor (METEK, 2017)

356

357 Photographic images have not been altered or cropped and are uploaded as .png files for the MASC and
358 macrophotography, or .jpg files for the timelapse cameras. Manual observations recorded in spreadsheets have
359 been archived as comma separated value (.csv) files. Upper air observations are saved as one file per sounding, in
360 tabular-delimited files, indexed by UTC date and time at a temporal resolution of 1 second.

361

362 In most instances, files have been identified using a specific naming convention using abbreviations for the project
363 (SAJESS, SJ), each site (Fixed Station, FS; MUST Trailer MT), and each instrument (see Tables 2 and 3). For
364 example, data from the disdrometer at the Fixed Station for the month of January 2021 are contained in the file:
365 SJ_FS_DIS_MAS_202112.txt. (The abbreviation MAS stands for master and is used by the field staff to identify
366 data that have been assembled ready for upload to the repository). MASC images do not follow this naming

367 convention as the software used with the instrument provides a detailed filename with respect to the snowflake
368 number and timestamp of the image.

369 **4.2 Data validity**

370 While not exhaustive, we list below known issues and attempts to-date at validating data from the SAJESS
371 instruments and observations. To preserve the raw data recorded during SAJESS, no quality control related post-
372 processing has been performed. We encourage all users to perform quality control and post-processing according
373 to their needs. We invite users to contact us for further information as several projects using SAJESS data are
374 ongoing.


375 **4.2.1 Met Tripod**

376 To our knowledge the only instrument to suffer from a systematic error was the HMP155A temperature and
377 humidity probe located on the meteorological tripod at the Fixed Station. Incomplete grounding at the datalogger,
378 and the subsequent datalogger program, resulted in a bias of $\sim -2.32^{\circ}\text{C}$ when compared to temperature data from
379 the ECCC station (Fig. 5). Due to the uniform pattern of the bias resulting in a low RMSE, these data have been
380 retained in the dataset and are available for use. Correction of these data by $+2.32^{\circ}\text{C}$ in on-going snow modeling
381 analyses indicate these data are still useful if post-processed accordingly. Post-deployment testing indicates that
382 this bias is not present in the temperature data from the MUST Trailer met tripod.

383

384 While data from the hotplate precipitation gauge include air temperature and humidity that align well with the
385 ECCC station (i.e., do not require bias correction), these data have significantly more noise than data from the
386 meteorological tripod sensor.

387

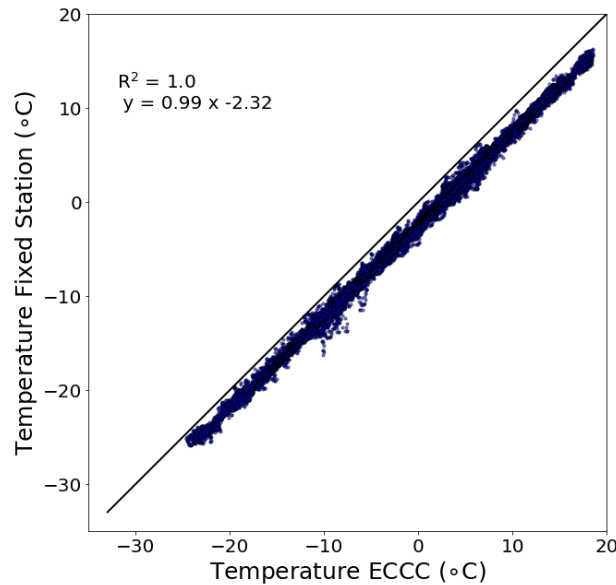

388

389 **Figure 5: SAJESS Fixed Station and ECCC temperature data. Comparison of 1-minute temperature data (63149**
 390 **recordings) from the Fixed Station temperature probe and the mean of the three ECCC temperature thermistor**
 391 **readings. The Fixed Station HMP155 has a -2.32 °C bias due to the method of wiring and data recording.**

392

393 Analysis of the IRR surface temperature data indicates that shading from the tripod and datalogger enclosure may
 394 have affected these measurements. When snow was present, the side with a shaded field of view (west in AM,
 395 east in PM) measured warmer conditions (up to $\sim 2^\circ\text{C}$) than on the unshaded side. Once snow cover was absent,
 396 the trend was reversed so that the shaded side is cooler (up to $\sim 6^\circ\text{C}$). This diurnal pattern of temperature difference
 397 between the two sensors existed at both SAJESS locations, so we caution against the averaging of both sensors
 398 without taking these differences into account. We found similar results to Domine et al. (2021) where RMSE
 399 between the net-radiometer (using $\text{LW}\uparrow$), and the IRRs was best reduced using an unphysical emissivity (ϵ) value
 400 of 1.028. This could indicate that direct comparison is difficult due to the difference in wavelength spectrum
 401 measured by the two instruments (Domine et al., 2021), yet the greater field of view of the net radiometer may
 402 also be influential. Surface temperature data have not been corrected for surface emissivity, and assume $\epsilon = 1$
 403 (Apogee Instruments Inc., 2022). The location of the IRRs should be installed on the unshaded south end of the
 404 cross arm in future deployment.

405


406 Snow depth measurements from the sonic ranger (SR50A) on the Fixed Station meteorological tripod were within
407 10% of the values from the same type of sensor used by ECCC at the Edmundston station over the course of the
408 2020-21 winter. At both SAJESS sites, the 1-min resolution caused noise in the snow depth data during periods
409 of precipitation, which is greatly reduced using a 1-hour running mean. Data from the SR50A also include a
410 ‘quality number’, which is detailed in the dataset readme and can be used to filter snow depth data.

411
412 The 4-way net radiometers on each meteorological tripod were fitted with the heater/ventilation unit to reduce
413 errors associated with dew/frost on the sensor window. This unit, however, does not heat the sensor window(s)
414 sufficiently to remove snow or ice during or after precipitation, which is observed in the pyranometer data when
415 SW_{\uparrow} is greater than SW_{\downarrow} , and correlated with precipitation events using the disdrometer and/or snow depth data.
416 This situation occurred on 13 days at the Fixed Station and five days at the MUST Trailer. For data analysis we
417 suggest using more advanced algorithms such as Lapo et al. (2015) to identify periods of snow accumulation,
418 which can then be corrected with other methods available in the literature (e.g., Sicart et al., 2006; Annandale et
419 al., 2002). Unlike Domine et al. (2021), no sustained periods of 0.0 W m^{-2} are observed in the LW_{\downarrow} data, indicating
420 the continuous use of the ventilation unit was successful in preventing frost build-up.

421 **4.2.2 Flux tripod**

422 Users wishing to utilize data from the flux tripod can investigate variables provided in the Flux Notes (FN),
423 Campbell Scientific (CS), and AmeriFlux (AM) files. These include the number of CO₂, H₂O samples per
424 averaging period, and a corresponding ‘bad data’ column. We observe that the maximum number of samples at
425 10 Hz for the 30-minute period (18,000 in total) did not reach a total of 19.5 hours during the March-April 2021
426 IOP. These occurrences correspond to periods of precipitation whereby we presume the IRGASON windows were
427 inhibited by rain/snow. On a finer scale, steady state integral turbulence characteristic (SSITC) tests were applied
428 to energy balance components for every 30-minute period (Foken et al., 2004). These can be found in the AM
429 files as variables named ‘_SSITC_TEST’, and in the CS files as variables named ‘_QC’. Users should consult
430 Foken et al. (2004) for further information regarding these tests as further analysis is beyond the scope of the
431 paper. Data have not been gap-filled, removed, or replaced from the dataset.

432

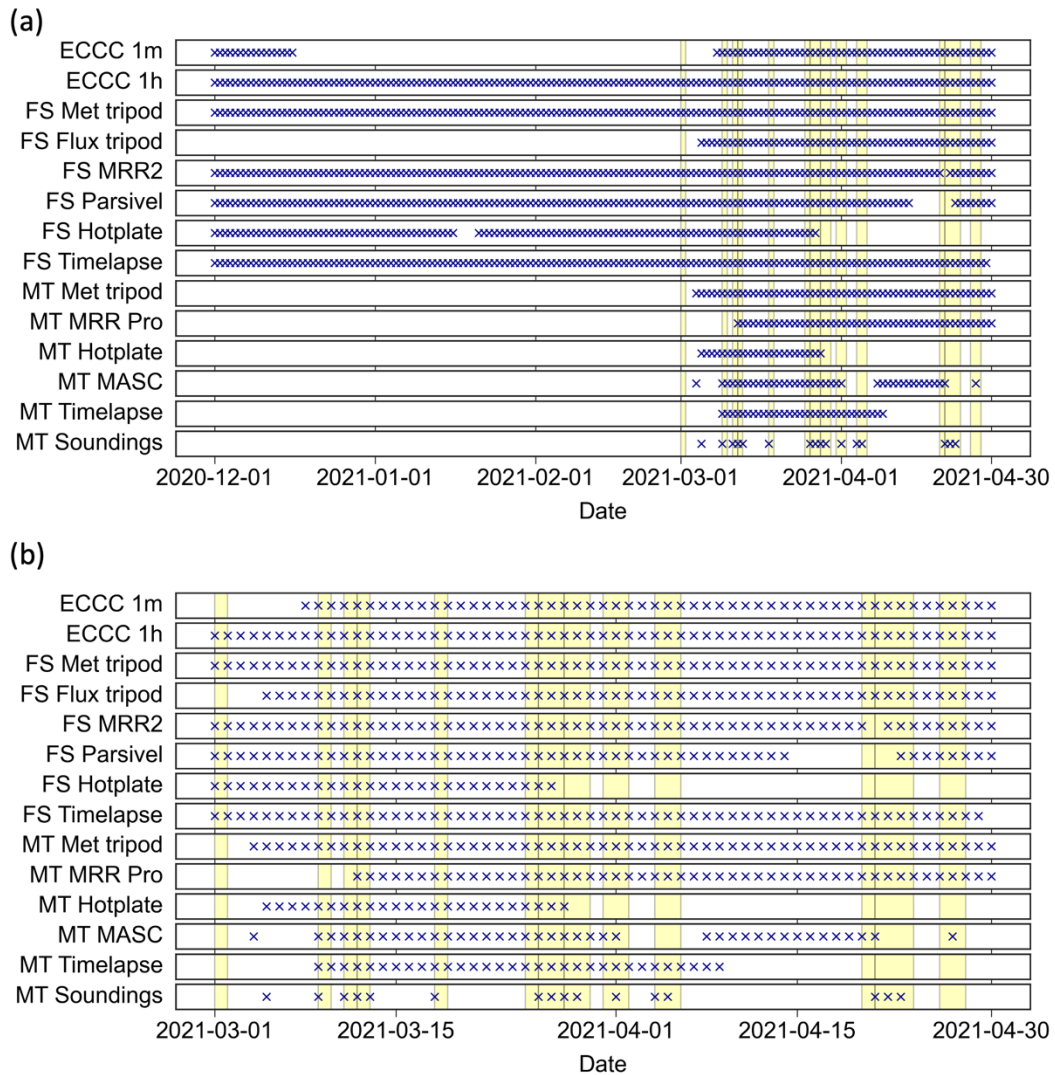

433

434 **Figure 6: Data availability (daily resolution). Operating periods for instrumentation for (a) the entire SAJESS field**
 435 **campaign, 1 December 2021 – 30 April 2021, and (b) during the intensive observation period, 1 March 2021 – 30 April**
 436 **2021 (bottom). Data availability for the Environment and Climate Change Canada station in Edmundston is given for**
 437 **illustrative purposes only, as ECCC data are not included with this dataset. (FS stands for Fixed Station, and MT for**
 438 **MUST Trailer). Vertical yellow bands indicate periods of manual observations at the MUST Trailer during storm**
 439 **events by SAJESS volunteers and students.**

440 **4.2.3 Hotplate**

441 Although the hotplate performed well when fully operational, a significant portion of the IOP was missed (28
442 March 2021 to 30 April 2021) due to faulty microprocessor settings on both hotplates (Fig 6). These have
443 subsequently been improved upon by the manufacturer, and further testing is underway. As described by
444 Rasmussen et al. (2011), hotplate precipitation rate accuracy is least assured during the onset and cessation of
445 precipitation, however, data from the hotplates include a ‘Status’ variable (#1, #2, or #3), that identifies these
446 periods. A full explanation is provided with the dataset readme. Precipitation data from the hotplate have not been
447 corrected for these under- or over-estimations.

448
449 Similar to Thériault et al. (2021b), we compared 30-minute cumulative sums of the hotplate 1-minute
450 accumulation for Dec 2020 – March 2021, with corrected Geonor data (using Kochendorfer et al., 2017) from the
451 Edmundston ECCC station. These align well with the best results (reduced bias and RMSE) found for rain ($>2^{\circ}\text{C}$)
452 and snow ($<-2^{\circ}\text{C}$). Finally, hotplate T1 (1-minute average) precipitation data are more sensitive and therefore
453 better at reproducing higher precipitation rates than the T5 (5-minute average) data, resulting in a positive bias up
454 to $\sim 1.5 \text{ mm h}^{-1}$ (at $4\text{-}5 \text{ mm h}^{-1}$).

455
456 Due to processor issues, barometer data were not recorded by the hotplate environmental sensor at all 1- or 5-
457 minute intervals, however, valid readings do exist for each hour of the campaign. We recommend filtering
458 barometer data from both SAJESS sites by selecting the median value during each hour to represent the hourly
459 value. This method correlates well with ECCC station pressure reading (within 4 hPa) for the duration of the
460 campaign. Barometer readings represent raw station pressure and are not corrected for elevation.

461 **4.2.4 Disdrometer**

462 The disdrometer dataset contains 1024 columns, which includes total particle counts and fallspeed, particle
463 spectrum (Section 3.1.4) and other derived variables listed in Table 4. This configuration option is provided by
464 the OTT software as raw data. At present we can only comment on a preliminary analysis of the OTT-derived
465 precipitation intensity. When compared to 30-minute ECCC Geonor and hotplate precipitation rates, timing and
466 amounts from the disdrometer are generally comparable, yet we observe the Parsivel² overestimates at high
467 precipitation rates ($>10 \text{ mm hr}^{-1}$), which is well documented (e.g., Angulo-Martínez et al., 2018). Users wishing
468 to utilize the drop size and fall speed distributions, and subsequently retrieve an improved precipitation rate, can
469 correct these data using Raupach and Berne (2015).

470 **4.2.5 Upper air observations**

471 Comparisons from four soundings from the MUST Trailer that aligned with either the 1200 UTC or 0000 UTC
472 balloon releases from Caribou (ME) were made for data from 18, 27, and 29 March 2021, with all four sounding
473 profiles displaying good agreement between the two sites. On some occasions, surface, and lower troposphere
474 (<700 hPa) temperatures at Edmundston were up to 5°C cooler than in Caribou, ~60 km to the northwest. The
475 SAJESS sounding data also correlate well with the surface observations of precipitation type and phase. We
476 recommend smoothing the 1 s sounding data using a low pass filter (e.g., 10 s running mean) to remove noise in
477 the temperature and dewpoint profiles.

478 **4.2.6 CoCoRaHS precipitation reports**

479 CoCoRaHS volunteers conducted most of their observations during the IOP, due to the delays in obtaining
480 equipment and training due to public health measures in place at the time. Despite this, 21 CoCoRaHS stations
481 (Table 4) reported 1715 daily total precipitation (liquid equivalent) measurements, 1729 new snow measurements,
482 and 1123 total snow measurements (Fig. 7). A comparison of the daily precipitation and new snow amounts has
483 not been conducted, but the total snow (i.e., snow on the ground) compares well with the Fixed Station and ECCC
484 instruments. CoCoRaHS data are not included in the SAJESS dataset as: (a) CoCoRaHS already provide long-
485 term storage and data retrieval via its own website, and (b) the authors encourage users to explore the CoCoRaHS
486 database for stations that may be useful for their own analysis that were not associated with SAJESS.

487

488 **4.2.7 MASC**


489 The MASC captured a total of 93,343 during March-April 2021. We present some of these images in Section
490 4.3.3, where they corroborate the particle type recorded by the manual observations. The MASC also allowed for
491 automated photography of particles when observers were not able to attend to manual observations or
492 macrophotography. Users should expect, however, a large portion (perhaps 50%) of images to not contain particles
493 distinguishable to the naked eye. We attribute this to SAJESS representing an experimental opportunity to deploy
494 the MASC in mixed-phase precipitation conditions. While images of liquid or freezing precipitation were usually
495 blurred and would be considered less than ideal from an aesthetic point of view, post-processing of the images
496 using algorithms provided in Praz et al. (2017) has resulted in particle fall speed and size distributions (similar to
497 disdrometer results) that align well with the observed precipitation type. Analysis of the images is ongoing.

498 **4.3 Examples of data and observations**

499 Here we provide an overview of the conditions observed during the SAJESS campaign, and examples of data
500 from each of the two SAJESS sites to illustrate possible uses. While the total SAJESS dataset is ~200 Gb, a ~1.1
501 Gb sample of data is available on the FRDR repository. This sample dataset is based on the example given here
502 for the MUST Trailer location, where a subset of data for 18 March 2021 is displayed. Sample data have been
503 made available for most instruments for the entire day (0000 – 2359 UTC), and for the MASC, macrophotography
504 images, and the MRRs for 1200 – 1300 UTC 18 March 2023 (to reduce file size).

505 **4.3.1 Overview**

506 Data covering 1 December 2020 – 30 April 2021 are provided by the instruments at the Fixed Station, which can
507 be supplemented by the near-by ECCC station. Maximum snow depth measured at the Fixed Station was 65 cm,
508 with snowfall amounts comparing well in timing, yet slightly less in magnitude (around 10%), than measured by
509 the ECCC instruments (Figure 7). Maximum snow depth observed at 21 surrounding CoCoRaHS stations (Table
510 4) ranged from 50 cm to 79 cm, with an average of 54 cm. During this period, the ECCC Geonor measured a total
511 of 287 mm of (liquid equivalent) precipitation, less than the climatology (1993-2022) mean of 364 mm.

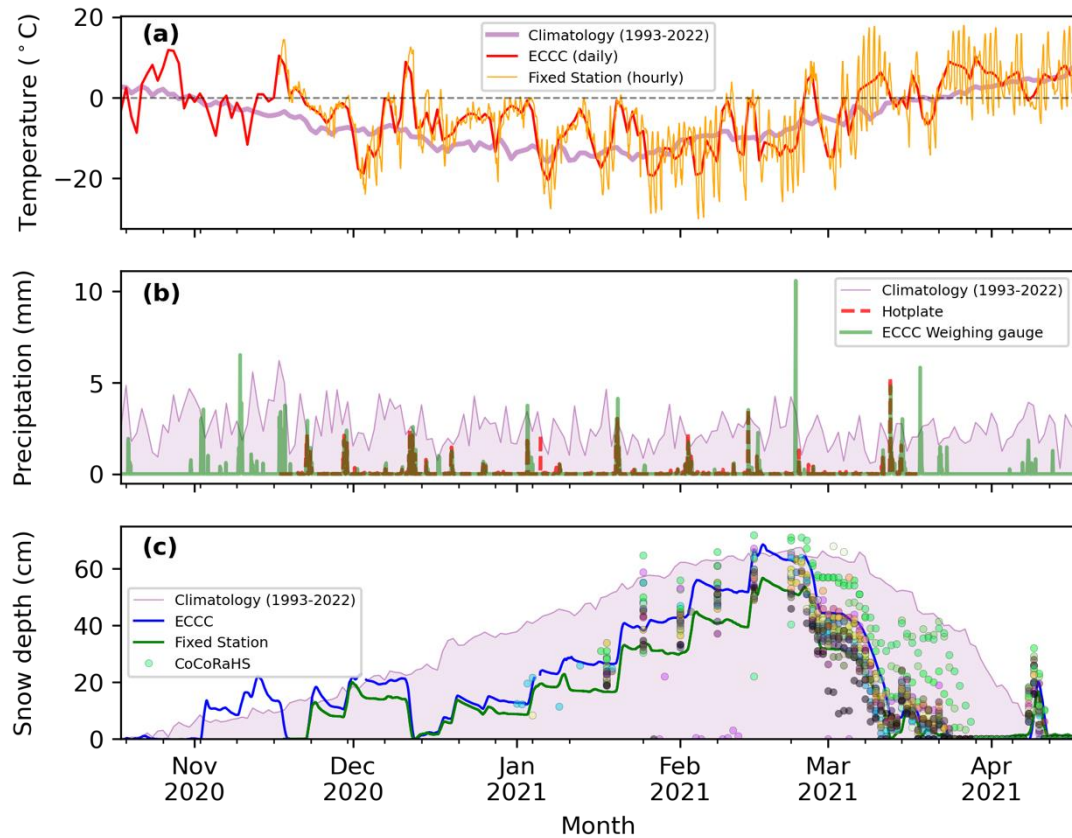

512


513 **Figure 7: Overview of select SAJESS measurements (December 2020 to April 2021) with comparison to the**
 514 **Edmundston ECCC station and 1993-2022 climatology. (a) Hourly mean Fixed Station temperature (corrected, see**
 515 **Section 4.2.1), daily mean ECCC temperature, and daily mean climatology temperature. (b) Hourly accumulation from**
 516 **the Fixed Station hotplate precipitation gauge and ECCC weighing gauge, with daily climatology accumulation. (c)**
 517 **Fixed Station and ECCC snow depth measurements, 1993-2022 snow-on-the-ground climatology, and measurements**
 518 **from local CoCoRaHS stations listed in Table 5 (each station has a randomly assigned individual marker color). No**
 519 **hotplate measurements are available, or therefore shown, for April 2021 due to an instrument fault.**

520

521 During the IOP (8 March 2021 - 30 April 2021) manual observations were made during 13 storms (Fig. 6), for a
 522 total of 183 hours of precipitation-type observations. Observers were present for 93 hours of snow (8 storms), 63
 523 hours of rain (5 storms), and 27 hours of mixed precipitation (more than one phase of precipitation occurring at
 524 the same time; 3 storms). Two storms (12 March 2021; 4-5 April 2021) included rain-snow transitions. Observers
 525 took a total of 4483 images of precipitation particles during the IOP. Using the ECCC Geonor, observers were
 526 present for 97 mm of the 105 mm of (liquid equivalent) precipitation that fell during the IOP period.

527 **4.3.2. Fixed Station storm measurements**

528 Focused examples of the meteorological measurements at the fixed station are given Fig. 8. This case covers the
529 period 25 – 27 December 2020 during which 22.5 hours of rain-on-snow (14 mm) from 1230 UTC 25 December
530 to 1100 UTC 26 December 2020, with temperatures of 5°C – 6°C, reduced the Fixed Station snow depth to 0.0
531 m. This was followed closely by a decrease in temperature to < 0°C and ~4.5 hours of snow (4 cm) from 1630
532 UTC to 2050 UTC 26 December 2021), restarting the seasonal snowpack from bare conditions. Precipitation type
533 derived from the disdrometer data correlates well with the decrease in air temperature below 0°C. The time
534 series³¹ of particle type can be constructed from the binned fall speed and diameter measurements and by using
535 equations in the literature such as Rasmussen et al. (1999) and Ishizaka et al. (2013), or by using the precipitation
536 type codes produced by the instrument software (Table 2). MRR data show the reduction of melting height
537 (determined by the sharp vertical gradient of reflectivity) from ~ 3 km AGL to just over ~ 2 km AGL during this
538 same period. These insights to the evolution of the seasonal snowpack are rare as many standard weather or climate
539 stations may not have the ability to explicitly identify precipitation types.

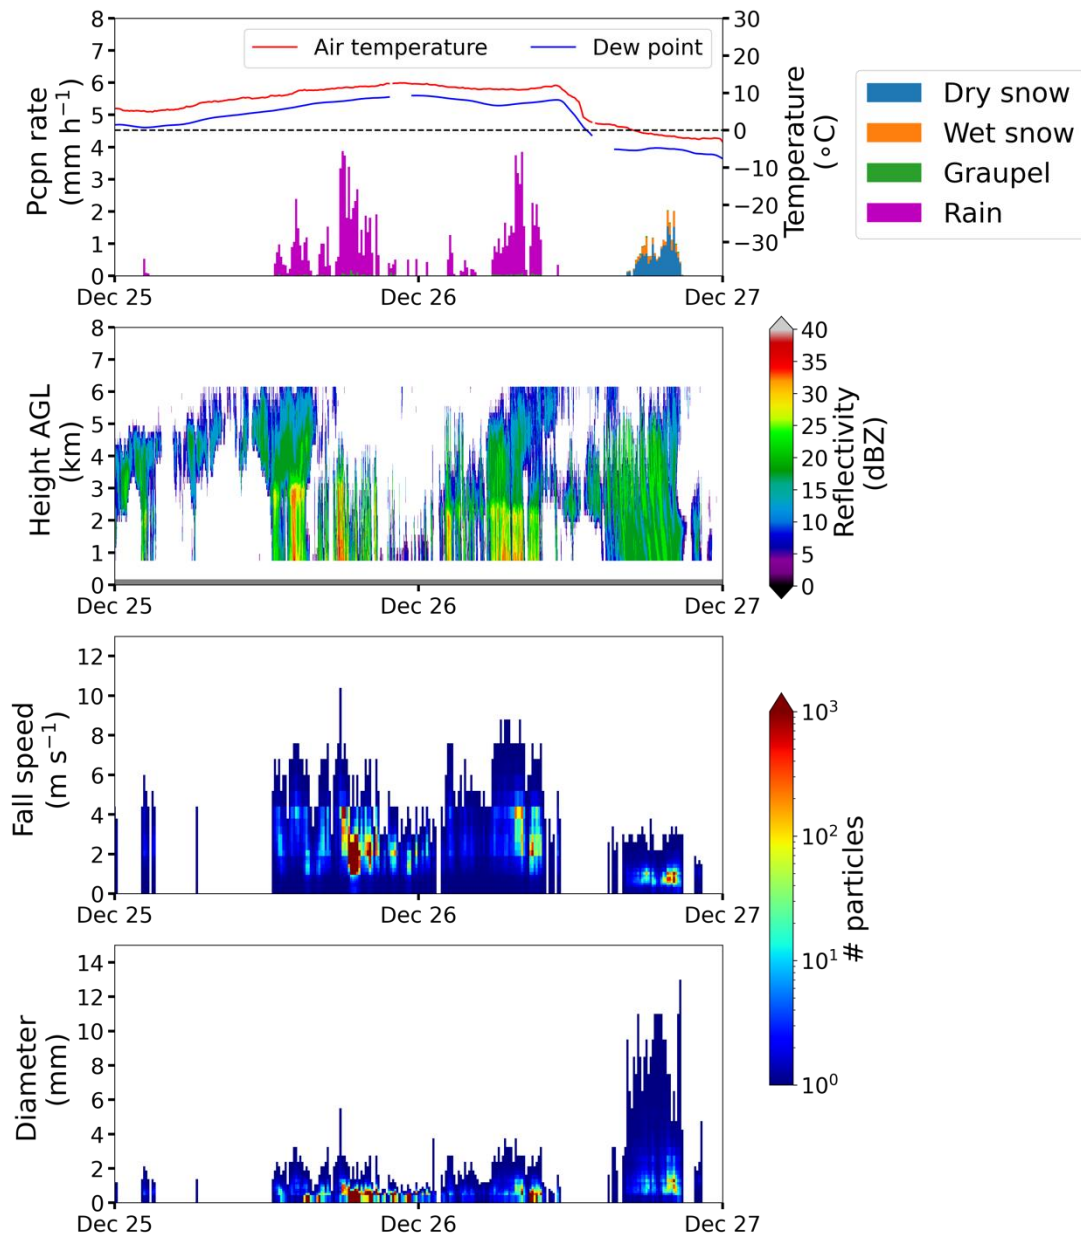


540

541 **Figure 8: Fixed Station storm measurements. From top to bottom, (a) air temperature and precipitation. The**
 542 **precipitation type is derived from disdrometer data using equations in Rasmussen et al. 1999 and Ishizaka et al. 2013,**
 543 **and is not included in the dataset. (b) radar reflectivity, (c) particle fallspeed, and (d) diameter (both from the Parsivel**
 544 **disdrometer), measured at the Fixed Station from 0000 UTC 25 December 2020 to 2359 UTC 26 December 2020.**
 545 **Temperature, dew point, precipitation, and disdrometer data are shown as 10-minute averages. Micro rain radar**
 546 **(MRR) data are at 10 second resolution, with a vertical resolution of 200 m.**

547

548 4.3.3 MUST Station storm observations

549 To complement the automated measurements made at the Fixed Station, the MUST Trailer site provided
550 observations of precipitation type, photographic imagery of particles, and upper air soundings, in addition to the
551 meteorological tripod and hotplate. Images and observations taken during a snow event that occurred on 18 March
552 2021 are shown in Figs. 9 and 10.

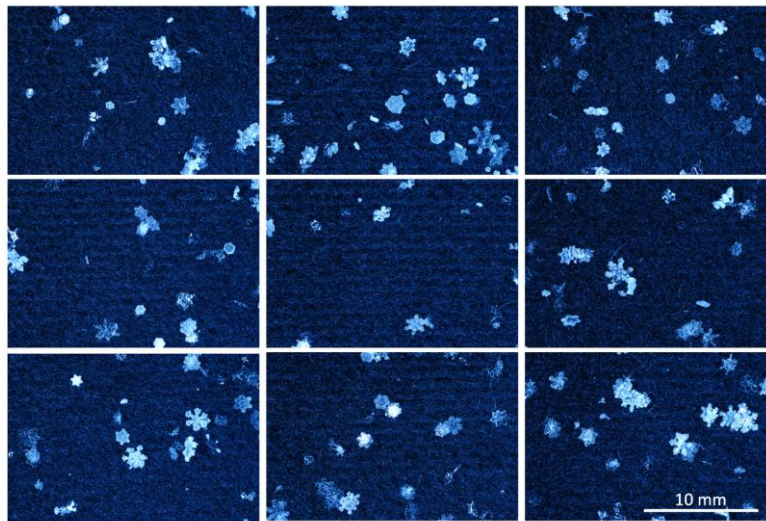

553


554 **Figure 9. MUST Trailer macrophotography. Nine independent (i.e., no overlap) images of the felt-covered pad with**
555 **solid hydrometeors collected at 1225 UTC 18 March 2021. Images are oriented as they were on the 13 cm × 13 cm pad.**

556

557 From 1000 UTC to 1430 UTC 18 March 2021, light intermittent snowfall with precipitation rates between 0.4 –
558 0.6 mm h⁻¹ resulted in ~1.5 cm of snowfall at the MUST Trailer. Precipitation rates were at times so low that the
559 hotplate did not record any precipitation, but snowfall was confirmed by the manual observations. The Fixed
560 Station disdrometer also detected very light precipitation (maximum rate of 0.6 mm h⁻¹) with only 0.2 mm total
561 (liquid equivalent) for the same period. The ECCC Geonor did not record any precipitation during this time. Air
562 temperature at the MUST Trailer remained between -1°C and 0°C during most of the snowfall, with a short (~30
563 min) period of snow grains being reported when temperatures increased to 0°C – 0.5°C. Macrophotography
564 images taken from the SAJESS MUST Trailer provide confirmation of hydrometeor type. From these images
565 (Fig. 9) crystal habit, size distribution, and riming can be diagnosed, and they align with the 10-minute

566 observations that recorded overcast skies, nimbostratus clouds, and snow. Also, during this time, the MASC
567 captured images of a variety of hydrometeors, with the clearest images being of large aggregates (Fig. 10a). At
568 1200 UTC 18 March 2021 a deep saturated layer between 900 and 700 hPa is evident on the upper air observations
569 from the MUST Trailer, matching the vertical profile observed in the National Weather Service (NWS) sounding
570 from Caribou (ME) (Fig. 10b).

571

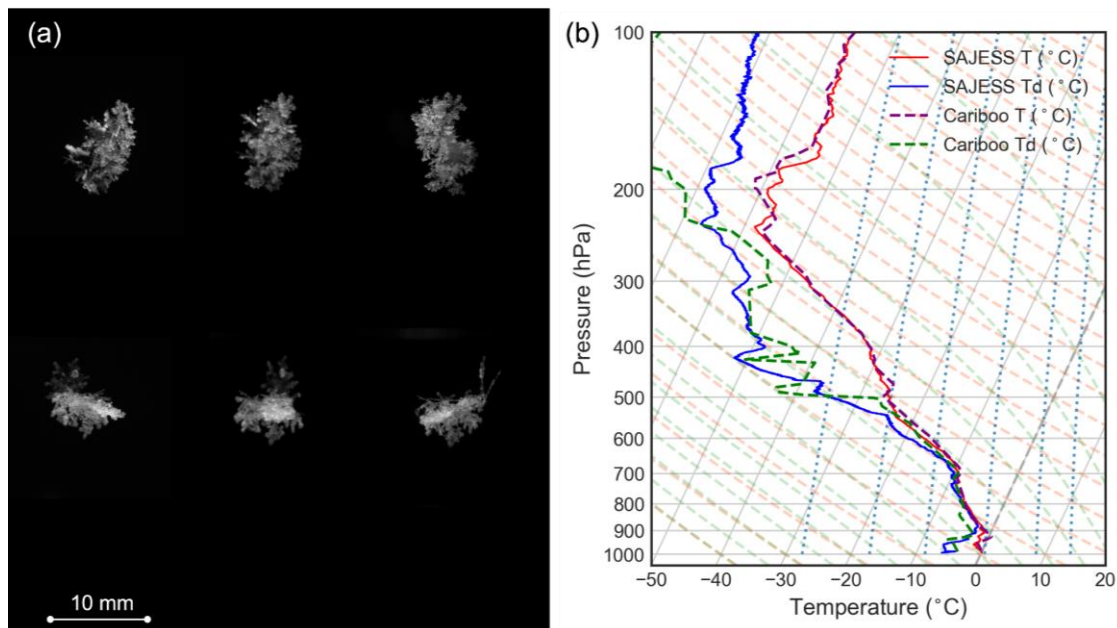

572

573 **Figure 10. Multi-angle snowflake camera (MASC) images and upper air observations. (a) Two triplet images of**
574 **aggregates taken by the MASC at 1240 UTC 18 March 2022, and (b) the 1200 UTC 18 March 2021 soundings from the**
575 **SAJESS MUST Trailer and the NWS Caribou (ME) station.**

576

577 After a break in conditions, light precipitation made up of wet snow and rain occurred between 1730 UTC – 1950
578 UTC 18 March 2021. The mixed precipitation erased the snow collected on the snowboard under the MUST
579 Trailer SR50A. This is important as it illustrates what CoCoRaHS observers would have encountered the next
580 morning (19 March 2021), when no observations of new snow were recorded.

581

582 **4.4 Challenges and lessons-learned**

583 Challenges during the SAJESS field campaign primarily originated from the requirement for remote computer
584 access to monitor and troubleshoot instrument problems as they arose, and intermittent interruptions to AC power,
585 especially at the Fixed Station site.

586
587 Such issues include the requirement to restart proprietary software. For example, the disdrometer software
588 provided by OTT requires a user to restart the program manually if the computer has suffered a power interruption
589 or reboot. This caused some periods of missing data to be longer than necessary. For subsequent deployments we
590 have circumvented this issue by writing a serial-based terminal program in Python that can run on any operating
591 system. Conversely, software provided by METEK for the MRR will restart automatically, however, users are
592 limited to Windows operating software.

593
594 The processor included with the MRR Pro does allow for data collection to begin automatically, for as long as the
595 on-board hard drive has space, however, raw data then are not retrievable as they are with the MRR2. We found
596 this to be an adequate trade-off as the longer acquisition time per spectrum results in the MRR Pro signal having
597 less noise, and due to the larger number of range gates, can have a finer vertical resolution for the same maximum
598 height as the MRR2. Our use of both versions of the METEK MRR was also due to equipment limitations within
599 the group.

600
601 A similar restart issue arose for the hotplate, whereby a manual reset was required after the instrument's
602 microprocessor cut power to the heating plates. This response has been rectified by the manufacturer; however,
603 we have since installed a remotely controlled AC outlet to our other hotplate stations that can be switched on/off
604 without having to visit the site in-person.

605
606 SAJESS provided an opportunity to operate the multi-angle snowflake camera (MASC) during mixed-phased
607 precipitation. Initial results indicate that the instrument can help diagnose mixed-phase precipitation using post-
608 processing algorithms that diagnose particle fallspeed and diameter to a similar standard as the disdrometer. This
609 leads, however, to many of the images being of blurred spherical raindrops rather than sharp pictures of ice crystal
610 types published elsewhere. Work is ongoing to modify the post-processing software to include the categorization
611 of raindrops, as this category is currently missing from the software.

612

613 Dishes for the SRS are required to be oriented to specific satellites (with the help of a satellite signal finder);
614 however, it is also best if these dishes are not currently being used to receive a satellite TV signal by the household.
615 In Edmundston, we located an adequate number of unused dishes within the community, however, an SRS specific
616 deployment may require the purchasing of new equipment solely for the purpose of the SRS system. In some
617 regions, satellite dishes may no longer be installed or maintained to a sufficient standard.

618

619 The use of community-based volunteers to assist in observations at times proved challenging, practically with
620 respect to data quality. Our conclusion is that SAJESS could have benefited from a smaller number of high-quality
621 measurements that could be verified, rather than a larger number of measurements that may have been prone to
622 error. Due to public health measures in place much of the hands-on training that was planned had to be conducted
623 remotely, and at times restrictions limited the volunteer's access to sites and equipment. We suggest a dedicated
624 team member to act as liaison for larger groups of volunteers. Compared to the high-temporal resolution of many
625 of the SAJESS instruments, precipitation amounts recorded once-per-day may not be suitable for all analyses, as
626 identified in Section 4.3.3.

627

628 Particularly difficult was the installation of the eddy covariance flux tripod during the winter season. The burial
629 of temperature sensors and heat flux plates was less than ideal in the frozen surface material, which also precluded
630 a soil pit analysis and soil layer documentation. However, care was taken to ensure restoration of the soil and turf
631 was as complete as possible after installation. The overlying snow was also restored as homogeneously as possible
632 to match the surrounding snowpack. Due to the lack of soil analysis, the datalogger program's default bulk density
633 value of 1300 kg m^{-3} was used. Although future deployments should not underestimate the time and energy
634 required to install the flux instrumentation correctly, we have retained the flux data as thorough post-processing
635 has allowed for effective analysis of the data (Leroux et al, 2023).

636 **5 Summary**

637 A valuable dataset was collected during the 2020-2021 Saint John River Experiment on Cold Season Storms
638 (SAJESS) over Eastern Canada. The dataset contains automatic measurements, manual observations, and photos
639 of the meteorological conditions and precipitation at the surface, micro rain radar measurements, upper air
640 observations, and measurements of precipitation amounts by community volunteers.

641

642 The experiment included an intensive observation period during March – April 2021, to document conditions
643 during the melt season with its below-average snowpack melt a month earlier than normal. The study region and
644 downstream communities are historically prone to ice jams and flooding during late winter and early spring, which
645 can be influenced by air temperature, rain-on-snow events, and the overall evolution of the seasonal snowpack.
646 Despite these hazards being minimal during the campaign, the dataset will contribute to an understanding of
647 snowpack evolution across the region by a variety of mechanisms. Firstly, the spatially distributed measurements
648 from CoCoRaHS observers and SRS installations give a broader view of precipitation types and amounts than the
649 typical isolated weather or climate station. The dataset contains more than 1700 measurements from these
650 community volunteers, and the experiment doubled as a learning opportunity for the classes of school children
651 that contributed by recording snow board and rain gauge measurements. Secondly, the identification of
652 precipitation type at the surface, particularly when there is snow on the ground and temperatures are near 0°C,
653 can be vital for forecasting the resulting snowpack and hydrological response. This was achieved during SAJESS
654 by combining high temporal resolution measurements (1-minute) of precipitation amount, snow depth, and
655 disdrometer data, with manual observations and photographic imagery of hydrometeors at the surface. Verifying
656 the precipitation type using these measurements removes the uncertainty of precipitation type estimation that is
657 necessary without such an array of measurements. Thirdly, observations of atmospheric conditions and
658 precipitation aloft from the micro rain radar and upper air soundings will advance our knowledge of pre-storm
659 conditions and the influence of tropospheric conditions on the precipitation type observed at the surface. When
660 these conditions result in solid precipitation at the surface, inspection of the macrophotographs and MASC images
661 can be included to confirm particle type, size, and shape, and for snow, crystal habit and riming condition. The
662 SAJESS dataset provides an opportunity to investigate the micro-scale influences these differing particle types
663 and crystal habits have on snowpack evolution.

664

665 In addition, the SAJESS dataset provides the opportunity to advance forecasting and model evaluation. The
666 breadth of instruments and human observations quantifies many parameters not archived in traditional
667 meteorological databases. Examples of this include the non-standard timing of balloon launches, spatially
668 distributed precipitation and temperature observations, as well as energy balance and flux data. The identification
669 of particle type obtained by using non-standard observations such as the MASC provides ground truth to help
670 further model microphysics.

671

672 Finally, the SAJESS field campaign also highlights the need to enhance measurements of precipitation and snow
673 in the upper Saint John River Basin. Near real-time access to data during the campaign allowed for the monitoring
674 of meteorological conditions as they occurred, which can be vital for emergency management, ice jam and flood
675 forecasting, and river navigation. This is not usually available in areas where weather or climate stations are
676 sparse. We envision that consideration be given to furthering the meteorological monitoring network in the upper
677 Saint John River Basin to increase the resolution and frequency of measurements and to better anticipate ice jams
678 and major flooding events along the Saint John River.

679

680 **Author contributions**

681 HDT wrote the first draft of the manuscript, as well as conducted some analyses. JMT, SJD, RES, and VV
682 designed and led the field project. DB and LR collected manual observations during the intensive observational
683 period. NDL contributed to the installation of the instruments and the management of the CoCoRaHS observers.
684 MC provided the Smart Rainfall System (SRS). HDT, JMT, SJD, RES, DB, LR, NRL, MC and VV contributed
685 to the writing and the editing of the manuscript.

686

687 **Competing interests**

688 The authors declare that they have no conflict of interest.

689

690 **Data availability**

691 The SAJESS dataset (including the sample subset of data) is available from the Federated Research Data
692 Repository (FRDR) and can be accessed at <https://doi.org/10.20383/103.0591> (Thompson et al., 2023), and is
693 included in the Global Water Futures FRDR collection. CoCoRaHS data are available from
694 <https://cocorahs.org/ViewData/>. SRS data are available from the Artys' web platform (<https://www1.artys.it/>) that
695 can be accessed upon request (m.colli@artys.it). Hourly and daily data from the Edmundston ECCC station are
696 available via the ECCC Historical data webpage, with 1-minute raw data from the station available from the
697 authors upon request. (https://climate.weather.gc.ca/historical_data/search_historic_data_e.html).

698

699 **Acknowledgments**

700 Funding was provided by the Global Water Futures programme which is project 418474-1234 funded by the
701 Canada First Research Excellence Fund, Natural Sciences and Engineering Research Council of Canada
702 Discovery Grants (Julie M. Thériault, Stephen J. Déry, and Ronald E. Stewart), the Canada Research Chairs

703 Program (Julie M. Thériault), and UNBC (Lisa Rickard), to conduct scientific analysis. The MUST Trailer was
704 developed with funding from the Canadian Foundation for Innovation. Many thanks to all the volunteers and
705 schools who collected measurements and provided locations for the SRS parabolic dishes across northwest New
706 Brunswick during SAJESS. Thank you to Jacques Doiron, Director of the Emergency Measures for the City of
707 Edmundston, for providing the sites, facilities and coordinating the local activity with the SAJESS team, and
708 Amanda Ronnquist for creating the SAJESS data management plan. We appreciate the detailed reviews and
709 constructive comments provided by Siwei He, Robert Hellstrom, and two anonymous referees, and assistance of
710 editor David Carlson.

711

712 **References**

713

714 Angulo-Martínez, M., Beguería, S., Latorre, B., and Fernández-Raga, M.: Comparison of precipitation
715 measurements by OTT Parsivel2 and Thies LPM optical disdrometers, *Hydrological Earth System Science*, 22,
716 2811–2837, <https://doi.org/10.5194/hess-22-2811-2018>, 2018.

717

718 Annandale, J., Jovanovic, N., Benadé, and N., Allen, R.: Software for missing data error analysis of Penman-
719 Monteith reference evapotranspiration. *Irrigation Science*, 21, 57–67, <https://doi.org/10.1007/s002710100047>,
720 2002.

721

722 Apogee Instruments Inc.: Infrared radiometers owner's manual, <https://www.apogeeinstruments.com/content/SI-400-manual.pdf>, last access 9 March 2023, 2023.

724

725 Beltaos, S., Ismail, S., and Burrell, B.: Midwinter breakup and jamming on the upper Saint John River: A case
726 study, *Canadian Journal of Civil Engineering*, 30, 77-88, <https://doi.org/10.1139/102-062>, 2011.

727

728 Budhathoki, S., Rokaya, P., & Lindenschmidt, K. E.: Impacts of future climate on the hydrology of a
729 transboundary river basin in northeastern North America. *Journal of Hydrology*, 605, 127317.

730 <https://doi.org/10.1016/j.jhydrol.2021.127317>, 2022.

731

732 Buttle, J. M., Allen, D. M., Caissie, D., Davison, B., Hayashi, M., Peters, D. L., Pomeroy, J. W., Simonovic, S.,
733 St-Hilaire, A., and Whitfield, P. H.: Flood processes in Canada: Regional and special aspects, *Canadian Water*
734 *Resources Journal*, 41(1–2), 7–30, <https://doi.org/10.1080/07011784.2015.1131629>, 2016.

735

736 Campbell Scientific (2022a): IRGASON: Integrated CO₂ and H₂O Open-Path Gas Analyzer and 3-D Sonic
737 Anemometer. <https://s.campbellsci.com/documents/us/manuals/irgason.pdf>, last access: 31 August 2022,
738 20221a.

739

740 Campbell Scientific (2022b). EASYFLUX DL: EASYFLUX DL CR6OP or CR1KXOP For CR6 or CR1000X
741 and Open-Path Eddy-Covariance Systems. Retrieved August 31, 2022, from
742 <https://s.campbellsci.com/documents/us/manuals/easyflux-dl-cr6op.pdf>, last access: 6 September 2023, 2022b.

743

744 Cauteruccio, A., Chinchella, E., Stagnaro, M., and Lanza, L. G.: Snow particle collection efficiency and
745 adjustment curves for the hotplate precipitation gauge. *Journal of Hydrometeorology*, 22(4), 941–954,
746 <https://doi.org/10.1175/JHM-D-20-0149.1>, 2021.

747

748 Cifelli, R., Doesken, N., Kennedy, P., Carey, L. D., Rutledge, S. A., Gimmestad, C., and Depue, T.: The
749 Community Collaborative Rain, Hail, and Snow Network: Informal education for scientists and citizens,
750 *Bulletin of the American Meteorological Society*, 86(8), 1069–1077, <http://www.jstor.org/stable/26221344>,
751 2005.

752

753 Colli, M., Cassola, F., Martina, F., Trovatore, E., Delucchi, A., Maggiolo, S., and Caviglia, D.D.: Rainfall fields
754 monitoring based on satellite microwave down-links and traditional techniques in the city of Genoa. *IEEE*
755 *Transactions on Geoscience Remote Sensing*, 58(9), 6266–6280, <https://doi.org/10.1109/TGRS.2020.2976137>,
756 2020.

757

758 Colli, M., Stagnaro, M., Caridi, A., Lanza, L.G., Randazzo, A., Pastorino, M., Caviglia, D.D., and Delucchi, A.:
759 A Field Assessment of a rain estimation system based on satellite-to-earth microwave links. *IEEE Transactions*
760 *on Geoscience Remote Sensing*, 57(5), 2864–2875, <https://doi.org/10.1109/TGRS.2018.2878338>, 2019.

761

762 Colorado Climate Center: Community collaborative rain, hail & snow network, CoCoRaHS Canada,
763 <https://cocorahs.org/Canada.aspx>, last access 15 March 2022, 2017.
764

765 Domine, F., Lackner, G., Sarrazin, D., Poirier, M., and Belke-Brea, M.: Meteorological, snow and soil data
766 (2013-2019) from a herb tundra permafrost site at Bylot Island, Canadian high Arctic, for driving and testing
767 snow and land surface models, *Earth System Science Data*, 13(9), 4331–4348. [https://doi.org/10.5194/essd-13-](https://doi.org/10.5194/essd-13-4331-2021)
768 [4331-2021](https://doi.org/10.5194/essd-13-4331-2021), 2021.
769

770 Environment and Climate Change Canada: Top ten weather stories for 2008: story four: Saint John River floods
771 from top to bottom, <https://www.ec.gc.ca/meteo-weather/default.asp?lang=En&n=7D6FDB7C-1>, last access 25
772 March 2023, 2017.
773

774 Environment and Climate Change Canada: Canada’s top 10 weather stories of 2018: 7. Flash flooding of the
775 Saint John River, [https://www.canada.ca/en/environment-climate-change/services/top-ten-weather-](https://www.canada.ca/en/environment-climate-change/services/top-ten-weather-stories/2018.html#toc6)
776 [stories/2018.html#toc6](https://www.canada.ca/en/environment-climate-change/services/top-ten-weather-stories/2018.html#toc6), last access 25 March 2023, 2019.
777

778 Environment and Climate Change Canada: Canada’s top 10 weather stories of 2019: 9. Saint John River floods
779 again. [https://www.canada.ca/en/environment-climate-change/services/top-ten-weather-](https://www.canada.ca/en/environment-climate-change/services/top-ten-weather-stories/2019.html#toc10)
780 [stories/2019.html#toc10](https://www.canada.ca/en/environment-climate-change/services/top-ten-weather-stories/2019.html#toc10), last access 25 March 2023, 2020.
781

782 Falconi, M.T., von Lerber, A., Ori, D., Silvio Marzano, F., and Moisseev, D.: Snowfall retrieval at X, Ka and W
783 bands: consistency of backscattering and microphysical properties using BAECC ground-based measurements,
784 *Atmospheric Measurement Techniques*, 11, 3059-3079, <https://doi.org/10.5194/amt-11-3059-2018>, 2018.
785

786 Fitch, K. E., Hang, C., Talaei, A., and Garrett, T. J.: Arctic observations and numerical simulations of surface
787 wind effects on Multi-Angle Snowflake Camera measurement, *Atmospheric Measurement Techniques*, 14(2),
788 1127–1142. <https://doi.org/10.5194/amt-14-1127-2021>, 2021.
789

790 Foken, T., Göckede, M., Mauder, M., Mahrt, L., Amiro, B., and Munger, W.: Post-Field Data Quality Control.
791 In: Lee, X., Massman, W., Law, B. (eds) *Handbook of Micrometeorology*, Atmospheric and Oceanographic
792 Sciences Library, vol 29, Springer, Dordrecht, https://doi.org/10.1007/1-4020-2265-4_9, 2004.

793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822

Fortin, G., and Dubreuil, V.: A geostatistical approach to create a new climate types map at regional scale: case study of New Brunswick, Canada. *Theoretical and Applied Climatology*, 139(1–2), 323–334, <https://doi.org/10.1007/s00704-019-02961-2>, 2020.

Garrett, T. J., Fallgatter, C., Shkurko, K., and Howlett, D.: Fall speed measurement and high-resolution multi-angle photography of hydrometeors in free fall, *Atmospheric Measurement Techniques*, 5, 2625–2633, <https://doi.org/10.5194/amt-5-2625-2012>, 2012.

Giannetti, F., and Reggiannini, R.: Opportunistic rain rate estimation from measurements of satellite downlink attenuation: A survey. *Sensors*, 21(17), 5872, <https://doi.org/10.3390/s21175872>, 2021.

Gibson, S. R., and Stewart, R. E.: Observations of ice pellets during a winter storm. *Atmospheric Research*, 85(1), 64–76. <https://doi.org/10.1016/j.atmosres.2006.11.004>, 2007

Hicks, A., and Notaroš, B. M.: Method for classification of snowflakes based on images by a multi-angle snowflake camera using convolutional neural networks. *Journal of Atmospheric and Oceanic Technology*, 36(12), 2267–2282, <https://doi.org/10.1175/JTECH-D-19-0055.1>, 2019.

Houze, R. A., McMurdie, L. A., Petersen, W. A., Schwall Er, M. R., Baccus, W., Lundquist, J. D., Mass, C. F., Nijssen, B., Rutledge, S. A., Hudak, D. R., Tanelli, S., Mace, G. G., Poellot, M. R., Lettenmaier, D. P., Zagrodnik, J. P., Rowe, A. K., DeHart, J. C., Madaus, L. E., & Barnes, H. C.: The olympic mountains experiment (Olympex). *Bulletin of the American Meteorological Society*, 98(10), 2167–2188, <https://doi.org/10.1175/BAMS-D-16-0182.1>, 2017.

Ishizaka, M., Motoyoshi, H., Nakai, S., Shiina, T., Kumakura, T., & Muramoto, K. I.: A new method for identifying the main type of solid hydrometeors contributing to snowfall from measured size-fall speed relationship. *Journal of the Meteorological Society of Japan*, 91(6), 747–762. <https://doi.org/10.2151/jmsj.2013-602>, 2013.

823 Joe, P., Scott, B., Doyle, C., Isaac, G., Gultepe, I., Forsyth, D., Cober, S., Campos, E., Heckman, I., Donaldson,
824 N., Hudak, D., Rasmussen, R., Kucera, P., Stewart, R., Thériault, J. M., Fisico, T., Rasmussen, K. L.,
825 Carmichael, H., Laplante, A., ... and Boudala, F.: The Monitoring network of the Vancouver 2010 Olympics,
826 Pure and Applied Geophysics, 171(1–2), 25–58, <https://doi.org/10.1007/s00024-012-0588-z>, 2014.
827

828 Kenny, J. L., and Secord, A. G.: Engineering modernity: Hydroelectric development in New Brunswick, 1945-
829 1970, *Acadiensis*, 39(1), 3–26, 2010.
830

831 Kochendorfer, J., Rasmussen, R., Wolff, M., Baker, B., Hall, M. E., Meyers, T., Landolt, S., Jachcik, A.,
832 Isaksen, K., Brækkan, R., and Leeper, R.: The quantification and correction of wind-induced precipitation
833 measurement errors. *Hydrology and Earth System Sciences*, 21(4), 1973–1989, [https://doi.org/10.5194/hess-21-](https://doi.org/10.5194/hess-21-1973-2017)
834 [1973-2017](https://doi.org/10.5194/hess-21-1973-2017), 2017.
835

836 Liao, L., Meneghini, R., Tokay, A., and Bliven, L. F.: Retrieval of snow properties for Ku- and Ka-band dual-
837 frequency radar, *Journal of Applied Meteorology and Climatology*, 55(9), 1845-1858,
838 <https://doi.org/10.1175/JAMC-D-15-0355.1>, 2016.
839

840 Lapo, K. E., Hinkelman, L. M., Landry, C. C., Massmann, A. K., and Lundquist, J. D.: A simple algorithm for
841 identifying periods of snow accumulation on a radiometer, *Water Resources. Research*, 51, 7820– 7828,
842 [doi:10.1002/2015WR017590](https://doi.org/10.1002/2015WR017590), 2015.
843

844 Maahn, M., and Kollias, P.: Improved Micro Rain Radar snow measurements using Doppler spectra post-
845 processing. *Atmospheric Measurement Techniques*, 5(11), 2661–2673. [https://doi.org/10.5194/amt-5-2661-](https://doi.org/10.5194/amt-5-2661-2012)
846 [2012](https://doi.org/10.5194/amt-5-2661-2012), 2012.
847

848 Marwitz, J.: A comparison of winter orographic storms over the San Juan Mountains and the Sierra Nevada.
849 *Precipitation Enhancement—A Scientific Challenge*, Meteorological Monographs., No. 21, Amer. Meteor. Soc.,
850 109–113, [https:// doi.org/10.1175/0065-9401-21.43.109](https://doi.org/10.1175/0065-9401-21.43.109), 1986.
851

852 METEK: MRR Physical Basics, 5.2.0.1,
853 https://mpimet.mpg.de/fileadmin/atmosphaere/barbados/Instrumentation/MRR-physical-basics_20090707.pdf,
854 last access: 25 March 2023, 2009.
855
856 METEK: Micro Rain Radar MRR-2, https://metek.de/wp-content/uploads/2014/05/Datasheet_MRR-2.pdf, last
857 access 22 June 2022, 2010.
858
859 METEK: Micro Rain Radar MRR-PRO, [https://metek.de/wp-](https://metek.de/wp-content/uploads/2016/12/20180206_Datenblatt_MRR-PRO.pdf)
860 [content/uploads/2016/12/20180206_Datenblatt_MRR-PRO.pdf](https://metek.de/wp-content/uploads/2016/12/20180206_Datenblatt_MRR-PRO.pdf), last access 22 June 2022, 2017.
861
862 Minder, J. R., Bassill, N., Fabry, F., French, J. R., Friedrich, K., Gultepe, I., Gyakum, J., Kingsmill, D. E.,
863 Kosiba, K., Lachapelle, M., Michelson, D., Nichman, L., Nguyen, C., Thériault, J. M., Winters, A. C., Wolde,
864 M., & Wurman, J.: P-Type Processes and Predictability: The Winter Precipitation Type Research Multiscale
865 Experiment (WINTRE-MIX). *Bulletin of the American Meteorological Society*, 104(8), E1469-E1492.
866 <https://doi.org/10.1175/BAMS-D-22-0095.1>, 2023.
867
868 Newton, B., and Burrell, B. C.: The April–May 2008 flood event in the Saint John River Basin: Causes,
869 assessment, and damages. *Canadian Water Resources Journal*, 41(1–2), 118–128.
870 <https://doi.org/10.1080/07011784.2015.1009950>, 2016.
871
872 Nitu, R., Roulet, Y., Wolff, M., Earle, M., Reverdin, A., Smith, C., Kochendorfer, J., Morin, S., Rasmussen, R.,
873 Wong, K., Alastrué, J., Arnold, L., Baker, B., Buisan, S., Collado, J. L., Colli, M., Collins, B., Gaydos, A.,
874 Hannula, H.-R., ... , and Senese, A.: WMO Solid Precipitation Intercomparison Experiment (SPICE) (2012-
875 2015), 131, World Meteorological Organization, 1429 pp.,
876 https://library.wmo.int/doc_num.php?explnum_id=5686, 2018.
877
878 Onset Computer Corporation: Hobo temperature/RH data logger, HOBO Temperature/RH Data Logger
879 MX2301A | Onset Data Loggers, <https://www.onsetcomp.com/products/data-loggers/mx2301a/>, last access 15
880 March 2022, 2022.
881

882 OTT: Operating instructions Present Weather Sensor OTT Parsivel², <https://www.ott.com/download/operating->
883 [instructions-present-weather-sensor-ott-parsivel2-with-screen-heating-2/](https://www.ott.com/download/operating-instructions-present-weather-sensor-ott-parsivel2-with-screen-heating-2/). Last access 5 September 2023, 2019.
884

885 Pond Engineering: K63 Hotplate total precipitation gauge, <http://www.pondengineering.com/k63>, last access 25
886 March 2023, 2021.
887

888 Praz, C., Roulet, Y. A., and Berne, A.: Solid hydrometeor classification and riming degree estimation from
889 pictures collected with a Multi-Angle Snowflake Camera. *Atmospheric Measurement Techniques*, 10(4), 1335–
890 1357, <https://doi.org/10.5194/amt-10-1335-2017>, 2017.
891

892 Rasmussen, R. M., Vivekanandan, J., Cole, J., Myers, B., & Masters, C.: The estimation of snowfall rate using
893 visibility. *Journal of Applied Meteorology*, 38(10), 1542–1563. <https://doi.org/10.1175/1520->
894 [0450\(1999\)038<1542:TEOSRU>2.0.CO;2](https://doi.org/10.1175/1520-0450(1999)038<1542:TEOSRU>2.0.CO;2), 1999.
895

896 Rasmussen, R. M., Hallett, J., Purcell, R., Landolt, S. D., and Cole, J.: The hotplate precipitation gauge, *Journal*
897 *of Atmospheric and Oceanic Technology*, 28(2), 148–164, <https://doi.org/10.1175/2010JTECHA1375.1>, 2011.
898

899 Raupach, T. H., and Berne, A.: Correction of raindrop size distributions measured by Parsivel disdrometers,
900 using a two-dimensional video disdrometer as a reference, *Atmospheric Measurement Techniques*, 8(1), 343–
901 365. <https://doi.org/10.5194/amt-8-343-2015>, 2015.
902

903 Schaer, M., Praz, C., and Berne, A.: Identification of blowing snow particles in images from a Multi-Angle
904 Snowflake Camera. *Cryosphere*, 14(1), 367–384, <https://doi.org/10.5194/tc-14-367-2020>, 2020.
905

906 Sicart, J.E., Pomeroy, J.W., Essery, R.L.H. and Bewley, D.: Incoming longwave radiation to melting snow:
907 observations, sensitivity and estimation in Northern environments, *Hydrological Processes*, 20, 3697–3708,
908 <https://doi.org/10.1002/hyp.6383>, 2006.
909

910 Skofronick-Jackson, G., Hudak, D., Petersen, W., Nesbitt, S. W., Chandrasekar, V., Durden, S., Gleicher, K. J.,
911 Huang, G. J., Joe, P., Kollias, P., Reed, K. A., Schwaller, M. R., Stewart, R., Tanelli, S., Tokay, A., Wang, J. R.,
912 and Wolde, M.: Global precipitation measurement cold season precipitation experiment (GCPEX): For

913 measurement's sake, let it snow, *Bulletin of the American Meteorological Society*, 96(10), 1719–1741,
914 <https://doi.org/10.1175/BAMS-D-13-00262.1>, 2015.

915

916 Souverijns, N., Gossart, A., Lhermitte, S., Gorodetskaya, I. V., Kneifel, S., Maahn, M., Bliven, F. L., & van
917 Lipzig, N. P. M.: Estimating radar reflectivity - Snowfall rate relationships and their uncertainties over
918 Antarctica by combining disdrometer and radar observations. *Atmospheric Research*, 196(June), 211–223.
919 <https://doi.org/10.1016/j.atmosres.2017.06.001>, 2017.

920

921 Stewart, R. E., Shaw, R. W., & Isaac, G. A.: Canadian Atlantic Storms Program: The meteorological field
922 project. *Bulletin of the American Meteorological Society*, 68(4), 338–345.
923 <http://www.jstor.org/stable/26225054>, 1987.

924

925 Stewart, R. E.: Canadian Atlantic Storms Program: Progress and plans of the meteorological component.
926 *Bulletin of the American Meteorological Society*, 72(3), 364–371. [https://doi.org/10.1175/1520-](https://doi.org/10.1175/1520-0477(1991)072<0364:CASPPA>2.0.CO;2)
927 [0477\(1991\)072<0364:CASPPA>2.0.CO;2](https://doi.org/10.1175/1520-0477(1991)072<0364:CASPPA>2.0.CO;2), 1991

928

929 Thériault, J. M., Hung, I., Vaquer, P., Stewart, R. E., and Pomeroy, J.: Precipitation characteristics and
930 associated weather conditions on the eastern slopes of the Rocky Mountains during March and April 20151,
931 *Hydrology and Earth System Sciences*, 22(8), 4491–4512, <https://doi.org/10.5194/hess-22-4491-2018>, 2018.

932

933 Thériault, J. M., Déry, S. J., Pomeroy, J. W., Smith, H. M., Almonte, J., Bertoncini, A., Crawford, R. W.,
934 Desroches-Lapointe, A., Lachapelle, M., Mariani, Z., Mitchell, S., Morris, J. E., Hébert-Pinard, C., Rodriguez,
935 P., and Thompson, H. D.: Meteorological observations collected during the Storms and Precipitation across the
936 continental Divide Experiment (SPADE), April-June 2019, *Earth System Science Data*, 13(3), 1233–1249,
937 <https://doi.org/10.5194/essd-13-1233-2021>, 2021a.

938

939 Thériault, J. M., Leroux, N. R., and Rasmussen, R. M.: Improvement of solid precipitation measurements using
940 a hotplate precipitation gauge, *Journal of Hydrometeorology*, 22(4), 877–885, [https://doi.org/10.1175/JHM-D-](https://doi.org/10.1175/JHM-D-20-0168.1)
941 [20-0168.1](https://doi.org/10.1175/JHM-D-20-0168.1), 2021b.

942

943 Thériault, J. M., Leroux, N. R., Stewart, R. E., Bertoincini, A., Déry, S. J., Pomeroy, J. W., Thompson, H. D.,
944 Smith, H., Mariani, Z., Desroches-Lapointe, A., Mitchell, S., & Almonte, J.: Storms and Precipitation across the
945 continental Divide Experiment (SPADE). *Bulletin of the American Meteorological Society*, 103(11), E2628–
946 E2649. <https://doi.org/10.1175/BAMS-D-21-0146.1>, 2022.

947

948 Thompson, H. D., Thériault, J. M., Déry, S. J., Stewart, R. E., Boisvert, D., Rickard, L., Leroux, N. R., Colli,
949 M., and Vincent Vionnet, V.: Atmospheric and surface observation data collected during the Saint John River
950 Experiment on Cold Season Storms, Federated Research Data Repository [data set],
951 <https://doi.org/10.20383/103.059>, 2023.

952

953 Tokay, A., Hartmann, P., Battaglia, A., Gage, K. S., Clark, W. L., and Williams, C. R.: A field study of
954 reflectivity and Z-R relations using vertically pointing radars and disdrometers, *Journal of Atmospheric and*
955 *Oceanic Technology*, 26(6), 1120–1134, <https://doi.org/10.1175/2008JTECHA1163.1>, 2009.

956

957 US Department of Energy: Toolbox — A rolling list of software/packages for flux-related data processing,
958 FLUXNET: The Data Portal Serving the FLUXNET Community, [https://fluxnet.org/2017/10/10/toolbox-a-](https://fluxnet.org/2017/10/10/toolbox-a-rolling-list-of-softwarepackages-for-flux-related-data-processing/)
959 [rolling-list-of-softwarepackages-for-flux-related-data-processing/](https://fluxnet.org/2017/10/10/toolbox-a-rolling-list-of-softwarepackages-for-flux-related-data-processing/), last access 31 August 2022, 2021.

Table 1. Primary site information

Location	Lat (°N)	Lon (°W)	Elevation (m)	Surface	Surroundings	Dates of operation for SAJESS
Fixed Station	47.418	68.324	152	Grassland on gravel riverbed	Open grassland in broad river valley, rural road ~150 m to the west	1 December 2020 – 30 April 2021
MUST Trailer	47.361	68.320	143	Packed gravel, short grass	Site on edge of city treatment ponds, ~ 250 m from confluence of two large rivers; suburban subdivision to the north,	1 March 2021 – 30 April 2021

961

962

963

Table 2. Instrument details for the SAJESS Fixed Station site

Installation (instrument abbr.)	Instrument	Installation height	Variable	Units	Resolution	Accuracy
Met tripod (MET)	Campbell Scientific CR1000X datalogger	1.5 m	data recording	NA	NA	NA
	OTT Parsivel ² disdrometer	2.80 m	Timestamp Intensity of precipitation (mm/h) Precipitation since start (mm) Weather code SYNOP WaWa Weather code METAR/SPECI Weather code NWS Radar reflectivity (dBz) MOR Visibility (m) Signal amplitude of Laserband Number of detected particles Temperature in sensor (°C) Heating current (A) Sensor voltage (V) Kinetic Energy Snow intensity (mm/h) V0D0 ... V31D31	Timestamp mm h ⁻¹ Mm val val val dBz m val val °C A V J (m ² h) ⁻¹ mm h ⁻¹ val	1 min (average), except for the VxDx size and fallspeed classes, which represent a 1 min sum	Accuracy is not given by OTT for the individual variables, however the size classification are not given by OTT±1 size class (0.2 to 2 mm) ±0.5 size class (>2mm)
	Vaisala HMP155 temperature /RH probe	2.00 m	Air temperature Relative Humidity	°C %	1 min (average)	0.226+0.0028×r eading (-80 to +20 °C) 0.055+0.0057× reading (+20 to +60 °C)
	Kipp & Zonen CNR4	1.80 m	4-way net radiation	W m ⁻²	1 min (average)	< 5 %

	Net radiometer					
	Campbell Scientific SR50A sonic ranger	1.80 m	Snow depth	m	1 min (average)	±1 cm
	Apogee SI-411 IR radiometer	1.80 m	Surface temperature	°C	1 min (average)	±0.2 °C
	Campbell Scientific CS655 Soil probe (vertically)	0.00 m	Soil temperature Soil moisture content Soil electrical conductivity	°C % dS m ⁻¹	1 min (average)	±0.1 - 0.5 °C ±1 - 3% ±5% of reading + 0.05 dS m ⁻¹
MRR tripod (MRR)	METEK MRR-2	2.60 m	Doppler raw spectra Reflectivity (Ze) Doppler velocity (W) Spectral width (σ)	dB dBz m s ⁻¹ m s ⁻¹	10 sec raw data; 1 min average; see Section 3.1.5	0.53 dB 0.53 dBZ 0.109 ms ⁻¹ 0.09 ms ⁻¹
Hotplate tripod (HP)	Pond engineering K63 Hotplate precipitation gauge	2.60 m	Air temperature Barometric pressure Precipitation rate Accumulation Windspeed Hotplate power	°C kPa mm hr ⁻¹ mm m s ⁻¹ W	1 min (average) 5 min (average)	±1 °C ±1 kPa ±0.5 mm hr ⁻¹ ±0.5 mm ±1 ms ⁻¹ NA
Flux tripod (FLUX)	Campbell Scientific CR1000X datalogger	1.5 m	data recording	NA	NA	NA
	Vaisala HMP155 Temperature /RH probe	2.00 m	Air temperature Relative humidity	°C %	30 min (average)	0.226+0.0028×reading (-80 to +20 °C) 0.055+0.0057×reading (+20 to +60 °C)

	Apogee SI-411 Infrared radiometer	1.80 m	Surface temperature	°C	30 min (average)	±0.2 °C
	Kipp & Zonen CNR4 Net radiometer	1.80 m	4-way net radiation	W m ⁻²	30 min (average)	< 5 %
	Campbell Scientific IRGASON	2.00 m	3D wind CO2 density H2O density Sonic temperature	m s ⁻¹ mg·m ⁻³ g·m ⁻³ °C	10 Hz	1 mm s ⁻¹ 0.2 mg·m ⁻³ (0.15 µmol·mol ⁻¹) 0.00350 g·m ⁻³ (0.006 mmol·mol ⁻¹) 0.025 °C
	Campbell Scientific CS655 Soil probe	2.5 cm below surface	Soil temperature Soil moisture content Soil electrical conductivity	°C % dS m ⁻¹	30 min (average)	±0.1 - 0.5 °C ±1 - 3% ±5% of reading + 0.05 dS m ⁻¹
	Campbell Scientific HFP01 Soil heat flux plates	8 cm below surface	Soil heat flux	W m ⁻²	30 min (average)	-15% to +5% in most common soils

965

966

967

968

Table 3. Instrument details for the SAJESS MUST Trailer site

Installation (Instrument abbr.)	Instrument	Installation height	Variable	Units	Resolution	Accuracy
Met tripod (MET)	Campbell Scientific CR1000X datalogger	1.5 m	data recording	NA	NA	NA
	Vaisala HMP155 Temperature/RH probe	2.00 m	Air temperature Relative humidity	°C %	1 min (average)	$0.226+0.0028 \times \text{reading}$ (-80 to +20 °C) $0.055+0.0057 \times \text{reading}$ (+20 to +60 °C)
	Kipp & Zonen CNR4 Net radiometer	1.80 m	Net 4-way radiation	W m ⁻²	1 min (average)	< 5 %
	Campbell Scientific SR50A	1.80 m	Snow depth	m	1 min (average)	±1 cm
10 m Mast (MAST)	Campbell Scientific CR1000X datalogger	1.5 m	data recording	NA	NA	NA
	Pond engineering K63 Hotplate precipitation gauge	2.60 m	Air temperature Barometric pressure Precipitation rate Accumulation Windspeed Hotplate power	°C kPa mm hr ⁻¹ mm m s ⁻¹ W	1 min (average) 5 min (average)	±1 °C ±1 kPa ±0.5 mm hr ⁻¹ ±0.5 mm ±1 ms ⁻¹ NA
MASC Platform (MASC)	Multi-angle snowflake camera	1.00 m	Series of 3 images	NA	Up to 3 Hz	NA
MRR Pro (MRR)	METEK MRR Pro	1.30.m	Doppler raw spectra Reflectivity (Ze) Doppler velocity (W) Spectral width (σ)	dB dBz m s ⁻¹ m s ⁻¹	see Section 3.1.5	0.53 dB 0.53 dBZ 0.109 ms ⁻¹ 0.09 ms ⁻¹
Macrophotog raphy (MP)	Nikon D80 with 60 mm macro lens	NA	Series of 9 images	N/A	10 min	NA

Manual observations (OBS)	Volunteer and/or student	NA	Sky condition Cloud type Precipitation type Blowing snow Light precipitation	Oktas Type Type Y/N Y/N	10 min	NA
Upper air observations (SB)	iMet-3050A 403 MHz portable sounding system with iMet-4 radiosonde	NA	Air temperature Relative humidity Wind speed Wind direction Pressure Geopotential height	°C % m s ⁻¹ degree s hPa m	1 sec	± 0.5 - 1.0 °C ± 5% ± 0.5 m s ⁻¹ ± 1 degrees ± 0.5 - 2.0 hPa ± 15 m

970

971
972
973
974

Table 4. Locations of CoCoRaHS stations founded during SAJESS, with HOBO MX2301A Temperature/RH information (if present)

CoCoRaHS ID	Temp/RH sensor ID (if present)	Lat (°N)	Lon (°W)	Elevation (m)	Temp/RH sensor period of record
CAN-NB-111	SJ_HOBOTEMP_01	47.37	68.32	166	11/12/2020 – 30/04/2021
CAN-NB-112	Not present	47.35	68.67	198	
CAN-NB-113	SJ_HOBOTEMP_02	47.25	68.03	155	11/12/2020 – 30/04/2021
CAN-NB-114	SJ_HOBOTEMP_03	47.37	68.31	197	10/12/2020 – 30/04/2021
CAN-NB-115	SJ_HOBOTEMP_04	47.43	68.39	142	10/12/2020 – 30/04/2021
CAN-NB-117	SJ_HOBOTEMP_05	47.45	68.32	326	11/12/2020 – 30/04/2021
CAN-NB-121	Not present	47.21	67.96	154	
CAN-NB-122	Not present	47.40	68.34	144	
CAN-NB-126	Not present	47.38	68.31	192	
CAN-NB-127	SJ_HOBOTEMP_06	47.36	68.16	176	05/03/2021 – 30/04/2021
CAN-NB-133	SJ_HOBOTEMP_07	47.35	68.46	332	05/03/2021 – 30/04/2021
CAN-NB-134	Not present	47.28	68.41	155	
CAN-NB-135	SJ_HOBOTEMP_08	47.26	68.61	167	12/12/2020 – 30/04/2021
CAN-NB-139	SJ_HOBOTEMP_09	47.37	68.34	241	10/12/2020 – 30/04/2021
CAN-NB-140	Not present	47.36	67.97	295	
CAN-NB-141	Not present	47.43	68.29	348	
CAN-NB-142	Not present	47.36	68.36	189	
CAN-NB-143	SJ_HOBOTEMP_10	47.24	68.70	170	12/12/2020 – 30/04/2021
CAN-NB-144	SJ_HOBOTEMP_11	47.37	68.28	141	10/12/2020 – 30/04/2021
CAN-NB-145	SJ_HOBOTEMP_12	47.33	68.09	231	05/03/2020 – 30/04/2021
CAN-NB-147	Not present	47.35	68.22	164	
N/A	SJ_HOBOTEMP_13	47.29	68.39	156	05/03/2021 – 30/04/2021

975