

# A First Approach Towards Dual-Hemisphere Sea Ice Reference Measurements from Multiple Data Sources Tailored for Evaluation and Product Intercomparison of Satellite Altimetry

Ida Birgitte Lundtorp Olsen<sup>1,9,\*</sup>, Henriette Skourup<sup>1,\*</sup>, Heidi Sallila<sup>2</sup>, Stefan Hendricks<sup>3</sup>, Renée Mie Fredensborg Hansen<sup>1,4</sup>, Stefan Kern<sup>5</sup>, Stephan Paul<sup>3</sup>, Marion Bocquet<sup>6</sup>, Sara Fleury<sup>6</sup>, Dmitry Divine<sup>7</sup>, and Eero Rinne<sup>8</sup>

<sup>1</sup>Department of Geodesy and Earth Observation, National Space Institute, Technical University of Denmark (DTU Space), Elektrovej Building 327, 2800 Kgs. Lyngby, Denmark

<sup>2</sup>Marine Research Unit, Finnish Meteorological Institute (FMI), Helsinki, Finland

<sup>3</sup>Alfred Wegener Institute (AWI), Helmholtz Centre for Polar and Marine Research, Bremerhaven, Germany

<sup>4</sup>Department of Civil and Environmental Engineering, Norwegian University of Science and Technology (NTNU), Trondheim, Norway

<sup>5</sup>Integrated Climate Data Center (ICDC), Center for Earth System Research and Sustainability (CEN), University of Hamburg, Hamburg, Germany

<sup>7</sup>Norwegian Polar Institute (NPI), Tromsø, Norway

<sup>8</sup>Arctic Geophysics, University Centre in Svalbard (UNIS), Longyearbyen, Svalbard, Norway

<sup>9</sup>National Center for Climate Research (NCKF), Danish Meteorological Institute, Copenhagen, 2100, Denmark

\*These authors contributed equally to this work.

**Correspondence:** Ida Birgitte Lundtorp Olsen (ilo@dmi.dk)

**Abstract.** Sea ice altimetry currently remains the primary method for estimating sea ice thickness from space, however, time series of such satellite-derived estimates are of limited use without having been quality-controlled against reference measurements. Such reference measurements (a term encapsulating in situ observations and remotely sensed measurements from ground, air, and below the ice) for validation of altimetry measurements over sea ice in the polar regions are sparse and rarely presented in a manner where the time-space averaging matches that of the satellite-derived products. Here, [the first an approach to a](#) published comprehensive collection of sea ice reference measurements tailored for satellite altimetry observations over sea ice is presented, [including which includes estimates of](#) freeboard, thickness, draft and snow depth from sea ice-covered regions in the Northern Hemisphere (NH) and the Southern Hemisphere (SH), [all of which are relevant for comparison with altimetry estimates](#). The measurements have been collected using airborne sensors, autonomous drifting buoys, moored and submarine-mounted upward-looking sonars, and visual observations. The data package has been prepared to match the spatial (25 km for NH and 50 km for SH) and temporal (monthly) resolutions of conventional satellite altimetry-derived sea ice thickness data products for a direct evaluation of these, and the code is publicly available and distributed for users to [change modify](#) depending on their aim. This data package, also known as the Climate Change Initiative (CCI) sea ice thickness (SIT) Round Robin Data Package (RRDP), was produced within the ESA CCI Sea Ice project. The current version of the CCI SIT RRDP covers the polar satellite altimetry era (1993–2024) and has ongoing efforts aimed at continuously updating the datasets. The CCI SIT RRDP has been collocated with satellite-derived sea ice thickness products from CryoSat-2, Envisat, and ERS-1/2 produced

within the ESA CCI and the Fundamental Data Records for Altimetry (FDR4ALT) projects to demonstrate the overlap and inter-comparison between the reference measurements and satellite-derived products. Here, the CCI SIT RRDP is introduced along with examples of its use as a validation source for satellite altimetry products, where the averaging, collocation and uncertainty methodology is presented, and advantages and limitations are discussed.

## 1 Introduction

Reference measurements are key to a successful satellite mission, forming the foundation for building confidence in satellite-derived geophysical products. However, over sea ice, such reference observations are limited in both spatial and temporal coverage—particularly during the earlier years of the satellite altimetry era. In addition, meaningful comparisons between reference observations and satellite altimetry data are complicated by differences in spatial resolution, temporal frequency, and sampling methodologies.

In this study, we adopt the term *reference measurements* to refer to a collection of non-satellite observations (from e.g., in-situ, airborne, moorings, drifting buoys, and ships) that can be used for comparison with satellite remote sensing data. This should not be confused with the term *Fiducial Reference Measurements (FRMs)*, which are required to follow specific standards. Protocols and procedures for individual FRMs, and their comparison to altimetry-derived Comprehensive validation of satellite altimetry-derived sea ice thickness (SIT) measurements, are currently being defined by the scientific community (e.g. Da Silva et al., 2023). Comprehensive validation of satellite-derived sea ice thickness products necessitates Climate Data Records (CDRs) requires coincident observations of sea ice freeboard, thickness, snow depth, and the densities of snow, ice, and water (Fig. 1), following the assumption that sea ice is in hydrostatic equilibrium), ideally at matching. Ideally, such measurements should match the spatial and temporal scales covering the of the satellite data and cover the entire polar satellite altimetry era, beginning with the launch of the European Space Agency (ESA) ERS-1 mission in 1991 and its subsequent collection of scientific altimetry data over sea ice as of 1993. However, such reference measurements observations are sparse and unevenly distributed across the Arctic and even more limited, even more so, in the Antarctic, due to logistical challenges constraints and high operational costs. Moreover In addition, most existing reference measurements provide only a subset of the required variables. Here, we include and assess existing publicly available reference measurements of freeboard, thickness, draft, and snow depth Examples of these include: snow depth and total freeboard from coincident airborne snow radar and laser, draft from a variety of sources to support long-term altimeter-derived sea ice thickness Climate Data Records (CDRs). We do not include reference measurements of upward-looking sonar moorings, or snow depth and SIT from drifting buoys. Measurements of the densities of snow, sea ice, or water densities, as these are extremely limited. We implement a simple approach developed in accordance with current community practices, intended as a first step toward a consistent collection of harmonized reference measurements and water are even more limited than the above-mentioned parameters and are therefore not included in this collection of observations.


The sea ice altimetry community—particularly when using radar altimeters—rarely validates data in its native form (i.e., along-track Level-2 data products). Examples can be found in studies such as Laxon et al. (2003); Kern et al. (2015); Giles and Hvidegaard, where some spatial averaging is applied and/or the data are restricted in time and space. For instance, Laxon et al. (2003)

50 use only satellite data within 100 km and 15 days of the reference measurements, while Fredensborg-Hansen et al. (2024b) smooth airborne underflight measurements using an along-track search radius of 7 km to match a processed satellite along-track product. In fact, community practice, based on numerous publications (e.g., Laxon et al., 2013; Tilling et al., 2018; Carret et al., 2025; Boer et al., 2025), is to compare monthly, gridded altimetry-derived geophysical variables (e.g., SD or SIT) with monthly averages of reference data gridded to the same resolution as the satellite product. This approach allows for comparison with reference measurements  
55 obtained at locations other than directly beneath the satellite track (e.g., from moorings or buoys), by utilizing a full month of satellite orbits to generate maps with pan-Arctic or Antarctic coverage. As such, most validation and inter-comparison studies are performed on monthly grids (commonly used grids such as EASE/EASE2.0 or North/South Polar Stereographic) with a resolution ranging between 12.5–80 km depending on the product (see e.g., Carret et al., 2025; Landy et al., 2022) allowing for inter-comparison with other products (e.g., model-based or other). We use the term *reference measurements* for such a  
60 compilation of independent non-satellite observations collected from airborne platforms, submarines, moorings, drifting buoys, and ships, which can potentially be used for evaluation of satellite-derived composites available in similar formats. Processing the reference measurements into such formats provides composites, otherwise tailored for validation of the satellite altimeters, that can be used more widely by the community.

The Data Package (DP) of reference measurements presented here, were collected and prepared in the framework of the  
65 European Space Agency (ESA) SIT CDRs. These should not be confused with Fiducial Reference Measurements (FRMs), which follow strict protocols and standards that are still being defined for SIT validation (e.g., Da Silva et al., 2023). Here, we present and evaluate a collection of existing, publicly available, freeboard, thickness, draft, and snow depth reference measurements from various sources. These measurements were compiled within the ESA Climate Change Initiative (CCI) for Sea Ice project (<https://climate.esa.int/en/projects/sea-ice/>, last accessed: 23 May 11 August 2025) Round Robin (RR) exercise, and is as part of the Round Robin Data Package (RRDP), hereafter referred to as the CCI SIT RRDP. To facilitate these  
70 comparisons, the reference measurements have been gridded to match the temporal (monthly) and spatial resolution of the satellite-derived SIT products (25 km in the Northern Hemisphere and 50 km in the Southern Hemisphere) according to the community practice. We present the

The overarching aim of the ESA CCI Sea Ice project is to produce CDRs of SIT (and sea ice concentration) from existing  
75 polar radar altimetry (and passive microwave radiometry) missions dating back to 1993 (or 1972) without inter-satellite-mission biases. This requires careful treatment of differences in spatial coverage, footprint sizes, resolution, and instrument design between missions. The specific purpose of the CCI SIT RRDP is to provide a set of independent, non-satellite reference measurements covering the polar satellite altimetry era, prepared to a level comparable with the CCI SIT CDRs. However, we acknowledge that the datasets in the CCI SIT RRDP in detail, including detailed description of the reference measurements with  
80 emphasis on methods, inherent biases and preferential sampling, pre-processing steps, as well as the characterization of their uncertainties, were not inherently collected or post-processed with the aim of satellite evaluation; thus, careful consideration of inherent biases, preferential sampling, and measurement uncertainties is critical.

In line with metrological principles, reference measurements themselves require validation – a requirement that is not always met. A key question is whether a given reference dataset is fit-for-purpose, i.e., adequate for SIT or snow depth validation

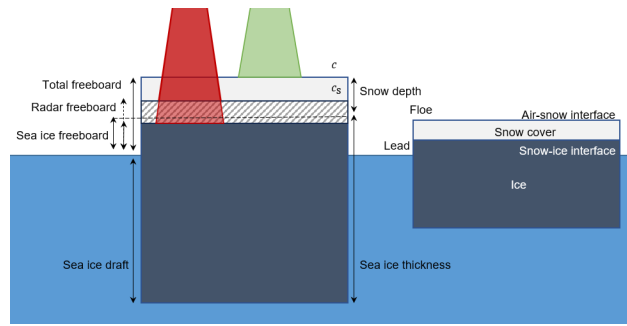

**Figure 1.** Schematic of the different sea-ice-altimetry-related terms. Radar (Ku-band) and laser altimetry observations and their expected penetration into the snow pack are shown by the red and green beams, respectively. Not to scale. The shaded area denotes the uncertainty related to penetration of radar and slowdown of propagation speed, which depends on the snow conditions, and impacts (along with other things) the retrieved radar freeboard.

85 without introducing selection biases (e.g., Langsdale et al., 2025). To address this, we performed a literature-based assessment of each dataset's validation efforts, noting limitations such as preferential sampling or known measurement biases. To improve the quality of the reference observations in the CCI SIT RRDP, we perform visual inspection and threshold-based outlier detection to remove likely erroneous values. Furthermore, we evaluate the spatial and temporal representativeness of each dataset and assign quality flags to guide users in identifying potential representativeness issues caused by differences in, e.g.,

90 sampling frequency, spatial coverage, or footprint sizes between satellite and reference measurements. We provide illustrative examples that demonstrate how excluding lower-quality data can affect the evaluation of satellite products.

Since the reference ~~observations originate from diverse~~ measurements originate from various instruments and methods, their uncertainties vary significantly. As an example, some older datasets (~~pre-2010~~pre-2010) lack detailed uncertainty information, and others (e.g., ~~visual~~visual ship-based observations) provide only a single uncertainty estimate per dataset. As a result, estimating

95 the uncertainty for each measurement in the CCI SIT RRDP is complex, but essential, and has been ~~a major focus at the center~~ of this work. Given the complexity of the uncertainty budget, including sampling biases and the conversion of freeboard to thickness, we ~~adopt~~rely on a simplified approach rather than ~~relying on introducing~~ advanced statistical methods that may not fully capture the underlying uncertainties. We refer the reader to the work of, e.g., (Xu et al., 2020), for further insights into ~~issues such as spatial representativeness and scaling properties related to airborne radar and laser observations.~~

100 Validation of radar altimetry SIT products is rarely performed directly on along-track data. Instead, community practice, demonstrated in numerous studies (e.g., Laxon et al., 2013; Tilling et al., 2018; Carret et al., 2025; Bocquet et al., 2024; Landy et al., 2022), is to compare monthly altimetry-derived variables (e.g. SIT or snow depth) with monthly averages of reference measurements gridded to the same spatial resolution. This is primarily because most satellite SIT products have monthly temporal resolution, a necessity given the limited spatial coverage achieved by a single satellite altimeter in one day. Following this established

105 practice, we grid the CCI SIT RRDP reference measurements to match the temporal (monthly) and spatial resolution of the

CCI SIT CDRs: 25 km for the Northern Hemisphere (NH) and 50 km for the Southern Hemisphere (SH). We note that other SIT records may use finer grids, such as the Southern Ocean SIT product of Fons et al. (2023).

~~We collocate the reference measurements with the~~ To showcase the temporal coverage of the reference measurements and their potential for validation of long-term SIT CDRs, we collocate the CCI SIT RRDP with the latest publicly available CCI SIT  
110 CDR version 3.0 (<http://cci.esa.int>, last accessed: 26 April 2024), which includes time series from (Olsen and Skourup, 2024a)  
, which contains CryoSat-2 (2010–present2010–2020) and Envisat (2002–2012) . Additionally, the RRDP is collocated with  
SIT time series. As this version does not include ERS-1 /2 (1993–2003) radar freeboard time series from or ERS-2, we use  
radar freeboards from these historical missions provided by the ESA Fundamental Data Records for Altimetry (FDR4ALT)  
project (Bocquet et al., 2023), providing coverage across the polar satellite altimetry era. This is done to demonstrate the  
115 usage and the performance of the reference measurement with a focus on evaluating their reliability for satellite altimetry  
inter-comparison. Erroneous observations are systematically rejected, and our performance analysis is grounded in several  
key criteria: spatial and temporal representativeness, methodological biases, and threshold-based outlier detections. These  
aspects are examined through sensitivity studies and insights from previous research. In line with metrological principles, we  
recognize that reference measurements themselves require validation, a condition, which is not always met. Therefore, we  
120 describe the validation status of each reference dataset through a comprehensive literature review, highlighting limitations such  
as preferential sampling and inherent biases. To support data usability, we assess the spatial and temporal representativeness of  
each dataset and assign quality flags accordingly. These flags assist users in identifying data with potential representativeness  
issues, and we provide illustrative examples demonstrating the impact of excluding low-quality data in the evaluation of satellite  
products. Ultimately, we aim to enhance transparency and usability by providing uncertainty estimates and user-oriented quality  
125 flags, which through guided examples enables informed decision-making tailored to specific validation needs. Finally, we share  
the reference measurements in their final format, collocated with the CCI. This allows us to illustrate the coverage of the CCI  
SIT RRDP over the entire polar altimetry era.

The final CCI SIT RRDP is delivered in a format collocated with CCI SIT CDRs and FDR4ALT altimetry-derived sea ice  
thickness datasets (Olsen and Skourup, 2024a). We also provide the associated code and scripts (Olsen and Skourup, 2024b),  
130 products, alongside the associated processing code (Olsen and Skourup, 2024b) and links to the native reference measurements  
(Table 2) allowing datasets (Table 2). This structure allows users to easily access and adapt the reference data to their desired  
measurements to their own temporal and spatial resolutionsresolution requirements.

~~Schematic of the different sea-ice altimetry-related terms. Radar (Ku-band) and laser altimetry observations and their~~  
~~expected penetration into the snow pack are shown by the red and green beams, respectively. Not to scale. The shaded~~  
135 ~~area denotes the uncertainty related to penetration of radar and slowdown of propagation speed, which depends on the snow~~  
~~conditions, and impacts (along with other things) the retrieved radar freeboard.~~

~~The manuscript is organized as follows: ; Section 2 describes the RRDP reference measurements with emphasis on methods,~~  
~~inherent biases and preferential sampling. Pre-processing steps, and representativeness quality flags are presented in Section 3~~  
~~reference measurements, their collection methods, and known biases; Section 3 details the pre-processing steps applied; Sec-~~  
140 ~~tion 4 ; respectively, followed by their uncertainties and the applied uncertainty methodology in presents representativeness~~

~~flags implemented;~~ Section 5 ~~-.Satellite SIT CDRs are described in-~~ explains the adapted uncertainty estimation; Section 6.1 ;  
followed by a description of the comparability and location of CCI SIT RRDP and introduces the satellite SIT CDRs in ;  
Section 6.2 ~~-.Results and discussions of the-~~ discusses comparability with CCI SIT RRDP and inter-comparison with satellite-derived  
products are presented in- ; Section 7 including the availability of the reference measurements and their advantages and  
145 limitations. Access to the CCI SIT RRDP and related software code is provided in- presents the results of inter-comparisons;  
Section 8 ~~-.Finally,~~ outlines data/code access; and Section 9 concludes the paper.

## 2 Description of RRDP reference measurements

The CCI SIT RRDP includes observations of freeboard (FRB), thickness (SIT), draft (SID) and snow depth (SD), in both  
the Arctic and Antarctic regions. Here, we use the term FRB as a general term for freeboard, including total freeboard  
150 and sea ice freeboard, as both are available in the CCI SIT RRDP. In addition, SIT ~~includes-include~~ total thickness (snow  
+ sea ice thickness), and sea ice thickness. Some reference measurements provide additional information on surface tem-  
perature and air temperature. As the temperature at the snow surface and within the snowpack has an impact on radar  
penetration depths (e.g. Giles and Hvidegaard, 2006; Willatt et al., 2011), we have included ~~the temperature observations~~  
observations of air (approximately 2 meter temperature) and surface temperatures in the CCI SIT RRDP. ~~All available reference~~  
155 ~~observations (from the included sources) for the polar regions for both hemispheres are-~~ However, temperature has not been  
part of the analysis in this paper. The reference measurements included in the CCI SIT RRDP, providing us with provide  
observations throughout the ~~entire~~-year, although ~~the their~~ coverage and availability are seasonally dependent, as ~~can be seen~~  
shown in Fig. 5. Reference ~~observations-measurements~~ north of the satellite altimeter coverage ~~i.e., the polar gap, has been~~  
included to prepare-, i.e. the pole hole, have been included for evaluation of ~~potential future satellite CDR gap-filling products~~  
160 ~~(e.g. by use of statistical methods such as kriging or optimal interpolation, see Gregory et al., 2021), but also to be used as reference~~  
observations-satellite products interpolated across the pole hole or as reference measurements for models. This is currently not  
the case for the CCI SIT CDR version 3.0.


In total, data from 14 different sources in the Arctic and 4 different sources in the Antarctic are included in the CCI  
SIT RRDP. The measurements are obtained from different platforms ~~using varying methods-~~ i.e., airborne ~~measurements,~~  
165 ~~measurements from moorings, moorings,~~ and autonomous drifting buoys, ships, and submarines, using a variety of methods.  
These methods and data products will be described more thoroughly in the following sections. A complete overview of the data  
sources used in the CCI SIT RRDP for both hemispheres is presented in Table 1 and links to the raw data are available from  
Table 2. Data sources are further illustrated in the Sankey diagram in Fig. 2, ~~where-which shows~~ the platform and ~~methods~~  
~~of measurements are shown, along with the name-~~ measurement techniques, names of the data sources, and the associated  
170 geophysical sea ice variables included in the CCI SIT RRDP. From here on, the data sources will be referred to by their abbrevi-  
ations as provided in Table 1.

**Table 1.** Overview of reference measurements and their sources included in the CCI SIT RRDp for both the Northern (NH) and Southern (SH) hemispheres.

<b>Campaign name or responsible</b>	<b>Description</b>	<b>Location</b>	<b>Abbreviation</b>
<i>Northern Hemisphere (NH)</i>			
North Pole Environmental Observatory	Stationary moored upward-looking sonar	North Pole	NPEO
Fram Strait Arctic Outflow Observatory	Stationary moored upward-looking sonar	Fram Strait	NPI-FS
Beaufort Gyre Exploration Project	Four stationary moored upward-looking sonars	Beaufort Sea	BGEP
Russian-German TRANSDRIFT project	Four stationary moored upward-looking sonar	Laptev Sea	TRANSDRIFT
Arctic Shipborne Sea Ice Standardization Tool (AS-SIST)	Visual observations from ships	Arctic Ocean	ASSIST
Submarine Arctic Science Program (SCICEX)	Submarine-mounted upward-looking sonar	Arctic Ocean	SCICEX
Cold Regions Research and Engineering Laboratory (CRREL)	Ice mass balance buoys (IMB)	Arctic Ocean	IMB-CRREL
Alfred Wegener Institute (AWI)	Snow depth buoys (SB)	Arctic Ocean	SB-AWI
Alfred Wegener Institute (AWI)	Airborne electromagnetic (AEM) measurements	Lincoln Sea/Beaufort Sea	AEM-AWI
NASA's Operation IceBridge (OIB)	Airborne laser and radar altimetry and snow radar	Lincoln Sea/Beaufort Sea	OIB
Multidisciplinary drifting Observatory for the Study of Arctic Climate (MOSAIC)	Airborne electromagnetic measurements and ice mass balance buoys	Arctic Ocean	MOSAIC
Nansen Legacy project	bottom-anchored ocean moorings and AEM measurements	Arctic Ocean	Nansen Legacy
<a href="#">Norwegian Young sea ICE cruise</a>	<a href="#">Airborne electromagnetic measurements</a>	<a href="#">Arctic Ocean</a>	<a href="#">N-ICE</a>
<i>Southern Hemisphere (SH)</i>			
Alfred Wegener Institute (AWI)	Stationary moored upward-looking sonar (ULS)	Weddell Sea	AWI-ULS
NASA's Operation Ice Bridge (OIB)	Airborne laser and radar altimetry	Weddell Sea	OIB-SH
Alfred Wegener Institute (AWI)	Snow depth buoys (SB)	Weddell Sea	SB-AWI-SH
Antarctic Sea ice Processes and Climate (ASPeCt)	Visual observations from ships	Southern Ocean	ASPeCt

**Table 2.** Direct data access is provided to all included reference data by using the DOI/[URL](#) links. DOI's are used when available.

Campaign	Reference	DOI/URL	Additional notes
OIB (NH, SH)	Kurtz et al. (2016), Kurtz et al. (2015)	<a href="https://doi.org/10.5067/GRIXZ91DE0L9">https://doi.org/10.5067/GRIXZ91DE0L9</a>	QuickLooks (QLs)
		<a href="https://doi.org/10.5067/GS19SHCKWQV6">https://doi.org/10.5067/GS19SHCKWQV6</a>	IDCS4. SH data is available from Operation IceBridge Data Portal, similar to IDCS4
AEM-AWI	Grosfeld et al. (2016)	<a href="https://data.meeretsportal.de/relaunch/airborne?lang=de">https://data.meeretsportal.de/relaunch/airborne?lang=de</a>	Snow depth measurements available for 2017 and 2019 (Jutla et al., 2024a, b)
ASSIST	ASSIST (2006)	<a href="https://icewatch.mct.no/">https://icewatch.mct.no/</a>	Data is repeatedly added, hence, providing more data than what is used in this study
ASPeCt	Worby et al. (2008b) Kern (2020)	<a href="https://aspect.antarctica.gov.au/data.html">https://aspect.antarctica.gov.au/data.html</a>	
		<a href="https://doi.org/10.26050/WDCC/ESACCIPSMVSBIOV2">https://doi.org/10.26050/WDCC/ESACCIPSMVSBIOV2</a>	
IMB-CRREL	Perovich et al. (2022)	<a href="http://imbc-crrel-dartmouth.org/archived-data/">http://imbc-crrel-dartmouth.org/archived-data/</a>	
SB-AWI (NH & SH)	Nicolaus et al. (2017)	<a href="https://doi.org/10.2312/polfor.2016.011">https://doi.org/10.2312/polfor.2016.011</a>	Data available by: Maps & Data -> Method -> Autonomous measurements -> Snowbiography
MOSSAIC	von Albedyll et al. (2021) Lei et al. (2021)	<a href="https://doi.pangaea.de/10.1594/PANGAEA.934578">https://doi.pangaea.de/10.1594/PANGAEA.934578</a>	Airborne Electromagnetic Measurements (AEM)
		<a href="https://doi.pangaea.de/10.1594/PANGAEA.938244">https://doi.pangaea.de/10.1594/PANGAEA.938244</a>	Snow and Ice Mass Balance Array (SIMBA)
Nansens Legacy	Øyvind and Sundford (2025) Cristea et al. (2023) Divine et al. (2023)	<a href="https://data.npolar.no/dataset/c19e8a7d-bd2c-4e59-9d65-8ebdd19a3e1b">https://data.npolar.no/dataset/c19e8a7d-bd2c-4e59-9d65-8ebdd19a3e1b</a>	Data from moorings
		<a href="https://data.npolar.no/dataset/1a9ec2df-c48c-4286-aad8-e7d0ca94904c">https://data.npolar.no/dataset/1a9ec2df-c48c-4286-aad8-e7d0ca94904c</a>	Data from AEM
		<a href="https://data.npolar.no/dataset/c1cfd5dd-71c8-4b00-b2f2-fd4f85a4d6af">https://data.npolar.no/dataset/c1cfd5dd-71c8-4b00-b2f2-fd4f85a4d6af</a>	Data from AEM
N-ICE	King et al. (2016)	<a href="https://data.npolar.no/dataset/aa3a5232-ccff-41ab-a41d-8b33b0393713">https://data.npolar.no/dataset/aa3a5232-ccff-41ab-a41d-8b33b0393713</a>	
BGEP	BGEP (2003)	<a href="https://www2.whoiedu/site/beaufortgyre/data/mooring-data/">https://www2.whoiedu/site/beaufortgyre/data/mooring-data/</a>	
AWL-ULS	Behrend et al. (2013b)	<a href="https://doi.org/10.1594/PANGAEA.785565">https://doi.org/10.1594/PANGAEA.785565</a>	
TRANSDRIFT	Belter et al. (2019), Belter et al. (2020)	<a href="https://doi.pangaea.de/10.1594/PANGAEA.899275">https://doi.pangaea.de/10.1594/PANGAEA.899275</a>	
		<a href="https://doi.pangaea.de/10.1594/PANGAEA.912927">https://doi.pangaea.de/10.1594/PANGAEA.912927</a>	
NPLFS	Sumata et al. (2021)	<a href="https://doi.org/10.21334/npolar.2021.5b717274">https://doi.org/10.21334/npolar.2021.5b717274</a>	
NPEO	Morison et al. (2016)	<a href="https://doi.org/10.5065/DGp84921">https://doi.org/10.5065/DGp84921</a>	
SCICEX	NSIDC (1998) SCICEX (2009, 2014)	<a href="https://doi.org/10.7265/NS5930R3Z">https://doi.org/10.7265/NS5930R3Z</a>	From 1993-2014
		<a href="https://doi.org/10.7265/NS34Q7RWK">https://doi.org/10.7265/NS34Q7RWK</a>	From 1960-2005
ERS-1 & ERS2	(Bocquet, 2023)	<a href="https://doi.org/10.6096/ctoh_sit_2023_01">https://doi.org/10.6096/ctoh_sit_2023_01</a>	
CryoSat-2	(Hendricks, 2024c), (Hendricks, 2024a)	<a href="https://catalogue.ceeda.ac.uk/uuid/6650437878c4ecd9f83960434023eff">https://catalogue.ceeda.ac.uk/uuid/6650437878c4ecd9f83960434023eff</a>	Northern Hemisphere
		<a href="https://catalogue.ceeda.ac.uk/uuid/861ad3c7f3a34ebd88b6f618a92b-d8e3">https://catalogue.ceeda.ac.uk/uuid/861ad3c7f3a34ebd88b6f618a92b-d8e3</a>	Southern Hemisphere
Envisat	(Hendricks, 2024b), (Hendricks, 2024d)	<a href="https://catalogue.ceeda.ac.uk/uuid/92eb2ba942074bec8044af6a8b5436bee">https://catalogue.ceeda.ac.uk/uuid/92eb2ba942074bec8044af6a8b5436bee</a>	Northern Hemisphere
		<a href="https://catalogue.ceeda.ac.uk/uuid/6196a1ecc493f49caa394dc912d15f2b17">https://catalogue.ceeda.ac.uk/uuid/6196a1ecc493f49caa394dc912d15f2b17</a>	Southern Hemisphere

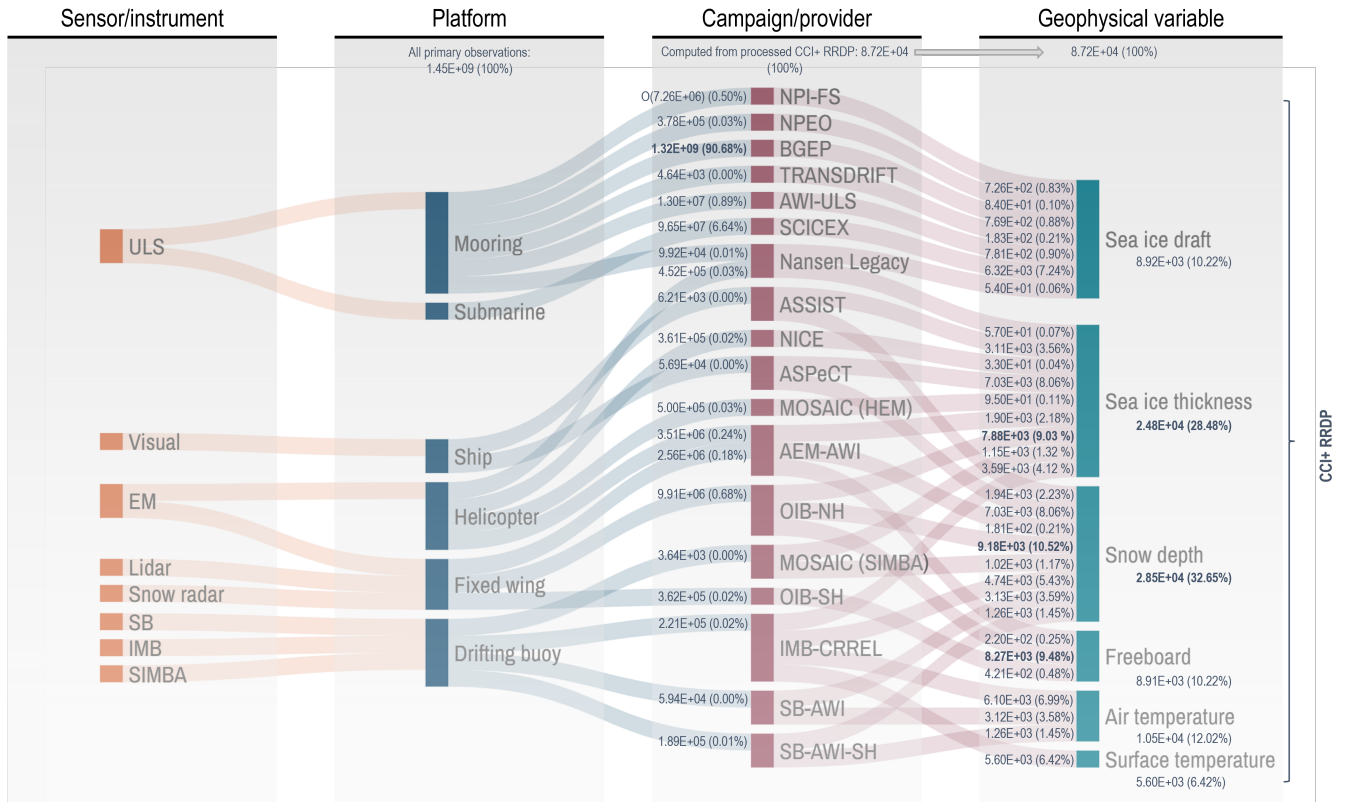

**Figure 2.** Sankey diagram providing an overview of the data sources used in the CCI SIT RRDP and how they are acquired, by whom/when and what has been observed. The diagram is shown by four categories; sensor or measurement type, platform, campaigns (Table 2), derived geophysical variable, and their dependencies. We note that the data volume included in the CCI SIT RRDP is represented here by numbers (in scientific notation) and percentages, and it is dependent on the processing level. Platform data volume denotes raw data, while campaign/geophysical variables refer to processed data. Note that the highest contributing data sources (at different processing levels) are highlighted in bold, defined as the the three highest contributing (in %) unless there is a large gap to the lesser contributors. In particular, the platform/mooring contributes more than 80% of the data, which primarily reflects the large [time-series](#), high sampling frequency, and temporal coverage of the buoys. In contrast, campaign (OIB-NH, ASPeCt, or SCICEX) primarily reflect spatial coverage, since these numbers refer to the processed CCI SIT RRDP. In total, SIT and SD account for approximately 60% of the CCI SIT RRDP. The notation O(number) denotes an approximation.

## 2.1 Airborne measurements

Measurements from OIB, AEM-AWI, MOSAiC, [N-ICE](#) and the Nansen Legacy are conducted from airborne platforms, either fixed-wing aircraft or helicopters (see Fig. 2). These measurements provide a higher spatial resolution than satellite measurements, and a larger spatial coverage than in situ observations, however, they are usually temporally limited to a few days to

weeks in specific months, primarily spring (March-April) in the NH and austral ~~summer~~ spring (October) in the SH, depending on when and whether an airborne campaign was conducted (see Fig. 5).

OIB's primary objective was to bridge the gap between NASA's ICESat (~~2003-2009~~ 2003-2009) and ICESat-2 (~~2018-onwards~~ 2018-onwards) satellite missions. During its duration from 2009 to 2019, more than 12 different types of fixed-wing aircraft were used, and within this time span-period several updates to the instruments used for surveying were made. For a detailed overview of the instruments used for different periods, along with an assessment of the impact on the obtained data, see MacGregor et al. (2021). The OIB ~~reference~~ measurements used in this study consist of data from the IceBridge "L4 Sea Ice Freeboard, Snow Depth, and Thickness", Version 001 (IDCS4), data product in the period of 2009–2013. Data after this are provided as quicklooks (Kurtz et al., 2016), which basically means that significantly less processing has been performed to provide a quick assessment of the collected data, leading to biases in the derived products, see Section 2.1.2. Quicklooks are processed from 2012–2019, but are only used from 2014–2019 due to IDCS4 being available until 2014. The measurands, that we compare to satellite observations are the sea ice FRB (total FRB subtracted the snow depth) and SD as well as SIT which is derived from laser and radar observations with additional sea ice density parametrisation. The officially published Antarctic campaign data are limited to total FRBs from the airborne topographic mapper (ATM) for the 2009 and 2010 campaigns, with no snow depth estimates provided and, hence, no sea ice thickness estimates. The sensors used to produce the OIB product, used herein, are the ATM laser altimeter system (Section 2.1.1), a digital camera (Section 2.1.1) and a snow radar (Section 2.1.2).

AEM-AWI, MOSAiC, N-ICE and the Nansen Legacy measurements are conducted using an electromagnetic (EM) sounding device (known as the "EM-Bird", see Section 2.1.3) dedicated to measuring the total ice thickness. In total, 27 campaigns are included in the AEM-AWI dataset as provided in Olsen and Skourup (2024a) along with information on the platform (either fixed-wing aircraft or helicopter) and measurement type for each campaign. AEM-AWI includes data from 2001–2019, but has not been measured consistently every year. For campaigns in 2017 and 2019, snow depth measurements (Section 2.1.2) were also obtained using an airborne frequency-modulated continuous-wave ultrawideband radar (Jutila et al., 2024a, b), which has been included in the CCI SIT RRD. Additionally, total thicknesses from ~~Airborne Electromagnetic (AEM) EM~~ measurements were obtained during both the N-ICE project (2015), the Nansen Legacy project (2019–2021) and the MOSAiC Expedition (2019–2020) using helicopters from ships. ~~MOSAiC AEM measurements (also called HEM, as measurements were obtained from a helicopter) were~~, also termed HEM. MOSAiC HEM measurements were provided with quality flags, described in the data product user manual (von Albedyll et al., 2021). The following flags were used to filter the data  $QF\_Reliability \leq 2$ ,  $Filter\_Moderate\_filter=1$   $Filter\_Strict\_filter=1$ . Total freeboards are provided for 2004 (IRIS, GreenIce) and 2007 (POLICE) campaigns in the AEM-AWI dataset (Olsen and Skourup, 2024a), derived from the EM-integrated laser.

### 2.1.1 Airborne topographic mapper (ATM) and digital camera

The main components of ATM are two conically scanning laser altimeters that measure the surface elevation along the path of the aircraft at  $15^\circ$  and  $2.5^\circ$  off-nadir angle, respectively (MacGregor et al., 2021). The ATM measures surface elevation relative to the WGS-84 reference ellipsoid by incorporating measurements from global navigation satellite system (GNSS) receivers and inertial navigation system attitude sensors. Measurements from ATM are subsequently converted to measurements of total

freeboard by subtracting the instantaneous sea surface height (the local sea level obtained from lead measurements) from the measured elevation height. Determination of the sea surface height involves corrections of geoid height, tides, atmospheric pressure and the dynamic sea surface e.g. waves. During these procedures, information from the geo-referenced images from the digital cameras is used to support the identification of leads, which are used as tie-points for the instantaneous sea surface height. For more information about the ATM and the subsequent processing, see Kurtz et al. (2013).

### 2.1.2 Snow radar

SD is recorded using an ultra-wide frequency-modulated-continuous-wave (FMCW) radar at either S/C (2-8 GHz) or S/Ku (2-18 GHz) band (MacGregor et al., 2021; Jutila et al., 2022b). The snow radar measures the return radar signal as a function of time, which is scattered from the illuminated area below the aircraft. SD is determined by identifying the air-snow and snow-ice interfaces (see Fig. 1 for the definition of the interfaces) in the received signal and converting the time difference between these interfaces to SD, accounting for the slowdown of the propagation speed in snow, by using the refractive index of snow (Kurtz et al., 2013).

Several different data products are available from snow radars, which are primarily caused by the use of different re-trackers (methodology to identify the air-snow and snow-ice interfaces, as shown in Fig. 1). ~~Five different processing methods were compared with extensive in situ field measurements averaged to scales of 40 m (from the BROMEX, Ozone, and Mercury EXperiment/BROMEX at Barrow, Alaska, and observations acquired near Eureka, Nunavut, Canada), as well as reanalysis data (ERA-Interim) in Kwok et al. (2017, henceforth K17).~~ Within this RRDP, three different re-trackers are employed in the three different data products (IDCS4, QLs, AEM-AWI-SD; ~~two of which were inter-compared in K17~~).

- **IDCS4** (denoted NSIDC in K17): A full description of the algorithm is available from Kurtz et al. (2013), which utilises an empirical method that selects the air-snow interface either as the first significant peak above a defined threshold or the fit point when the rise in radar return power reaches a specified threshold, for the cases where no peaks are detected. The snow-ice interface is selected as the ~~maxima~~ maximum in the radar signal below the air-snow interface.
- **QLs** (denoted GSFC-NK in K17): The full details of the algorithm methodology are described in the product documentation at NSIDC, but are based on the waveform fitting method described in Kurtz et al. (2014). The algorithm fits a model waveform to the snow-radar data, and both interfaces are selected from the model fit results. The model fit is highly sensitive to the parameters used in the fitting process, where the most important include the initial guess and model fit bounds for the interfaces along with the maximum number of iterations.
- **AEM-AWI-SD**: Jutila et al. (2022b) implemented a peakiness-based method, adapted from satellite radar altimetry, to enhance the detection of air-snow and snow-ice interfaces. This method is more robust in picking the right surface, especially when the air-snow interface is the dominant scattering surface, compared to ~~e.g.,~~ e.g., the Haar wavelet method. Their method is specifically tailored for the snow radar system deployed during the AWI IceBird campaigns, which has smaller footprints due to a lower flight altitude and slower speed of the aircraft.

According to ~~K17~~[Kwok et al. \(2017\)](#), the QLs snow depth product exhibits a negative bias of approximately 5 cm compared to the IDCS4 product, based on comparisons with in situ measurements from the BROMEX and Eureka in situ field campaigns. Biases of similar magnitude (-4.5 to -6.7 cm) were found by King et al. (2015) and Petty et al. (2023) depending on sea ice type and settings (i.e. ~~deformed-~~[deformed](#) ice versus level ice). The performance of the AEM-AWI-SD derived snow depth measurements ~~over for~~ level, landfast first-year sea ice shows a mean bias of 0.86 cm between radar-derived estimates and ground truth (Jutilla et al., 2022b), ~~aligning-~~[This aligns](#) closely with the performance ~~(with of the OIB IDCS4 product, which shows~~ biases of 0.3m~~-cm~~ and -0.8m~~-cm~~ when compared to the same in situ ~~field~~-observations as the ~~the QLs in K17)of~~ ~~the OIB IDCS4 product~~[QLs in Kwok et al. \(2017\)\)](#). While alternative processing algorithms exist, their lack of consistency ~~across datasets (Stroeve et al., 2020; Kwok et al., 2017)~~[between datasets \(Stroeve et al., 2020; Kwok et al., 2017\)](#) has led us to ~~implement only adopt~~ a single approach in this study. However, this choice may introduce biases that exceed the ~~provided uncertainties~~[uncertainties provided](#) in the OIB QLs product, see Section 5.2.1.

### 2.1.3 EM-Bird

The EM-bird senses the distance of the sensor to the ice-water interface using frequency-domain EM induction sounding capitalizing on the substantial difference of electrical conductivity between the sea ice and snow layers compared to the ocean (Haas et al., 2009). Subtracting the instrument distance to the air-snow ~~surface~~[interface](#), measured by an integrated laser, from the distance to the ice-water ~~surface~~[interface](#) yields the total ~~(sea ice plus snow)~~ thickness. The EM probe is towed by a helicopter or fixed-wing aircraft approximately 10-20 m above the surface of the sea ice. We further emphasize that helicopters tend to avoid certain ice types, such as thin or young ice, and open water areas for safety reasons, and therefore preferentially sample sea ice thicker than 0.30 m. Comparison with drill-hole data shows that helicopter-borne EM derived ice thicknesses agree within  $\pm 0.1$  m over level ice (e.g., Haas et al., 2007). However, the ~~accuracy~~[ice thickness](#) can be heavily underestimated over deformed ice (by as much as 50 to 60% in worst case) due to the footprint size of EM measurements over those 3D structures, and the presence of air pockets between the ice floes ~~and blocks~~ that have been pushed together (Haas et al., 2009; Mahoney et al., 2015; Haas et al., 2007).

## 2.2 Stationary moorings

In the CCI SIT RRDP, we have included data from stationary moorings equipped with upward-looking sonar (ULS) ~~-The observations~~[measuring the sea ice draft \(the submerged part of the ice\) from below the water. The ULS emits sound pulses and detects their echo return after being reflected from the bottom of the ice or from the water level between the ice floes.](#) ~~From these observations, the sea ice draft is derived using assumptions about seawater physical properties that influence the speed of sound, along with other corrections as described in Melling et al. (1995).~~ ULS records are the only sea ice reference measurements, ~~which are~~ fixed to a specific geographic location, ~~and provide~~[providing](#) continuous measurements throughout the year. ~~Even though the individual measurements are point measurements, the sea ice drift causes time-averaged sea ice drafts from ULS to provide information of the sea~~ ~~Although individual ULS measurements are essentially point observations when compared to satellite measurements, each observation has an effective spatial extent determined by the sonar footprint, which~~

depend on the beam width of the sonar and the depth at which it is deployed. As an example, ULS's deployed about 50 m below the surface with a beam width of  $\sim 1.8^\circ$ , corresponding to a footprint of roughly 2 m at the icepack representative of a larger area. water interface (Krishfield and Proshutinsky, 2006). While the footprint size can influence the absolute draft estimate and its associated uncertainties, the continuous drift of sea ice over the moored instrument ensures that the ULS samples a representative range of sea ice conditions over a larger upstream area. This is especially true given the typical high sampling rate for ULS moorings (e.g. 1/2 s for BGEP, 1/19 s for Nansen Legacy and between 1/1 min and 1/15 min for AWI-ULS). Moreover, the observed draft values and their variability depend not only on the actual sea ice thickness and its snow loading, but also on the averaging period, as well as the direction and speed of the sea ice drift. Many of the existing ULS' provide long time-series s provide long time series (Fig. 4), and thus have the potential to provide reference measurements ideal for evaluation of long-term multi-satellite climate data records. A ULS is an instrument targeted at measuring the sea ice draft (the submerged part of the ice). The instrument emits sound pulses and detects their echo return after being reflected on the bottom of the ice or the water level between the ice floes. From these observations, the sea ice draft is derived after applying corrections. For basic principles, see Melling et al. (1995). SIT CDRs.

In the Arctic, we include five sources providing stationary ULS data; the North Pole Environmental Observatory (NPEO) located at the North Pole with data from 2001–2010, the Fram Strait Arctic Outflow Observatory of the Norwegian Polar Institute (NPI-FS) located in the Fram Strait with data from 1990–2018, the Beaufort Gyre Exploration Project (BGEP) in the Beaufort Sea providing data from 2003–2023, the Nansen Legacy project providing data from 2019–2021, and the Russian-German TRANSDRIFT project (TRANSDRIFT) in the Lincoln Sea and Beaufort Sea with data from 2003 to 2016. Where the NPEO, NPI-FS, BGEP and TRANSDRIFT (2013–2015) moorings are measuring using an Ice Profiling Sonar (IPS), the Nansen Legacy and TRANSDRIFT (2003–2016) are using upward-looking Acoustic Doppler Current Profilers (ADCPs) (Belter et al., 2020). These different measurement techniques might introduce biases in the measured draft.

In the Antarctic, there are ULS draft observations from AWI (AWI-ULS) moorings in the Weddell Sea, where data were collected from 1990 to 2011. We note that currently there are several ULS stationed around the Arctic and Antarctic, ensuring the continuation of the mooring time-series of ice draft, however, data is time series of the ice draft. However, data are not available in near-real-time due to the sensor being submerged under near real time as the sensor is submerged below the water. Routine deployment and collection efforts are needed efforts are required to deploy and retrieve the ULS data, which is then processed afterwards are then processed. Hence, the lag time for data collection is significant, often at least one year, compared to other data sources, e.g., autonomous drifting buoys equipped with Iridium link.

To our knowledge, there are no community practices w.r.t. direct validation of ULS derived sea ice drafts. However, different methods to extract the drafts from raw derive the sea ice draft from the sound pulse runtime (or other) measurements can impact the resulting uncertainties, see Section 5.2.

### 2.3 Drifting buoys


Drifting buoys are autonomous systems, installed on selected sea ice floes, that drift freely with the ice compared to being anchored to one location as moorings. Depending on the buoy model, drifting buoys provide, along with other variables, the

310 evolution of the thermodynamic growth and melt of the ice and/or changes in the snow depth at the specific point where they  
are deployed, ~~and~~. The representativeness of the data acquired by these buoys depends on the initial snow and ice conditions  
at the time of deployment, as well as on how representative the selected ice floe is with respect to the surrounding ice cover.  
The derived information from drifting buoys is limited to ~~point measurements, and do not capture the floe on which they are~~  
deployed, and thus represents a point measurement. With that a drifting buoy cannot capture the ice distribution on larger  
315 spatial scales ~~nor~~ or the changes in the ice thickness distribution due to deformation, unless they are deployed in an array.  
However, a drifting buoy allows us to monitor the temporal development of various ice and snow physical properties of that  
particular ice floe.

In the CCI SIT RRD, we have included data from ice mass balance (IMB) buoys, maintained by the Cold Regions Research  
and Engineering Laboratory (CRREL) (Perovich et al., 2022), covering the period ~~2003–2003~~ to 2018; the Snow and Ice Mass  
320 Balance Array (SIMBA) deployed during the MOSAiC expedition in 2019 ~~–2020~~ to 2020; and dedicated acoustic snow depth  
buoys (SB) deployed by AWI during the time period ~~2013–2013~~ to 2023. ~~While the~~ As IMB-CRREL and SIMBA buoys are  
only available for the Northern Hemisphere, SB data are available for both hemispheres. ~~Data~~ The data from IMB-CRREL  
for 2017 is found to be faulty, as all recorded values are identical. ~~These data were therefore~~ Consequently, these data were  
excluded from the CCI SIT RRD.

325 The Snow and Ice Mass Balance (IMB) buoys measure the thermodynamic contribution to changes in the mass balance of  
sea ice. The main component is ~~thermistor strings mounted vertically throughout a~~ thermistor string mounted vertically through  
the snow and ice column ~~measuring to measure~~ the temperature profile, along with acoustic sounders placed above and below  
the ice, measuring the ~~top of the~~ location of the air-snow or air-ice interface and of the water-ice interface, respectively. The  
combined snow + ice thickness is determined from the acoustic sounders and can be separated into measurements of SD and  
330 SIT by taking into account initial measurements of the snow/ice ~~and the bottom of the ice, respectively~~ interface taken during  
deployment. Specifically, SD is given as the initial SD + snow accumulation or melt, while SIT is the distance between the top  
interface (air/snow or air/ice) and the bottom interface (water/ice) subtracted the SD (Planck et al., 2020). In addition, the buoys  
are typically equipped with a barometer and an air temperature sensor. From the IMB-CRREL buoys, we include measurements  
of SIT and SD, along with surface and air temperature. Typically, 3–6 IMB buoys are deployed each year in the Arctic Ocean,  
335 with the most regular deployments focused in the Beaufort Sea and at the North Pole with a typical survival period of ~~1–2~~  
~~seasons~~ 1 year (Richter-Menge et al., 2006a). The time interval between subsequent mass balance data measurements (SD and  
SIT) varies for different buoys and depends on the buoy model and the year of deployment. In general, the mass balance data  
are measured approximately every four hours for the majority of buoys, but several buoys provide measurements every two  
hours and some (2002A, 2003A) only twice a day, while others (2015I, 2015J, 2015K) have measurements every hour. SIMBA  
340 ~~consists of an array of IMB buoys and hence is a thermistor string type IMB (Lei et al., 2021) and therefore~~ also measures  
vertical temperature profiles through the air-snow-ice-water column using a thermistor string. During MOSAiC 22 SIMBA  
buoys were deployed in the Arctic Ocean in a Distributed Network (DN).

As such, an individually deployed IMB buoy (IMB-CRREL) provides spatially localized measurements, due to its fixed  
position on an ice floe, but with relatively high temporal resolution. Whereas, an array of IMB buoys (SIMBA) is expected to

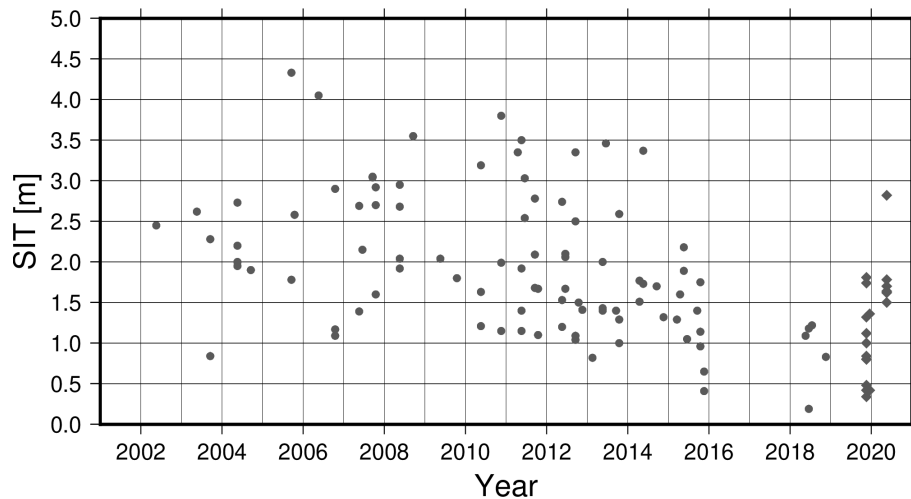

**Figure 3.** Initial thickness for the 92 IMB-CRREL (dots) and 19 SIMBA (diamonds) buoys included in this study.

345 better represent a larger spatial variation of ice thicknesses and snow depths on the scales of the array, while keeping the high temporal sampling. The automatic detection of snow depth and ice thickness from SIMBA has been evaluated against in situ data by Zeliang Liao and Cheng (2019) when deployed in landfast ice (in vicinity of Zhongshan station in Prydz Bay, East Antarctic). In situ snow depth and ice thickness were measured on a weekly ~~bases~~basis, where boreholes were drilled through the ice and the distance was measured using an ice gauge to determine ice thickness, ~~and snow~~. Snow depth was measured with a stainless ruler from three close (less than 1 m) random sites near the ice boreholes (within 2m), ~~with accuracies of~~ 0.01 m and 0.005 m for ice and snow measurements, respectively. No in situ comparison was recorded over drifting ice. ~~Comparisons of ice thickness records a bias of 0.025 m, a RMSE of 0.09 m, and a correlation of 0.99, and the snow depth comparison was not reported.~~ Cheng et al. (2020) compared SIMBA observations acquired in-on a frozen lake in Finland, where ~~the interfaces of snow detection estimates of~~ snow depth and ice thickness, derived from automatic or manually identified air-snow, snow-ice, and ice-water interfaces in temperature profiles, were compared with in situ observations acquired from the lake at observation sites 500 m apart ~~from each other~~. Comparisons of (total) ice thickness record a bias of 0.04-0.06 m and RMSE of 0.13 m.

350  
355

The IMB-CRREL and SIMBA buoys' initial thicknesses, i.e., the ice thickness at deployment, are shown in Fig. 3. Of the 92 IMB-CRREL buoys included here, only two buoys (2015H, 2018D) ~~has~~have an initial SIT < 0.5 m. In general, they tend to be deployed in ice thicker than 1 m with few exceptions (2003C, 2013A, 2015H, 2015I, 2015K, 2018D and 2018E) with 37 of them deployed in the perennial sea ice cover (MYI) with initial thicknesses > 2 m to decrease the likelihood of damage to the buoy due to e.g., sea ice deformation events and thereby prolonging its potential life span. ~~Buoys deployed in MYI do not capture the seasonal cycle (Polashenski et al., 2011).~~ Post-2009, more buoys are deployed in ice with an initial thickness < 2 m (44 out of 63) with a minimum initial thickness of 0.19 m (2018D), i.e., in the seasonal ice cover (FYI). This is consistent with the design of the first IMBs to be adapted and well-suited for deployments in MYI (Richter-Menge et al., 2006b). An

360  
365

optimized buoy design to better fit deployments in seasonal ice zones was first tested in 2009 according to Polashenski et al. (2011). Basically, all 19 SIMBA buoys (except 2019T79) were deployed in ice with initial thickness <2 m.

Snow depth buoys (SB) measure relative changes in snow height, ~~that are i.e.~~ the accumulation of snow since deployment. These are then calibrated against the initial snow depths measured during deployment in order to retrieve the absolute snow depth values. In the Alfred Wegener Institute snow depth buoys (SB-AWI) (Nicolaus et al., 2017), the measurements are made with four ultrasonic snow depth sensors that are installed on a mast-attached platform. SB-AWI measurements are available for both hemispheres. The data transmission interval for SB-AWI is approximately once per hour, resulting in spatial and temporal characteristics similar to IMB-CRREL. We were not able to identify validation studies where the derived snow depths were inter-compared with in situ data ~~or reported, however, however,~~ the SB is consistently deployed by AWI in both hemispheres, and has shown reasonable accumulation rates (e.g., Nicolaus and Katlein, 2017; Nicolaus et al., 2021; Arndt et al., 2024). Also, the methodology to convert the snow accumulation measurement by the buoy into a snow depth value is continuously developed further, especially for the Southern Ocean, including consistency checks to regional in situ measurements of the snow depth and consideration of the formation of snow ice and meteoric ice (Arndt et al., 2024).

## 2.4 Ships

Collected and archived ship-based observations are provided via the Ice Watch program (Hutchings et al., 2018) for the NH. ~~These are visual observations, that are~~ The Southern Hemisphere has a corresponding program called ASPeCt (Antarctic Sea Ice Process and Climate), which was established in 1997 by the Scientific Committee on Antarctic Research. These are manual visual observations from the ship's bridge carried out by voluntary, ideally trained observers. Observations shall be recorded with the ASSIST (Arctic Shipborne Sea Ice Standardization Tool) following an established Ice Watch protocol established in the 2000s in the NH and following the ASPeCt protocol in the SH. Reported observations ~~may include e.g. shall include, for the three dominant ice thickness categories within a 1 km/1 nm radius around the ship, e.g., sea ice concentration and thickness, sea ice thickness, snow depth,~~ stage of growth or melt, state of the snow cover and surface roughness, ~~and may be inconsistent in which variables are recorded within a particular observation and at what quality depending on the.~~ Despite the used protocols, the number of observed variables reported is often inconsistent and can vary between ship cruises. Factors influencing the quality of these observations are visibility around the ship, and experience and qualifications of the ~~observer~~ observers which cannot be quantified (find a brief description of Ice Watch instructions for observers in Section 3.1.2). ~~We are not aware of any specific validation practices that compare visual ship observations with other complementary data. However, new techniques are emerging such as the Sea Ice Monitoring System (SIMS, von AbedoII et al. (2024)) and downward looking cameras mounted on ships.~~ ASSIST data is available from ~~2006–2021~~ 2006–2024 and contains data from ~~61 voyages. The Southern Hemisphere has a corresponding program called ASPeCt (Antarctic Sea Ice Process and Climate), which was established in 1997 by the Scientific Committee on Antarctic Research.~~ 89 voyages. Data until 2005 is available from the ASPeCt data archive and contains data from 83 voyages and 2 helicopter flights for the period 1980–2005. More recent additions (2002–2019) to the dataset have been processed and are publicly available (Kern, 2020). Links to data sources for ASPeCt and ASSIST are available from Table 2. We are not aware of any specific validation practices that compare

400 visual ship observations with other complementary data, especially with respect to SIT and SD. However, new techniques are emerging such as the Sea Ice Monitoring System (SIMS, von Abedyll et al. (2024)) and downward looking cameras mounted on ships. Ship observations are, in a similar manner as the airborne campaigns, dedicated to individual cruises with a duration of 1–2 months. ~~Many of the observations in SH are made from supply ships, which primarily take place during the Austral summers and tend to navigate thin or less consolidated ice~~Thanks to the more harsh conditions during winter in the respective  
405 hemisphere, more ship-based observations can be found for the summer months (Kern et al., 2019). In general, ships, whenever possible, tend to avoid well-consolidated and deformed ice to limit risks, which impacts the ice observations. While estimates of the sea ice concentration are less influenced by this tendency to operate in easily navigable ice conditions, estimates of sea ice thickness and snow depth on sea ice are known to be biased low; thick and deformed ice conditions are underrepresented (Worby et al., 2008a).

## 410 2.5 Submarines

The submarine dataset provides ULS SIDs, similarly to stationary moorings, except that the measurements are taken along trajectories and thus have a larger regional coverage. However, the data is collected only during dedicated cruises of 1–3 months duration. The submarine cruises are primarily military operations, which can imply that the data distribution to the common sea ice community can take several years due to restrictions on data sharing. The data included here were collected  
415 by the U.S. Navy and Royal Navy and are available for the Arctic Ocean. The temporal span of the data is from the 1st of February 1960 to the 30th of November 2005, along with data available in 2011 and 2014. Data from several other years (2012, 2016, 2018 and 2020) are currently being processed and evaluated for releasability. Examination of SCICEX data from the 2014 New Mexico cruise reveals anomalous behavior when compared to data from other years. Additionally, according to the SCICEX data product user manual (SCICEX, 2009, 2014), the 2014 New Mexico dataset has undergone an unspecified level  
420 of processing. Given these issues, the 2014 data ~~has~~have been excluded from the analysis, as it is likely not comparable with the other submarine measurements.

## 3 Processing of RRDP reference measurements


### 3.1 Pre-processing of reference data

~~All of the collected reference data underwent some degree of processing prior to converting into the~~ All reference measurements  
425 underwent pre-processing before being converted to common spatial and temporal scales for comparison with satellite-altimetry-derived composites. In most cases, the necessary pre-processing steps involved converting the date and coordinate formats to the desired output format and/or automatically extracting location and/or date information from the file header, which are all considered standard procedures. Additionally, observations were filtered to exclude data points that potentially represent outliers. Specifically, measurements were removed if SIT exceeded ~~10m~~10 m, SD exceeded ~~2m~~2 m, SID exceeded ~~8m~~8 m,  
430 FRB exceeded 2 m, or if any variable had values below 0 m. In addition, several ~~reference data~~ subsets needed additional


**Table 3.** Description of reference data structure in CCI SIT RRDp.

<b>SIT, SD and FRB reference data files</b>									
<b>obsID</b>	Observation Identifier	<b>date</b>	Median of dates in gridcell	<b>lat</b>	Latitude of grid center	<b>lon</b>	Longitude of grid center		
<b>SD</b>	Median SD in gridcell	<b>SDstd</b>	Robust standard deviation of SD in gridcell	<b>SDIn</b>	Number of SDs in average	<b>SDunc</b>	Uncertainty of gridcell SD (*)		
<b>SIT</b>	Median SIT in gridcell	<b>SITstd</b>	Robust standard deviation of SIT in gridcell	<b>SITIn</b>	Number of SITs in average	<b>SITunc</b>	Uncertainty of gridcell SIT (*)		
<b>FRB</b>	Median FRB in gridcell	<b>FRBstd</b>	Robust standard deviation of FRB in gridcell	<b>FRBIn</b>	Number of FRBs in average	<b>FRBunc</b>	Uncertainty of gridcell FRB (*)		
<b>Tsur</b>	Median Surface temperature	<b>Tair</b>	Median Air temperature	<b>wSD</b>	Warren Snow Depth (**)	<b>w-rho</b>	Warren Snow Density (**)		
<b>pp-flag</b>	Pre-processing flag (*)	<b>unc-flag</b>	Uncertainty flag (*)	<b>QFT</b>	Temporal representativeness quality flag (***)	<b>QFS</b>	Spatial representativeness quality flag (***)		
<b>SID reference data files</b>									
<b>obsID</b>	Same as above	<b>date</b>	Same as above	<b>lat</b>	Same as above	<b>lon</b>	Same as above		
<b>SID</b>	Median SID in gridcell	<b>SIDstd</b>	Robust standard deviation of SID in gridcell	<b>SIDIn</b>	Number of SIDs in average	<b>SIDunc</b>	Uncertainty of gridcell SID (*)		
<b>wSD</b>	Same as above	<b>w-rho</b>	Same as above	<b>pp-flag</b>	Same as above	<b>unc-flag</b>	Same as above		
<b>QFT</b>	Same as above	<b>QFS</b>	Same as above						

(\*) see sec. 5 for a description of how uncertainties are determined for each campaign (\*\*\*) from Warren et al. (1999), (\*\*\*) see Section 4

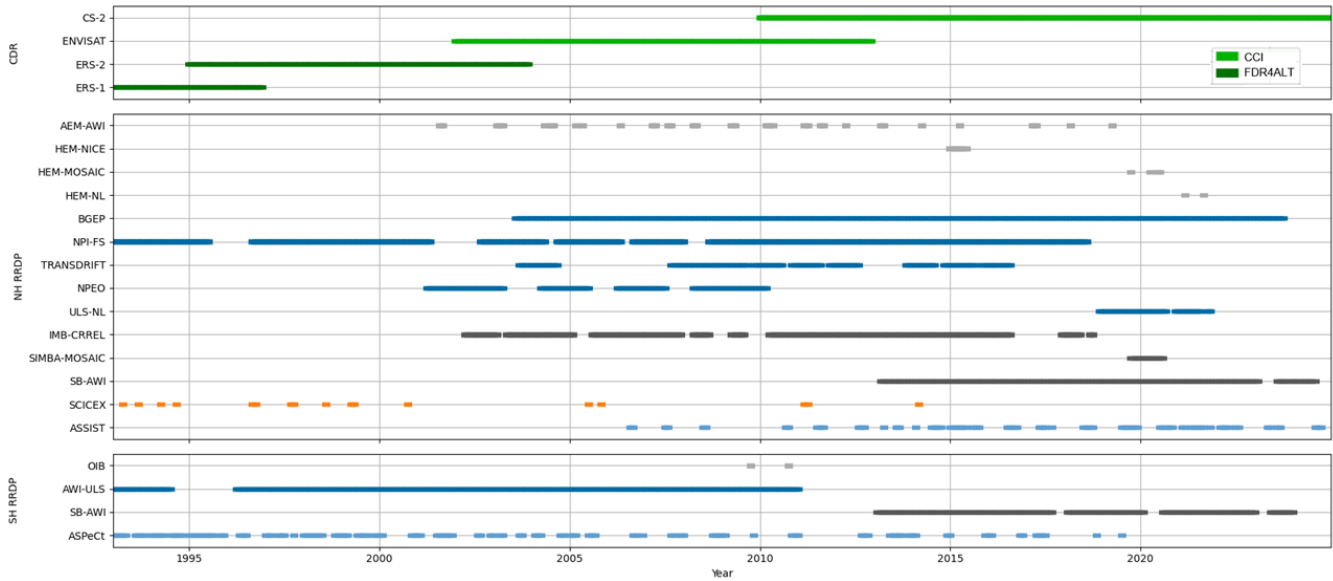

**Figure 4.** Timeline of all data included in the CCI SIT RRD. The CDR observations are color-coded according to project as shown in the legend, whereas the colors of the RRD reflect the type of reference observations as defined in Fig. 5.

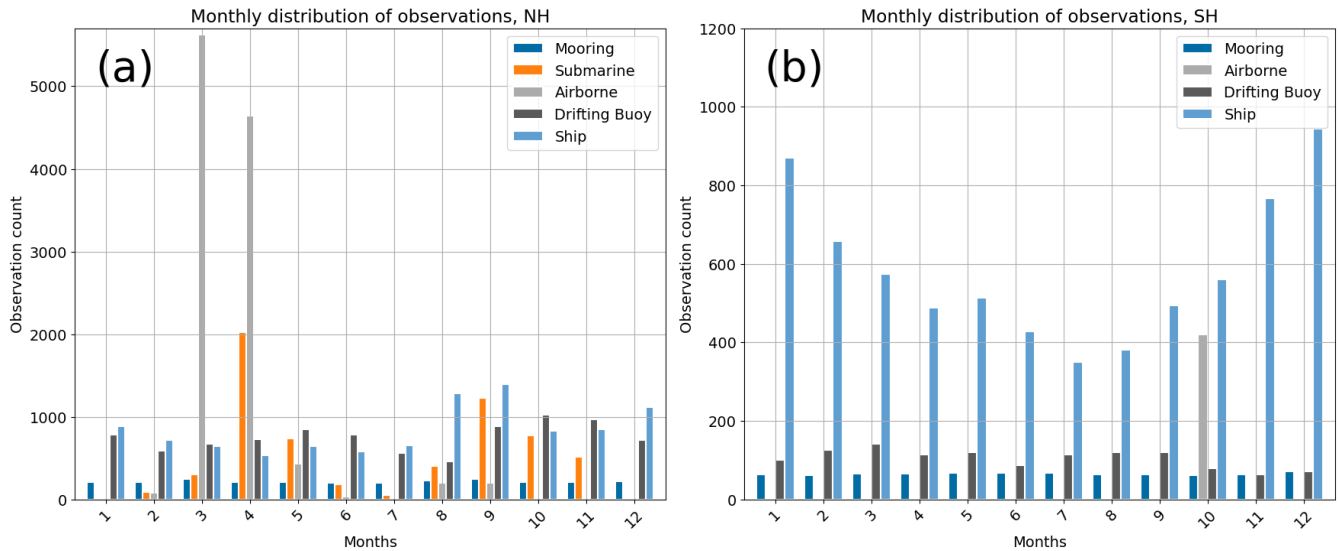

**Figure 5.** Seasonal distribution of reference data in CCI SIT RRD; (a) NH and (b) SH categorised based on sensor type.

pre-processing steps due to, e.g., incomplete information of time and/or position. As a result, a pre-processing (pp) flag is included in the final data file, indicating whether the data required additional pre-processing steps, which could be associated with higher uncertainties. As the required level of additional pre-processing varies for the different types of reference mea-

surements, an overview of the use of the pre-processing flag is presented in Table 4. It should be noted that, because the data  
435 are subsequently averaged into monthly means on a 25 km grid for the Northern Hemisphere (NH) and a ~~50km~~ 50 km grid  
for the Southern Hemisphere (SH), temporal uncertainties of up to 24 hours are expected to have minimal impact. Discussions  
of temporal and spatial representativeness ~~is presented in sections~~ are presented in Sections 4, 7.6 and 7.7. In the following  
~~sub-sections,~~ subsections specific major processing steps are further detailed.

### 3.1.1 AEM-AWI

440 Files within AEM-AWI either contain measurements of total FRB or total thickness (in combination with SD for files in 2017  
and 2019). It was therefore decided to split the final product into two files, one with all the measurements of total ice thickness  
and one with all measurements of total freeboard (see appendix in Olsen and Skourup (2024a) for a filewise overview).

### 3.1.2 Ship measurements

The IceWatch manual provides guidelines for observing SIT and SD from ~~the~~ ships. The standard procedure requires making  
445 observations every hour while the ship is in motion. The ice is observed, depending on actual visibility conditions, up to ~~a mile~~  
1 km / 1 nm from the ship during a 10-minute observation period, which is usually performed on the bridge of the ship. Recent  
instructions ([https://aspectsouth.org/wp-content/uploads/2024/06/sea-ice-cards\\_LOGODOI.pdf](https://aspectsouth.org/wp-content/uploads/2024/06/sea-ice-cards_LOGODOI.pdf), last accessed 2025-05-23) re-  
iterate that observations should be made every hour ~~;~~ and recorded on the hour. Observers are required to document the sea ice  
types/classes and estimate their area coverage within a 1 km / 1nm radius of the ship, estimated from the radar display on the  
450 bridge of the ship in addition. SIT estimates are made by visually assessing overturned sea ice viewed from the bridge refer-  
enced to a 55 cm diameter buoy on the side of the ship, or a ruler/stick ~~sticking out with 0.2 m or 0.5 m graduation~~ sticking out  
perpendicular to the side of the ship. Rafted ice is included in the thickness estimate, whereas ridged ice ~~is shall be~~ excluded.  
The same measurement methodology is applied for SD, which is differentiated from ice by color. ~~The manual did not mention~~  
~~any specific validation approaches to ensure consistency or quality of the visual observations.~~

455 The aim is to classify up to three ~~prevalent ice types / classes that combined cover the most area. Of these, the thickest is the~~  
~~primary ice type~~ dominant ice types or classes that together cover the largest area. These are denoted as primary, secondary,  
and tertiary ice, where the thickest ice type is primary, and the thinnest is ~~the tertiary ice type. The area.~~ The areas of primary  
~~;~~ secondary, and tertiary ice should sum to ice are summed to obtain the total ice concentration (Hutchings et al., 2018).

Due to the acquisition method, data from ASSIST and ASPeCt must undergo pre-processing to combine the observations of  
460 the individual ice types into one. The thickness and partial concentration of each ice type are used to make a weighted average  
of the mean sea ice thickness within the observed area (1 km in the SH or 1 nautical mile  $\approx$  1.85 km according to Hutchings  
et al. (2018)). The following formulas show the computation of such averaged sea ice thickness estimates:

$$\text{SIT}_{\text{EP}} = \frac{C_{\text{P}}}{C_{\text{tot}}} \cdot \text{SIT}_{\text{P}}, \quad (1)$$

Flag	Description	Data Sources	Specifics
0	No additional pre-processing performed	All other data sources included	Converting the date and coordinate formats to the desired output format and/or automatically extracting location and/or date information from the file header.
1	<b>Very minor pre-processing:</b> Includes temporal approximations ( <a href="#">time-alignments</a> ) of less than 12 hours, along with data that has already been processed into monthly means.	NPI  IMB-CRELL	Raw <a href="#">time-series-time series</a> are already processed into monthly means by the data sources, with <a href="#">no-<del>neither</del></a> variation (standard deviation) <a href="#">being-included-or-not</a> the number of observations <sup>a</sup> <a href="#">being-included</a> . Information is available on SD+SIT (file A), position (file B), air temperature (file C), and ice surface temperature (file D), but the measurements do not coincide directly in time. Data is collocated to file A format using the smallest time difference.
2	<b>Minor pre-processing:</b> Includes temporal approximations of up to 24 hours, along with additional calculations performed on raw data	IMB CRELL  AEM-AWI  SCICEX  ASSIST, ASPeCt	If the difference in time between observations from the different files (A-D) exceeds 12 hours.  Missing time of day information (several AEM-AWI files, see an overview in Olsen and Skourup (2024a)), where the output date-time is given as date + arbitrary time stamp of 00:00:00.  Geographical coordinates (lat,lon) are found based on start and end positions + distance traveled by the submarine. No time of day is provided, only the date  Conversion using the partial sea ice concentration (and related SIT and SD observations) into a combined SIT and SD estimate <a href="#">independent-taking the areal fractions of</a> the three <a href="#">most-prevalent-ice-types-dominant-ice thickness categories into account</a> , see more in Section 3.1.2. If total sea ice concentration is noted as 0, SD and SIT is set to 0.
3	<b>Major pre-processing:</b> Includes temporal approximations of more than 24 hours	SCICEX	Geographical coordinates (lat,lon) are found based on start and end positions + distance traveled by the submarine. Dates are only provided as the third of the given month e.g. 1st third of the month, 2nd third or 3rd third

<sup>a</sup>An updated version of the data (Sumata, 2022) contains an estimate of the number of samples per observation given as in the order of  $10^4$  for data obtained with the ES300 instruments (until Sep 2006) and in the order of  $10^6$  for data obtained with the IPS4/5 instruments. This information has been added to the CCI SIT RRD, but users should be aware that the number is an approximation.

$$465 \quad \text{SIT}_{\text{ES}} = \frac{C_{\text{S}}}{C_{\text{tot}}} \cdot \text{SIT}_{\text{S}}, \quad (2)$$

$$\text{SIT}_{\text{ET}} = \frac{C_{\text{T}}}{C_{\text{tot}}} \cdot \text{SIT}_{\text{T}}, \quad (3)$$

$$\text{SIT} = \text{SIT}_{\text{EP}} + \text{SIT}_{\text{ES}} + \text{SIT}_{\text{ET}} \quad (4)$$

470 Here, P, S and T stand for *primary*, *secondary* and *tertiary*, respectively.  $C_{\text{tot}}$  is the total ice concentration, and  $C_{\text{P, S, or T}}$  denote the ice concentration of the particular ice type. The combined SD is derived using the same weighting principle.

~~Reference data is used~~ We use these reference measurements only if the sum of the partial concentration adds up to the total concentration and at least one of the partial concentrations belonging to SIT/SD is defined (e.g. is not NaN).

### 3.1.3 Submarine measurements

475 SCICEX submarine measurements ~~are obtained over a long period (1960-2014)~~ were collected over an extended period, from 1960 to 2014. During this time period, the information provided in the data acquisition files is not consistent, and post-processing of different parts of the data has been treated by different institutions, which results in inconsistencies between different cruises. Nevertheless, as all SCICEX data are subject to some level of interpolation, due to a lack of continuous measurements of time and position, all ~~the data is~~ data are given pp-flags in categories 2 or 3 (see Table 4).

480 Parts of the SCICEX data are known as the "analog subset" because it was derived from traces on paper rolls (SCICEX (2009, 2014), see General resources *Documentation for G01360 Analog Subset*). Each file in the analog subset contains sea ice drafts of one line segment and provides only the start and end coordinates, along with date information including the year, month and the segment of the month in which measurements were obtained, given as the first, second, or third part of the month. We are using the following date-time conversion for converting the segment of the month into a date containing day  
485 and time:

- 1st third = Day 5 at 00:00:00 UTC
- 2nd third = Day 15 at 00:00:00 UTC
- 3rd third = Day 26 at 00:00:00 UTC

Other files within SCICEX provide a specific day of the month, and for these, we use the specified day and an arbitrary time at  
490 00:00:00. 00 UTC.

Spatial interpolation to obtain the positions of each reference measurement is done using the inverse haversine formula from the Python package haversine 2.8.0 (released ~~Feb~~ February 28, 2023). Here, the coordinates ( $\phi$ ,  $\lambda$ ) are calculated iteratively

by using the provided using the distances ( $\delta d$ ) provided between observations when available and the bearing ( $\theta$ ) between neighboring points. When these are not available, an equal distance is assumed between subsequent measurements using the start and end positions.

### 3.2 Transformation into composites for comparison with satellites

The reference Reference measurements were averaged to the Equal-Area Scalable Earth Grid in version 2 (EASE2) provided by the National Snow and Ice Data Center (NSIDC). For each gridcell, the median was used to compute the average value, accompanied by the corresponding robust standard deviation (see Eq. 5). The date assigned to each gridcell corresponds to the median date of all observations within that gridcell. The median and robust standard deviation were selected to reduce the influence of outliers to better handle skewed distributions present in several datasets. This approach was preferred over the mean and ordinary standard deviation to obtain a typical representative value for each grid cell. Using the median date also indicates when the reference measurements are most densely distributed and enables matchup weighting based on temporal distance. EASE2 is based on a polar aspect spherical Lambert Azimuthal equal-area projection Brodzik et al. (2012) (Brodzik et al., 2012) and the WGS-84 reference ellipsoid. The NH grid dimension is 5400 km x 5400 km with a spatial resolution of 25 km, resulting in a grid consisting of 432 x 432 grid cells, whereas the SH grid has a spatial resolution of 50 km, resulting in a grid consisting of 216 x 216 grid cells. The grid is centered on the geographic pole, meaning which means that the pole is located at the intersection of the center cells. A temporal resolution of 30 days is used for both hemispheres. Data obtained from stationary moorings have only been temporally averaged, as these are fixed in space. The output data was subsequently sorted temporally and processed to fit into a standardized text format, as shown in Table 3. Since most campaigns only record some of the information required by the standardized format, missing values were filed as NaNs.

$$\sigma_{\text{robust}} = 1.4826 \cdot \text{median}(|x_i - \text{median}(x)|) \quad (5)$$

## 4 Representativeness in space and time

We further flag ("quality-flag" or QF) data with temporal or spatial representativeness issues according to their temporal and spatial representativeness. This is achieved by separating the flag into two categories: a temporal representativeness flag (QFT) and a spatial representativeness flag (QFS), see Table 5 for specifications. Spatial representativeness (QFS) is difficult to assess, particularly given the different nature of the reference measurements. To address this, the reference data are split measurements are divided into categories based on how they are measured. Airborne measurements (OIB, AEM-AWI, N-ICE and parts of the MOSAiC and Nansen Legacy) and submarine measurements (SCICEX) move operate above/below the ice and have a particular footprint size. Therefore, respectively, and have distinct footprint sizes. Consequently, the number of observations within a grid cell scales with the area covered. Due to the very different footprint sizes of particularly, particularly for airborne and submarine measurements, the spatial representativeness is estimated by the number of measurements within a grid cell. Four flag values are used defined based on the 25% (Q1), 50% (Q2) and 75% (Q3) quartiles of the total number of observations

**Table 5.** Quality flags to deduce representativeness of the reference measurements. Note that QFT thresholds are based on the monthly temporal resolution produced within the RRDP, and would need to be updated for users that utilise a different spatial resolution when processing with this set-up.

Abbreviation	Flag name	Flag value	Description
QFT	Quality Flag Temporal	0	Data within cell spans > 15 days
		1	Data within grid cell spans $5 < \text{days} \leq 15$
		2	Data within grid cell spans $1 < \text{days} \leq 5$
		3	Data within grid cell spans $\leq 1$ day
QFS	Quality Flag Spatial	0	Airborne: The number of observations in a cell is above Q3 Moorings: Data in grid cell spans > 15 days
		1	Airborne: The number of observations in a cell is between Q2 and Q3
		2	Airborne: The number of observations in a cell between Q1 and Q2
		3	Airborne: The number of observations in a cell is below Q1 Moorings: Data in grid cell spans < 15 days Buoys & Ship: Data has known representativeness issues

across the dataset. These spatial flags provide a relative indication of ~~the extent of~~ area coverage compared to the overall data distribution. For more advanced considerations of the scaling properties related to, e.g., OIB data, we refer to (Xu et al., 2020) In contrast, buoys placed on the ice have an inherent issue with ~~temporal-spatial~~ representativeness due to their fixed location on the ice floe. Thus, by definition, these have limitations ~~regarding in terms of~~ high spatial representativeness. Similarly, ships navigating in ice tend to choose a route with thinner sea ice and ~~therefore exhibit an inherent bias in terms of spatial representativeness. In~~, therefore, exhibit a sampling bias because only a part of the SIT and SD distribution function can be covered. In addition, any ship-based and airborne reference measurements are likely to be biased to represent spring/summer sea ice conditions; this applies in particular to OIB. In contrast, moorings, although fixed in position beneath the sea ice, can achieve high spatial representativeness due to the drifting ice passing over them, provided that different ice masses drift across. As such, their spatial representativeness can be approximated by the number of days with measurements in a given month.

## 5 Uncertainties of RRDP reference measurements

All source reference data in the CCI SIT RRDP are ~~related with some degree associated with some level~~ of uncertainty; however, except for OIB, they lack uncertainty information for individual data points. Instead, uncertainty quantification in the CCI SIT RRDP must rely on average errors, accuracies, or uncertainties reported in various studies. These sources are presented in Table 7 along with the estimated uncertainty. It is important to note that the amount of uncertainty information varies greatly among the datasets. Several uncertainty estimates are based on assumptions (e.g., AEM-AWI), rely solely on instrument accuracy (e.g., IMB-CRREL), or are only valid within a certain range. Therefore, an uncertainty flag is introduced

**Table 6.** Uncertainty flag describing the expected quality of the uncertainty estimate (level of variability and whether it seems reasonable). Does not take into account issues with representativeness. This is quantified by the quality flag (see tab 5)

Abbreviation	Flag name	Flag value	Description
unc-flag	Uncertainty flag	0	No uncertainty assumption, individual uncertainties are provided for each measurement
		1	Uncertainty measures have some degree of distinction based on e.g. thickness, time of year or likewise
		2	The same uncertainty is assumed for all data within a given dataset
		3	The same uncertainty is assumed for all data within a given dataset and this uncertainty is expected to be too low

to quantify the level of variability available in the uncertainty estimate (see Table 6). Whereas this flag serves as an indicator of the confidence we have in the uncertainty estimate, it does not take into account issues regarding temporal and spatial representation errors. These are quantified in the quality flags described in Section 4 and examples of the impact of the flags are provided in Sections 7.6.

545 Section 5.2 provides a description of the uncertainty associated with each type of reference measurement, including the assigned uncertainty flag values. An overview of the uncertainty flags is presented in Table 6, and Table 7 lists the uncertainties and [the](#) corresponding uncertainty flags for all datasets.

Another concern is the interchangeable use of terms such as error, uncertainty, and accuracy, despite their distinct statistical meanings. ~~Error~~ [The error](#) represents the absolute deviation between [the](#) measured and true values, ~~accuracy describes a the~~  
550 [precision describes the](#) closeness of the agreement between ~~measured and the~~ [measured and the](#) true values, and [the](#) uncertainty provides a quantification of the doubt of a measurement given as an estimate of the range within which the true value is expected to lie (Taylor, 1939; Bell, 1999). Therefore, while error is calculated based on a known true value, uncertainty is typically described by a confidence interval or standard uncertainty within which the true value is expected to fall. Uncertainty is a measure of the random error in a sample, ~~whereas~~ [while](#) systematic error is ~~referred to as bias or an~~ [termed bias or](#) offset  
555 (Bell, 1999). Based on these definitions, when a paper refers to an error indicated by a ~~± value value ±~~, it is ~~here interpreted as an~~ [interpreted here as](#) uncertainty.

### 5.1 Uncertainty propagation in average calculation

The propagation of uncertainties in the final CCI SIT RRDP product is based on the principles outlined in Taylor (1939). According to Taylor's theorem, if the uncertainties of the measurements  $x_1$  to  $x_n$  are independent and random, then  
560 the uncertainty of the mean is obtained by summing the individual uncertainties in quadrature and dividing by the square root of the number of measurements (N).

$$\delta\bar{x} = \frac{1}{N} \sqrt{\delta x_1^2 + \delta x_2^2 + \dots + \delta x_n^2}. \quad (6)$$

The upper bound of the uncertainty is the ordinary sum of the measurement uncertainties:

$$\delta\bar{x} \leq \frac{1}{N} (\delta x_1 + \delta x_2 + \dots + \delta x_n) \quad (7)$$

565 In this study formula 5-6 is used for the propagation of uncertainties, hence, the uncertainties are assumed to be independent and random, as we do not have sufficient information to obtain full error covariance matrices. Nevertheless, this is not necessarily the case ~~and it will result in some uncertainties being underestimated. The effect of this is largest for those campaigns where the~~, and it can result in an underestimation of uncertainties. This effect is most pronounced for reference measurements with a large number of observations per grid cell ~~is large, which is particularly the case~~, particularly for the ULS ~~observations data~~,  
 570 where several thousand measurements are averaged to obtain the final values in the CCI SIT RRDP. Therefore, we underline that it might be more appropriate to use the upper bound uncertainty in some cases, which is equivalent to the uncertainty estimates shown in Table 7. This is especially true for ~~campaigns/data~~ reference measurements, where we have the same uncertainty estimate for all input data (equivalent to an uncertainty flag of 2 or 3), as is the case for the majority of the ~~campaign data data from airborne campaigns or SID measurements~~. Table 7 presents a summary of the input uncertainty estimates for  
 575 each campaign, along with a citation to the publication, where the uncertainty estimate was originally sourced. In the following sections, we describe in more detail how the uncertainty estimates of each campaign are obtained and the underlying assumptions.

## 5.2 Original uncertainties of data

### 5.2.1 Airborne data

580 OIB data contain individual uncertainty estimates for FRB, SD and SIT measurements as the only data source included in the CCI SIT RRDP. These uncertainties are based on variations in the sea ice properties, instrument, and inter-campaign algorithm changes. As individual uncertainties are provided, ~~OIB data has the OIB data have~~ been given an uncertainty flag of category 0. A detailed overview of how uncertainties are calculated is presented in Kurtz et al. (2013). A central concern ~~by of~~ this approach is the substantial variation in both the magnitude and interannual variability of snow depths among different OIB-  
 585 derived datasets; see Section 2.1.2. In particular, the OIB QLs are prone to bias -4.5 to -6.7 cm low depending on sea ice type and settings (i.e. ~~deformed vs.~~ deformed vs. level) (Kwok et al., 2017; King et al., 2015; Petty et al., 2023). These magnitudes might exceed the uncertainties provided in the OIB data products, which complicates our efforts in establishing a consistent uncertainty estimate based on the uncertainties provided in the products.

The uncertainty of AEM/HEM (AEM-AWI, MOSAiC, N-ICE and Nansen Legacy) measurements depends on the sea ice  
 590 conditions i.e., whether the ice is level or ~~deformed~~ deformed, as described in Section 2.1.3. For airborne EM ~~measurement~~ measurements, we here adopt a constant uncertainty of  $\pm 0.1$  m over level ice. Since this uncertainty is ~~inaccurate not representative~~

**Table 7.** Uncertainties related to the products in CCI SIT RRDp.

Campaign	Averaging methodology	Uncertainty estimates [m]	Uncertainty source	Uncertainty flag
OIB (Altimetry)	EASE-Grid 2.0	Individual uncertainties available	Kurtz et al. (2016); Kurtz et al. (2015)	0
AEM-AWI (AEM)	EASE-Grid 2.0	$\pm 0.10$ (SIT), $\pm 0.10$ (FRB), $\pm 0.10$ (SD),	SIT: Haas et al. (2007), SD: provided in data FRB: Jutila et al. (2022a)	2 for SIT $\leq$ 3m 3 for SIT > 3m
MOSAIC-HEM (AEM)	EASE-Grid 2.0	$\pm 0.10$ (SIT)	Haas et al. (2007)	2 for SIT $\leq$ 3m 3 for SIT > 3m
Nansen_legacy (AEM)	EASE-Grid 2.0	$\pm 0.10$ (SIT)	Haas et al. (2007)	2 for SIT $\leq$ 3m 3 for SIT > 3m
NICE (EM)	EASE-Grid 2.0	$\pm 0.10$ (SIT)	Haas et al. (2007)	2 for SIT $\leq$ 3m 3 for SIT > 3m
ASSIST (VO)	EASE-Grid 2.0	10-20% of actual thickness	Worby et al. (2008a, 1999)	1
ASPeCt (VO)	EASE-Grid 2.0	10-20% of actual thickness	Worby et al. (2008a, 1999)	1
IMB-CRREL (IMB)	EASE-Grid 2.0	$\pm 0.01$ ****	Perovich et al. (2022)	3
MOSAIC-SIMBA (IMB)	EASE-Grid 2.0	$\pm 0.02$	Richter-Menge et al. (2006a)	3
SB-AWI (SDB)	EASE-Grid 2.0	$\pm 0.01$	Lei et al. (2021)	3
Nansen_legacy (ULS)	Temporal	NaN	Personal comm..Nicolaus et al. (2021)	3
BGEP (ULS)	Temporal	$\pm 0.05$ -0.10	No source	2
AWI-ULS (ULS)	Temporal	$\pm 0.05$ (summer), $\pm 0.12$ (winter)**	Krishfield and Proshutinsky (2006)	1; 3 for 206-4 and 227-3 files
TRANSDRIFT (ULS)	Temporal	$\pm 0.05$ (ULS), $\pm 0.96$ (ADCP)	Behrendt et al. (2013a)	2
NPI-FS (ULS)	Temporal	$\pm 2.7E-03$ (1990-1991), $1.9E-03$ (1991-2003), *	Belter et al. (2020), Belter et al. (2021)	2
NPEO (ULS)	Temporal	$1.3E-03$ (2003-2006), $0.088E-03$ (2007-2018)	Sumata (2022), supplementary materials table 3	1
SCICEX (ULS)	EASE-Grid 2.0	$\pm 0.05$ Bias: $\pm 0.29$ , Unc: $\pm 0.5$ **	Morison et al. (2016)***** Rothrock and Wensnathan (2007); NSIDC (1998, 2006)	2 for SID $\leq$ 2, 3 for SID > 2

VO: Visual Observation

\*: Uncertainty of the monthly means Supplementary materials table 3

\*\* : uncertainty based on 2\_std

\*\*\*: default: line correction for sound speed model:  $\pm 0.23$

\*\*\*\*: 0.01 m accuracy in usual conditions 0.02 m if it is very cold the sensors do not work well during the melting season

\*\*\*\*\*: uncertainty estimate available from metadata

for deformed ice and, to [the best of](#) our knowledge, no uncertainty quantification has been estimated for it, further analysis is needed. Here, we introduce an uncertainty flag of category 3 for average sea ice thicknesses greater than 3 m, while sea ice thinner than 3 m is assigned a category 2 uncertainty flag. In principle, level ice can exceed 3 m, and deformed first-year ice can be thinner than 3 m. Therefore, using this threshold may introduce some erroneous assumptions affecting the results. However, since we lack detailed information whether the ice is level or deformed, this represents a first approach to flag the data based on these parameters. The total FRB measurements are related to an overall uncertainty of  $\pm 0.1$  m (Haas et al., 2007) and are given an uncertainty flag of category 2. Snow depth measurements are also linked to a fixed uncertainty of  $\pm 0.1$  m, which is provided in the [input source](#) data.

## 5.2.2 Stationary moorings

Although individual moorings have their own uncertainty estimates, the cause of uncertainty for observations obtained by similar measurands tends to be similar. Raw ULS measurements can be linked to significant biases caused by measuring the first return that comes from the ice closest to the sonar, which can cause draft values for deformed ice to be overestimated. They are also prone to uncertainties linked to [, e.g. e.g.,](#) corrections for variations in local atmospheric pressure, instrument tilts, and variations in the speed of sound in the water column (BGEP, 2003). However, all mooring data used in this validation study have undergone some [level of correction to decrease the quality assessment with corrections applied to decrease](#) uncertainties and biases [if deemed appropriate by the data providers](#).

BGEP and TRANSDRIFT data have undergone significant processing, resulting in no expected bias and an uncertainty in the range of  $\pm 5$ – $10$  cm– $0.05$ – $0.1$  m for BGEP and  $\pm 5$  cm– $0.05$  m for ULS data from TRANSDRIFT.

As previously mentioned NPI data was already processed into monthly [means averages \(using the mean\)](#) and therefore the uncertainty used in this dataset is based on the uncertainties of the monthly [mean sea ice thickness average SIT](#) product, which was created based on the monthly [mean sea ice drafts average SID](#), see Sumata (2022). In the supplementary materials of this publication (Table 3) are listed four categories of uncertainties [for the SIT](#) based on a mix of instrument type (ES300 or IPS4/5) and on the year. The uncertainties vary between  $\pm 2.7E-03$  m and  $\pm 0.088E-03$ . [As NPI uncertainty estimates contain some level of variation based on](#) m. [Due to the lack of uncertainty estimates for the NPI SID data, these SIT uncertainties are applied to the NPI SID dataset. Since the NPI uncertainty estimates vary with](#) sensor type and [age of instrument instrument age](#), an uncertainty flag of [category](#) 1 is assigned. [Upward-looking](#) The upward-looking ADCP data from TRANSDRIFT [has have](#) a significantly larger uncertainty of  $\pm 96$  cm– $0.96$  m, which is a consequence of [ADCP's general instrument setup being the general nature of the ADCP instrument setup](#) designed to measure [the](#) velocity fields within the water column rather than to derive [sea ice draft SID](#) (Belter et al., 2021). NPEO has also undergone corrections [resulting that result](#) in an estimated uncertainty of  $\pm 5$  cm– $0.05$  m for level and gently undulating ice, but no additional correction has been made to correct for the first return ([Morison et al., 2016](#)). Therefore, [sea ice drafts for SID of](#) deformed sea ice may tend to be biased high. To account for this, [data points with an average sea ice draft of more than 2 meters are given an we assign an](#) uncertainty flag of category 3. [SID from ADCP3 to monthly averaged SID values that exceed 2 meters. Sea ice draft from ADCP's from the Nansen Legacy](#) has no quantified uncertainty. Furthermore, the provided uncertainty for the TRANSDRIFT [ACDP ADCP's](#) cannot be used, as

a major contributor to the TRANSDRIFT ~~ACDP~~ADCP's uncertainty is the lack of reliable measurements of pressure, which is not the case for Nansen Legacy ~~ACDP~~ADCP's. Due to this, the Nansen Legacy SID measurements are given an uncertainty of NaN and an uncertainty flag of category 3.

630 The mooring data for the SH from the AWI-ULS dataset have undergone varying levels of processing, and the estimated uncertainty depends on both the time of the year and the applied corrections. Based on Behrendt et al. (2013a), ~~drafts~~SID corrected by zero-line correction have an estimated uncertainty of  $\pm 5$ ~~em~~0.05 m in summer (November to May) and  $\pm 12$ ~~em~~0.12 m in winter (June to October). When using the sound-speed model instead of zero-line correction, the estimated uncertainty is  $\pm 23$ ~~em~~0.23 m. Here we decide to use the zero-line correction result when available, as Behrendt et al. (2013a) found only a few cases where the sound-speed model performed better than the zero-line correction. SID data from moorings 206-4  
635 and 227-3 are given an uncertainty flag of category 3, as Behrendt et al. (2013a) states that these moorings have problems with the pressure sensor, signifying that they have undergone a simpler and likely less accurate correction.

Behrendt et al. (2013a) also find significant biases for AWI-ULS drafts, as the measured drafts are consistently overestimated, except when measuring on completely level ice. The bias depends on the ~~draft~~depthSID measurement and ice type, with MYI summer having smaller biases of around  $30$ ~~em~~0.3 m, whereas FYI winter has the largest biases, ranging from  $42$ ~~em~~for ULS  
640 depth0.42 m for ULS instrument depths of up to  $100$ ~~em~~and~~68 em for ULS depth~~m and 0.68 m for ULS instrument depths up to  $180$ ~~em~~m. However, these biases were computed for the Arctic, and since sea ice in the Antarctic is generally younger and thinner due to e.g., differences in ocean heat flux and thermal insulation ~~by~~from a thicker snow cover ~~in the Antarctic~~  
(Maksym et al., 2012; Haas, 2016), they may not be accurate.

### 5.2.3 Drifting buoys

645 IMB-CRREL drifting buoys lack information regarding the uncertainty of the data after processing. However, information about the estimated instrument accuracy of the acoustic rangefinder sounders ~~, used for the measurements,~~ is provided. Therefore, this information is utilized as the uncertainty for each measurement. According to Richter-Menge et al. (2006a), the acoustic rangefinder sounders, which are located above the air-snow/ice interface and below the ice surfacewater-ice interface, have an accuracy of 5 mm, resulting in a combined uncertainty of 0.01 m, when summed. However, this value is likely un-  
650 derestimated when compared to satellite measurements, as IMB-CRREL buoys provide localized data. Although the standard deviation of the final measurements in CCI SIT RRDP accounts for some variability, each buoy is positioned and follows its own drifting ice floe, and thus the impact of the overall variability of the ice in the area is expected to be largely unaccounted for, unless an array of buoys ~~have~~has been deployed which are representative of the ice on the satellite scales. Additionally, no specific uncertainty for SD versus SIT is provided, resulting in the acoustic rangefinder sounders' accuracy being used as the  
655 uncertainty for both SD and SIT. Lastly, the initial SD measurement is expected to be one of the major sources of uncertainty, but no estimate of this uncertainty is available. Due to these concerns, the uncertainty estimates of IMB-CRREL are assigned an uncertainty flag of category 3. SIMBA drifting buoys have recorded an overall uncertainty of 0.02 m for both ~~the snow depth~~  
~~and the ice thickness~~SD and SIT. As both IMB-CRREL and SIMBA consist of IMB's this uncertainty could be an alternative

to the uncertainty of 0.01 m. Nevertheless, neither of the uncertainties take into account issues of representativeness, which are  
660 instead addressed by the use of quality flags (see section 4).

Uncertainty measurements are also not provided for SB-AWI. However, a study by Nicolaus and Katlein (2017) mentions  
that the largest source of uncertainty originates from the initial snow depth measurement, which remains unquantified. The  
sensor uncertainty is reported to be on a millimeter scale, with each of the four sensors linked to the snow depth buoy having  
an uncertainty of 1 mm according to information from ~~Meereisportalen~~ the Meereisportal (<https://www.meereisportal.de/en/>,  
665 last accessed on May 2, 2024). Lee et al. (2015) investigated the uncertainty of SD measurements performed with ultrasonic  
sensors and found that each of the three different ultrasonic sensors had an uncertainty in the range of 0.0187 to 0.0217 m.  
However, this study was conducted on terrestrial snow ~~;~~ and none of the sensors used ~~were~~ was consistent with the one used  
for SB-AWI. Nevertheless, an uncertainty of 0.02 m is utilized here, as it is considered more realistic than the alternative of  
1 mm. In Lee et al. (2015), a comparison ~~to~~ of manual snow depth measurements was also performed, revealing biases between  
670 0.005 m and 0.1 m. Consequently, the uncertainty estimate is based on several assumptions and does not account for variability  
in time, space, or thickness ~~variability~~. Especially, for SB-AWI buoys deployed on Antarctic sea ice one needs to take into  
account that the measurement of these buoys provide a measure of the snow accumulation rather than the snow depth; snow  
depth needs to be computed from the accumulation measurements, which involves a whole suite of additional assumptions and  
uncertainties that contribute to the uncertainty of SD data of SB-AWI in the Antarctic (Arndt et al., 2024). Therefore, SB-AWI  
675 is assigned an uncertainty flag of category 3.

#### 5.2.4 Ship data

The data acquisition of ship observations from NH (collected in ASSIST) and SH (collected in ASPeCt) ~~follow~~ follows the  
same guidelines. Nevertheless, the uncertainty of the visual observations ~~are~~ is not recorded as being the same. For ASSIST,  
the only information about the uncertainty provided is the expected precision of the visual observations. The precision of  
680 estimating ~~snow depth~~ SD is not explicitly stated, but as the method for observing SIT and SD is the same, it is expected that  
the uncertainties will range close to the same intervals. Based on Hutchings et al. (2018), the precision of this estimate is 0.2 m  
for an experienced observer. ASPeCt denotes that the error, when compared to drilled measurements, depends on the thickness  
of the ice floe (Worby et al., 2008a). For sea ice <0.1 m thick, the estimated error is  $\pm 50\%$ ; for ice between 0.1 and 0.3 m,  
the error is  $\pm 30\%$ ; and for level ice >0.30 m, the error is  $\pm 20\%$ . Here, it is also stated that similar error estimates apply to  
685 snow of the same thickness. As these estimates provide a quantified uncertainty estimate, and as the data acquisition method  
for ASSIST and ASPeCt is the same, it is decided to use the uncertainty measures from (Worby et al., 2008a) for both. These  
uncertainty estimates provide some degree of variation ~~due to the sea ice thickness dependency~~ because they scale with the  
actually observed SD and SIT values. Therefore, ASSIST and ASPeCt are given an uncertainty flag of category 1. However,  
we acknowledge that this does not take into account ~~human error, such as the use of a non-experienced observer~~ observational  
690 errors caused by the different level of experience of the voluntary observers.

## 5.2.5 Submarine data

Bias and standard deviation of SCICEX submarine data are based on a paper by Rothrock and Wensnahan (2007) addressing the accuracy of US NAVY submarine measurements, which are a part of the SCICEX data, using all available data from 1975 to 2000. The combined estimated bias is +0.29 m when compared to the reference obtained from ice drillings, and the combined standard deviation among submarine measurements due to seven error sources is 0.25 m (see Rothrock and Wensnahan (2007) for further information). To convert this into a 95 % confidence interval, an uncertainty of twice the standard deviation is used, giving a  $\pm 0.50$  m uncertainty for each data point. Furthermore, the 0.29 m bias is subtracted. As the uncertainty is assumed to be the same for all data points, SCICEX data ~~is given~~are given, an uncertainty flag of category 2.

## 6 Validation and inter-comparison with satellite SIT CDRs as an example

To illustrate the use of ~~the~~ CCI SIT RRDP reference measurements, the data ~~has been collocated with~~were collocated with the CCI SIT CDRs v3.0 from CryoSat-2 and Envisat for both NH and SH. The satellite datasets are available from the ESA CCI open data portal (<https://ccidataproducts.esa.int/>, last accessed on August 8, ~~2024~~2025):

– CryoSat-2 (NH): <https://catalogue.ceda.ac.uk/uuid/c6504378f78c4ecd9f839b0434023eff>

– CryoSat-2 (SH): <https://catalogue.ceda.ac.uk/uuid/861ad3c7f3a34ebd8be6f618a92bd8e3>

– Envisat (NH): <https://catalogue.ceda.ac.uk/uuid/92eb2ba942074bec804af6a8b5436bee>

– Envisat (SH): <https://catalogue.ceda.ac.uk/uuid/af96a1ec493f49caa39dc912d15f2b17>

CryoSat-2 in the CCI ~~CDR data set~~SIT CDR is available from ~~2010–2021~~2010–2020 for both NH and SH, with 2010 having only data from November, December and the following years having data from October through April in the NH, and for all months in the SH. Envisat data ~~is~~are available from 2002–2012 for ~~similar~~the same months as CryoSat-2.

### 6.1 Algorithm description

The method for extracting sea ice freeboard and thickness from radar altimetry data follows work of Laxon et al. (2003) and Tilling et al. (2018), where some of the key steps include distinguishing the sea ice (floes) and sea surface (leads) radar echoes, correcting for slower wave propagation speed in snow, and calculating the ~~sea ice thickness~~SIT assuming hydrostatic equilibrium. To derive sea ice elevation estimates (and freeboards), one needs a dataset containing radar echo waveforms for range retrieval and other relevant variables such as altitude, atmospheric and geophysical corrections, in addition to auxiliary data of mean sea surface height, sea ice type, SD, snow density and sea ice density. The CCI CryoSat-2 sea ice processing uses the Baseline D Level 1b SAR and SARIn orbit data files from November 2010 until April 2021. For Envisat, the version 3.0 of the Envisat SGDR (Sensor and Geophysical Data Record) data has been used. The auxiliary data common to both Arctic and Antarctic sea ice processing contain the DTU21 mean sea surface product (Andersen et al., 2023) and the Copernicus

720 Climate Change Service (C3S) CDR for sea ice concentration. For sea ice type in the Arctic, the C3S CDR is used, and for the Antarctic, the ice is considered to be of a single type, i.e. FYI. Snow is handled for the Arctic by using the merged monthly Warren et al. (1999)-AMSR2 snow depth climatology interpolated to daily values (more in Paul et al., 2021) with the snow density modifications suggested by Mallett et al. (2020). In the SH, a revised version of the approach described by Cavalieri et al. (2014) is used. Here, ~~the daily-estimated-daily~~ AMSR-E/2 snow depths are averaged for each calendar day of the year to  
725 form a daily climatology used together with a fixed climatological value for snow density (Paul et al., 2021).

For CryoSat-2, the sea ice freeboard and thickness processing is done conventionally, classifying the surface type with multi-parameter approach (using the following waveform parameters: backscatter, leading edge width and pulse peakiness), and using the Threshold First Maximum Retracker Algorithm (TFMRA) with a 50% threshold from the first maximum peak power for range retrieval (find more details in Paul et al., 2021). To achieve a consistent ~~time-series~~ time series accounting  
730 for the different types of CryoSat-2 and Envisat radar altimeters, the CCI SIT CDR v3.0 Envisat product makes use of orbit crossovers and orbital overlap during coincident mission periods with CryoSat-2 during winter months between October 2010 and March 2012. ~~This data is~~ These data are used to retrieve optimal retracker parameters for calibration of Envisat, while using CryoSat-2 freeboard estimates as a reference which is applied to the full Envisat period (Paul et al., 2021, 2022). The satellite data ~~is~~ are available in two formats: ~~a~~-L3 gridded product and ~~a~~-L2 trajectory product. Here, the L2-trajectory product  
735 was used to ensure that the spatial overlap between satellite and reference ~~data~~ measurements was as close as possible. The L2 product consist of daily satellite trajectories and contain information including radar freeboard, sea ice freeboard (radar freeboard corrected for the slower radar wave propagation speed in snow), sea ice thickness and auxiliary snow depth with related uncertainties.

In addition, radar freeboards from ERS-1/2 are available within the ESA FDR4ALT project (Bocquet et al., 2023) in a  
740 gridded format for both NH and SH. As the ERS-1/2 products only include radar freeboards in its current form with no additional information of snow depth, snow and ice densities nor sea ice types, which are needed in the radar-freeboard-to-sea-ice freeboard and sea-ice-freeboard-to-sea-ice-thickness conversions, we only use the FDR4ALT dataset to demonstrate the availability of overlapping satellite and reference measurements during the ERS-1/2 satellite period. We note, that FDR4ALT also provides freeboards from Envisat and CryoSat-2 having, through an application of neural-networks, aimed to account for  
745 inter-satellite-mission biases caused by different acquisition modes (Bocquet et al., 2023) and thus provides a full ~~time-series~~ time series ranging back to 1994 of radar freeboards.

## 6.2 Comparability and collocation of RRDP and CDR

It is imperative to ensure that we compare the same measurand of the reference measurements within the CCI SIT RRDP and the satellite altimetry derived CCI SIT CDR. From a metrological approach, the aim is to ensure that the reference measurement  
750 and the measurand of the satellite product, whether being the total FRB, sea ice FRB, SIT, SID or SD, are comparable (Da Silva et al., 2023). Here, we aim to ensure this by, in most cases, keeping the reference measurand in its most original form and adapting the CCI SIT CDR measurand accordingly. As an example, when we compare the CCI SIT CDR with SID from ULS, we convert the satellite-derived SIT into SID by subtracting the sea ice FRB from SIT, as the ULS does not provide any

information about the ice above the local sea level, following:

$$755 \quad \text{SID}_{\text{CDR}} = \text{SIT}_{\text{CDR}} - \text{FRB}_{\text{CDR, sea ice}} \quad (8)$$

In addition, for NH OIB, we have coincident ~~reference~~ measurements of total ~~FBR-FRB~~ and SD, thus we compare the OIB derived sea ice FRB by subtracting the measured SD from the total FRB directly with the satellite derived sea ice freeboard, provided in the CCI SIT CDR, following:

$$\text{FRB}_{\text{OIB NH, sea ice}} = \text{FRB}_{\text{OIB NH, total}} - \text{SD}_{\text{OIB NH}} \quad (9)$$

760 Additionally, we compare the OIB SD directly with the auxiliary SD product in the satellite CCI SIT CDR. By using this approach, we avoid introducing additional auxiliary products (e.g., snow depths) ~~which is that are~~ not already used, and reduce errors from introducing new products. For SH OIB, we do not have any SD measurements and the same is the case for FRB measurements from AEM-AWI. Therefore, the comparison is made using the total freeboard by adding the auxiliary SD to the satellite derived sea ice freeboard in the CCI SIT CDR, following:

$$765 \quad \text{FRB}_{\text{CDR, total}} = \text{FRB}_{\text{CDR, sea ice}} + \text{SD}_{\text{CDR}} \quad (10)$$


Similarly, the SIT measured by AEM-AWI is the total thickness (snow + ice). Hence, to compare this measurand to the satellite observations, we add the auxiliary SD product in the satellite CCI SIT CDR to the SIT in the CCI SIT CDR, following:

$$\text{SIT}_{\text{CDR, AEM-AWI}} = \text{SIT}_{\text{CDR}} + \text{SD}_{\text{CDR}} \quad (11)$$

770 Collocation is performed by finding all satellite data points obtained within  $\pm 15$  days from the date of the reference data, and within the 25 km (50 km for SH) grid cell of the reference coordinates. The median (arithmetic median) of these satellite points are subsequently allocated to the reference data.

## 7 Results and discussions


We present the comparison between CCI SIT RRDP and CCI SIT CDRs for each of the NH and SH sea ice variables (FRB, SIT, SID and SD) in Fig. 6–9, with the location of SH CryoSat-2 and Envisat collocated observations in Fig. 10a. The figures  
775 visualize the geographical distribution of the CCI SIT RRDP reference measurements collocated to CCI SIT CDRs of CryoSat-2 and Envisat, respectively, together with associated ~~scatterplots~~ scatter density plots and histograms. Linear best fits are added to the scatter plots for both individual campaigns and for the combined data available for each sea ice variable. Linear fits are obtained by using an Orthogonal Distance Regression (ODR), which involves calculating the orthogonal distance of the points with respect to a linear fit and allows taking into account the errors in errors of the measurements for both independent and  
780 dependent variables (Boggs and Rogers, 1990). Hereby, the linear fits are weighted by the individual uncertainties in both the CCI SIT CDRs and the CCI SIT RRDP. ~~The pearson~~ Values of the Pearson correlation coefficient (R) of each fit are shown in the scatter plots, and additional statistical information can be found in Tables B1 (CryoSat-2) and B2 (Envisat) in Appendix B.

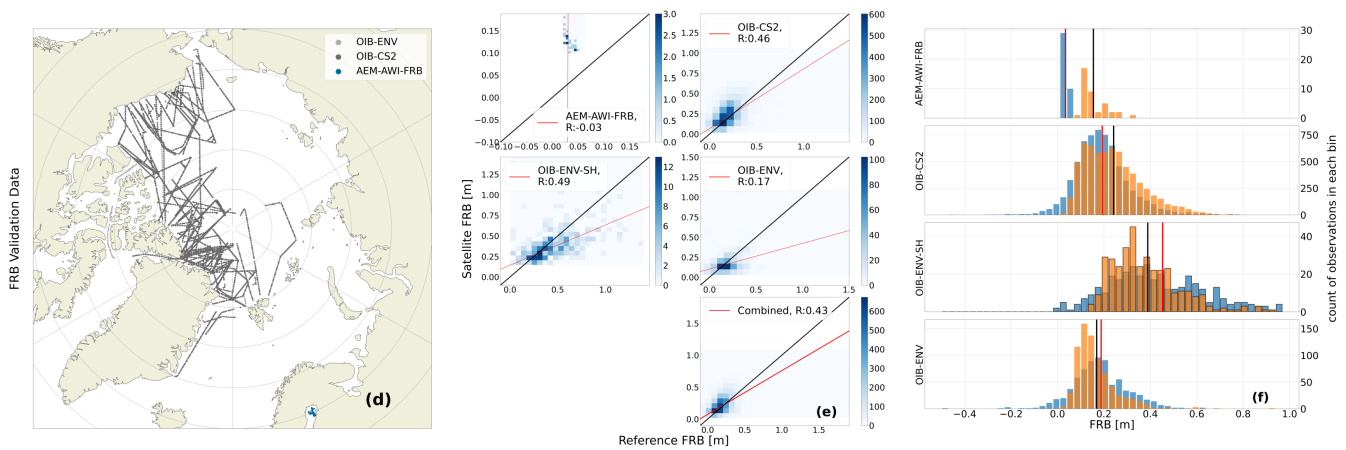

**Figure 6.** FRB satellite and reference observation-measurements comparison for CryoSat-2 (CS2) and Envisat (ENV) combined. The campaign names are followed by the satellite abbreviation, to highlight which satellite the reference data-has-measurements-have been collocated to. (a) map of available overlap data for NH, (b) scatterplot with NH data with uncertainty weighted linear fits and associated correlation coefficients in the legend and (c) histograms with the reference observations-measurements and satellite CDRs marked with blue and orange, respectively, with associated average as red and black vertical lines. A black outline around the histogram bins are added to data from the SH.

Histograms show the distribution of reference measurements in-blueand-collocated-CryoSat-2-or-Envisat-in-orange(blue) and collocated CryoSat-2- or Envisat-based sea ice variables (orange), with red and black vertical lines indicating the mean of satellite and reference data, respectively. For SIT and SID a bin size of 10 cm is used, whereas 3 cm is used for SD and FRB. Data from the SH is-are marked by a black outline around the histogram bins. The geographical representation of both the SH sea ice variables collocated to CCI SIT CDRs of CryoSat-2 and Envisat and the NH and SH sea ice variables collocated to FDR4ALT dataset of ERS-1/2, is highly limited. Therefore, only the data locations from the variables are presented in Fig. 10. As the ERS-1/2 product only included radar freeboard at the time that this research was conducted, there-has-not-been-we-have not made any comparisons with scatter plots and histograms.


When examining Fig. 6–9, it is important to note that the main objective of this paper is not to conduct an inter-comparison study but rather to present the applications of the CCI SIT RRDP. Therefore, we focus on demonstrating how the database of reference measurements can be utilized to validate satellite products by highlighting the advantages and limitations of the different types of reference-observations the reference measurements. Furthermore, we discuss the availability of reference measurements for validating the four primary variables (FRB, SIT, SID and SD) for CryoSat-2, Envisat and ERS-1/2, respectively.

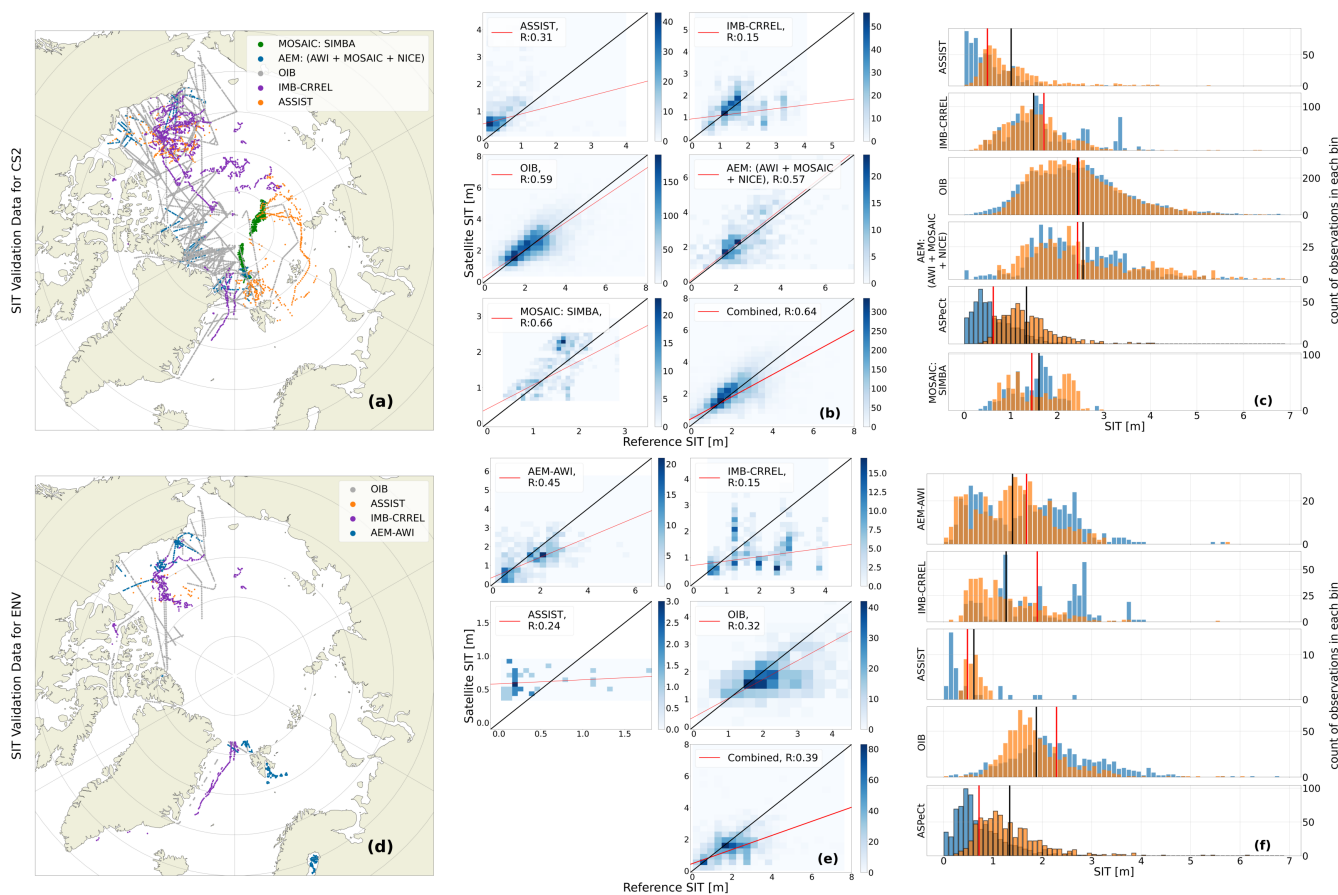

**Figure 7.** SIT satellite and reference [observation-measurements](#) comparison for CryoSat-2 (a-c) and Envisat (d-f). Maps of overlap data are shown for NH in (a,d), associated scatterplots with uncertainty weighted linear fits and associated correlation coefficients in the legend in (b,e) and histograms in (c,f). In the histograms the reference [observations-measurements](#) and satellite CDRs are marked with blue and orange, respectively, with associated average as black and red vertical lines. A black outline around the histogram bins are added to data from the SH

## 7.1 Freeboards (FRB)


The amount of reference [observations-measurements](#) for freeboard validation [are included in the CCI SIT RRDP](#) is limited to airborne campaign data, [which is](#) primarily collected in March [/and](#) April in NH (Section 2.1, Fig. 5a). Nevertheless, [the](#) [airborne-reference data-airborne reference measurements](#) show a good geographic representation in the western Arctic i.e., the Beaufort Sea, the Canadian Archipelago, as well as the Lincoln and Wandel Seas north of Greenland, and to a less degree the Fram Strait with CryoSat-2 and a reasonable overlap with Envisat (Fig. 6). However, no data [is available from are available](#) [for](#) eastern Arctic including the East Siberian, Laptev, Kara and Barents Seas due to logistical challenges operating in these regions. For [the](#)-SH, FRB [reference](#) measurements are currently limited to OIB campaign data from October 2009 and 2010 [805](#) (Section 2.1, Fig. 5b) collected in the Weddell, Bellingshausen, and Amundsen Seas (Fig. 10a). Thus, no [FRB-reference](#)

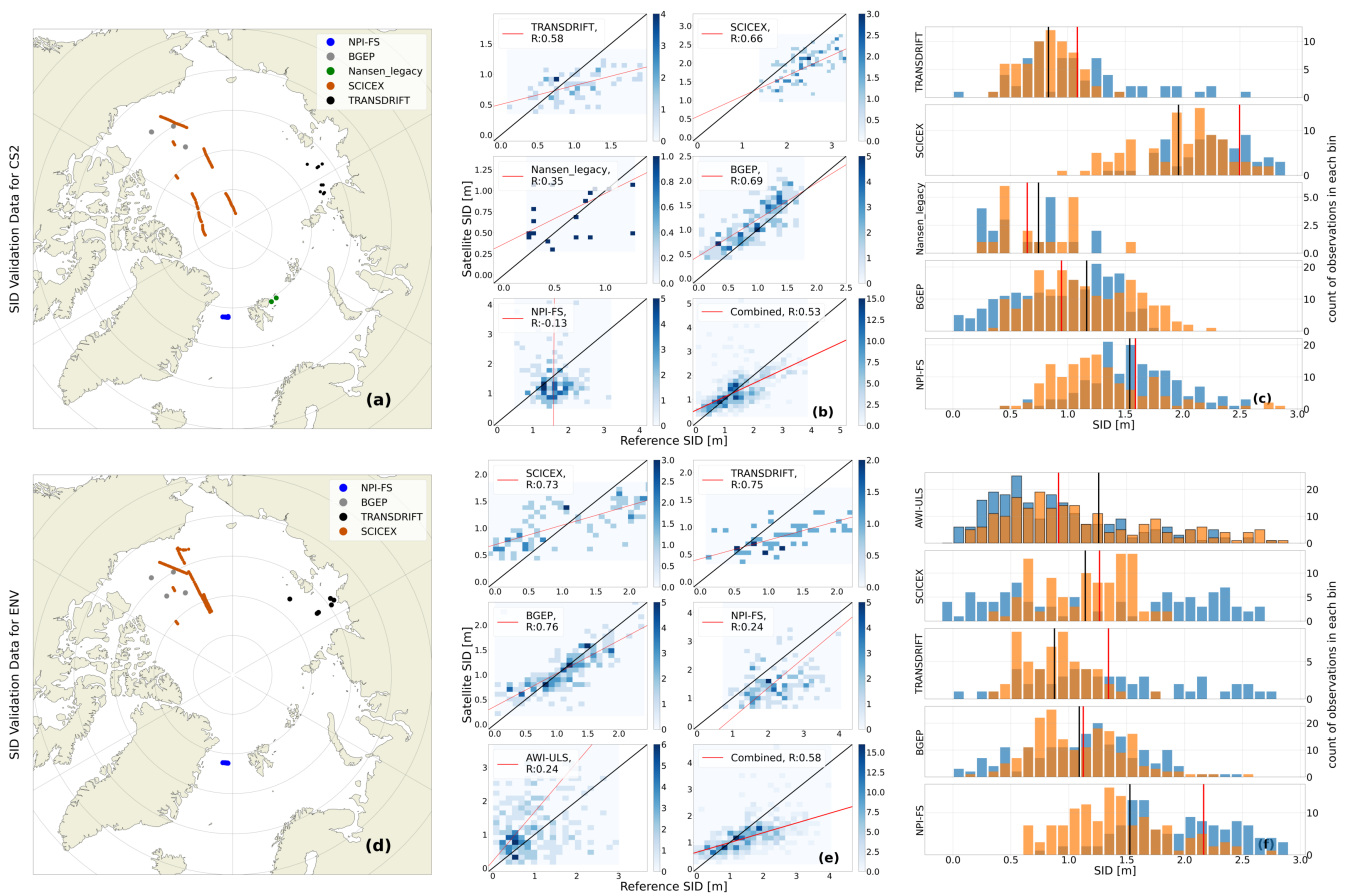

**Figure 8.** SID satellite and reference [observation measurements](#) comparison for CryoSat-2 (a-c) and Envisat (d-f). Maps of overlap data are shown for NH in (a,d), associated scatterplots with uncertainty weighted linear fits and associated correlation coefficients in the legend in (b,e) and histograms in (c,f). In the histograms the reference [observations measurements](#) and satellite CDRs are marked with blue and orange, respectively, with associated average as black and red vertical lines. A black outline around the histogram bins are added to data from the SH

[airborne FRB reference measurement](#) data is available for CryoSat-2 in [SHthe SH in our CCI SIT RRDp](#). The associated histograms in Fig. 6c show similar distributions for NH OIB and CryoSat-2 FRB with -0.05 m mean difference (Table B1). Envisat is over-represented in thin sea ice thicknesses (FRB<0.20 m NH) and has, in general, a narrower distribution [when](#) compared to OIB FRB in NH, which is not reflected in the mean difference of 0.02 m (Table B2).

810 Reference [data measurements](#) from AEM-AWI NH and OIB SH presents total FRB. Therefore, they are compared to the collocated satellite-derived sea ice FRB plus SD from the auxiliary snow depth information as provided in the CCI SIT CDR (Section 6.2) using Equation 10. AEM-AWI FRB only includes data from the Baltic Sea, which is reflected in the low total FRB heights (<0.3 m) representative for FYI. The limited geographical extent and the limited data amount of the AEM-AWI total FRB is expected to be one of the causes of the negative correlation coefficient ( $R = -0.03$ ) as seen in Fig. 6b. Additionally,

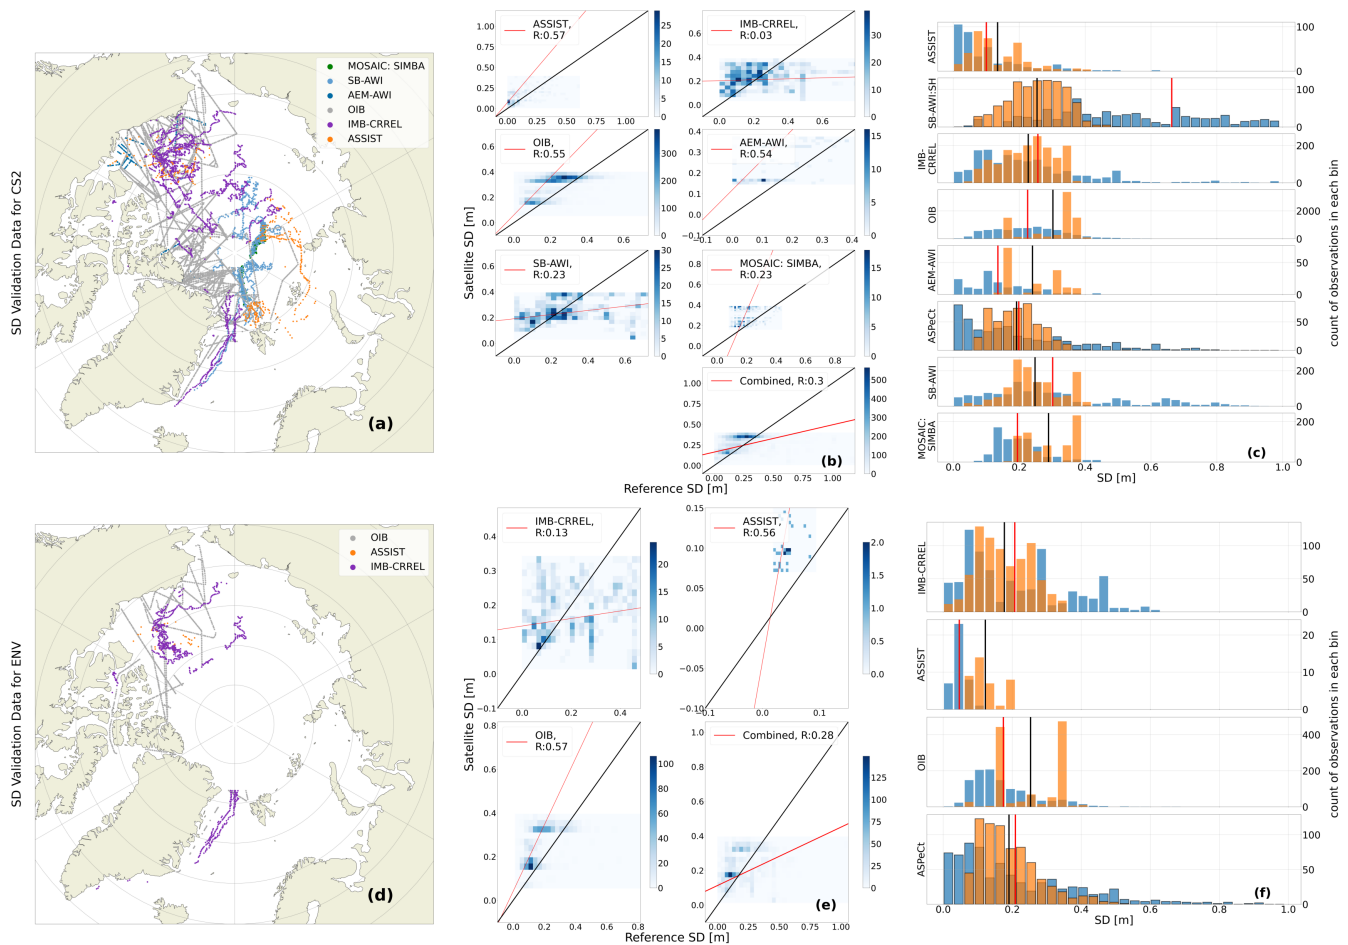

**Figure 9.** SD satellite and reference observation-measurements comparison for CryoSat-2 (a-c) and Envisat (d-f). Maps of overlap data are shown for NH in (a,d), associated scatterplots-scatter density plots with uncertainty weighted linear fits and associated correlation coefficients in the legend in (b,e) and histograms in (c,f). In the histograms the reference observations-measurements and satellite CDRs are marked with blue and orange, respectively, with associated average as black and red vertical lines. A black outline around the histogram bins are added to data from the SH

815 we do not know how well Envisat performs in the Baltic Sea, which is an area with only FYI and confined by land with many small Islands, which may impact the relatively large footprint size of Envisat. The over-representation of Envisat total FRB for thinner ice is also present in the SH when compared to OIB. The over-estimation of thin sea ice and a more narrow distribution is presumed to be a consequence of the different footprints of Envisat and CryoSat-2, and not caused by the reference measurements.

The amount of NH SIT reference measurements ~~are is~~ more substantial than is the case for FRB and ~~include includes~~ observations from airborne campaigns, ships, and ice mass balance buoys, which complement each other in terms of spatial and temporal coverage. For CryoSat-2 (Fig. 7a) reference measurements are well covered in the western Arctic region and also include some reference measurements in the eastern Arctic north of 80°N. However, most of the reference measurements in the eastern Arctic are based on visual ship observations. ~~The reference~~ Reference measurements overlapping with Envisat are sparse and limited to few drifting buoys and airborne campaigns in the Beaufort Sea and the Fram Strait (Fig. 7d). SIT reference measurements to compare with ERS-1/2 are limited to some AEM-AWI airborne observations around Svalbard in the NH (Fig. 10b). In SH, SIT reference data is limited to visual ship observations from ASPeCt (Fig. 10a and 10c).

A reasonable overlap is found between the distribution of IMB and CryoSat-2 SIT (Fig. 7c) with a mean difference of 0.22 m, where IMB SIT is thicker than CryoSat-2 SIT. ~~Nevertheless, the~~ However, we did not find a linear relationship between the two datasets ~~is nonexistent~~, as evidenced by the low correlation coefficient (Fig. 7b) and the  $R^2 \approx 0$  value (Table B1). This is mainly expected to be due to the acquisition method, as mentioned in ~~section~~ Section 4 resulting in a QFS of category 3 for buoys, as each buoy is measuring the temporal evolution of the same ice floe. Hereby, the measurements are local and do not capture variations in the surrounding ice as measured on satellite scales e.g, the growth of new ice and thicker ice, and deformation caused by the divergent and convergent motion of sea ice. As ~~the~~ ice mass balance buoys must be placed on ~~a stable ice floe, this also mean that, the buoys stable ice floes, this means they~~ tend to be slightly biased ~~towards thicker ice, resulting toward thicker ice. This bias arises~~ from the need to ensure that the ice ~~floe does floes do~~ not melt or deform in ~~a manner that cause damage and premature loss of the buoy. On the other hand, the satellites measures ways that could damage the buoy or lead to its premature loss. In contrast, satellites measure~~ a much larger area, which ~~is likely why the likely explains~~ the weak linear relationship between the two ~~is weak~~. Contrary to IMB-CRREL buoys, ~~MOSAIC-SIMBA buoys has~~ MOSAIC SIMBA buoys have a high correlation ( $R = 0.66$ ), which is likely due to ~~MOSAIC-MOSAIC~~ MOSAIC SIMBA bouys being a part of a distributed network. Nevertheless, as will be shown in ~~section~~ Section 7.6 the low correlation between IMB-CRREL and ~~CS2 and ENV is also highly CryoSat-2 and Envisat is strongly~~ linked to the method of comparison, ~~where other methods. Alternative approaches, other~~ than the one presented in Fig. 7a, ~~are, may be~~ more suitable.

The use of the visual ship observations, as reference measurements for SIT, is dubious, as is also reflected in the assigned QFS of category 3 (see ~~section~~ Section 4). First, visual ship observations ~~are dependent on human interpretation, which introduce contain a substantial degree of subjectivity, which introduces~~ a larger uncertainty on the individual measurements in particular if the "IceWatch" manual (Hutchings et al., 2018) is not followed in detail and ~~thus, is subjective~~ the observer is un-experienced. Additionally, as stated in U.S. Fleet (2007, Chapt. 7), ships tend to choose the fastest and most economical route, which usually means avoiding ice to the highest degree possible by navigating in areas with thin ice, in leads or where there is low concentration. Additionally, Hutchings et al. (2018) states that only level ice should be recorded due to the likelihood of thicker ice not fully overturning. These factors combined suggests that observations from ships tend to have a larger representation of

thin ice in the SIT distribution. Likewise the SD distribution also can only represent conditions of level, easy-to-navigate sea ice.


855 This tendency is clearly reflected in the ASSIST and ASPeCt SIT distributions when compared both to CryoSat-2 and Envisat (Figs. 7c and 7f). This results in large negative biases of -0.51 m and -0.71 m, when comparing ASSIST and ASPeCt SIT to CryoSat-2 SIT. Similar large negative bias of -0.62 m is found between ASPeCt and Envisat SIT, whereas the bias is smaller for ASSIST (-0.13 m). This is expected to be partly due to the limited amount of available ASSIST reference data overlapping with Envisat (Fig. 7d). As shown in Table B2 39 data points are available in the CCI SIT RRDP after averaging.  
860 In general, few ship observations are averaged for each value in the CCI SIT RRDP, as a result of limited data availability for each 25 km (50 km) grid cell for NH (SH). As a reference, 1.1 observations are used per average for the ASSIST measurements coinciding with Envisat and 1.95 for CryoSat-2. This means that the 39 available ~~reference~~-data points from ASSIST to Envisat represent a limited amount of information ~~-, and is thus related- and are therefore associated~~ with a larger uncertainty in ~~the reference measurements~~their ability to represent the actual, larger-scale SIT and SD conditions.

865 In ~~section 7.6 and in Section 7.6 and~~ particularly in Fig. 11 an example of applying a filter of  $QFS < 3$  is presented, showing that the correlation between ~~CS2-CryoSat-2~~ and SIT reference ~~observations- measurements~~ can be vastly improved by ~~filtering out observations from- excluding measurements from drifting~~ buoys and ships.

### 7.3 Sea ice draft (SID)

SID data has a very limited geographical representation, as seen in Fig. 8a for CryoSat-2 and Fig. 8d for Envisat, and Fig. 10b  
870 for ERS-1/2 in NH, as most of SID data (except for SCICEX) ~~is-are~~ obtained from stationary moorings. However, the moorings represent a time-averaged SID and thus represent a larger sample of sea ice due to ~~the~~ sea ice drift (Section 2.2), and have been used extensively to validate satellite-derived ~~sea ice thicknesses- SIT~~ (e.g. Sallila et al., 2019; Quartly et al., 2019). A reasonable agreement ~~are- is~~ seen in the distributions (Fig. 8c) between CryoSat-2 and SID data from SCICEX, NPI, Nansen\_legacy and BGEP.

875 The TRANSDRIFT data ~~is-are~~ the only sea ice reference ~~measurement- measurements~~ available for the Seas north of Russia, and ~~represents- represent~~ data over assumed fairly level FYI (the ideal sensing scenario for CryoSat-2). In Belter et al. (2020) they find a correlation coefficient ( $R = 0.47$ ) and a mean difference (0.28 m) using orbit information from CryoSat-2 similar to our approach. These values are similar to those found in this study ( $R = 0.58$ ) and mean difference of (0.25 m). Their findings of a general tendency of ~~the~~ satellite CDRs to overestimate SID  $< 0.7$  m and underestimate SID  $> 1.3$  m are in agreement with  
880 our findings. The SID distributions for Envisat and reference measurements in NH (Fig. 8f) are similar to those discussed for Envisat ~~in- SIT- SIT in~~ Section 7.2, where Envisat ~~tend to be over-represented in- the- tends to be overrepresented in~~ thinner ice and vice versa for thicker ice. This ~~effect~~ is most pronounced ~~for- the- in~~ comparison with SCICEX and TRANSDRIFT SID, where the reference ~~observations- have- SID- measurements show SID values~~ up to 3 m ~~and- Envisat- SID- <- while Envisat SID remains below~~ 1.8 m. Nevertheless, a good agreement is seen when comparing the Envisat and BGEP distributions, which is  
885 also reflected in the small mean difference of 0.03 m. Furthermore, high correlation coefficients are observed for all data except for NPI ~~and- AWI- ULS~~, ranging between  $R = 0.73$  and  $R = 0.76$ . SID data from NPEO is also available in the CCI SIT RRDP,

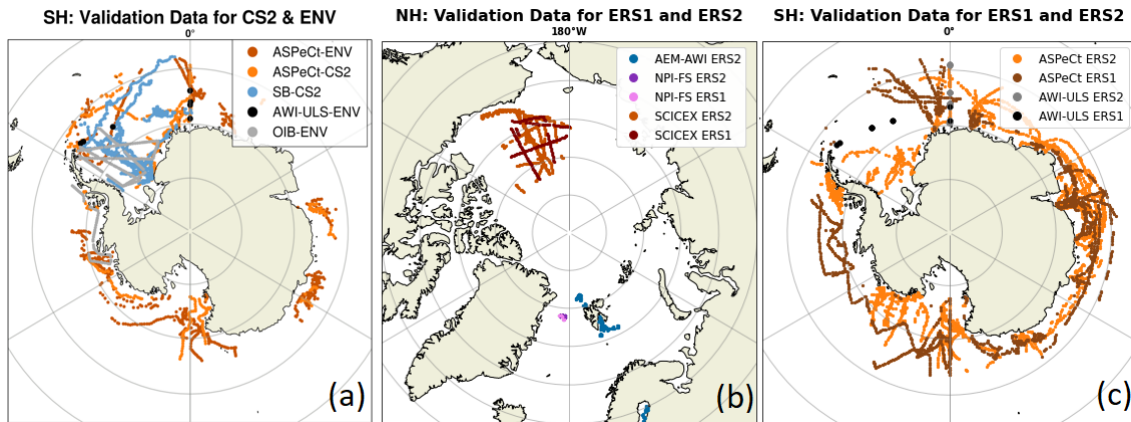

**Figure 10.** Maps showing the geographical representation of; (a) SH reference measurements collocated with CryoSat-2 and Envisat data, (b) NH reference measurements collocated with ERS-1/2 and (c) SH reference measurements collocated with ERS-1/2.

but this data is located at the north pole and is, therefore, within the polar-gap-pole hole of the existing satellites radar altimetry satellite missions. Nonetheless, the data has been included to validate future-satellite-products-which-may-cover-the-polar-gap-by-the-implementation-of-different-interpolation-techniquesatellite products or model data which have been interpolated across the pole hole. The strength of the SID reference measurement record is that NH NPI-ULS and SCICEX covers both CryoSat-2, Envisat and ERS-1/2.

The representation of SID data for SH (Fig. 10a and 10c) is limited to moorings in the Weddell Sea and Lazarev Sea, which only overlaps with Envisat and ERS-1/2. This data shows a reasonable overlap in the distributions, except-for-a-larger-spike-in-SID-measurements-close-0-measured-by-although AWI-ULS measuring-many-leads-(tend-to-have-more-measurements-of-low SID ( $<0.5$  m, see Fig. 8f). AWI-ULS SID is on average 0.470,32 m lower when compared to Envisat SID if no bias correction is applied. Moreover, no significant trend ( $R^2 \sim 0$ ) is seen between Envisat SID and AWI-ULS SID (Table B2).

#### 7.4 Snow depth (SD)

A quite extensive amount of SD reference observations-measurements are available for the NH in particular overlapping with CryoSat-2 (Fig. 9a), and to a lesser extent Envisat (Fig. 9d), including airborne, buoy and ship data. The geographic distribution of data-SD reference measurements is similar to the SIT data-presented-in-(see Section 7.2). For SH, ASPeCt ship observations are available as presented in Fig. 10a for CryoSat-2 and Envisat, and in Fig. 10c for ERS-1/2. Snow depth measurements from buoys (SB-AWI-SH) are only available for CryoSat-2.

The comparison of the distributions presented in Figs. 9c and 9f show-large-variability,where-shows-large-variability. The auxiliary snow depth products provided in the CCI SIT CDRs auxiliary-snow-depth-climatologies-tend-to-have-a-narrower distribution-when-tend-to-exhibit-narrower-distributions compared to the different-reference-observations.-This-indicates-that the-auxiliary-snow-depth-climatologies-provided-in-the-CCI-SIT-CDRs-various-reference-measurements. This suggests that these

products supporting the satellite-derived sea ice thicknesses (described in Section 6.1) ~~fail to quantify sufficient variability in~~  
~~do not adequately capture the full variability of~~ the snow depth distribution, ~~when compared to reference data, particularly~~  
~~for the SH snow depth climatology, which is particularly in the SH, where the auxiliary SD data used in the CCI SIT CDR are~~  
910 based on daily satellite radiometer observations. ~~This is a fair assumption, as climatologies are averages and do not provide~~  
~~inter-annual variations.~~

However, the variability may also be caused by the reference data having too high a variability, which may not signify the  
~~larger-large~~ scale variability of satellite products. This was also discussed in Stroeve et al. (2020) for drifting buoy observations  
of snow depths compared to models of similar spatial resolution (25 km) as for the CCI SIT CDRs in NH. Further work should  
915 be prioritized to improve this.

Nevertheless, reasonably high correlation coefficients ( $R > 0.45$ , Figs. 9b and 9e) ~~coefficients~~ are obtained for several  
~~reference data sources such as~~ SD reference measurements such as ASSIST, AEM-AWI and OIB. Therefore, although the  
distributions do not show strong agreement, some degree of linear correlation is observed between the satellite SD product for  
some, but not all, sources of reference ~~observations~~measurements.

920

## 7.5 Uncertainty quantification

Accurate uncertainty quantification is crucial to obtain the full potential of reference observations. However, this requires  
individual uncertainty measurements, that are ideally propagated all the way from the raw measurements through the processing  
chain to the final estimates. In this study, uncertainties have been assumed to be independent, ~~although this~~. However, this  
925 assumption is likely not ~~the case, valid~~ and is expected to ~~result in lead to~~ an underestimation of the uncertainties ~~for in~~ the CCI  
SIT RRDP. However, in lack of more accurate estimates, these values provide a first assessment of uncertainties and can be  
used as an alternative to the uncertainty values provided in Table 7. In the future, all reference measurements (buoy, airborne,  
submarine, and ship) should be quantified with individual uncertainty measurements or provided with uncertainty estimates  
that take into account some degree of seasonal/spatial variation.

930 An additional ~~uncertainty source~~ source of uncertainty in the CCI SIT RRDP arises from the representativeness of the  
reference data ~~for within~~ a 25/50 km grid cell ~~for over~~ a monthly period. ~~An attempt has been made to provide an estimate of~~  
~~this by providing~~ To address this, we provided the standard deviations and the number of entries for each grid cell. However,  
differences in spatial and temporal coverage ~~between reference data sources both between reference measurements~~ and between  
satellite products within a 25/50 km grid cell ~~for over~~ a monthly period ~~might result in may introduce~~ temporal and spatial biases  
935 ~~, which are not accounted for here. However that are not captured in this analysis. Nevertheless,~~ this study provides an initial  
assessment and ~~steps towards~~ takes steps toward a unified uncertainty estimate for SIT reference ~~observations, which requires~~  
~~measurements. A comprehensive description will require~~ future iterations and ~~additional information to be fully described~~the  
inclusion of additional information. Further discussion of this topic is provided in Section 7.7.


## 7.6 Filtering and flagging

940 ~~Global~~ As described in Section 3.1, global filters have been applied in the CCI SIT RRDP, where all ~~observations~~ reference  
measurements with values below 0 have been replaced with NaN, ~~along with and removed if~~ SIT > 10m 10 m, SID > 8m 8 m,  
SD > 2m and 2 m or FRB > 2m 2 m. Apart from these filters, the only additional filtering ~~has included removing~~ involved the  
removal of clearly erroneous data, such as ~~data from IMB-CRREL in the IMB-CRREL data from~~ 2017 (see Section 5.2.3). As  
945 ~~was mentioned in Section 6.2 both satellite and reference observations~~ 6.2, satellite observations and reference measurements  
have been gridded using the median and robust standard deviation, which makes the dataset less sensitive to outliers. Neverthe-  
less, data in the CCI SIT RRDP include ~~observations with potentially~~ reference measurements with high robust standard devi-  
ations and/or ~~observations based on that are based on only~~ very few input measurements. If the standard deviation is high, the  
data ~~either contains outliers that could be faulty or the variation of the reference data within the grid cell is high, reflecting a may~~  
either contain outliers potentially caused by faulty measurements or reflect substantial variation in the reference measurements  
950 collocated with the respective grid cell of a satellite observation. This could indicate complex ice topography ~~within the grid~~  
~~cell or conditions where the sea ice (or snow depth) have undergone large variations within the time span of the reference~~  
~~observation~~ has undergone significant changes during the reference observation period (up to a month) ~~in within~~ the grid  
celle.g., ~~caused by, such as~~ deformation or redistribution. On the other hand, a ~~few reference measurements included within~~  
~~one grid cell estimate might indicate~~ small number of reference measurements within a grid cell may suggest that the reference  
955 data ~~is are~~ is not representative of the ~~whole entire~~ area and/or time period.

Nevertheless, these considerations are closely ~~linked related~~ linked to the nature of the measurements and the applied methodology.  
For example, airborne campaigns often yield a high number of individual observations, but these are typically confined to a  
few days within a specific region. When such limited temporal and spatial coverage is compared ~~to with~~ to a monthly mean from  
the CDR, questions arise regarding the representativeness of the comparison. A more detailed analysis of this issue is provided  
960 in Section 7.7.


To maximize the usability of the CCI SIT RRDP, ~~a quality flag is~~ quality flags are provided for the data (Section 4). The  
temporal quality flag (QFT) describes how temporally representative the data ~~is are~~ is, whereas the spatial quality flag (QFS)  
aims at describing how spatially representative the data ~~is are~~ is. An example of filtering ~~CS2 of CryoSat-2~~ CS2 of CryoSat-2  
data using QFS < 3 is shown in Fig. 11. As seen, this removes all of the IMB and ~~the~~ ASSIST data due to their known limitations in terms of  
965 spatial representativeness. For airborne data (AEM and OIB), this removes datapoints where the number of observations is  
below the 25% quartile of the respective data source. For the remaining data, we ~~see a high~~ observe a strong overlap in both  
distributions ~~of the data~~, with low median differences of 0.04 m and ~~-0.10 -0.14~~ -0.10 -0.14 m, a relatively high combined correlation  
( $R=0.59$ ), and an ODR regression line close to the ~~1 to~~ 1 to 1 line.

Other methods, such as matching the satellite SIT CDRs and reference measurements from drifting buoys and stations in a  
970 Lagrangian framework, i.e., following the buoys buoy trajectories, might be a more suitable methodology for future compar-  
isons. This approach was successfully demonstrated by Stroeve et al. (2020), ~~where they compare who compared~~ where they compare snow depths  
from the CRREL-IMBs and snow depth buoys to a snow depth model ~~of similar spatial scales as~~ with spatial scales similar

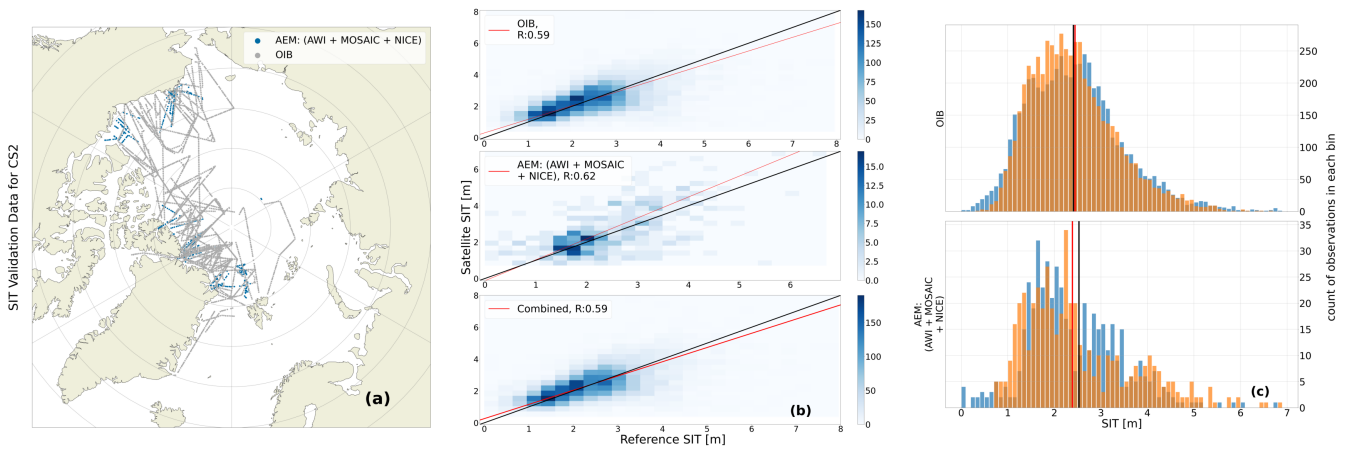

**Figure 11.** Similar to Fig. 7 (a-c), but after applying the spatial representativeness quality flags ( $QFT < 3$ ) to filter the reference measurements.

to the NH satellite products used in our study. However, as an alternative and inspired by former As an alternative, inspired by previous studies (e.g., Guerreiro et al., 2016), the buoy data have also been compared in terms of time-series as time series relative to the satellite CDR time-series rather than comparing only time series, rather than relying solely on absolute measurements. An example of this approach is presented in Fig. 12. Here, we observe that although issues in spatial representativeness make the satellite observations related to spatial representativeness reduce the comparability between satellite and buoy observations less comparable, the overall accumulation during the period of the data data period is generally captured by both CS2 and reference observations, and overall becomes more comparable CryoSat-2 and the reference measurements. Moreover, comparability improves when filtering by the temporal flag (QFT). An example of filtering with using the QFT is presented in Fig. 12b+d, where an overall increase in correlation is observed when filtering with a applying high temporal representativeness filter ( $QFT \leq 1$ ), where MOSAIC SIMBA  $R$  increases of. For MOSAIC SIMBA data, the correlation increases from 0.78 to 0.82 with similar bias of a similar bias and RMSE for snow depth, whereas IMBs  $R$ . In contrast, for the IMBs, the correlation changes from -0.47 to 0.15, but while the bias decreases of from 0.05 m to -0.03 m and RMSE from 0.24 m to 0.09 m. Most strikingly for SD is the change of SB-AWI with a change in  $R$  which increases from 0.46 to 0.61, a reduction of bias in correlation and reduces by 0.05m and RMSE by m in bias and 0.04m m in RMSE, respectively. SIT estimates for MOSAIC SIMBA shows dataset show highly favorable statistics with a  $R$  correlation coefficient of 0.94, which increases to 0.97 with QFT applied, bias of filter applied. The bias improves from -0.10 m to -0.05 m, and a RMSE of the RMSE decreases from 0.26m reduced m to 0.16 m. We hypothesize that the favorable statistics of MOSAIC SIMBA relate to the fact that the MOSAIC SIMBA buoys were part of a distributed network, and therefore better represent the spatial conditions observable by the satellite. However, this aspect is currently not included in the spatial flag, which, for the buoys, is based on the assumption that the conditions of only one floe are represented. An update to the flag could include identifying whether multiple buoys from different floes are present within a single grid cell and, similar to airborne data, computing the spatial extent covered by such buoys. An interesting change when applying the QFT flag is observed for IMB (Fig. 12c, d), where the correlation

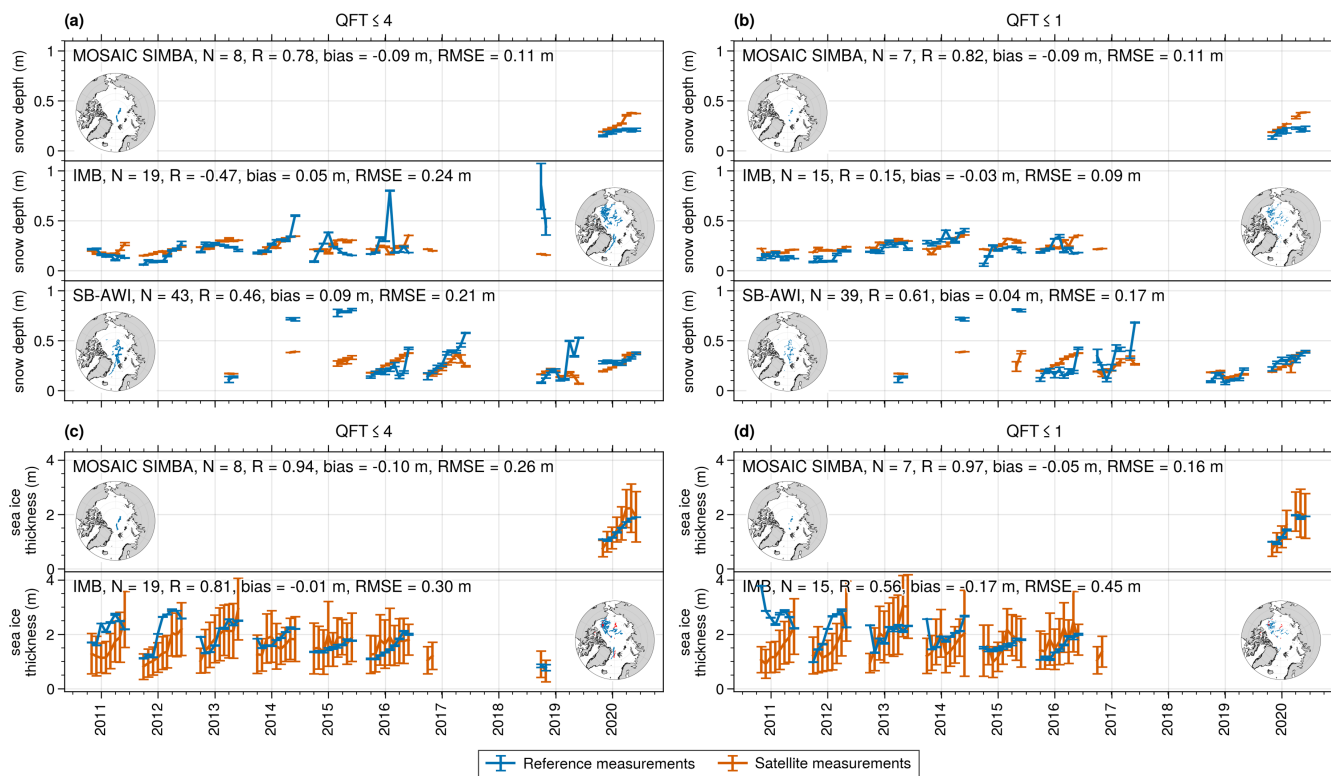

**Figure 12.** Time series of reference measurements from IMB-CRREL, MOSAIC SIMBA and SB-AWI and CS2 satellite observations for collocated data. Each point represents the NH monthly average of all available buoys of a given type and the monthly average of collocated satellite observations, and with the example of utilising the temporal quality flag (QFT) applied (see Table 5 for a description of the flag). Error bars present the averaged standard deviation of the specified variable per grid cell included provided in the data product (see also Table 3 for the RRDP data set structure), bias is computed as the satellite measurements subtracted from the reference measurements, and RMSE is the root-mean-square-error. The inset shows the spatial extent of buoy observations included in the monthly [time-series-time series](#) (in blue), where in (c) and (d) for IMB, red denotes the observations from winter season 2010/2011 included in the [timeseries-time series](#) (dependent on QFT) which is discussed in the text.

995 decreases from 0.81 to 0.56, the bias increases from -0.01 m to -0.17 m, and RMSE increases by 0.15 m. Qualitatively, it shows that the winter of 2010/2011 for the IMB presents an opposite relationship (thinning of the ice during the winter season). Exploring it further, only 59 out of 183 (~32%) IMB observations [would-be-are](#) included for that winter period if [the-QFT≤1](#) [was-is](#) applied. The insets of Fig. 12c+d (point observations in red) [shows-show](#) the buoy tracks [of-from](#) the 2010/2011 winter season and [illustrates-illustrate](#) how the entire track [of-through](#) the Fram Strait (likely due to the high drift speeds) is discarded; [and-the-](#). The high thickness observations [of-the-timeseries-appear-linked-in-the-time-series-appear-to-be-associated](#) with the two buoys located in the fast ice [area-region](#) of the Canadian Archipelago, which skews the distribution and [impacts-affects](#) the monthly derived [timeseries-time series](#). One could filter by including information on basins (e.g., Central Arctic Ocean or


1000

Barents Sea as examples) to limit the potential impact that buoys in-deployed on landfast ice might introduce. We note that this sensitivity analysis was based on filtering with the flags prior to producing the monthly time series. However, this comparison appears more favorable than comparing with absolute observations, and allows for the inclusion of many observations-reference measurements from across the basin to produce one estimate, which minimizes the impact of different type of representation within a grid cell between the two data sources.


## 7.7 Representativeness and stability

Another important topic is the representativeness of the collocated satellite data when compared to the reference observationsmeasurements. While the spatial and temporal filters help to some degree-extent in quantifying representativeness issues, they are also restrictive and may result in-lead to the removal of a significant portion of the reference data-measurements if applied too strictly. For instance, the combination of a QFS<3 and a QFT<3 for SIT would result in almost no reference data (8 observations  $\approx 0.08\%$ ), as the vast-majority of airborne data would be removed by the temporal representativeness filter. This raises the question of whether using another collocation window for satellite measurements would be more appropriate for certain data types. To test this, we have made a representation error study using OIB data as the test case. We applied collocation windows varying in temporal sampling between 4, 16 and 30 days and in spatial sampling varying between 5, 15 and 25 km. The result of this analysis is shown in Fig. 13. For the comparison, we consider only the grid cells that contain collocated data across all categoriescollocation categories mentioned above. The analysis shows that decreasing the spatial radius of observations tends to reduce the correlation, whereas changing the temporal window has little effect.

To further-understand these results, we refer to Fig. 14. This figure shows one OIB track (colored-by-the-colorbar, which appears black when zoomed-outgreen) along with satellite-available satellite orbit tracks within a 25km-25 km radius and a  $\pm 15$  days temporal window. It illustrates that the OIB route-flight track follows one of the satellite orbit tracks, but for this case not the one closest in time (may not have been the target track of the flight campaign). If a small temporal window is chosen, this track would therefore not be included in the comparison. Similarly, a smaller spatial window will result in the inclusion of satellite measurements that only cover parts of the OIB track. Overall, it also showcases the effect of comparing monthly gridded satellite data, which can cover the-a grid cell more comprehensively than a one-day OIB track. Furthermore, the footprint sizes illustrate the varying information available from each data source, even if they were to fly along the same track. Such issues are inherent to the data itself as the resolution differs, and future work should investigate how to further minimise this impact for various data sources-minimize the impact of these scaling issue between data sources (see also (Xu et al., 2020)).

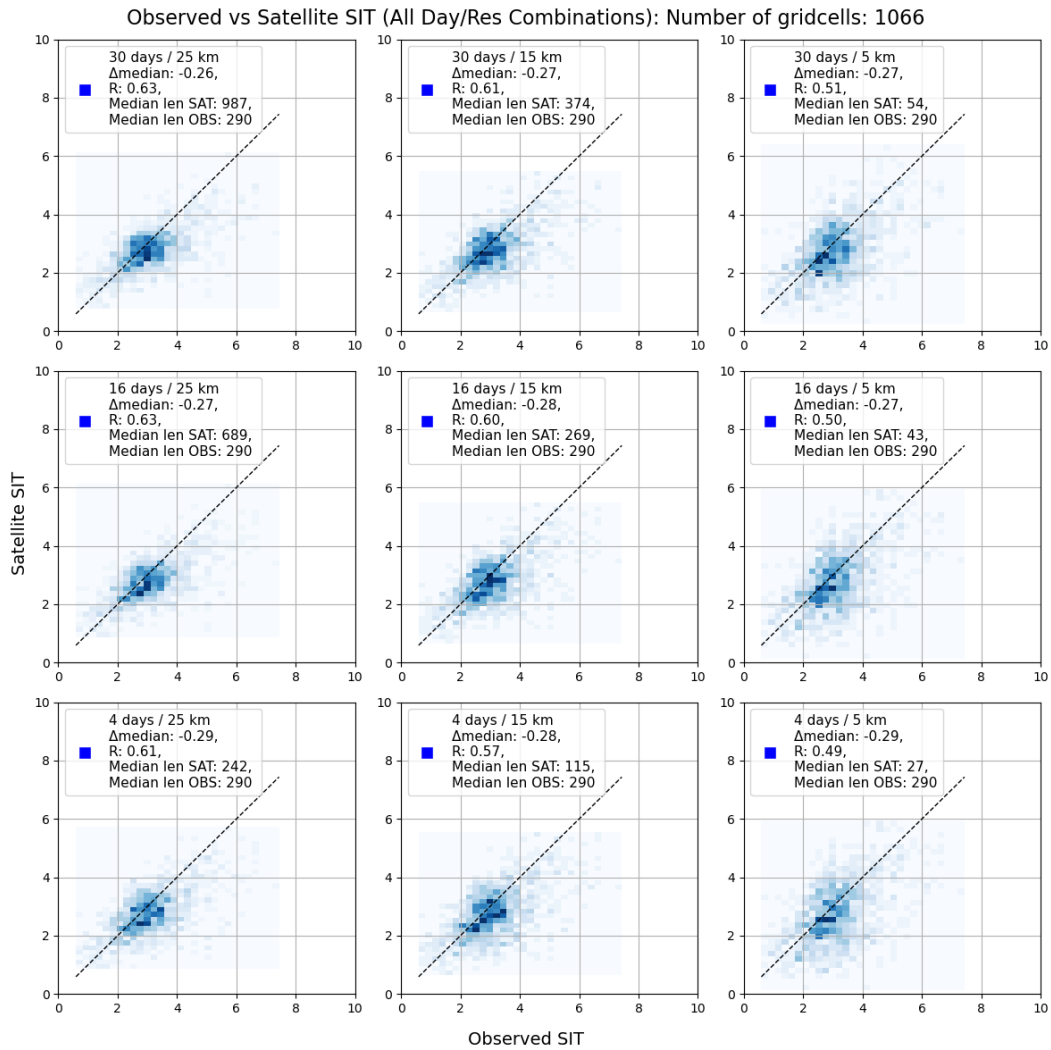

**Figure 13.** Scatterplot of collocated OIB and CryoSat-2, when varying temporal sampling windows between 4, 16 and 30 days and spatial sampling windows between 5, 15 and 25 km. Only gridcells that appear when applying the smallest spatial and temporal windows (4 days and 5 km) are included.

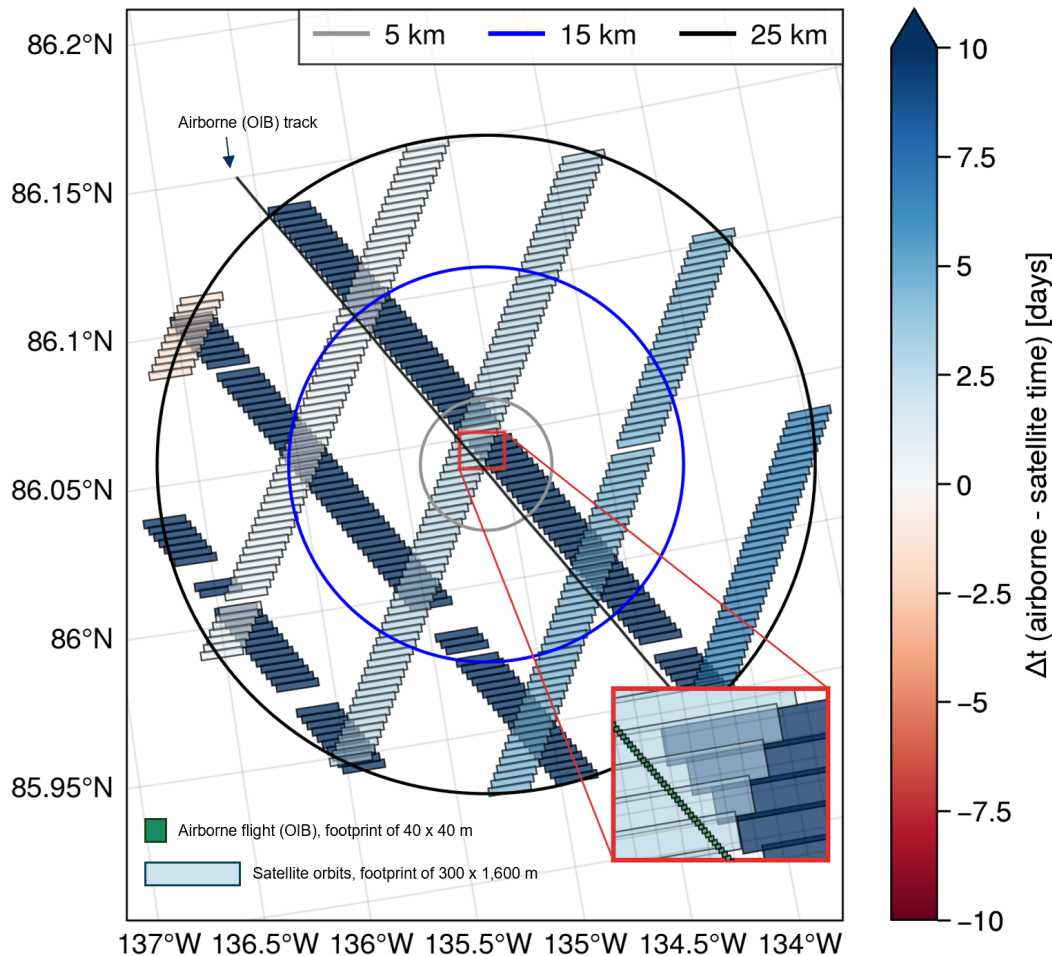

**Figure 14.** Example of spatial representativeness for one grid cell of the EASE2 grid (with center location at 87.38°N and -154.68°E) with an airborne track (OIB-QL, coloured using the snow depth product where fill-values have been given NaN) flown on the 22nd of April 2019 and satellite tracks (CryoSat-2) within the vicinity in time (using a temporal span of maximum  $\pm 15$  days) and space (using search radii of 5 km, 15 km, and 25 km denoted by the circles). Footprints of the different sources are visualised using  $40 \times 40$  m for OIB-QL and  $1600 \times 300$  m for CryoSat-2.  $\Delta t$  describes the temporal difference between the airborne and satellite measurements in days.

Scatterplot of collocated reference observations from OIB and CryoSat-2, when varying temporal sampling windows between 4, 16 and 30 days and spatial sampling windows between 5, 15 and 25 km. Only gridcells that appear when applying the smallest spatial and temporal windows (4 days and 5 km) are included.

To test the stability of the satellite-based SIT CDRs with reference observations measurements, we here recommend using a combination of the long-term monitoring programs, i.e., upward-looking moorings from the Beaufort Gyre Exploitation Project (BGEP), the Fram Strait Arctic Outflow Observatory (NPI-FS) and the Russian-German TRANSDRIFT project (TRANSDRIFT), together with submarine cruises (SCICEX) and airborne EM-campaigns (AEM-AWI) for NH. A similar extensive

dataset is not available for the SH ~~in particular with the biased ASPeCt sea ice thickness observations~~ because the AWI-ULS only cover the Envisat period and ASPeCt SIT and SD reference measurements are biased towards the thinner end of the SIT and SD distributions. To combine the NH measurements into a trend dataset, we need to align the reference measurements and the satellite SIT CDRs to a common measurand, e.g., total SIT or draft. For consistency, one must ensure that a common baseline for auxiliary information of ~~snow depth~~ SD and densities of sea ice, snow and water is used. Thus, we encourage the community to include the information of all auxiliary data used to support the radar-freeboard-to-sea-ice-freeboard and sea-ice-freeboard-to-thickness conversions ~~to form a consistent baseline into their data sets.~~ Furthermore, we note that ~~this reference dataset~~ our reference measurements dataset CCI SIT RRDP has been prepared to match the format of satellite products provided as monthly, gridded products, mainly the CCI SIT CDRs. However, efforts should also be made to investigate how to utilise other available datasets to validate the lower level (e.g., Level-2) satellite observations, and contribute to the discussion of the formats which ~~validation data~~ reference measurements should be collected to ensure that satellite ~~data~~ observations can be deemed fit for purpose and fulfilling of their mission requirements.

## 1050 **8 Code and data availability**

The CCI SIT RRDP dataset is available at DTU DATA (<https://figshare.com/s/77be0cfd6842d08f1b6b>) (Olsen and Skourup, 2024a) and released under a CC-BY 4.0 license. The final data files are formatted as NetCDF files with not-a-number (NaN) denoting missing data. Apart from the final dataset, all the source code used in the processing steps from the original reference observations to the final CCI SIT RRDP, together with procedures for collocating the CCI SIT RRDP to the satellite measurements from CryoSat-2, Envisat and ERS-1/2, and for creating Figure 3-12 and 14 are available on GitHub through (Olsen and Skourup, 2024b). By providing links to the original reference measurements and satellite data (Table 2), this ensures transparency and equips users with the tools and data needed to fully reproduce the final data set. It also allows users to easily redefine their own temporal and spatial scales tailored to their specific needs. In the ReadMe file in GitHub (Olsen and Skourup, 2024b) are specified how the temporal and spatial resolutions can be adjusted in the provided scripts. Fig. 2 (Sankey diagram) was produced using the online tool "VisualParadigmOnline", and adapted in Microsoft Office Power Point. Fig. 14 has been developed from adapted scripts of Fredensborg Hansen (2024) using intermediate data developed within the framework of the RRDP, which is not provided in the final output version of the data product, and the script to produce this figure is therefore not provided publicly.

## 9 Conclusions

1065 Here, we have presented the CCI SIT RRDP (Olsen and Skourup, 2024a) ~~of available,~~ which is a collection of public available non-satellite sea ice thickness ~~reference~~ observations covering the polar satellite era ~~1993–2021~~ 1993–2024 including freeboards (total, radar or derived sea ice), thicknesses (total or sea ice), drafts and snow depths from different sources. ~~The We have prepared the~~ CCI SIT RRDP ~~is suitable for the evaluation~~ to be suitable for comparison of satellite altimeter observations

of sea ice freeboard, sea ice thickness and auxiliary snow depth products, but can also be used for ~~evaluation-comparison~~ of  
1070 e.g. models. The ~~reference~~ observations have been prepared to a level where they can be directly compared to satellite altimetry  
temporal (monthly) and spatial (25 km NH; 50 km SH) scales, but these can easily be changed by using the CCI SIT RRDP  
software package Olsen and Skourup (2024b). We have added uncertainties to the associated reference measurements and  
flagged these according to their reliability, as well as flagged data according to spatial and temporal representativeness, caused  
by the inherent nature of the various measurements.

1075 As examples of how this data package can be used, we have compared them with the CCI SIT CDRs from CryoSat-2 and  
Envisat. Here, we generally find good agreement across the different reference ~~observations~~ measurements included in the CCI  
SIT RRDP. Visual observations of sea ice thickness and snow depths from ship cruises cannot be used as reference measure-  
ments for satellite altimetry in ~~its the~~ present form presented in the RRDP, as they are biased low in their distributions. This is  
expected as ships tend to navigate through the thinnest ice. Furthermore, care should be taken when using OIB QL products  
1080 due to existing biases in snow depth processing, as this dataset were only meant to be processed for a quick assessment of the  
data and not designed as a long- term archived dataset for satellite inter-comparison. In addition, the approach used in this study  
by gridding and time-averaging ~~the reference measurements~~ observations from drifting buoys ~~and stations~~ to match satellite  
scales might not be the most optimal. Other methods, such as matching the satellite SIT CDRs and ~~reference measurements~~  
observations from drifting buoys ~~and stations~~ in a Lagrangian framework might present a more suitable solution ~~in the future.~~

1085 However, existing reference ~~data is~~ measurements are still scarce in the polar regions, even more pronounced in the Antarctic  
than in the Arctic. It is therefore necessary to include and use as much data as possible, while acknowledging the advantages  
and limitations of each method. We also note that data prior to 2011 is limited to a few reference measurements - even more so if  
we remove ~~observations above the polar gap~~ measurements carried out within the so-called pole hole, the area poleward of, e.g.,  
81.5°N for ERS-1/2 and Envisat - thus, limiting the comparisons to be made with ~~the ERS-1/2 these~~ satellites. Existing potential  
1090 reference measurements, which are not included in the CCI SIT RRDP, need to be made publicly available and processed to  
a level where they can directly be used for inter-comparison to satellite altimetry-derived observations before inclusion into  
the CCI SIT RRDP. This includes e.g., freeboards from ESA's CryoSat Validation Experiment (CryoVEx) campaigns, ~~as well  
as OIB~~ Antarctic total freeboards and snow depths ~~from OIB campaigns after 2010.~~ When satellite altimetry-derived sea  
ice thicknesses are provided in a CDR it is important for comparison and evaluation purposes to include all the auxiliary  
1095 information used in the intermediate steps in the radar freeboard to sea ice thickness conversion.

For future work, it will be crucial to ensure that reference ~~observations~~ measurements follow the protocols and procedures  
for ~~fiducial reference measurements (FRMs)~~ FRMs i.e., that they are traceable, and fully described with uncertainty diagrams,  
effects tables and comparability diagrams, see first efforts for altimetry derived sea ice thicknesses in Da Silva et al. (2023).  
Such comparability diagrams will also aid the design of campaigns to produce reference measurements which are directly  
1100 comparable to satellite SIT products. As an example, the AWI IceBird Winter campaigns since 2019 use a sensor combination  
of EM-Bird, airborne laser scanner and snow radar that allows for a direct retrieval of sea ice thickness, sea ice freeboard  
and snow depth simultaneously (Jutilla et al., 2022a). Updating the data package will be ongoing work to ensure it remains  
current and comprehensive. The community also urgently ~~need~~ needs to ensure a consistent network of polar observations for

continuous reference measurements of current and future satellite altimeter missions such as Copernicus Polar Ice and Snow  
1105 Topography Altimeter (CRISTAL) (Kern et al., 2020). There are currently no concrete plans for updating the CCI SIT RRDP  
beyond 2026, where the project ends. However, we will seek other opportunities for a continuation within frameworks of related  
databases and projects e.g., St3TART-FO project (<https://frm-datahub.noveltis.fr/>), SIN'XS (<https://sinxs.noveltis.fr/>) or C3S  
(<https://cis2.eea.europa.eu/about>). Otherwise, the code is readily available, making it easy for users to process and update the  
database with extensions or additional reference measurements.

1110 *Author contributions.* IO has collected and prepared the CCI SIT RRDP presented in this paper, including pre-processing, estimation  
of uncertainties and flags. The CCI SIT RRDP is based on previous versions prepared by HSK within the initial phases of the CCI  
SI project. The initial versions included only sea ice freeboards and snow depth, with no uncertainties or flags provided until 2016,  
<https://ftp.spacecenter.dk/pub/SICCI/>. IO further collocated the reference data with the satellite CDRs. IO, HSK, HS, RMFH wrote the  
initial manuscript, produced the figures, and specified the extended flagging procedure currently implemented. HSK, ER, SH, RMFH, and  
1115 SK contributed by identifying relevant reference measurements and defining the temporal and spatial resolution together with the collocation  
procedures and initial uncertainty flagging procedures. They also contributed through discussions. HSK, ER, SK contributed to the develop-  
ment of the first phases of the CCI SIT RRDP, including validation. SH, SP, ER and HS contributed to satellite-derived CCI SIT CDRs from  
CryoSat-2 and Envisat. MB and SF contributed with ERS-1/2 data from the FDR4ALT project. DD contributed with NPI mooring data. All  
authors contributed to the revision of the manuscript, which was led by IO and HSK, together with RMFH.

1120 *Competing interests.* The authors declare that they have no conflict of interest.

*Acknowledgements.* This publication was funded by the ESA's Climate Change Initiative (CCI) for sea ice (grant no. 4000126449/19/I-NB).  
The main contribution to this work was conducted while I. B. L. Olsen was affiliated with DTU Space. The project and its results are primarily  
associated with this institution. I. B. L. Olsen is now affiliated with DMI, which contributed to the revision process of the manuscript. We  
would like to thank DMI for their support during this phase.

1125 We would also like to express our sincere gratitude to everyone involved in the collection, preparation, maintenance, and publication  
of the input data used in this study. These include, but are not limited to, the Beaufort Gyre Exploration Program based at the Woods  
Hole Oceanographic Institution (<https://www2.who.edu/site/beaufortgyre/>) in collaboration with researchers from Fisheries and Oceans  
Canada at the Institute of Ocean Sciences, the Norwegian Polar Institute, the North Pole Environmental Observatory and the Polar Sci-  
ence Center, the Russian-German BMBF-funded TRANSDRIFT project, the Alfred Wegener Institute, the Norwegian Meteorological In-  
1130 stitute, the Cold Regions Research and Engineering Laboratory, the SCAR Antarctic Sea Ice Processes and Climate (ASPeCt) program  
([aspect.antarctica.gov.au](http://aspect.antarctica.gov.au)), the U.S. Navy and Royal Submarines, and the Submarine Arctic Science Program, The Nansen Legacy Arctic  
research project ~~and~~, the Multidisciplinary drifting Observatory for the Study of Arctic Climate (MOSAiC) expedition [and the Norwegian  
Young sea ICE cruise \(N-ICE\)](#). We acknowledge that it would not have been possible to create the Climate Change Initiative Sea Ice Thick-  
ness Round Robin Data Package without the up-to-date and publicly available reference data from the above sources.

1135 We acknowledge the use of AI-based language tools (co-pilot and chatgpt) to assist in checking the manuscript for consistency and clarity. These tools were used to support language refinement without altering the scientific content.

We further acknowledge the important contributions of the CCI Sea Ice scientific leader, Thomas Lavergne, and project coordinator, Mari Anne Killie, both from the Norwegian Meteorological Institute (METNO). Their exceptional leadership, management, and insightful discussions have been pivotal to the success of this study.

1140 Finally, we would like to express our sincere appreciation to the reviewers for their thoughtful and constructive evaluations. Their insightful comments and suggestions have been invaluable in improving the clarity and overall quality of the manuscript.

## References

- Andersen, O. B., Rose, S. K., Abulaitijiang, A., Zhang, S., and Fleury, S.: The DTU21 global mean sea surface and first evaluation, *Earth System Science Data*, 15, 4065–4075, <https://doi.org/10.5194/essd-15-4065-2023>, 2023.
- 1145 Arndt, S., Maaß, N., Rossmann, L., and Nicolaus, M.: From snow accumulation to snow depth distributions by quantifying meteoric ice fractions in the Weddell Sea, *The Cryosphere*, 18, 2001–2015, <https://doi.org/10.5194/tc-18-2001-2024>, 2024.
- ASSIST: Ice Watch ASSIST Data Network, accessed [23-07-2023], <https://icewatch.met.no/>, 2006.
- Behrendt, A., Dierking, W., Fahrbach, E., and Witte, H.: Sea ice draft in the Weddell Sea, measured by upward looking sonars, *Earth System Science Data*, 5, 209–226, <https://doi.org/10.5194/ESSD-5-209-2013>, 2013a.
- 1150 Behrendt, A., Dierking, W., Fahrbach, E., and Witte, H.: Sea ice draft measured by upward looking sonar at mooring site AWI227-4. PANGAEA, <https://doi.org/10.1594/PANGAEA.785805>, 2013b.
- Bell, S.: *Measurement Good Practice Guide, A Beginner’s Guide to Uncertainty of Measurement*, Esscolab, 11, [Online; accessed 2023-07-28], 1999.
- Belter, H. J., Janout, M. A., Krumpen, T., Ross, E., Hölemann, J. A., Timokhov, L., Novikhin, A., Kassens, H., Wyatt, G., Rousseau, S., and Sadowy, D.: Daily mean sea ice draft from moored Upward-Looking Sonars in the Laptev Sea between 2013 and 2015, <https://doi.org/10.1594/PANGAEA.899275>, 2019.
- 1155 Belter, H. J., Janout, M. A., Hölemann, J. A., and Krumpen, T.: Daily mean sea ice draft from moored upward-looking Acoustic Doppler Current Profilers (ADCPs) in the Laptev Sea from 2003 to 2016, <https://doi.org/10.1594/PANGAEA.912927>, 2020.
- Belter, H. J., Krumpen, T., Hendricks, S., Hoelemann, J., Janout, M. A., Ricker, R., and Haas, C.: Satellite-based sea ice thickness changes in the Laptev Sea from 2002 to 2017: Comparison to mooring observations, *Cryosphere*, 14, 2189–2203, <https://doi.org/10.5194/TC-14-2189-2020>, 2020.
- 1160 Belter, H. J., Krumpen, T., Janout, M. A., Ross, E., and Haas, C.: An Adaptive Approach to Derive Sea Ice Draft from Upward-Looking Acoustic Doppler Current Profilers (ADCPs), Validated by Upward-Looking Sonar (ULS) Data, *Remote Sensing*, 13, <https://doi.org/10.3390/rs13214335>, 2021.
- 1165 BGEF: The data were collected and made available by the Beaufort Gyre Exploration Program based at the Woods Hole Oceanographic Institution in collaboration with researchers from Fisheries and Oceans Canada at the Institute of Ocean Sciences., <https://www2.whoi.edu/site/beaufortgyre/data/mooring-data/>, [Online; accessed 2021-07-12], 2003.
- Bocquet, M., Fleury, S., Piras, F., Rinne, E., Sallila, H., Garnier, F., and Rémy, F.: Arctic sea ice radar freeboard retrieval from the European Remote-Sensing Satellite (ERS-2) using altimetry: toward sea ice thickness observation from 1995 to 2021, *The Cryosphere*, 17, 3013–3039, <https://doi.org/10.5194/tc-17-3013-2023>, 2023.
- 1170 Bocquet, M., Fleury, S., Rémy, F., and Piras, F.: Arctic and Antarctic Sea Ice Thickness and Volume Changes From Observations Between 1994 and 2023, *Journal of Geophysical Research: Oceans*, 129, e2023JC020 848, <https://doi.org/https://doi.org/10.1029/2023JC020848>, e2023JC020848 2023JC020848, 2024.
- Bocquet, M. Fleury, S.: Arctic and Antarctic sea ice thickness climate data record (ERS-1, ERS-2, Envisat, CryoSat-2), [https://doi.org/https://doi.org/10.6096/ctoh\\_sit\\_2023\\_01](https://doi.org/https://doi.org/10.6096/ctoh_sit_2023_01), 2023.
- 1175 Boggs, P. T. and Rogers, J. E.: Orthogonal Distance Regression,” in “Statistical analysis of measurement error models and applications: proceedings of the AMS-IMS-SIAM joint summer research conference held June 10-16, 1989, *Contemporary Mathematics*, 112, 186, 1990.

- Brodzik, M., Billingsley, B., Haran, T., Raup, B., and Savoie, M.: EASE-Grid 2.0: Incremental but Significant Improvements for Earth-Gridded Data Sets, *International Journal of Geo-Information*, 1, 32–45, <https://doi.org/10.3390/ijgi1010032>, 2012.
- 1180 Carret, A., Fleury, S., Di Bella, A., Landy, J., Lawrence, I., Kurtz, N., Laforge, A., Bouffard, J., and Parrinello, T.: A multi-frequency altimetry snow depth product over Arctic sea ice, *Scientific Data*, 12, <https://doi.org/10.1038/s41597-024-04343-4>, 2025.
- Cavaleri, D. J., Markus, T., and Comiso, J. C.: AMSR-E/Aqua Daily L3 12.5 km Brightness Temperature, Sea Ice Concentration, Snow Depth Polar Grids, Version 3, [https://doi.org/10.5067/AMSR-E/AE\\_SI12.003](https://doi.org/10.5067/AMSR-E/AE_SI12.003), 2014.
- 1185 Cheng, Y., Cheng, B., Zheng, F., Vihma, T., Kontu, A., Yang, Q., and Liao, Z.: Air/snow, snow/ice and ice/water interfaces detection from high-resolution vertical temperature profiles measured by ice mass-balance buoys on an Arctic lake, *Annals of Glaciology*, 61, 309–319, <https://doi.org/10.1017/aog.2020.51>, 2020.
- Cristea, A., Gerland, S., and Bratrein, M.: Results of regional scale sea ice and snow thickness surveys during Nansen Legacy/Synoptic Arctic Survey Joint Cruise 2 (JC2-2) in August – September 2021 using helicopter-borne electromagnetic induction sounding instrument (EM-bird), <https://doi.org/10.21334/NPOLAR.2023.C1CFD5DD>, 2023.
- 1190 Da Silva, E., Woolliams, E. R., Picot, N., Poisson, J.-C., Skourup, H., Moholdt, G., Fleury, S., Behnia, S., Favier, V., Arnaud, L., Aublanc, J., Fouqueau, V., Taburet, N., Renou, J., Yesou, H., Tarpanelli, A., Camici, S., Fredensborg Hansen, R. M., Nielsen, K., Vivier, F., Boy, F., Fjørtoft, R., Cancet, M., Ferrari, R., Picard, G., Tourian, M. J., Sneeuw, N., Munesa, E., Calzas, M., Paris, A., Le Meur, E., Rabatel, A., Valladeau, G., Bonnefond, P., Labroue, S., Andersen, O., El Hajj, M., Catapano, F., and Féménias, P.: Towards Operational Fiducial Reference Measurement (FRM) Data for the Calibration and Validation of the Sentinel-3 Surface Topography Mission over Inland Waters, Sea Ice, and Land Ice, *Remote Sensing*, 15, <https://doi.org/10.3390/rs15194826>, 2023.
- 1195 Divine, D., Bratrein, M., Jacobsen, J. A., and Gerland, S.: Results of regional scale sea ice and snow thickness surveys during Nansen Legacy Q1 research cruise in March 2021 using helicopter-borne electromagnetic induction sounding instrument (EM-bird), <https://doi.org/10.21334/NPOLAR.2023.1A9CC2DF>, 2023.
- 1200 Fons, S., Kurtz, N., and Bagnardi, M.: A decade-plus of Antarctic sea ice thickness and volume estimates from CryoSat-2 using a physical model and waveform fitting, *The Cryosphere*, 17, 2487–2508, <https://doi.org/10.5194/tc-17-2487-2023>, 2023.
- Fredensborg Hansen, R. M.: cryo2iceant22-airborne-cryo2ice-weddell-sea-ice, <https://doi.org/10.5281/zenodo.13749342>, 2024.
- Fredensborg Hansen, R. M., Skourup, H., Rinne, E., Høyland, K. V., Landy, J. C., Merkouriadi, I., and Forsberg, R.: Arctic Freeboard and Snow Depth From Near-Coincident CryoSat-2 and ICESat-2 (CRYO2ICE) Observations: A First Examination of Winter Sea Ice During 2020–2022, *Earth and Space Science*, 11, e2023EA003313, <https://doi.org/https://doi.org/10.1029/2023EA003313>, e2023EA003313, 2024a.
- 1205 Fredensborg Hansen, R. M., Skourup, H., Rinne, E., Jutila, A., Lawrence, I. R., Shepherd, A., Høyland, K. V., Li, J., Rodriguez-Morales, F., Simonsen, S. B., Wilkinson, J., Veyssiere, G., Yi, D., Forsberg, R., and Casal, T. G. D.: Exploring microwave penetration into snow on Antarctic summer sea ice along CryoSat-2 and ICESat-2 (CRYO2ICE) orbit from multi-frequency air- and spaceborne altimetry, *EGUsphere*, 2024, 1–53, <https://doi.org/10.5194/egusphere-2024-2854>, 2024b.
- 1210 Giles, K. A. and Hvidegaard, S. M.: Comparison of space borne radar altimetry and airborne laser altimetry over sea ice in the Fram Strait, *International Journal of Remote Sensing*, 27, 3105–3113, <https://doi.org/10.1080/01431160600563273>, 2006.
- Gregory, W., Lawrence, I. R., and Tsamados, M.: A Bayesian approach towards daily pan-Arctic sea ice freeboard estimates from combined CryoSat-2 and Sentinel-3 satellite observations, *The Cryosphere*, 15, 2857–2871, <https://doi.org/10.5194/tc-15-2857-2021>, 2021.

- 1215 Grosfeld, K., Treffeisen, R., Asseng, J., Bartsch, A., Bräuer, B., Fritsch, B., Gerdes, R., Hendricks, S., Hiller, W., Heygster, G., Krumpfen, T., Lemke, P., Melsheimer, C., Nicolaus, M., Ricker, R., and Weigelt, M.: Online sea-ice knowledge and data platform <<https://data.meereisportal.de/relaunch/airborne?lang=de>>, <https://doi.org/10.2312/polfor.2016.011>, 2016.
- Guerreiro, K., Fleury, S., Zakharova, E., Rémy, F., and Kouraev, A.: Potential for estimation of snow depth on Arctic sea ice from CryoSat-2 and SARAL/AltiKa missions, *Remote Sensing of Environment*, 186, 339–349, <https://doi.org/https://doi.org/10.1016/j.rse.2016.07.013>,  
1220 2016.
- Guerreiro, K., Fleury, S., Zakharova, E., Kouraev, A., Rémy, F., and Maisongrande, P.: Comparison of CryoSat-2 and ENVISAT radar freeboard over Arctic sea ice: Toward an improved Envisat freeboard retrieval, *Cryosphere*, 11, 2059–2073, <https://doi.org/10.5194/TC-11-2059-2017>, 2017.
- Haas, C.: Sea Ice, third edition, Chapter 2: sea ice thickness distribution, Wiley Blackwell, <https://doi.org/10.1002/9781118778371>, 2016.
- 1225 Haas, C., Göbell, S., Hendricks, S., Martin, T., Pfaffhuber, A., and Saldern, C.: Airborne electromagnetic measurements of sea ice thickness: methods and applications, European Commission, 2007.
- Haas, C., Lobach, J., Hendricks, S., Rabenstein, L., and Pfaffling, A.: Helicopter-borne measurements of sea ice thickness, using a small and lightweight, digital EM system, *Journal of Applied Geophysics*, 67, 234–241, <https://doi.org/https://doi.org/10.1016/j.jappgeo.2008.05.005>, airborne Geophysics, 2009.
- 1230 Hendricks, S. Paul, S. . R. E.: ESA Sea Ice Climate Change Initiative (Sea\_Ice\_cci): Northern hemisphere sea ice thickness from CryoSat-2 on the satellite swath (L2P), v3.0., <https://catalogue.ceda.ac.uk/uuid/c6504378f78c4ecd9f839b0434023eff>, 2024a.
- Hendricks, S. Paul, S. . R. E.: ESA Sea Ice Climate Change Initiative (Sea\_Ice\_cci): Northern hemisphere sea ice thickness from Envisat on the satellite swath (L2P), v3.0., <https://catalogue.ceda.ac.uk/uuid/92eb2ba942074bec804af6a8b5436bee>, 2024b.
- Hendricks, S. Paul, S. . R. E.: ESA Sea Ice Climate Change Initiative (Sea\_Ice\_cci): Southern hemisphere sea ice thickness from CryoSat-2  
1235 on the satellite swath (L2P), v3.0, <https://catalogue.ceda.ac.uk/uuid/861ad3c7f3a34ebd8be6f618a92bd8e3>, 2024c.
- Hendricks, S. Paul, S. . R. E.: ESA Sea Ice Climate Change Initiative (Sea\_Ice\_cci): Southern hemisphere sea ice thickness from Envisat on the satellite swath (L2P), v3.0., <https://catalogue.ceda.ac.uk/uuid/af96a1ec493f49caa39dc912d15f2b17>, 2024d.
- Hutchings, J., Delamere, J., and Heil, P.: The Ice Watch Manual - [https://icewatch.met.no/Ice\\_Watch\\_Manual\\_v4.1.pdf](https://icewatch.met.no/Ice_Watch_Manual_v4.1.pdf), <https://icewatch.met.no/>, [https://icewatch.met.no.](https://icewatch.met.no/), 2018.
- 1240 Jutila, A., Hendricks, S., Ricker, R., von Albedyll, L., Krumpfen, T., and Haas, C.: Retrieval and parameterisation of sea-ice bulk density from airborne multi-sensor measurements, *The Cryosphere*, 16, 259–275, <https://doi.org/10.5194/TC-16-259-2022>, 2022a.
- Jutila, A., King, J., Paden, J., Ricker, R., Hendricks, S., Polashenski, C., Helm, V., Binder, T., and Haas, C.: High-Resolution Snow Depth on Arctic Sea Ice From Low-Altitude Airborne Microwave Radar Data, *IEEE Transactions on Geoscience and Remote Sensing*, 60, 1–16, <https://doi.org/10.1109/TGRS.2021.3063756>, 2022b.
- 1245 Jutila, A., Hendricks, S., Ricker, R., von Albedyll, L., and Haas, C.: Airborne sea ice parameters during the PAMARCMIP2017 campaign in the Arctic Ocean, Version 2, <https://doi.org/10.1594/PANGAEA.966009>, 2024a.
- Jutila, A., Hendricks, S., Ricker, R., von Albedyll, L., and Haas, C.: Airborne sea ice parameters during the IceBird Winter 2019 campaign in the Arctic Ocean, Version 2, <https://doi.org/10.1594/PANGAEA.966057>, 2024b.
- Kern, M., Cullen, R., Berruti, B., Bouffard, J., Casal, T., Drinkwater, M. R., Gabriele, A., Lecuyot, A., Ludwig, M., Midthassel, R.,  
1250 Navas Traver, I., Parrinello, T., Ressler, G., Andersson, E., Martin-Puig, C., Andersen, O., Bartsch, A., Farrell, S., Fleury, S., Gascoin, S., Guillot, A., Humbert, A., Rinne, E., Shepherd, A., van den Broeke, M. R., and Yackel, J.: The Copernicus Polar Ice and Snow Topography Altimeter (CRISTAL) high-priority candidate mission, *The Cryosphere*, 14, 2235–2251, <https://doi.org/10.5194/tc-14-2235-2020>, 2020.

- Kern, S.: ESA-CCI\_Phase2\_Standardized\_Manual\_Visual\_Ship-Based\_SeaIceObservations\_v02, <https://doi.org/10.26050/WDCC/ESACCIPSMVSBISIC> 2020.
- 1255 Kern, S., Khvorostovsky, K., Skourup, H., Rinne, E., Parsakhoo, Z. S., Djepa, V., Wadhams, P., and Sandven, S.: The impact of snow depth, snow density and ice density on sea ice thickness retrieval from satellite radar altimetry: results from the ESA-CCI Sea Ice ECV Project Round Robin Exercise, *The Cryosphere*, 9, 37–52, <https://doi.org/10.5194/tc-9-37-2015>, 2015.
- Kern, S., Lavergne, T., Notz, D., Pedersen, L. T., Tonboe, R. T., Saldo, R., and Sørensen, A. M.: Satellite passive microwave sea-ice concentration data set intercomparison: closed ice and ship-based observations, *The Cryosphere*, 13, 3261–3307, [https://doi.org/10.5194/tc-13-](https://doi.org/10.5194/tc-13-3261-2019)  
1260 3261-2019, 2019.
- King, J., Howell, S., Derksen, C., Rutter, N., Toose, P., Beckers, J. F., Haas, C., Kurtz, N., and Richter-Menge, J.: Evaluation of Operation IceBridge quick-look snow depth estimates on sea ice, *Geophysical Research Letters*, 42, 9302–9310, <https://doi.org/https://doi.org/10.1002/2015GL066389>, 2015.
- King, J., Gerland, S., Spreen, G., Bratrein, M., and Institute, N. P.: N-ICE2015 sea-ice thickness measurements from helicopter-borne  
1265 electromagnetic induction sounding, <https://doi.org/10.21334/NPOLAR.2016.AA3A5232>, 2016.
- Krishfield, R. and Proshutinsky, A.: BGOS ULS Data Processing Procedure, [https://www2.who.edu/site/beaufortgyre/wp-content/uploads/sites/108/2020/04/BGOS\\_ULS\\_Data\\_Processing\\_Procedure\\_85684.pdf](https://www2.who.edu/site/beaufortgyre/wp-content/uploads/sites/108/2020/04/BGOS_ULS_Data_Processing_Procedure_85684.pdf), 2006.
- Kurtz, N., Studinger, M., Harbeck, J., Onana, V., and Yi, D.: IceBridge L4 Sea Ice Freeboard, Snow Depth, and Thickness, Version 1, <https://doi.org/10.5067/G519SHCKWQV6>, [Online; accessed 2023-07-12], 2015.
- 1270 Kurtz, N., Studinger, M., Harbeck, J., Onana, V., and Yi, D.: IceBridge Sea Ice Freeboard, Snow Depth, and Thickness Quick Look, Version 1, <https://doi.org/10.5067/GRIXZ91DE0L9>, 2016.
- Kurtz, N. T., Farrell, S. L., Studinger, M., Galin, N., Harbeck, J. P., Lindsay, R., Onana, V. D., Panzer, B., and Sonntag, J. G.: Sea ice thickness, freeboard, and snow depth products from Operation IceBridge airborne data, *The Cryosphere*, 7, 1035–1056, [https://doi.org/10.5194/tc-](https://doi.org/10.5194/tc-7-1035-2013)  
7-1035-2013, 2013.
- 1275 Kurtz, N. T., Galin, N., and Studinger, M.: An improved CryoSat-2 sea ice freeboard retrieval algorithm through the use of waveform fitting, *The Cryosphere*, 8, 1217–1237, <https://doi.org/10.5194/tc-8-1217-2014>, 2014.
- Kwok, R. and Kacimi, S.: Three years of sea ice freeboard, snow depth, and ice thickness of the Weddell Sea from Operation IceBridge and CryoSat-2, *The Cryosphere*, 12, 2789–2801, <https://doi.org/10.5194/tc-12-2789-2018>, 2018.
- Kwok, R. and Markus, T.: Potential basin-scale estimates of Arctic snow depth with sea ice freeboards from CryoSat-2 and ICESat-2: An  
1280 exploratory analysis, *Advances in Space Research*, 62, 1243–1250, <https://doi.org/https://doi.org/10.1016/j.asr.2017.09.007>, the CryoSat Satellite Altimetry Mission: Eight Years of Scientific Exploitation, 2018.
- Kwok, R., Kurtz, N. T., Brucker, L., Ivanoff, A., Newman, T., Farrell, S. L., King, J., Howell, S., Webster, M. A., Paden, J., Leuschen, C., MacGregor, J. A., Richter-Menge, J., Harbeck, J., and Tschudi, M.: Intercomparison of snow depth retrievals over Arctic sea ice from radar data acquired by Operation IceBridges, *The Cryosphere*, 11, 2571–2593, <https://doi.org/10.5194/tc-11-2571-2017>, 2017.
- 1285 Landy, J. C., Dawson, G. J., Tsamados, M., Bushuk, M., Stroeve, J. C., Howell, S. E. L., Krumpen, T., Babb, D. G., Komarov, A. S., Heorton, H. D. B. S., Belter, H. J., and Aksenov, Y.: A year-round satellite sea-ice thickness record from CryoSat-2, *Nature*, 609, 517–522, <https://doi.org/10.1038/s41586-022-05058-5>, 2022.
- Langsdale, M., Verhoelst, T., Povey, A., Schutgens, N., Dowling, T., Lambert, J.-C., Compernelle, S., and Kern, S.: The Challenges and Limitations of Validating Satellite-Derived Datasets Using Independent Measurements: Lessons Learned from Essential Climate Variables, *SurvGeophys*, 2025, 1–38, <https://doi.org/10.1007/s10712-025-09898-4>, 2025.
- 1290

- Laxon, S., Peacock, N., and Smith, D.: High interannual variability of sea ice thickness in the Arctic region, *Nature*, pp. 947–950, <https://doi.org/10.1038/nature020505>, 2003.
- Laxon, S. W., Giles, K. A., Ridout, A. L., Wingham, D. J., Willatt, R., Cullen, R., Kwok, R., Schweiger, A., Zhang, J., Haas, C., Hendricks, S., Krishfield, R., Kurtz, N., Farrell, S., and Davidson, M.: CryoSat-2 estimates of Arctic sea ice thickness and volume, *Geophysical Research Letters*, 40, 732–737, <https://doi.org/10.1002/grl.50193>, 2013.
- Lee, J.-E., Lee, G. W., Earle, M., and Nitu, R.: Uncertainty Analysis for Evaluating the Accuracy of Snow Depth Measurements, *Hydrology and Earth System Sciences Discussions*, 12, 4157–4190, <https://doi.org/10.5194/hessd-12-4157-2015>, 2015.
- Lei, R., Cheng, B., Hoppmann, M., and Zuo, G.: Snow depth and sea ice thickness derived from the measurements of SIMBA buoys deployed in the Arctic Ocean during the Legs 1a, 1, and 3 of the MOSAiC campaign in 2019-2020, <https://doi.org/10.1594/PANGAEA.938244>, 2021.
- MacGregor, J. A., Boisvert, L. N., Medley, B., Petty, A. A., Harbeck, J. P., Bell, R. E., Blair, J. B., Blanchard-Wrigglesworth, E., Buckley, E. M., Christoffersen, M. S., Cochran, J. R., Csathó, B. M., De Marco, E. L., Dominguez, R. T., Fahnestock, M. A., Farrell, S. L., Gogineni, S. P., Greenbaum, J. S., Hansen, C. M., Hofton, M. A., Holt, J. W., Jezek, K. C., Koenig, L. S., Kurtz, N. T., Kwok, R., Larsen, C. F., Leuschen, C. J., Locke, C. D., Manizade, S. S., Martin, S., Neumann, T. A., Nowicki, S. M., Paden, J. D., Richter-Menge, J. A., Rignot, E. J., Rodríguez-Morales, F., Siegfried, M. R., Smith, B. E., Sonntag, J. G., Studinger, M., Tinto, K. J., Truffer, M., Wagner, T. P., Woods, J. E., Young, D. A., and Yungel, J. K.: The Scientific Legacy of NASA's Operation IceBridge, *Reviews of Geophysics*, 59, e2020RG000712, <https://doi.org/10.1029/2020RG000712>, 2021.
- Mahoney, A. R., Eicken, H., Fukamachi, Y., Ohshima, K. I., Simizu, D., Kambhamettu, C., Rohith, M. V., Hendricks, S., and Jones, J.: Taking a look at both sides of the ice: Comparison of ice thickness and drift speed as observed from moored, airborne and shore-based instruments near Barrow, Alaska, *Annals of Glaciology*, 56, 363–372, <https://doi.org/10.3189/2015AoG69A565>, 2015.
- Maksym, T., Stammerjohn, S. E., Ackley, S., and Massom, R.: Antarctic Sea Ice: A Polar Opposite?, *Oceanography*, 25, 140–151, <http://www.jstor.org/stable/24861407>, [Online; accessed 2023-07-31], 2012.
- Mallett, R. D. C., Lawrence, I. R., Stroeve, J. C., Landy, J. C., and Tsamados, M.: Brief communication: Conventional assumptions involving the speed of radar waves in snow introduce systematic underestimates to sea ice thickness and seasonal growth rate estimates, *The Cryosphere*, 14, 251–260, <https://doi.org/10.5194/tc-14-251-2020>, 2020.
- Melling, H., Johnston, P., and Riedel, D. A.: Measurements of the Underside Topography of Sea Ice by Moored Subsea Sonar, *Journal of Atmospheric and Oceanic Technology*, 12, 589–602, <https://api.semanticscholar.org/CorpusID:140548130>, 1995.
- Morison, J. H., Aagaard, Dr, K., Moritz, R., McPhee, M., Heiberg, A., Steele, M., and Andersen, R.: North Pole Environmental Observatory (NPEO) Oceanographic Mooring Data., <https://doi.org/10.5065/D6P84921>, [Online; accessed 2023-07-12], 2016.
- Nicolaus, M. and Katlein, C.: Observations of the Snow Depth on Arctic Sea Ice, *Journal of Geophysical Research: Oceans*, 122, 7167–7183, <https://doi.org/10.1002/2017JC012838>, 2017.
- Nicolaus, M., Hoppmann, M., Arndt, S., Hendricks, S., Katlein, C., König-Langlo, G., Nicolaus, A., Rossmann, L., Schiller, M., Schwegmann, S., Langevin, D., and Bartsch, A.: Snow height and air temperature on sea ice from Snow Buoy measurements, <https://doi.org/10.1594/PANGAEA.875638>, 2017.
- Nicolaus, M., Hoppmann, M., Arndt, S., Hendricks, S., Katlein, C., Nicolaus, A., Rossmann, L., Schiller, M., and Schwegmann, S.: Snow Depth and Air Temperature Seasonality on Sea Ice Derived From Snow Buoy Measurements, *Frontiers in Marine Science*, 8, 377, <https://doi.org/10.3389/FMARS.2021.655446/BIBTEX>, 2021.
- NSIDC: Submarine Upward Looking Sonar Ice Draft Profile Data and Statistics, Version 1, <https://doi.org/10.7265/N54Q7RWK>, 1998.

- NSIDC: Submarine Upward Looking Sonar Ice Draft Profile Data and Statistics, Version 1 USER GUIDE, [https://nsidc.org/sites/default/files/g01360-v001-userguide\\_1\\_0.pdf](https://nsidc.org/sites/default/files/g01360-v001-userguide_1_0.pdf), 1998, 2006.
- 1330 Olsen, I. L. and Skourup, H.: Sea ice thickness reference measurements (ESA CCI SIT RRDP), Dataset, <https://doi.org/10.11583/DTU.24787341>, 2024a.
- Olsen, I. L. and Skourup, H.: Source code for the creation of the ESA CCI SIT RRDP, <https://github.com/Idalundtorp/ESACCI->, 2024b.
- Paul, S., Sallila, H., Hendricks, S., and Rinne, E.: ESA CCI+ Climate Change Initiative Phase 1, D2.1 Sea Ice Thickness Algorithm Theoretical Basis Document (ATBD), v.3.1, <https://climate.esa.int/en/projects/sea-ice/Sea-Ice-Key-Documents/>, 2021.
- 1335 Paul, S., Hendricks, S., Skourup, H., Sallila, H., Rinne, E., and Lavergne, T.: The ESA CCI Sea-Ice Thickness CDR: Current State and Evolutions, in: ESA Living Planet Symposium 2022, Bonn, 2022.
- Perovich, D., Richter-Menge, J., and Polashenski, C.: Observing and understanding climate change: Monitoring the mass balance, motion, and thickness of Arctic sea ice, <http://imb-crrl-dartmouth.org>, 2022.
- 1340 Petty, A. A., Keeney, N., Cabaj, A., Kushner, P., and Bagnardi, M.: Winter Arctic sea ice thickness from ICESat-2: upgrades to freeboard and snow loading estimates and an assessment of the first three winters of data collection, *The Cryosphere*, 17, 127–156, <https://doi.org/10.5194/tc-17-127-2023>, 2023.
- Planck, C., Perovich, D., and Light, B.: A Synthesis of Observations and Models to Assess the Time Series of Sea Ice Mass Balance in the Beaufort Sea, *Journal of Geophysical Research: Oceans*, 125, <https://doi.org/10.1029/2019JC015833>, 2020.
- 1345 Polashenski, C., Perovich, D., Richter-Menge, J., and Elder, B.: Seasonal ice mass-balance buoys: adapting tools to the changing Arctic, *Annals of Glaciology*, 52, 18–26, <https://doi.org/10.3189/172756411795931516>, 2011.
- Quartly, G. D., Rinne, E., Passaro, M., Andersen, O. B., Dinardo, S., Fleury, S., Guillot, A., Hendricks, S., Kurekin, A. A., Müller, F. L., Ricker, R., Skourup, H., and Tsamados, M.: Retrieving Sea Level and Freeboard in the Arctic: A Review of Current Radar Altimetry Methodologies and Future Perspectives, *Remote Sensing*, 11, <https://doi.org/10.3390/rs11070881>, 2019.
- 1350 Richter-Menge, J., Gascard, J.-C., and Andersen, S.: State of the Arctic Sea Ice Cover, *EOS Transactions American Geophysical Union*, 87, 253–260, <https://doi.org/10.1029/2006EO250002>, 2006a.
- Richter-Menge, J. A., Perovich, D. K., Elder, B. C., Claffey, K., Rigor, I., and Ortmeier, M.: Ice mass-balance buoys: a tool for measuring and attributing changes in the thickness of the Arctic sea-ice cover, *Annals of Glaciology*, 44, 205–210, <https://doi.org/10.3189/172756406781811727>, 2006b.
- 1355 Rothrock, D. A. and Wensnahan, M.: The Accuracy of Sea Ice Drafts Measured from U.S. Navy Submarines, *Journal of Atmospheric and Oceanic Technology*, 24, 1936–1949, <https://doi.org/10.1175/JTECH2097.1>, 2007.
- Sallila, H., Farrell, S. L., McCurry, J., and Rinne, E.: Assessment of contemporary satellite sea ice thickness products for Arctic sea ice, *The Cryosphere*, 13, 1187–1213, <https://doi.org/10.5194/tc-13-1187-2019>, 2019.
- SCICEX: Science Ice Exercise Data Collection. Boulder, Colorado USA: National Snow and Ice Data Center, <https://doi.org/10.7265/N5930R3Z>, 2009, 2014.
- 1360 Stroeve, J., Liston, G. E., Buzzard, S., Zhou, L., Mallett, R., Barrett, A., Tschudi, M., Tsamados, M., Itkin, P., and Stewart, J. S.: A Lagrangian Snow Evolution System for Sea Ice Applications (SnowModel-LG): Part II—Analyses, *Journal of Geophysical Research: Oceans*, 125, e2019JC015900, <https://doi.org/10.1029/2019JC015900>, 2020.
- Sumata, H.: Monthly sea ice thickness distribution in Fram Strait [Data set], <https://doi.org/https://doi.org/10.21334/npolar.2022.b94cb848>, 2022.
- 1365

- Sumata, H., Divine, D., and de Steur, L.: Monthly mean sea ice draft from the Fram Strait Arctic Outflow Observatory since 1990., <https://doi.org/10.21334/npolar.2021.5b717274>, 2021.
- Taylor, J. R.: *An Introduction to Error Analysis - the study of uncertainties in physical measurements*, University Science Books, California, United States of America, 2nd. ed., 1939.
- 1370 Tilling, R. L., Ridout, A., and Shepherd, A.: Estimating Arctic sea ice thickness and volume using CryoSat-2 radar altimeter data, *Advances in Space Research*, 62, 1203–1225, <https://doi.org/10.1016/j.asr.2017.10.051>, the CryoSat Satellite Altimetry Mission: Eight Years of Scientific Exploitation, 2018.
- U.S. Fleet: *Polar Icebreakers in a Changing World*, chapter 7 icebreaking environments and challenges to U.S. Fleet, <https://doi.org/10.17226/11753>, [Online; accessed 2023-07-29], 2007.
- 1375 von Abedyll, L., Kubiczek, J. M., von Bock und Polach, F., and Haas, C.: Sea ice thickness, ice loads, and navigability during the North Pole cruise CC110823 of Le Commandant Charcot in August 2023, Cruise report, Alfred Wegener Institute, Helmholtz Centre for Polar and Marine Research, Bremerhaven, Germany, 2024.
- von Albedyll, L., Haas, C., and Grodofzig, R.: EM-Bird ice thickness measurements in the Transpolar Drift during MOSAiC 2019/2020, part 1, <https://doi.org/10.1594/PANGAEA.934578>, 2021.
- 1380 Warren, S. G., Rigor, I. G., Untersteiner, N., Radionov, V. F., Bryazgin, N. N., Aleksandrov, Y. I., and Colony, R.: Snow Depth on Arctic Sea Ice, *Journal of Climate*, 12, 1814 – 1829, [https://doi.org/10.1175/1520-0442\(1999\)012<1814:SDOASI>2.0.CO;2](https://doi.org/10.1175/1520-0442(1999)012<1814:SDOASI>2.0.CO;2), 1999.
- Willatt, R., Laxon, S., Giles, K., Cullen, R., Haas, C., and Helm, V.: Ku-band radar penetration into snow cover on Arctic sea ice using airborne data, *Annals of Glaciology*, 52, 197–205, <https://doi.org/10.3189/172756411795931589>, 2011.
- Worby, A., Allison, I., and Dirita, V.: ANTARCTIC CRC COOPERATIVE RESEARCH CENTRE FOR THE ANTARCTIC AND SOUTH-  
 1385 ERN OCEAN ENVIRONMENT; A Technique for Making Ship-Based Observations of Antarctic Sea Ice Thickness and Characteristics PART I, Observational Technique and Results PART II User Operating Manual, <http://www.antarc.utas.edu.au/aspect.>, 1999.
- Worby, A. P., Geiger, C. A., Paget, M. J., Van Woert, M. L., Ackley, S. F., and Deliberty, T. L.: Thickness Distribution of Antarctic Sea Ice, *Journal of Geophysical Research*, 113, 5–92, <https://doi.org/10.1029/2007JC004254>, 2008a.
- Worby, A. P., Geiger, C. A., Paget, M. J., Woert, M. L. V., Ackley, S. F., and DeLiberty, T. L.: ASPeCt data — antarctic sea ice processes  
 1390 climate (ASPeCt), <https://aspect.antarctica.gov.au/data.html>, [Online; accessed 2023-07-12], 2008b.
- Xu, S., Zhou, L., and Wang, B.: Variability scaling and consistency in airborne and satellite altimetry measurements of Arctic sea ice, *The Cryosphere*, 14, 751–767, <https://doi.org/10.5194/tc-14-751-2020>, 2020.
- Zeliang Liao, Bin Cheng, J. Z. T. V. K. J. Q. Y. Y. Y. L. Z. Z. L. Y. Q. and Cheng, X.: Snow depth and ice thickness derived from SIMBA ice mass balance buoy data using an automated algorithm, *International Journal of Digital Earth*, 12, 962–979,  
 1395 <https://doi.org/10.1080/17538947.2018.1545877>, 2019.
- Øyvind, F. and Sundfjord, A.: Sea ice draft and sea ice and upper ocean velocity from mooring observations in the northwestern Barents Sea from 2018 onward, <https://doi.org/10.21334/NPOLAR.2024.C19E8A7D>, 2025.

## Appendix A: Acronym table

**Table A1.** Acronym table - for Acronyms given to campaigns included in the CCI SIT RRDP, see Table 1.

<b>Abbreviation</b>	<b>Definition</b>
AEM	Airborne Electromagnetic (measurements)
ATM	Airborne Topographic Mapper
CCI	Climate Change Initiative
CDR	Climate Data Record
CRISTAL	Polar Ice and Snow Topography Altimeter
CryoVEx	CryoSat Validation Experiment
EASE2	Equal-Area Scalable Earth grid, version 2
ECV	Essential Climate Variable
EM	Electromagnetic
Envisat	Environmental Satellite
ERS-1/2	European Remote Sensing Satellites 1 and 2
ESA	European Space Agency
FDR4ALT	Fundamental Data Records for Altimetry
FRB	Freeboard
FRM	Fiducial Reference Measurements
GNSS	Global Navigation Satellite System
HEM	Helicopter Borne Electromagnetic (measurements)
ICESat	Ice, Cloud and land Elevation Satellite
LiDAR	Light Detection and Ranging
NASA	National Aeronautics and Space Administration
NH	Northern Hemisphere
NSIDC	National Snow and Ice Data Center
RA	Radar Altimeter
RRDP	Round Robin Data Package
SAR	Synthetic Aperture Radar
SH	Southern Hemisphere
SD	Snow Depth
SID	Sea Ice Draft
SIRAL	SAR interferometric radar altimeter
SIT	Sea Ice Thickness
ULS	Upward Looking Sonar
WGS	World Geodetic System

## Appendix B: Statistics of comparison between satellite and reference data

- 1400 The following tables show statistics ~~linked~~related to the comparison of CCI SIT RRDP ~~to~~with Envisat CDR and CryoSat-2 CDR. The comparison includes the standard deviation (std) and average of the reference and satellite data, respectively. The ~~Root Mean Square Error~~root mean square error (RMSE), Pearson's correlation coefficient (R) (only shown in the plots 6–9) and ~~Coefficient~~the coefficient of determination ( $R^2$ ) for both the best fit and ~~for the~~ (the fit  $y = x$ ) fit, as would be the ideal case.
- 1405 Due to the nature of  $R^2$  being a calculation between a true value and a fit, this calculation is highly sensitive to which variable is ~~being~~ examined. In the case presented below the ( $R^2$ ) value is calculated between the satellite CDRs and the predictions.

**Table B1.** Statistics of results CryoSat-2, LS= Least Squares, ODR= Orthogonal Distance Regression

Campaign	variable	Avg. (obs)	Avg. (CS-2)	std. (obs)	std. (CS-2)	bias (obs-stad)	$R^2$ ODR	RMSE ODR	$R^2$ LS	RMSE LS	$R^2$ (y = x)	RMSE (y = x)	points	ODR fit
		[m]	[m]	[m]	[m]	[m]	[m]	[m]	[m]	[m]		[m]		
BGEP	SID	0.94	1.16	0.43	0.44	-0.22	0.47	0.32	0.48	0.32	0.15	0.41	193	y=0.75 x + 0.46
	SID	0.65	0.74	0.34	0.32	-0.10	0.04	0.32	0.12	0.30	-0.45	0.39	19	y=0.60 x + 0.37
	SID	1.59	1.54	0.42	0.88	0.05	-8679.13	82.27	0.02	0.87	-0.36	1.03	154	y=194.45 x + -307.50
	SID	2.49	1.97	0.57	0.39	0.52	0.36	0.32	0.37	0.31	-2.10	0.69	97	y=0.51 x + 0.67
	SID	1.08	0.83	0.50	0.23	0.25	0.33	0.19	0.34	0.18	-3.49	0.48	67	y=0.31 x + 0.50
AEM: (AWI + MOSAIC + NICE)	SIT	2.43	2.55	1.06	1.22	-0.12	0.23	1.07	0.33	1.00	0.23	1.07	650	y= 1.01 x + 0.10
	SIT	0.50	1.01	0.45	0.73	-0.51	0.09	0.75	0.10	0.69	-0.48	0.89	560	y=0.33 x + 0.56
	SIT	1.71	1.49	0.78	0.67	0.22	0.02	0.73	0.02	0.66	-1.11	0.97	1238	y=0.16 x + 0.92
	SIT	1.45	1.61	0.46	0.59	-0.15	0.42	0.50	0.44	0.44	0.36	0.47	729	y=0.67 x + 0.41
	SIT	2.46	2.43	1.05	0.94	0.03	0.21	0.84	0.35	0.76	0.07	0.91	6465	y=0.86 x + 0.32
AEM-AWI	SD	0.14	0.24	0.10	0.08	-0.11	-1.06	0.14	0.29	0.07	-1.77	0.14	155	y= 1.44 x + 0.12
	SD	0.30	0.25	0.21	0.08	0.05	0.02	0.08	0.05	0.08	-5.96	0.21	1302	y=0.16 x + 0.19
	SD	0.10	0.13	0.11	0.08	-0.03	-2.35	0.19	0.32	0.07	-0.39	0.10	388	y= 1.69 x + 0.07
	SD	0.26	0.23	0.23	0.08	0.03	-0.01	0.08	0.00	0.08	-8.71	0.24	1626	y=0.04 x + 0.20
	SD	0.19	0.29	0.07	0.07	-0.09	-8.97	0.23	0.05	0.07	-2.13	0.13	729	y= 3.33 x + -0.33
OIB	SD	0.23	0.30	0.11	0.08	-0.08	-1.78	0.16	0.31	0.07	-1.29	0.12	7498	y= 1.48 x + 0.06
	FRB	0.19	0.24	0.12	0.13	-0.05	0.14	0.12	0.21	0.11	-0.21	0.14	6501	y=0.74 x + 0.07
	SIT	0.62	1.34	0.44	0.56	-0.71	0.00	0.56	0.00	0.56	-2.20	1.00	488	y=0.05 x + 1.30
	SD	0.20	0.19	0.19	0.07	0.01	-2.57	0.14	0.08	0.07	-5.48	0.18	491	y=0.73 x + 0.09
	SD	0.66	0.25	0.38	0.08	0.41	-0.07	0.10	0.05	0.08	-48.10	0.57	979	y= -0.12 x + 0.28

**Table B2.** Statistics of results Envisat, LS= Least Squares, ODR= Orthogonal Distance Regression

Campaign	variable	Avg. (obs) [m]	Avg. (ENV) [m]	std. (obs) [m]	std. (ENV) [m]	bias (obs-sat) [m]	$R^2$ ODR	RMSE ODR [m]	$R^2$ LS	RMSE LS [m]	$R^2(y=x)$	RMSE( $y=x$ )	points	ODR fit
BGEP	SID	1.12	1.09	0.49	0.40	0.03	0.57	0.26	0.57	0.26	0.33	0.32	183	$y=0.66x+0.36$
	SID	2.16	1.53	0.65	0.66	0.64	-0.59	0.83	0.06	0.64	-1.45	1.03	140	$y=1.05x-0.75$
	SCICEX	1.27	1.14	0.86	0.38	0.12	0.52	0.26	0.53	0.26	-1.97	0.65	100	$y=0.36x+0.69$
	TRANSDRIFT	1.43	0.85	0.70	0.31	0.58	0.50	0.22	0.53	0.22	-5.10	0.78	55	$y=0.40x+0.30$
AEM-AWI	SIT	1.69	1.39	1.03	0.76	0.29	0.13	0.72	0.20	0.67	-0.78	1.01	473	$y=0.53x+0.37$
	SIT	0.48	0.61	0.58	0.15	-0.13	0.06	0.15	0.06	0.15	-13.30	0.58	39	$y=0.06x+0.58$
	IMB-CRREL	1.89	1.27	0.91	0.71	0.63	0.02	0.75	0.02	0.71	-2.00	1.24	497	$y=0.17x+0.69$
	OIB	2.29	1.88	0.93	0.76	0.41	-0.17	0.83	0.10	0.73	-1.00	1.08	733	$y=0.69x+0.34$
ASSIST	SD	0.05	0.12	0.02	0.04	-0.08	-1.05	0.07	0.31	0.04	-2.58	0.08	39	$y=4.04x-0.04$
	IMB-CRREL	0.21	0.18	0.15	0.08	0.03	0.01	0.08	0.02	0.08	-3.43	0.16	768	$y=0.11x+0.14$
	OIB	0.17	0.25	0.10	0.09	-0.08	-0.98	0.13	0.33	0.07	-0.84	0.12	1155	$y=1.52x+0.04$
	AEM-AWI-FRB	0.03	0.15	0.01	0.05	-0.12	-4830.56	3.83	0.00	0.05	-5.49	0.13	39	$y=376.03x-11.33$
AWI-ULS-SH	FRB	0.19	0.17	0.14	0.11	0.02	-0.04	0.11	0.03	0.10	-1.34	0.16	748	$y=0.32x+0.10$
	SID	0.93	1.26	0.61	0.85	-0.32	-0.63	1.13	0.06	0.82	-0.33	0.98	216	$y=1.47x+0.21$
	ASPeCt	0.72	1.34	0.51	0.69	-0.62	0.01	0.69	0.01	0.69	-1.16	1.02	734	$y=0.20x+1.18$
	OIB-SH	0.45	0.39	0.24	0.17	0.06	0.21	0.16	0.24	0.15	-0.68	0.23	363	$y=0.49x+0.14$