

CAMELS-AUS v2: updated hydrometeorological timeseries and landscape attributes for an enlarged set of catchments in Australia

Keirnan J. A. Fowler¹, Ziqi Zhang¹, Xue Hou^{1,a}

¹Department of Infrastructure Engineering, University of Melbourne, Parkville, Victoria, Australia

5 ^anow at: Department of Energy, Environment, and Climate Action, East Melbourne, Victoria, Australia

Correspondence to: Keirnan Fowler (fowler.k@unimelb.edu.au)

Abstract. This paper presents Version 2 (v2) of the Australian edition of the Catchment Attributes and Meteorology for Large-sample Studies (CAMELS) series of datasets. Since publication in 2021, CAMELS-AUS (Australia) has served as a resource for the study of hydrological change, arid-zone hydrology, and hydrological model improvement. In this update, the dataset
10 has been significantly enhanced both temporally and spatially. The new dataset comprises information for more than twice as many catchments (561 compared to 222). The streamflow and climatic information have been updated a further eight years (2022 compared to 2014). Lastly, the catchment attribute information has been improved, particularly with respect to hydrological statistics (signatures) and uncertainty in streamflow. Together, these updates make CAMELS-AUS v2 a more comprehensive and current resource for hydrological research and applications. CAMELS-AUS v2 is freely downloadable
15 from <https://zenodo.org/doi/10.5281/zenodo.12575680> (Fowler et al., 2024).

1 Introduction

Large-sample hydrology plays a crucial role in understanding hydrological processes across diverse catchments, and is essential for developing generalisable insights in hydrology (Gupta et al., 2014). The large sample approach enhances the robustness and generalizability of hydrological models, contributes to schemes for prediction in ungauged or poorly gauged
20 regions, and contributes to the development of machine learning methods in hydrology (Addor et al., 2019; Kratzert et al., 2023). Among many large sample hydrology datasets and projects, the CAMELS initiative (Catchment Attributes and Meteorology for Large-sample Studies) is a prominent example, offering comprehensive data for various regions including the United States (Newman et al., 2015; Addor et al., 2017), Great Britain (Coxon et al., 2020), Chile (Alvarez-Garreton et al., 2018), Brazil (Chagas et al., 2020), France (Delaigue et al., 2022), Switzerland (Höge et al., 2023), Sweden (Teutschbein,
25 2024) and India (Mangukiya et al., 2024). These datasets provide streamflow data, climatic information suitable as forcing data for hydrological modelling, and catchment attributes such as catchment properties and hydroclimatic statistics.

This paper presents the second version of CAMELS-AUS, the CAMELS dataset for Australia. Since publication in 2021 (Fowler et al., 2021a), CAMELS-AUS has supported a wide variety of hydrological studies, including development and testing

30 of machine learning techniques (Kapoor et al., 2023), exploring properties and causes of hydrological drought (Fowler et al., 2022; Brunner and Stahl, 2023) and road-testing methods for rainfall-runoff and river system modelling (Fowler et al., 2021b; John et al., 2021; McInerney et al., 2024). A particular focus has been the study of evapotranspiration, as CAMELS-AUS is one of few large sample hydrology datasets providing several potential evapotranspiration formulations (Abbas et al., 2022; Kim et al., 2022; Niu et al., 2024). Many studies have combined CAMELS-AUS with other datasets to create near-global samples of catchments (e.g. McMillan et al., 2022; Althoff and Destouni, 2023; Chen and Ruan, 2023; Wang et al., 2023; Lei et al., 2024; Rasiya Koya and Roy, 2024; Van Oorschot et al., 2024). Responding to the same imperative to create combined datasets, the CAMELS datasets have recently been merged into a global freely available dataset, termed CARAVAN, with a particular focus on consistency and inter-continental comparability (Kratzert et al., 2023).

2 Rationale for updating the dataset

40 Given the wide spectrum of research activity supported by CAMELS-AUS, it is highly desirable to update and expand the dataset where possible. The current expansion has been facilitated by recent updates to the CAMELS-AUS source datasets, which have made streamflow information easily available for a wider set of catchments. Specifically, the Hydrological Reference Stations (HRS) dataset, maintained by Australia's Bureau of Meteorology (BOM), which provided the streamflow component of CAMELS-AUS v1, has been updated with a significant increase in the number of catchments. Note that the contribution of the HRS to CAMELS-AUS is limited to streamflow data, while non-streamflow data (hydroclimatic timeseries and catchment attributes) are sourced from elsewhere. An additional factor is the opportunity to augment the catchment set via a separate dataset which has become available since publication of CAMELS-AUS v1. This second dataset (Saft et al., 2023) has been used by several hydrological studies in Australia (see list in Section 3.2.2). Although most Saft et al. (2023) catchments are also in HRS, including all such catchments gives users the option to adopt the same selection of catchments as these earlier studies, improving comparability between different research efforts (see Section 3.2.2. for more details).

The remainder of this paper is concerned with describing the changes between v1 and v2 in more detail (Section 3), in addition to providing guidance and advice for users of the new dataset (Section 4). The appendix provides tables with information on each hydrometeorological timeseries and each catchment attribute, highlighting new or altered information for this update.

55 3 Dataset changes

3.1 Overview of changes

The following table summarises the changes made to CAMELS-AUS for v2. Aside from the additional catchments, several minor changes have been made, some opportunistically as better information has become available, while others are responding to changes in source datasets.

60 **Table 1: Summary of changes to CAMELS-AUS dataset for version 2**

Change	Description	Reason and/or motivation	Section
Increased number of catchments	The number of catchments has increased from 222 to 561	The source dataset for the streamflow data has itself been expanded and updated; in addition, a second streamflow database has been incorporated.	2; 3.2; Fig. 1
Updated timeseries data	The data timeseries have been extended so their end date is now March 2022 (previously December 2014)		3.3; Fig. 2
Different hydrological signatures	The set of hydrological statistics (signatures) has been expanded from 13 to 39.	A freely available toolbox for signature calculation has been published, which is easily adopted for CAMELS-AUS.	3.4.1
Different metrics regarding streamflow uncertainty	The metrics characterising streamflow uncertainty have been improved.	The study providing the original characterisation has been updated and improved with better rating curve information.	3.4.2
Single, not multiple, solar radiation product	Omission of one of two solar radiation timeseries products that was provided with CAMELS-AUS v1	One of the source datasets for climate information, namely the Australian Gridded Climate Dataset, has stopped producing their solar radiation product.	3.5.1
Inclusion of additional vapour pressure timeseries product	One of the vapour pressure timeseries products has split into two products: one quantifying vapour pressure in the morning and the other in the afternoon.	This responds to changes to the Australian Gridded Climate Dataset.	3.5.1

3.2 Enlarging the selection of catchments

As mentioned, the primary change to the dataset is an increase in the number of catchments from 222 to 561. All the original catchments have been retained, with additional catchments originating from:

- 65
- An update to the source dataset of CAMELS-AUS v1, namely the Hydrological Reference Stations compiled by Australia's Bureau of Meteorology;
 - Inclusion of additional catchments from the dataset of Saft et al. (2021), which has supported several hydrological studies, as outlined below.

These data sources are each discussed in more detail in the following subsections.

70

Figure 1 shows the spatial distribution of the updated set. This figure demonstrates that the updated set provides denser coverage overall, in addition to new-found coverage for some areas of Australia, notably in the west.

3.2.1 Hydrologic reference stations (HRS) update

The HRS, first published in 2013, was updated in 2015 (HRS-2015—the basis for CAMELS-AUS v1) and subsequently in 75 2020 and 2022. HRS-2020 was notable for considering a wider range of catchments than before while also tightening the rules

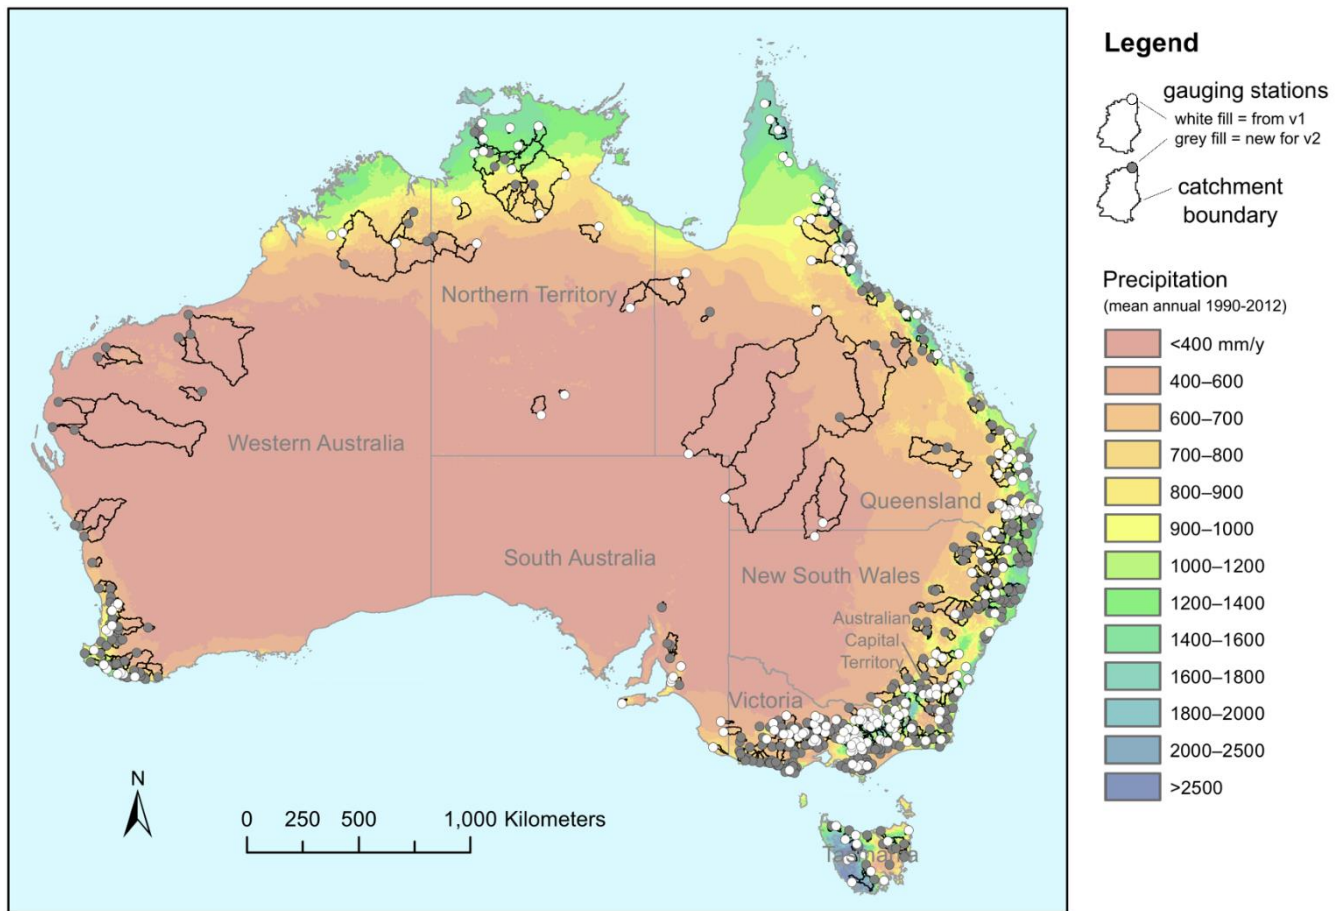


Figure 1: Map after Fowler et al. (2021a) showing location of the CAMELS-AUS flow gauging stations and catchments, distinguishing v1 catchments from those added for v2. Shown along with mean annual precipitation (from Jones et al., 2009) and Australian states and territories.

80

for station selection, as discussed below. HRS-2015 had 222 catchments while HRS-2020 saw the number of catchments increase to 467. A further update in 2022 (HRS-2022) extended the streamflow timeseries without altering catchment selection, and this latest update is adopted for CAMELS-AUS v2.

85

Note that all actions described in this subsection (3.2.1) were taken by Australia’s Bureau of Meteorology, not the authors. Further information on these actions can be found at http://www.bom.gov.au/water/hrs/update_2020.shtml (last access 3rd December, 2024).

90

When station selection was undertaken for HRS-2013, data quality information such as quality codes and rating curves were not available for some catchments. For affected catchments, the issue was not that this information did not exist, but rather

that it was not provided by the data owners (the states and territories of Australia) in time for the selection process. This led to a relatively smaller sample of catchments being initially considered for HRS-2013. Later, during the selection process for HRS-2020, this information was available for a much wider set of catchments. In addition, the selection requirements—namely the requirements of 30 years’ record with less than 5% missing data—were more easily met due to the passage of time between the two updates.

However, two rules were more restrictive than before, namely:

- no more than 25% of measured flow volume could be extrapolated above the highest available rating; and
- missing data could constitute a maximum of 10% by volume (where volumes on missing days were estimated via a rainfall runoff model).

The first of these rules was new, whereas the second one was a redefinition of an existing missing data rule.

Of the 222 HRS-2015 stations, 179 were included in HRS-2020, while 43 failed the new selection guidelines. In addition to the 179 catchments from the previous version, HRS-2020 included 288 new catchments that were not previously included, for a total of 467.

Despite the omission of these 43 failed catchments from HRS-2020, they are included in CAMELS-AUS v2. Partly, this is to allow for users of CAMELS-AUS v1 who may wish to continue to use the same set of catchments as before. More broadly, while we do not intend to trivialise the issues of missing data or flow extrapolation, we prefer to provide information relevant to these issues directly to CAMELS-AUS users (eg. uncertainty information, Section 3.4.2) and then let users decide upon the inclusion or otherwise of such catchments, depending on study context. However, we do provide some guidance on this issue in Section 4.2.

Given the above, the net effect of the 2020 HRS update on the CAMELS-AUS dataset is the addition of 288 catchments to CAMELS-AUS v2 compared to v1, while no catchments are removed. Note that the adopted basis for CAMELS-AUS v2 is the most recent HRS version (HRS-2022), which updated timeseries data without altering HRS-2020 catchment selection.

3.2.2 Saft et al. (2023) dataset

The Saft et al. (2023) dataset was compiled with the support of the State Government of Victoria and covers only that state. It is a significant dataset in the sense that it has been used by several hydrological studies, including Peterson et al. (2021), Trotter et al. (2021, 2023, 2024), Trotter (2023), Gardiya Weligamage et al. (2021, 2023, 2024) and Fowler et al. (2022). Given the importance of those studies in examining recent unusual hydrological behaviour in response to multi-year drought, we wish to give users the option to adopt the same selection of catchments as the earlier studies, and thus we include any catchment in the

Saft dataset not otherwise present in CAMELS-AUS v1 or HRS-2020—a total of 51 catchments. This is done using the streamflow data provided by Saft et al. (2023) for those 51 catchments.

125

The rules used for catchment selection are listed in Peterson et al. (2021). In summary, the criteria include consideration of upstream reservoirs and diversions, which can sum to a maximum of 5% of mean annual streamflow. Separate criteria were framed around availability of high-quality data associated with the multi-year drought that formed the focus of all the above studies, called the "Millennium" Drought (1997-2010). Catchments were eliminated with less than 15 years, 7 years or 5 years of streamflow data prior to, during or after this drought, respectively.

130


3.2.3 Summary of changes to catchment selection

In summary, CAMELS-AUS v1 had 222 catchments, to which 288 catchments have been added from the 2020 HRS update, and a further 51 have been added from Saft et al. (2023). Thus, the total number of catchments in CAMELS-AUS v2 is 561.

3.3 Updating timeseries to 2022

Relative to the temporal coverage of CAMELS-AUS v1 (to 2014), the new source datasets both have more recent data. Timeseries data in CAMELS-AUS v2 are now provided up to 31st March 2022. Figure 2 shows the range of record length across the updated catchment sample, along with missing data proportions for different periods.

135

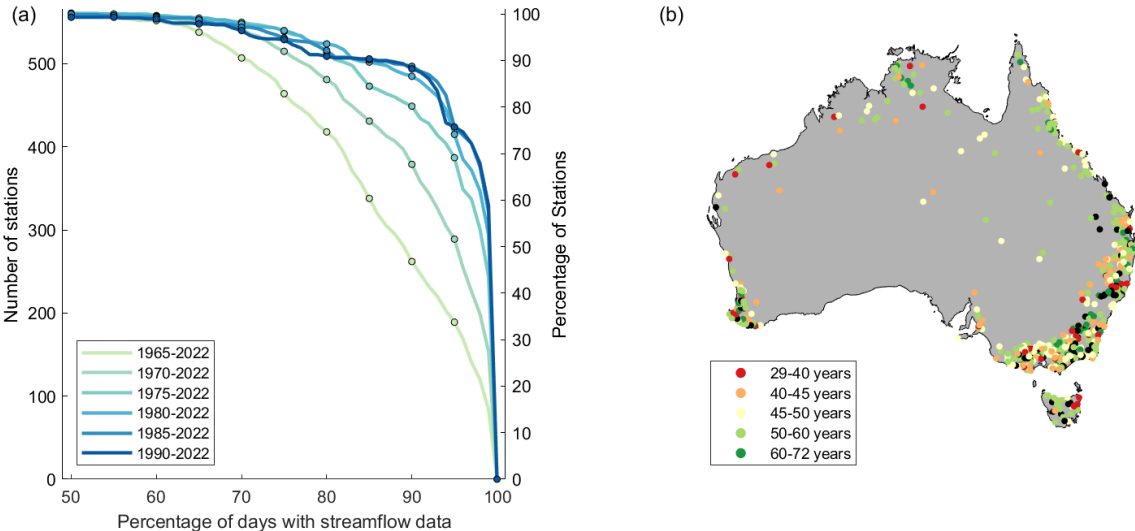

140

Figure 2: Figure after Fowler et al. (2021a) and Coxon et al. (2020) showing (a) number of stations with percentage of available streamflow data for different periods and (b) length of the flow time series for each gauge.

3.4 Improved attributes

Most of the attributes remain unchanged, but the following subsections outline the exceptions, where the formulation or calculation of the attribute did change relative to Version 1. Figure 3 shows the spatial distribution of selected attributes, using the updated methods and catchment set.

3.4.1 Hydrological signatures

In the new version of CAMELS-AUS, we have transitioned to using TOSSH (Toolbox for Streamflow Signatures in Hydrology; Gnann et al., 2021) for calculating streamflow statistics (signatures). TOSSH offers a comprehensive and standardized approach to signature calculations, incorporating both the 13 signatures used in CAMELS-AUS version 1 by Addor et al. (2018) and additional signatures from related research (e.g. Sawicz et al., 2011; Euser et al., 2013; McMillan, 2020).

We ran all the calculation functions in TOSSH and obtained a unique set of 49 streamflow signatures (note the number of signatures in Gnann et al. (2021) appears greater, but some functions produce overlapping results). Among these, 10 signatures have multiple outputs, so we stored only the 39 single-output signatures in the dataset attribute table. For users who need the complete set, we also provided a .mat file that includes all outputs of TOSSH including the 49 signatures and associated information such as run-time messages. For easy use, we categorized the 39 single-output signatures into six categories based on Poff et al. (1997): magnitude, frequency, duration, timing, rate of change, and other. Within each category, the signatures are ordered alphabetically (see Table A3 for details).

3.4.2 Metrics of streamflow uncertainty

We have adopted the new method proposed by McMahon et al. (2024) for streamflow uncertainty assessment. This method offers a straightforward and practical approach for estimating uncertainty in daily streamflow data. For CAMELS-AUS v1, the uncertainty information was from an earlier study (McMahon and Peel, 2019) which was not provided with the rating curves used for flow estimation (only the raw data), and thus was forced to use a method (Chebyshev polynomials) to estimate its own rating curves. Since then, the Bureau of Meteorology organised for the same authors to be supplied with the actual rating curves, leading to a new study (McMahon et al., 2024) using this updated information. McMahon et al. (2024) post-processed their data for 459 stations in CAMELS-AUS v2 to derive the following statistics (Table A3): (i) number of unique rating curves; (ii) root mean square error (RMSE) of the gauged versus rating curve discharges as a percentage of the mean discharge for all non-zero gauged values, for the lower half of non-zero gauged values, and for the upper half of non-zero gauged values; (iii) the percentage of days for which the published discharge values exceed the maximum gauged discharge; and (iv) the percentage of the total discharge volume that is above the maximum gauged discharge.

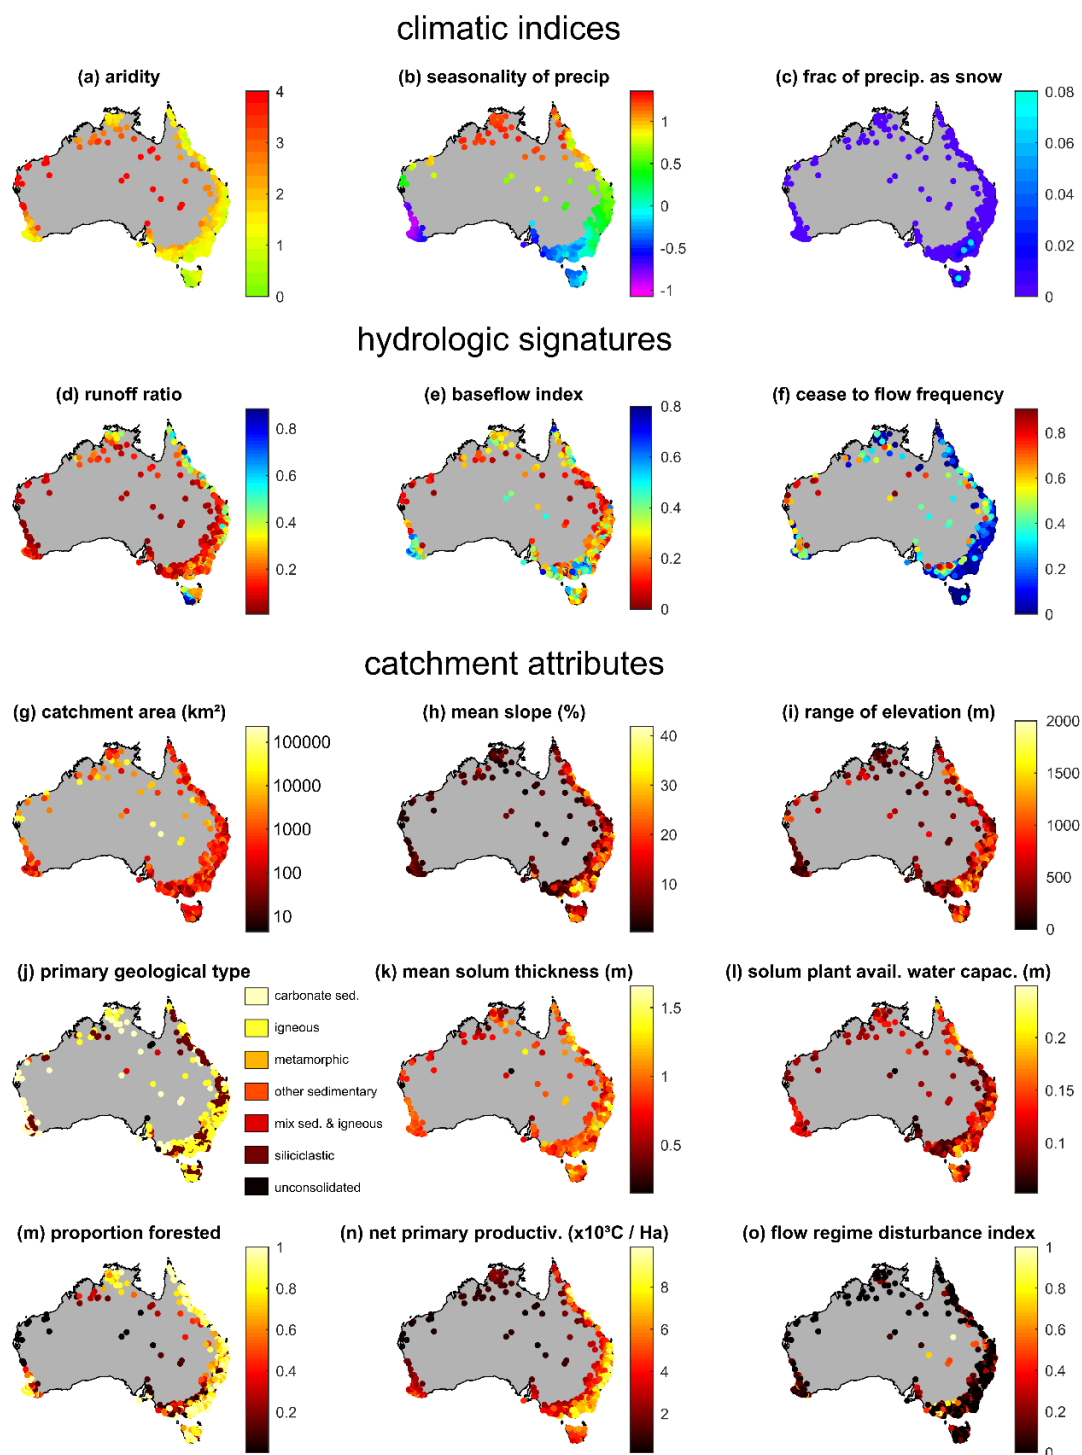


Figure 3: Maps of selected climatic indices (a–c), hydrologic signatures (d–f) and other catchment attributes (g–o). For definitions, see Tables A3 and A4—for easy identification, attributes shown here are written in bold in those tables.

3.5 Other changes

3.5.1 Changes to hydrometeorological data

A significant source of gridded climate information is the Bureau of Meteorology’s Australian Gridded Climate Dataset (AGCD). This superseded an earlier program called the Australian Water Availability Project (AWAP). Thus, whereas v1 of CAMELS-AUS referred to AWAP, v2 refers to AGCD instead. Regarding changes to the underlying methods:

- Our understanding is that no changes have been made to the underlying method in the case of temperature and precipitation data.
 - Significant investment was made to improve the monthly gridded precipitation dataset, as described in Evans et al. (2020). However, the monthly data is not included with CAMELS-AUS, and the improvement efforts have not affected the daily gridded precipitation dataset, the derivation of which is described by Jones et al. (2008).
- Regarding solar radiation, whereas AWAP provided solar radiation, the most recent update of AGCD (v1.0.1) no longer includes solar radiation data, but solar radiation data are still provided within CAMELS-AUS v2 from an alternate source (namely the Scientific Information for Land Owners (SILO) dataset, as it was in v1).
- Regarding vapour pressure, the AGCD now provides two variants of vapor pressure data collected at either 9:00 AM or 3:00 PM (Jones et al., 2009; <https://doi.org/10.25914/hjqj-0x55>, last accessed on 10 April 2024), and each are incorporated into CAMELS-AUS, as shown in Table A2.

4 User guidance and recommendations

Here we provide guidance for users on various issues and decisions to be made when using the updated dataset.

4.1 Karst topography

Karst topography, characterised by drainage systems such as sinkholes and caves, can significantly affect surface runoff. Thus, it is important to note any catchments that are affected. Karst topography is relatively rare in Australia, and as such, the relevant Geoscience Australia dataset (Geoscience Australia, 2008) reveals only twenty catchments contain any “carbonate sedimentary rock”. Of these, the only five that have more than 10% covered are 912105A (approximately 60% covered by this rock type), 912101A (50%), G8110004 (50%), 304040 (30%) and G9070142 (15%). This coverage should be considered when users are analysing hydrological information or modelling results from these catchments.

4.2 Decisions regarding catchment choice

Although the extra catchments are welcome in this dataset, the different quality standards applied among the source datasets does raise questions for users. For example, since many of the original catchments (from version 1) were subsequently

205 excluded from HRS2022 based on data quality rules, the question arises as to whether users should now avoid such catchments even though they are included in CAMELS-AUS v2. A key focus for the data quality rules is the degree of extrapolation of the rating curve, since this affects uncertainty. However, some studies can account for variable levels of uncertainty because they explicitly consider it in the study design (this could be done with reference to the CAMELS-AUS v1 and v2 attributes regarding uncertainty – see Section 3.4.2 above and Fowler et al., 2021a). For such studies, it is recommended that all 561
210 catchments are used. Furthermore, for studies that combine across several datasets, vetting the catchments may have limited value unless such vetting is done consistently across the other datasets, which might be difficult given that uncertainty information is different for different datasets (or omitted entirely). Ultimately, it is a question of whether the information content in those catchments outweighs the increased uncertainty in their data, and the answer to this question is context specific because it depends on how the data are being used. We recommend that researchers give due consideration to these matters,
215 including the option of using the smaller subset of 467 catchments from HRS2022.

Furthermore, some users of the dataset may seek a set of catchments that are "almost" natural (ie. mostly free of human impact). To identify such rivers, Stein et al. (2002) defined various indices of disturbance (see the "anthropogenic influences" section of Table A4). They suggested that the aggregate index (River Disturbance Index, or "river_di" in Table A4) should ideally be
220 below 0.01 for truly "wild" rivers, but this may be untenable for a large sample study since only 20 out of 561 CAMELS-AUS v2 catchments are under this threshold. Stein et al. (2002) also tested a threshold of 0.05, and this threshold provides a sample of 81 catchments which are relatively well spread over Australia's climatic zones (not shown). Thus, a threshold of 0.05 is recommended for users seeking a set of catchments that are "almost" natural. Lastly, note that a key factor that disqualifies many catchments is altered landuse relative to pre-European settlement; thus, studies seeking a larger sample size of "almost"
225 natural catchments might consider relaxing this criterion first.

4.3 Decisions regarding selection of forcing data for modelling

The next decision is the selection of forcing data—namely, which precipitation and which potential evapotranspiration product should be used for hydrological modelling? Whereas many large sample datasets have only one option, CAMELS-AUS has several, and in the interests of consistency between studies, it is useful to nominate which dataset is the preferred option.
230 For potential evapotranspiration, the AGDC provides no estimates and thus a SILO product must be adopted, but the question remains which formulation to adopt. Some formulations contain rather specific assumptions (regarding crops being grown) which may not be appropriate in broader contexts including natural catchments—this disqualifies the FAO56 short crop and the ASCE tall crop formulations. Other formulations are disqualified because they give no consideration to land-atmosphere feedbacks whereby evaporated water can change the properties of the overlying air mass. Such considerations are important
235 when modelling at catchment scale and greater, so this disqualifies the pan evaporation and Morton point potential estimates. The Morton Wet Environment Evaporation is recommended, as it avoids both these criticisms.

For precipitation, we feel either product is suitable for modelling purposes, but we recommend the AGCD gridded precipitation product over SILO. The SILO interpolation “is set to accurately reproduce the observed data” (Tozer et al., 2012), meaning that SILO matches its calibration gauges much more closely than AGCD. For example, Tozer et al. (2012) reported that the Nash Sutcliffe Efficiency scores exceed 0.99 in approximately half of the stations tested. Given each 0.05 degree grid cell covers an area of approximately 25 km² or 10 square miles, in our opinion it is unreasonable to expect that the gauged precipitation at a point will exactly match the areal average (particularly in areas with a high runoff ratio, which tend to be steeper). Thus, we recommend the method that does not require this exact matching in the interpolation, namely the AGCD. Nonetheless, it is noted that Tozer et al. (2012) reported that the SILO and AGDC datasets had similar accuracy when tested on gauges not included in the calibration, which is why either dataset is considered suitable for modelling. It is noted that SILO has recently increased in popularity in academic studies due to a period during which AGDC data was temporarily placed behind a paywall, but pleasingly this has now been retracted and both datasets are once again freely available.

Regardless of which gridded dataset is adopted, it is noted that the quality of the precipitation data changes over time, due to the sensitivity of interpolated precipitation to gauge network density, among other things. A comparison conducted by Lucas Pamminger (Monash University), which examined the degree of agreement between AGCD and SILO precipitation estimates, indicates greater agreement post-1960 for many catchments. This may reflect that the gauging network density approached its zenith around this time. It is recommended that studies use post-1960 precipitation data if possible, and employ caution if earlier data are required. Note that the Pamminger analysis is included in the repository, in the folder entitled “*Comparison of AGCD and SILO precipitation*”.

To summarise, we recommend for standard users of this data set to use the SILO Morton Wet Environment Evaporation and the AGDC precipitation data as forcing data for hydrological modelling studies.

5 Data availability

The CAMELS-AUS dataset is freely available for download from the Zenodo online repository at <https://zenodo.org/doi/10.5281/zenodo.12575680> (Fowler et al., 2024). The dataset (along with datasets on which it is based) is subject to a Creative Commons BY (attribution) licence agreement (<https://creativecommons.org/licenses/>, last access: 28 June 2024).

6 Conclusion

This paper presents an updated version of the CAMELS-AUS dataset, in which the temporal coverage has been extended to 2022 and the spatial coverage has been expanded to 561 catchments. Changes in hydrometeorological data and catchment

attributes make this dataset more comprehensive, current, and valuable for research. These updates provide critical support for hydrological research and water resource management, facilitating the study of Australia's unique and variable hydroclimate for researchers globally.

7 Appendices

Table A1: Basic catchment information provided in the attribute table of CAMELS-AUS v2. Changes compared to CAMELS-AUS v1 are written in italics. Variables that are mapped in Figure 3 are written in bold font.

Short name	Description	Data source / notes
station_id	Station ID used by the Australian Water Resources Council.	Source dataset (HRS-2022; HRS-2015; or Saft et al., (2023))
station_name	River name and station name	
drainage_division	Drainage division, of the 13 defined by the BOM.	Bureau of Meteorology (BOM) website www.bom.gov.au and also provided in “bonus data” folder.
river_region	River region, of the 218 defined by the BOM.	
notes	General notes about data issues and/or catchment area calculations	This study For daystart_Q, see Jian et al., (2017)
lat_outlet	Latitude and longitude at outlet. Note, in most cases this will be slightly different to the BoM published value because most outlets needed to be moved onto a digital streamline in order to facilitate flow path analysis.	
long_outlet		
lat_centroid	Latitude and longitude at centroid of the catchment.	
long_centroid		
map_zone	Map zone used to calculate catchment area (function of longitude)	
catchment_area	Area of upstream catchment in km²	
state_outlet	Indicates which state or territory of Australia the outlet is within	
state-alt	If the catchment crosses a state or territory boundary, the alternative state or territory is listed here, otherwise “n/a”	
daystart	Time (UTC) for midnight local standard time (for state_outlet). This is the day start time for T _{max} and T _{min} (see Fowler et al., 2021a).	
daystart_P	Time (UTC) for 9am local standard time (for state_outlet). 9am is when once-per-day precipitation measurements are reported (see Fowler et al., 2021a).	
daystart_Q	Time (UTC) for streamflow day start time, assuming local standard time for state_outlet. This varies by state/territory (Fowler et al., 2021a).	
nested_status	"Not nested" indicates the catchment is not contained within any other. "Level1" means it is contained within another, except in cases where it is contained in another "Level1" catchment in which case it is marked "Level2". Same for “Level 3” and “Level 4”.	
next_station_ds	For nested catchments, NextStationDS ('DS' meaning downstream) indicates the catchment they are contained within.	
num_nested_within	Indicates how many catchments are nested within this catchment.	
start_date	Streamflow gauging start date (yyyymmdd)	
end_date	Streamflow gauging end date (yyyymmdd)	

prop_missing_data	Proportion of data missing between startdate and enddate	Source dataset (HRS-2022; HRS-2015; or Saft et al., (2023))
-------------------	--	---

275 **Table A2: Hydrometeorological time series data supplied with CAMELS-AUS v2. All timesteps are daily. All non-streamflow data were processed as part of the CAMELS-AUS version 2 to extract catchment averages from Australia-wide AGCD/SILO grids. Changes compared to CAMELS-AUS v1 are highlighted in red. Variables that are mapped in Figure 3 are written in purple.**

Category	File name	Source data	Description / comments	Unit	
streamflow	streamflow_MLd.csv	HRS-2022; HRS-2015; or Saft et al., (2023)	Streamflow (not gap filled)	ML d ⁻¹	
	streamflow_MLd_infilled.csv		Streamflow gap filled by the BOM using GR4J (Perrin et al, 2003)	ML d ⁻¹	
	streamflow_mmd.csv		Streamflow (not gap filled) expressed as depths relative to CAMELS-AUS version 2 adopted catchment areas	mm d ⁻¹	
	streamflow_QualityCodes.csv		Quality codes/flags as supplied by the HRS website, with meanings listed at www.bom.gov.au/water/hrs/qc_doc.shtml	-	
precipitation	precipitation_agcd.csv	BOM's Australian Gridded Climate Data (AGCD) v1.0.1, (Evans et al., 2020) www.bom.gov.au/climate/maps/	catchment average precipitation (Note, AGDC supersedes earlier AWAP data used in v1)	mm d ⁻¹	
	precipitation_var_agcd.csv	AGCD provides 0.05° grids.	Spatial internal variance in precipitation	mm ² d ⁻²	
	precipitation_silo.csv	Scientific Information for Land Owners (SILO) project, Government of Queensland (Jeffrey et al., 2001) www.longpaddock.qld.gov.au SILO provides 0.05° grids.	catchment average precipitation	mm d ⁻¹	
Actual and potential evapo- transpiration (AET and PET)	et_short_crop_silo.csv		FAO56 short crop PET (see FAO, 1998)		
	et_tall_crop_silo.csv		ASCE tall crop PET (see ASCE, 2000)		
	et_morton_wet_silo.csv		Morton (1983) wet-environment areal PET over land		
	et_morton_potential_silo.csv		Morton (1983) point PET		
	et_morton_actual_silo.csv		Morton (1983) areal AET		
evaporation	evap_morton_lake_silo.csv		Morton (1983) shallow lake evaporation		Interpolated Class A pan evaporation
	evap_pan_silo.csv		Interpolated synthetic extended Class A pan evaporation (Rayner, 2005)		
	evap_syn_silo.csv				
temperature	tmax_agcd.csv	AGCD (see above)	Daily maximum temperature	°C	
	tmax_silo.csv	SILO (see above)			
	tmin_agcd.csv	AGCD (see above)	Daily minimum temperature		
	tmin_silo.csv	SILO (see above)			
Other variables	vapourpres_h09_agcd.csv	AGCD (see above)	Vapour pressure	hPa	
	vapourpres_h15_agcd.csv				
	vp_silo.csv	SILO (see above)	Solar radiation	MJ m ⁻²	
	radiation_silo.csv		Vapour pressure deficit	hPa	
	vp_deficit_silo.csv				

	rh_tmax_silo.csv		Relative humidity at the time of maximum temperature	%
	rh_tmin_silo.csv		Relative humidity at the time of minimum temperature	%
	mslp_silo.csv		Mean sea level pressure	hPa

280 **Table A3: Flow uncertainty information, climatic indices and streamflow signatures provided in the attribute table of CAMELS-AUS v2. Changes compared to CAMELS-AUS v1 are highlighted in red.**

Short Name	Description	Units	Data source / notes
<i>q_uncert_unique_curves</i>	Number of unique rating curves considered in analysis by McMahon et al. (2024)	-	McMahon et al. (2024)
<i>q_uncert_rmse_all</i>	Root mean square error (RMSE) of the gauged versus rating curve discharges as a percentage of the mean discharge for all non-zero gauged values	%	
<i>q_uncert_rmse_lower</i>	As above but for the lower half of non-zero gauged values (daily discharges less than the published non-zero median value)	%	
<i>q_uncert_rmse_upper</i>	As above but for the upper half of non-zero gauged values (daily discharges greater than the published non-zero median value)	%	
<i>q_uncert_days_above</i>	The percentage of days for which the published discharge values exceed the maximum gauged discharge	%	
<i>q_uncert_Q_above</i>	The percentage of the total discharge volume that is above the maximum gauged discharge	%	
<i>p_mean</i>	mean daily precipitation	mm d ⁻¹	Climatic signatures are calculated using code from Addor et al. (2017), using the following datasets (cf. Table 1) - Precipitation is based on AGCD rainfall. - PET is based on SILO Morton Wet Env. PET - temperature data is based on AGCD temperature For p_seasonality see Eq. 14 in Woods (2009)
<i>pet_mean</i>	mean daily potential evapotranspiration (PET) (Morton's Wet Environment)	mm d ⁻¹	
aridity	aridity (<i>pet_mean</i> / <i>p_mean</i>)	-	
p_seasonality	precipitation seasonality (0: uniform; +ve: Dec/Jan peak; -ve: Jun/Jul peak)	-	
frac_snow	fraction of precipitation on days colder than 0° C	-	
<i>high_prec_freq</i>	frequency of high precipitation days, ≥ 5 times <i>p_mean</i>	d y ⁻¹	
<i>high_prec_dur</i>	average duration of high precipitation events	days	
<i>high_prec_timing</i>	season during which most high precip. days occur (djf, mam, jja, or son)	season	
<i>low_prec_freq</i>	frequency of dry days (≤ 1 mm/d)	d y ⁻¹	
<i>low_prec_dur</i>	average duration of low precipitation periods (days ≤ 1 mm/d)	days	
<i>low_prec_timing</i>	season during which most dry days occur (djf, mam, jja, or son)	season	
<i>sig_mag_BaseMag</i>	Difference between maximum and minimum of annual baseflow regime	mm	Calculated using TOSSH by Gnnann et al. (2021); the signature description is from tosshtoolbox.github.io/TOSSH/p2_signatu
<i>sig_mag_BFI</i>	Baseflow index	-	
<i>sig_mag_Q_7_day_max</i>	7-day maximum streamflow	mm/timestep	
<i>sig_mag_Q_7_day_min</i>	7-day min streamflow	mm/timestep	
<i>sig_mag_Q_CoV</i>	Coefficient of variation	-	

<i>sig_mag_Q_mean</i>	Mean streamflow	mm/timestep	res.html#list-of-signature-sets
<i>sig_mag_Q_skew</i>	Skewness of streamflow	mm ³ /timestep ³	
<i>sig_mag_Q_var</i>	Variance of streamflow	mm ² /timestep ²	
<i>sig_mag_Q5</i>	5-th streamflow percentile	mm/timestep	
<i>sig_mag_Q95</i>	95-th streamflow percentile	mm/timestep	
<i>sig_mag_VarIdx</i>	Variability index of flow, calculated from flow duration curve	-	
<i>sig_freq_high_Q_freq</i>	High flow frequency	-	
<i>sig_freq_low_Q_freq</i>	Low flow frequency	-	
<i>sig_freq_zero_Q_freq</i>	Zero flow frequency	-	
<i>sig_dur_RespTime</i>	Catchment response time	timestep	
<i>sig_dur_high_Q_dur</i>	High flow duration	timestep	
<i>sig_dur_low_Q_dur</i>	Low flow duration	timestep	
<i>sig_dur_zero_Q_dur</i>	Zero flow duration	timestep	
<i>sig_timing_HFD_mean</i>	Half flow date	day of year	
<i>sig_timing_HFI_mean</i>	Half flow interval	days	
<i>sig_roc_ACI</i>	Lag-1 autocorrelation	-	
<i>sig_roc_ACI_low</i>	Lag-1 autocorrelation for low flow period (the four months with the lowest average flows)	-	
<i>sig_roc_BaseRecesK</i>	Exponential recession constant	1/d	
<i>sig_roc_FDC_slope</i>	Slope of the flow duration curve	-	
<i>sig_roc_FlashIdx</i>	Richards-Baker flashiness index	-	
<i>sig_roc_RecesK_early</i>	Recession constant of early (exponential) recessions	1/timestep	
<i>sig_roc_RecesVarSeasonality</i>	Seasonal variations in recession parameters	-	
<i>sig_roc_RLD</i>	Rising limb density	1/timestep	
<i>sig_other_EventRR</i>	Event runoff ratio	-	
<i>sig_other_PeakDistribution</i>	Slope of distribution of peaks	-	
<i>sig_other_PeakDistribution_low</i>	Slope of distribution of peaks for low flow period (the four months with the lowest average flows)	-	
<i>sig_other_QP_elasticity</i>	Streamflow-precipitation elasticity	-	
<i>sig_other_RR_seasonality</i>	Runoff ratio seasonality	-	
<i>sig_other_SnowDayRatio</i>	Snow day ratio (T_threshold = 2 degC)	-	
<i>sig_other_SnowStorage</i>	Snow storage derived from cumulative P-Q regime curve	mm	
<i>sig_other_Spearmans_rho</i>	Non-uniqueness in the storage-discharge relationship	-	
<i>sig_other_StorageFromBase</i>	Average storage from average baseflow and storage-discharge relationship	-	
<i>sig_other_TotalRR</i>	Total runoff ratio	-	
<i>sig_other_ratio_Event_TotalRR</i>	Ratio between event and total runoff ratio	-	

Table A4: Catchment attributes included in the attributes table of CAMELS-AUS v2 (apart from climatic and hydrologic indices)

	Short name	Description	Unit	Data source	Notes/references
Geology and Soils	geol_prim	Two most common geologies (see list in cell below) with corresponding proportions.	-	Geoscience Australia (2008)	Preprocessed by Stein et al. (2011)
	geol_prim_prop				
	geol_sec				
	geol_sec_prop				
	unconsoldted	Proportion of catchment taken up by individual geological types, specifically: unconsolidated rocks; igneous rocks, siliciclastic/undifferentiated sedimentary rocks; carbonate sedimentary rocks; other sedimentary rocks; metamorphic rocks; and mixed sedimentary/igneous rocks.	-	Geoscience Australia (2008)	Preprocessed by Stein et al. (2011)
	igneous				
	silicised				
	carbntated				
	otherised				
	metamorph				
	sedvolc				
	oldrock	Catchment proportion old bedrock	-	National Land and Water Resources Audit (2001)	Preprocessed by Stein et al. (2011)
	claya	Percent clay in the soil A & B horizons, for the stream valley in the reach containing gauging station.	%		
	clayb		%		
	sanda	As above, but % sand in the soil A horizon	%		
	solum_thickness	Mean soil depth considering all principle profile forms	m	McKenzie et al. (2000)	-
	ksat	Saturated hydraulic conductivity (areal mean)	mm h ⁻¹	Western and McKenzie (2004)	Preprocessed by Stein et al. (2011)
	solpawhc	Solum plant available water holding capacity (areal mean)	mm		
Topography and geometry	elev_min	Elevation above sea level at gauging station	m	Gallant et al. (2009)	-
	elev_max	Catchment maximum and mean elevation above sea level	m	Hutchinson et al. (2008)	Preprocessed by Stein et al. (2011)
	elev_mean				
	elev_range	Range of elevation within catchment: elev_max-elev_min	m		-
	mean_slope_pct	Mean slope, calculated on a grid-cell-by-grid-cell basis	%	Gallant et al. (2012)	-
	upsdist	Maximum flow path length upstream	km	Hutchinson et al. (2008)	Preprocessed by Stein et al. (2011). For strahler, see Strahler (1957) For elongratio, see Gordon et al. (1992).
	strdensity	Ratio: (total length of streams) / (catchment area)	km ⁻¹		
	strahler	Strahler stream order at gauging station	-		
	elongratio	Factor of elongation as defined in Gordon et al. (1992)	-		
	relief	Ratio: (mean elev. above outlet)/(max elev. above outlet)	-		
	reliefratio	Ratio: (elevation range)/(flow path distance)	-		
	mrvmf_prop_0 through to mrvmf_prop_9	Proportion of catchment occupied by classes of Multi-Resolution Valley Bottom Flatness (MRVBF). These indicate areas subject to deposition. Broad interpretations are: 0 – erosional; 1 – small hillside deposit; 2-3 – narrow valley floor; 4 – valley floor; 5-6 –extensive valley floor; 7-8 – depositional basin; 9 – extensive depositional basin	-	CSIRO (2016)	Gallant and Dowling (2003)
	confinement	Proportion of stream segment cells & neighbouring cells that are not valley bottoms (as defined by MRVBF)	-	Hutchinson et al. (2008)	Preprocessed by Stein et al. (2011)
Land Cover and Vegetation	lc01_extracti	Proportion of catchment occupied by land cover categories within the Dynamic Land Cover Dataset (DLCD): mines and quarries (ISO name: extraction sites) lakes and dams (inland water bodies) salt lakes (salt lakes) irrigated cropping (irrigated cropping) irrigated pasture (irrigated pasture) irrigated sugar (irrigated sugar) rain fed cropping (rainfed cropping) rain fed pasture (rainfed pasture) rain fed sugar (rainfed sugar) wetlands (wetlands)	-	Lymburner et al. (2015)	Note, the source dataset has 13 timeslices; these attributes indicate the temporal average. The timeslices are separately supplied with CAMELS-AUS
	lc 03_waterbo				
	lc 04_saltlak				
	lc 05_irrcrop				
	lc06_irrpast				
	lc07_irrsuga				
	lc08_rfcropp				
	lc09_rfpastu				
	lc10_rfsugar				
	lc11_wetlands				
	lc14_tussclo				
	lc15_alpineg				

	Short name	Description	Unit	Data source	Notes/references
	lc16_openhum	closed tussock grassland (tussock grasses - closed)			
	lc18_opentus	alpine meadows (alpine grasses - open)			
	lc19_shrbsca	open hummock grassland (hummock grasses - open)			
	lc24_shrbden	open tussock grasslands (tussock grasses - open)			
	lc25_shrbope	scattered shrubs and grasses (shrubs and grasses - sparse - scattered)			
	lc31_forclos	dense shrubland (shrubs - closed)			
	lc32_foropen	open shrubland (shrubs - open)			
	lc33_woodope	closed forest (trees - closed)			
	lc34_woodspa	open forest (trees - open)			
	lc35_urbanar	open woodland (trees - scattered)			
		woodland (trees - sparse)			
		urban areas (urban areas)			
	prop_forested	sum(LC_31, LC_32, LC_33, LC_34)			
	nv_grasses_n	Major vegetation sub-groups within the National Vegetation Information System (NVIS). Despite redundancy with the DLCD attributes (see above), these are included because NVIS quantifies alteration from ‘natural’ by differentiating between ‘pre-1750’ (‘_n’) and ‘extant’ (‘_e’). Subgroups: grasses forests shrubs woodlands bare no data	-	DEWR (2008)	Preprocessed by Stein et al. (2011)
nv_grasses_e					
nv_forests_n					
nv_forests_e					
nv_shrubs_n					
nv_shrubs_e					
nv_woodl_n					
nv_woodl_e					
nv_bare_n					
nv_bare_e					
nv_nodata_n					
nv_nodata_e					
Anthropogenic Influences	distupdamw				
	impound_fac	Dimensionless factors quantifying human impacts on catchment hydrology, in two broad categories: - Flow regime factors: impoundments (ImpoundmF), flow diversions (FlowDivF), and levee banks (LeveebankF). The combined effect is disturbance index FlowRegimeDI; - Catchment factors: infrastructure (InfrastrucF), settlements (SettlementF), extractive industries (ExtractiveIndF) and landuse (LanduseF). The combined effect is captured in CatchmentDI. FlowRegimeDI and CatchmentDI are combined in RiverDI	-	Stein et al. (2002), updated by Stein et al. (2011)	
	flow_div_fac				
	leveebank_fac				
	infrastruc_fac				
	settlement_fac				
	extract_inf_fac				
	landuse_fac				
	catchment_di				
	flow_regime_di				
river_di					
Other	pop_mean	Average and maximum human population density in catchment across 3" grid squares.	km ⁻²	ABS (2006)	Preprocessed by Stein et al. (2011)
	pop_max				
	pop_gt_1	Proportion of catchment with population density exceeding 1 person / km ² and 10 people / km ²	-		
	pop_gt_10				
	erosivity	Rainfall erosivity (spatial average across catchment)	MJ mm ha ⁻¹ h ⁻¹	NLWRA (2001)	
	anngro_mega	Average annual growth index value for megatherm, mesotherm and microtherm plants, respectively	-	Xu and Hutchinson (2011)	
	anngro_meso				
	anngro_micro				
	gromega_seas	Seasonality of growth index value for megatherm, mesotherem and microtherm plants, respectively	-		
	gromeso_seas				
	gromicro_seas				
	npp_ann	Net Primary Productivity estimated by Raupach et al. (2002) for pre-European settlement conditions: - annually; and	tC Ha ⁻¹	Raupach et al. (2002)	
npp_1 through to					

	Short name	Description	Unit	Data source	Notes/references
	npp_12	- for the twelve calendar months of the year			

285 **8 Author contributions**

Keirnan Fowler conceived the project, supervised all data processing, liaised with supporting organisations (notably the Bureau of Meteorology), and led the drafting of the manuscript. Ziqi Zhang did the majority of the data processing and contributed to the manuscript. Xue Hou contributed to data processing with a particular focus on derivation of catchment boundaries.

9 Competing interests

290 The authors declare that they have no conflict of interest.

10 Acknowledgements

The authors gratefully acknowledge the cooperation of Australia’s Bureau of Meteorology, particularly for their proactive assistance in supplying the Hydrological Reference Stations data to the authors in a timely fashion. The contribution of Murray Peel, who assisted with provision and interpretation of uncertainty information, is also acknowledged. The contributions of Lucas Pamminger (together with supervisors Murray Peel and Tim Peterson) to characterise precipitation data quality through time is acknowledged (see Section 4.3). The authors gratefully acknowledge support from the University of Melbourne Early Career Researcher Grant scheme, grant number 2021ECR155.

11 References

300 Abbas, A., Boithias, L., Pachepsky, Y., Kim, K., Chun, J. A., and Cho, K. H.: AI4Water v1.0: an open-source python package for modeling hydrological time series using data-driven methods, *Geosci. Model Dev.*, 15, 3021–3039, <https://doi.org/10.5194/gmd-15-3021-2022>, 2022.

ABS (Australian Bureau of Statistics): Australian Census 2006 Population Statistics [data set], <https://www.abs.gov.au/websitedbs/censushome.nsf/home/historicaldata2006?opendocument&navpos=280>, 2006.

305 Addor, N., Newman, A. J., Mizukami, N., and Clark, M. P.: The CAMELS data set: catchment attributes and meteorology for large-sample studies, *HESS*, 21, 5293–5313, <https://doi.org/10.5194/hess-21-5293-2017>, 2017.

Addor, N., Nearing, G., Prieto, C., Newman, A. J., Le Vine, N., and Clark, M. P.: A Ranking of Hydrological Signatures Based on Their Predictability in Space, *Water Resour. Res.*, 54, 8792–8812, <https://doi.org/10.1029/2018WR022606>, 2018.

310 Addor, N., Do, H. X., Alvarez-Garreton, C., Coxon, G., Fowler, K., and Mendoza, P. A.: Large-sample hydrology: recent progress, guidelines for new datasets and grand challenges, *Hydrological Sciences Journal*, 65, 712–725, <https://doi.org/10.1080/02626667.2019.1683182>, 2019.

- Althoff, D. and Destouni, G.: Global patterns in water flux partitioning: Irrigated and rainfed agriculture drives asymmetrical flux to vegetation over runoff, *One Earth*, 6, 1246–1257, <https://doi.org/10.1016/j.oneear.2023.08.002>, 2023.
- Alvarez-Garreton, C., Mendoza, P. A., Boisier, J. P., Addor, N., Galleguillos, M., Zambrano-Bigiarini, M., Lara, A., Puelma, C., Cortes, G., Garreaud, R., McPhee, J., and Ayala, A.: The CAMELS-CL dataset: catchment attributes and meteorology for large sample studies – Chile dataset, *HESS*, 22, 5817–5846, <https://doi.org/10.5194/hess-22-5817-2018>, 2018.
- ASCE (American Society for Civil Engineering): ASCE’s Standardized Reference Evapotranspiration Equation, proceedings of the National Irrigation Symposium, Phoenix, Arizona, 2000.
- BOM (Bureau of Meteorology, Australia): Hydrologic Reference Stations data update 2015. www.bom.gov.au/water/hrs/update_2015.shtml, last access: 1 June 2020.
- 320 Brunner, M. I. and Stahl, K.: Temporal hydrological drought clustering varies with climate and land-surface processes, *Environ. Res. Lett.*, 18, 034011, <https://doi.org/10.1088/1748-9326/acb8ca>, 2023.
- Chagas, V. B. P., Chaffe, P. L. B., Addor, N., Fan, F. M., Fleischmann, A. S., Paiva, R. C. D., and Siqueira, V. A.: CAMELS-BR: hydrometeorological time series and landscape attributes for 897 catchments in Brazil, *Earth Syst. Sci. Data*, 12, 2075–2096, <https://doi.org/10.5194/essd-12-2075-2020>, 2020.
- 325 Chen, S. and Ruan, X.: A hybrid Budyko-type regression framework for estimating baseflow from climate and catchment attributes, *J. Hydrol.*, 618, 129118, <https://doi.org/10.1016/j.jhydrol.2023.129118>, 2023.
- Coxon, G., Addor, N., Bloomfield, J. P., Freer, J., Fry, M., Hannaford, J., Howden, N. J. K., Lane, R., Lewis, M., Robinson, E. L., Wagener, T., and Woods, R.: CAMELS-GB: hydrometeorological time series and landscape attributes for 671 catchments in Great Britain, *Earth Syst. Sci. Data*, 12, 2459–2483, <https://doi.org/10.5194/essd-12-2459-2020>, 2020.
- 330 CSIRO: AUS SRTM 1sec MRVBF mosaic v01. Bioregional Assessment Source Dataset [data set], <http://data.bioregionalassessments.gov.au/dataset/79975b4a-1204-4ab1-b02b-0c6fbbbbbcb5>, 2016.
- Delaigue, O., Brigode, P., Andréassian, V., Perrin, C., Etchevers, P., Soubeyroux, J.-M., Janet, B., and Addor, N.: CAMELS-FR: A large sample hydroclimatic dataset for France to explore hydrological diversity and support model benchmarking, <https://doi.org/10.5194/iahs2022-521>, 2022.
- 335 DEWR (Department of the Environment and Water Resources, Australia): Estimated Pre-1750 Major Vegetation Subgroups - NVIS Stage 1, Version 3.1 [data set], <https://www.environment.gov.au/land/native-vegetation/national-vegetation-information-system>, 2008.
- Euser, T., Winsemius, H. C., Hrachowitz, M., Fenicia, F., Uhlenbrook, S., and Savenije, H. H. G.: A framework to assess the realism of model structures using hydrological signatures, *HESS*, 17, 1893–1912, <https://doi.org/10.5194/hess-17-1893-2013>, 2013.
- 340 Evans, A., Jones, D., Smalley, R., Lelleyett, S.: An enhanced gridded rainfall analysis scheme for Australia. Bureau of Meteorology (Australia) Research Report – BRR041, ISBN: 978-1-925738-12-4, <http://www.bom.gov.au/research/publications/researchreports/BRR-041.pdf>, 2020.
- FAO (Food and Agriculture Organization of the United Nations): Irrigation and drainage paper 56: Crop evapotranspiration - Guidelines for computing crop water requirements, 1998.
- 345

- Fowler, K. J. A., Acharya, S. C., Addor, N., Chou, C., and Peel, M. C.: CAMELS-AUS: hydrometeorological time series and landscape attributes for 222 catchments in Australia, *Earth Syst. Sci. Data*, 13, 3847–3867, <https://doi.org/10.5194/essd-13-3847-2021>, 2021a.
- 350 Fowler, K. J. A., Coxon, G., Freer, J. E., Knoben, W. J. M., Peel, M. C., Wagener, T., Western, A. W., Woods, R. A., and Zhang, L.: Towards more realistic runoff projections by removing limits on simulated soil moisture deficit, *J. Hydrol.*, 600, 126505, <https://doi.org/10.1016/j.jhydrol.2021.126505>, 2021b.
- 355 Fowler, K., Peel, M., Saft, M., Peterson, T. J., Western, A., Band, L., Petheram, C., Dharmadi, S., Tan, K. S., Zhang, L., Lane, P., Kiem, A., Marshall, L., Griebel, A., Medlyn, B. E., Ryu, D., Bonotto, G., Wasko, C., Ukkola, A., Stephens, C., Frost, A., Gardiya Weligamage, H., Saco, P., Zheng, H., Chiew, F., Daly, E., Walker, G., Vervoort, R. W., Hughes, J., Trotter, L., Neal, B., Cartwright, I., and Nathan, R.: Explaining changes in rainfall–runoff relationships during and after Australia’s Millennium Drought: a community perspective, *HESS*, 26, 6073–6120, <https://doi.org/10.5194/hess-26-6073-2022>, 2022.
- Fowler, K., Zhang, Z., and Hou, X: Dataset for CAMELS-AUS v2: updated hydrometeorological timeseries and landscape attributes for an enlarged set of catchments in Australia. <https://zenodo.org/doi/10.5281/zenodo.12575680>
- 360 Gallant, J. C., and T. I. Dowling: A multiresolution index of valley bottom flatness for mapping depositional areas, *Water Resour. Res.*, 39, 1347, <https://doi.org/10.1029/2002WR001426>, 2003.
- Gallant, J., Wilson, N., Tickle, P.K., Dowling, T., Read, A.: 3 second SRTM Derived Digital Elevation Model (DEM) Version 1.0. Record 1.0. Geoscience Australia, Canberra [data set], <http://pid.geoscience.gov.au/dataset/ga/69888>, 2009.
- Gallant, J., Austin, J.: Slope derived from 1" SRTM DEM-S. v4. CSIRO. Data Collection [data set], <https://doi.org/10.4225/08/5689DA774564A>, 2012.
- 365 Gardiya Weligamage, H., Fowler, K., Peterson, T. J., Saft M. and Peel, M. C.: Observation based gridded annual runoff estimates over Victoria, Australia, in: MODSIM2021, 24th International Congress on Modelling and Simulation, Sydney, Australia, 5 to 10 December 2021, 602-608, 2021.
- 370 Gardiya Weligamage, H., Fowler, K., Peterson, T. J., Saft, M., Peel, M. C., and Ryu, D.: Partitioning of Precipitation Into Terrestrial Water Balance Components Under a Drying Climate, *Water Resour. Res.*, 59, e2022WR033538, <https://doi.org/10.1029/2022WR033538>, 2023.
- Gardiya Weligamage, H., Fowler, K., Ryu, D., Saft, M., Peterson, T., & Peel, M. C. Vegetation as a driver of shifts in rainfall-runoff relationship: Synthesising hydrological evidence with remote sensing. *Journal of Hydrology*, 132389, <https://doi.org/10.1016/j.jhydrol.2024.132389>, 2024.
- 375 Geoscience Australia: Dams and Water Storages 1990, Geoscience Australia, Canberra [data set], <https://data.gov.au/data/dataset/ce5b77bf-5a02-4cf8-9cf2-be4a2cee2677>, 2004.
- Geoscience Australia: Surface Geology of Australia 1:1 million scale dataset [data set], <https://data.gov.au/dataset/ds-dga-48fe9c9d-2f10-49d2-bd24-ac546662c4ec/details>, 2008
- Gnann, S. J., Coxon, G., Woods, R. A., Howden, N. J. K., and McMillan, H. K.: TOSSH: A Toolbox for Streamflow Signatures in Hydrology, *Environ. Model. Softw.*, 138, 104983, <https://doi.org/10.1016/j.envsoft.2021.104983>, 2021.
- 380 Gordon, N. D., McMahon, T. A., Finlayson, B. L., and Christopher, J.: Stream Hydrology: an Introduction for Ecologists. John Wiley & Sons, Ltd. 1992.

- Gupta, H. V., Perrin, C., Blöschl, G., Montanari, A., Kumar, R., Clark, M., and Andréassian, V.: Large-sample hydrology: a need to balance depth with breadth, *HESS*, 18, 463–477, <https://doi.org/10.5194/hess-18-463-2014>, 2014.
- 385 Höge, M., Kauzlaric, M., Siber, R., Schönenberger, U., Horton, P., Schwanbeck, J., Floriancic, M. G., Viviroli, D., Wilhelm, S., Sikorska-Senoner, A. E., Addor, N., Brunner, M., Pool, S., Zappa, M., and Fenicia, F.: CAMELS-CH: hydro-meteorological time series and landscape attributes for 331 catchments in hydrologic Switzerland, *Earth Syst. Sci. Data*, 15, 5755–5784, <https://doi.org/10.5194/essd-15-5755-2023>, 2023.
- 390 Hutchinson, M.F., Stein, J.L., Stein, J.A., Anderson, H., and Tickle, P.K.: GEODATA 9 second DEM and D8: Digital Elevation Model Version 3 and Flow Direction Grid 2008. Record DEM-9S.v3. Geoscience Australia, Canberra [data set], <http://pid.geoscience.gov.au/dataset/ga/66006>, 2008.
- Jeffrey, S. J., Carter, J. O., Moodie, K. B., and Beswick, A. R.: Using spatial interpolation to construct a comprehensive archive of Australian climate data, *Environ. Model. Softw.*, 16, 309–330, [https://doi.org/10.1016/S1364-8152\(01\)00008-1](https://doi.org/10.1016/S1364-8152(01)00008-1), 2001.
- 395 Jian, J., Costelloe J., Ryu D., and Wang Q. J.: Does a fifteen-hour shift make much difference? – Influence of time lag between rainfall and discharge data on model calibration, in 22nd International Congress on Modelling and Simulation, Hobart, Tasmania, Australia, 3-8 December 2017, <https://www.mssanz.org.au/modsim2017/H3/jian.pdf>, 2017.
- John, A., Fowler, K., Nathan, R., Horne, A., and Stewardson, M.: Disaggregated monthly hydrological models can outperform daily models in providing daily flow statistics and extrapolate well to a drying climate, *J. Hydrol.*, 598, 126471, <https://doi.org/10.1016/j.jhydrol.2021.126471>, 2021.
- 400 Jones, D., Wang, W., and Fawcett, R.: High-quality spatial climate data-sets for Australia, *AMOI*, 58, 233–248, <https://doi.org/10.22499/2.5804.003>, 2009.
- Kapoor, A., Pathiraja, S., Marshall, L., and Chandra, R.: DeepGR4J: A deep learning hybridization approach for conceptual rainfall-runoff modelling, *Environ. Model. Softw.*, 169, 105831, <https://doi.org/10.1016/j.envsoft.2023.105831>, 2023.
- Kim, D., Choi, M., and Chun, J. A.: Linking the complementary evaporation relationship with the Budyko framework for ungauged areas in Australia, *HESS*, 26, 5955–5969, <https://doi.org/10.5194/hess-26-5955-2022>, 2022.
- 405 Kratzert, F., Nearing, G., Addor, N., Erickson, T., Gauch, M., Gilon, O., Gudmundsson, L., Hassidim, A., Klotz, D., Nevo, S., Shalev, G., and Matias, Y.: Caravan - A global community dataset for large-sample hydrology, *Sci Data*, 10, 61, <https://doi.org/10.1038/s41597-023-01975-w>, 2023.
- 410 Lei, X., Cheng, L., Zhang, L., Cheng, S., Qin, S., and Liu, P.: Improving the Applicability of Lumped Hydrological Models by Integrating the Generalized Complementary Relationship, *Water Resour. Res.*, 60, e2023WR035567, <https://doi.org/10.1029/2023WR035567>, 2024.
- Lymburner, L., Tan, P., McIntyre, A., Thankappan, M., Sixsmith, J.: Dynamic Land Cover Dataset Version 2.1. Geoscience Australia, Canberra [data set], <http://pid.geoscience.gov.au/dataset/ga/83868>, 2015.
- 415 Mangukiya, N. K., Kumar, K. B., Dey, P., Sharma, S., Bejagam, V., Mujumdar, P. P., and Sharma, A.: CAMELS-INDIA: hydrometeorological time series and catchment attributes for 472 catchments in Peninsular India, *Earth Syst. Sci. Data Discuss.* [preprint], <https://doi.org/10.5194/essd-2024-379>, in review, 2024.
- McInerney, D., Thyer, M., Kavetski, D., Westra, S., Maier, H. R., Shanfield, M., Croke, B., Gupta, H., Bennett, B., and Leonard, M.: Neglecting hydrological errors can severely impact predictions of water resource system performance, *J. Hydrol.*, 634, 130853, <https://doi.org/10.1016/j.jhydrol.2024.130853>, 2024.

- McKenzie, N.J., Jacquier, D.W., Ashton L.J. and Cresswell, H.P.: Estimation of Soil Properties Using the Atlas of Australian Soils. CSIRO Land and Water Technical Report 11/00, https://www.asris.csiro.au/themes/Atlas.html#Atlas_Digital, 2000.
- McMahon, T. A., & Peel, M. C. Uncertainty in stage–discharge rating curves: application to Australian Hydrologic Reference Stations data. *Hydrological sciences journal*, 64(3), 255-275, <https://doi.org/10.1080/02626667.2019.1577555>, 2019
- McMahon TA, Peel MC, Amirthanathan GE. Assessing rating curve uncertainty. *Hydrological Sciences Journal*. In Press (accepted 28/11/2024), 2024.
- McMillan, H.: Linking hydrologic signatures to hydrologic processes: A review, *Hydrological Processes*, 34, 1393–1409, <https://doi.org/10.1002/hyp.13632>, 2020.
- McMillan, H. K., Gnann, S. J., and Araki, R.: Large Scale Evaluation of Relationships Between Hydrologic Signatures and Processes, *Water Resour. Res.*, 58, e2021WR031751, <https://doi.org/10.1029/2021WR031751>, 2022.
- Morton, F. I.: Operational estimates of areal evapotranspiration and their significance to the science and practice of hydrology, *J. Hydrol.*, 66, 1–76, [https://doi.org/10.1016/0022-1694\(83\)90177-4](https://doi.org/10.1016/0022-1694(83)90177-4), 1983.
- National Land and Water Resources Audit: Gridded soil information layers. Canberra [data set], www.asris.csiro.au/mapping/viewer.htm, 2001.
- Newman, A. J., Clark, M. P., Sampson, K., Wood, A., Hay, L. E., Bock, A., Viger, R. J., Blodgett, D., Brekke, L., Arnold, J. R., Hopson, T., and Duan, Q.: Development of a large-sample watershed-scale hydrometeorological data set for the contiguous USA: data set characteristics and assessment of regional variability in hydrologic model performance, *HESS*, 19, 209–223, <https://doi.org/10.5194/hess-19-209-2015>, 2015.
- Niu, J., Vis, M., and Seibert, J.: Evaluation of different precipitation and potential evapotranspiration time series for hydrological modeling in Australian catchments, in *EGU General Assembly 2024*, Vienna, Austria, 14–19 Apr 2024, EGU24-1022, <https://doi.org/10.5194/egusphere-egu24-1022>, 2024.
- Peterson, T. J., Saft, M., Peel, M. C., and John, A.: Watersheds may not recover from drought, *Science*, 372, 745–749, <https://doi.org/10.1126/science.abd5085>, 2021.
- Poff, N. L., Allan, J. D., Bain, M. B., Karr, J. R., Prestegard, K. L., Richter, B. D., Sparks, R. E., and Stromberg, J. C.: The Natural Flow Regime, *BioScience*, 47, 769–784, <https://doi.org/10.2307/1313099>, 1997.
- Rasiya Koya, S. and Roy, T.: Temporal Fusion Transformers for streamflow Prediction: Value of combining attention with recurrence, *J. Hydrol.*, 637, 131301, <https://doi.org/10.1016/j.jhydrol.2024.131301>, 2024.
- Raupach, M. R., Kirby, J. M., Barrett, D. J., and Briggs, P.R.: Balances of Water, Carbon, Nitrogen and Phosphorus in Australian Landscapes version 2.04, CSIRO Land and Water, Canberra, <http://www.clw.csiro.au/publications/technical2001/tr40-01.pdf>, 2002.
- Rayner, D.: Australian synthetic daily Class A pan evaporation. Technical Report December, Queensland Department of Natural Resources and Mines, Indooroopilly, Qld., Australia [data set], <https://data.longpaddock.qld.gov.au/static/silo/pdf/AustralianSyntheticDailyClassAPanEvaporation.pdf>, 2005.
- Saft, M., Weligamage, H. G., Peel, M., Peterson, T., Brown, R., Jordan, P., Morden, R., and Fowler, K.: Victorian Water and Climate dataset: long-term streamflow, climate, and vegetation observation records and catchment attributes (1.0) [data set], <https://doi.org/10.5281/ZENODO.7527565>, 2023.

- 455 Sawicz, K., Wagener, T., Sivapalan, M., Troch, P. A., and Carrillo, G.: Catchment classification: empirical analysis of hydrologic similarity based on catchment function in the eastern USA, *HESS*, 15, 2895–2911, <https://doi.org/10.5194/hess-15-2895-2011>, 2011.
- Stein, J. L., Stein, J. A. and Nix, H. A.: Spatial analysis of anthropogenic river disturbance at regional and continental scales: identifying the wild rivers of Australia, *Landsc. Urban Plan.*, 60, 1-25, [https://doi.org/10.1016/S0169-2046\(02\)00048-8](https://doi.org/10.1016/S0169-2046(02)00048-8), 2002.
- 460 Stein, J. L., Hutchinson, M. F. and Stein, J. A.: National Catchment and Stream Environment Database version 1.1.4 [data set], <http://pid.geoscience.gov.au/dataset/ga/73045>, 2011.
- Strahler, A. N.: Quantitative analysis of watershed geomorphology. *Eos, Transactions American Geophysical Union*, 38, 913-920. <https://doi.org/10.1029/TR038i006p00913>, 1957.
- Teutschbein, C.: CAMELS-SE: Long-term hydroclimatic observations (19612020) across 50 catchments in Sweden as a resource for modelling, education, and collaboration, *Geosci. Data J.*, gdj3.239, <https://doi.org/10.1002/gdj3.239>, 2024.
- 465 Trotter, L., Saft, M., Peel, M. C., and Fowler, K. J. A.: “Naïve” inclusion of diverse climates in calibration is not sufficient to improve model reliability under future climate uncertainty, in: MODSIM2021, 24th International Congress on Modelling and Simulation, Sydney, Australia, 5 to 10 December 2021, <https://doi.org/10.36334/modsim.2021.J8.trotter>, 2021.
- Trotter, L., Saft, M., Peel, M. C., and Fowler, K. J. A.: Symptoms of Performance Degradation During Multi-Annual Drought: A Large-Sample, Multi-Model Study, *Water Resour. Res.*, 59, e2021WR031845, <https://doi.org/10.1029/2021WR031845>, 2023.
- 470 Trotter, L.: Hydrologic processes in changing climates: better understanding and modelling, Ph.D. thesis, University of Melbourne, Australia, 2023.
- Trotter, L., Saft, M., Peel, M. C., and Fowler, K. J. A.: Recession constants are non-stationary: Impacts of multi-annual drought on catchment recession behaviour and storage dynamics, *J. Hydrol.*, 630, 130707, <https://doi.org/10.1016/j.jhydrol.2024.130707>, 2024.
- 475 Van Oorschot, F., Van Der Ent, R. J., Alessandri, A., and Hrachowitz, M.: Influence of irrigation on root zone storage capacity estimation, *HESS*, 28, 2313–2328, <https://doi.org/10.5194/hess-28-2313-2024>, 2024.
- Wang, H., Li, X., Tong, C., Xu, Y., Lin, D., Wang, J., Yao, F., Zhu, P., and Yan, G.: Varying performance of eight evapotranspiration products with aridity and vegetation greenness across the globe, *Front. Environ. Sci.*, 11, 1079520, <https://doi.org/10.3389/fenvs.2023.1079520>, 2023.
- 480 Western, A. and McKenzie, N.: Soil hydrological properties of Australia Version 1.0.1, CRC for Catchment Hydrology, Melbourne, 2004.
- Woods, R. A.: Analytical model of seasonal climate impacts on snow hydrology: Continuous snowpacks, *Adv. Water Resour.*, 32, 1465–1481, <https://doi.org/10.1016/j.advwatres.2009.06.011>, 2009.
- 485 Xu, T., and Hutchinson, M.: ANUCLIM version 6.1 user guide. The Australian National University, Fenner School of Environment and Society, Canberra. <https://fennerschool.anu.edu.au/files/anuclim61.pdf>, 2011.