

Gas exchange velocities (k_{600}), gas exchange rates (K_{600}), and hydraulic geometries for streams and rivers derived from the *NEON Reaeration field and lab collection data product (DP1.20190.001)*

Kelly S. Aho¹, Kaelin M. Cawley², Robert T. Hensley², Robert O. Hall, Jr.³, Walter K. Dodds⁴, Keli J. Goodman²

¹Department of Earth and Environmental Science, Department of Integrative Biology, Michigan State University, East Lansing, MI 48824, USA

²National Ecological Observatory Network, Battelle, 1685 38th St. #100, Boulder, CO 80301, USA

³Flathead Lake Biological Station, University of Montana, Polson, MT 59911, USA

⁴Division of Biology, Kansas State University, Manhattan, KS, 66506, USA

Correspondence to: Kelly S. Aho (kellyaho@msu.edu)

Abstract. Air-water gas exchange is essential to understanding and quantifying many biogeochemical processes in streams and rivers, including greenhouse gas emissions and metabolism. Gas exchange depends on two factors, which are often quantified separately: 1) the air-water concentration gradient of the gas and 2) the gas exchange velocity. There are fewer measurements of gas exchange velocity compared to concentrations in streams and rivers, which limits accurate characterization of air-water gas exchange (i.e., flux rates). The National Ecological Observatory Network (NEON) conducts SF₆ gas-loss experiments in 22 of their 24 Wadeable streams using standardized methods across all experiments and sites, and publishes raw concentration data from these experiments on the NEON data portal. NEON also conducts NaCl injections that can be used to characterize hydraulic geometry at all 24 Wadeable streams. These NaCl injections are conducted both as part of the gas-loss experiments and separately. Here, we use these data to estimate gas exchange and water velocity using the *reaRates* R package. The dataset presented includes estimates of hydraulic parameters, cleaned raw concentration SF₆ tracer-gas data (including removing outliers and failed experiments), estimated SF₆ gas loss rates, normalized gas exchange velocities ($k_{600}, m\ d^{-1}$), and normalized depth-dependent gas exchange rates (K_{600}, d^{-1}). This dataset provides one of the largest compilations of gas loss experiments (n = 339) in streams to date. This dataset is unique in that it contains gas exchange estimates from repeated experiments in geographically diverse streams across a range of discharges. In addition, this dataset contains information on the hydraulic geometry of all 24 NEON Wadeable streams, which will support future research using NEON aquatic data. This dataset is a valuable resource that can be used to explore both within- and across-reach variability in the hydraulic geometry and gas exchange velocity in streams.

30 1 Introduction

Air-water gas exchange contributes to many aquatic processes in streams and rivers, including greenhouse gas emissions (Liu et al., 2022; Rocher-Ros et al., 2023), aquatic metabolism (Aristegi et al., 2009; Hall et al., 2016; Hall and Hotchkiss, 2017), and reoxygenation rates after wastewater discharge (O'Connor and Dobbins, 1958). Despite this importance, gas exchange can be difficult to measure and model (Churchill et al., 1964; Hornberger and Kelly, 1975; Rathbun, 1977; Ulseth et al., 2019). According to Fick's Law of Diffusion, gas flux across the air-water boundary depends on the concentration gradient of the gas and the gas exchange velocity ($k, m\ d^{-1}$):

$$Flux = k([gas]_{dissolved} - [gas]_{equilibrium}), \quad (1)$$

40 Where $[gas]_{dissolved}$ is the concentration of the gas of interest and $[gas]_{equilibrium}$ is the concentration of the gas at equilibrium with the atmosphere.

In streams and rivers, measurements of gas concentrations are more readily available than estimates of k ; resultantly, estimates of k are often extrapolated from a few measurements. Several methods exist for assessing k , including predictive models (Raymond et al., 2012), models of gas dynamics through time and space in rivers (Appling et al., 2018), and direct measurements with tracers (Hall and Hotchkiss, 2017). Here, k refers to exchange of dissolved gases (i.e., diffusive and bubble-mediated gas transfer) and does not capture ebullitive fluxes. Characterizing k from direct measurement of tracer-gas exchange velocities and modeling based on observed diurnal gas dynamics are likely more accurate for any particular stream or river than more general predictive models (Appling et al., 2018; Hall and Ulseth, 2020; Riley and Dodds, 2013).

50 Gas exchange velocity is spatiotemporally variable; it is controlled by energy dissipation rate and, therefore, turbulence at the air-water boundary (Zappa et al., 2007). Models that estimate k at broad spatial scales and in low-versus-high gradient streams have found that hydraulic variables (e.g., streambed slope [S , unitless], water velocity [v , $m\ s^{-1}$], mean water depth [z , m], discharge [Q , $L\ s^{-1}$]) are the dominant controls on variation in k (Churchill et al., 1964; O'Connor and Dobbins, 1958; Rathbun, 1977; Raymond et al., 2012). Although similar models for within-reach temporal variability are not widely available, hydrology is expected to control k locally. Existing reach-scale studies have reported different k responses to Q (Genzoli and Hall, 2016; Maurice et al., 2017; McDowell and Johnson, 2018) and point to the importance of quantifying the variable relationships between k and Q on a site-by-site basis. The dataset presented here leverages a unique set of tracer-gas experiments conducted by the National Ecological Observatory Network (NEON) that will allow for assessment of within- and across-reach variability in lotic gas exchange in a wide variety of streams.

60 Tracer-gas experiments are an approach to estimating k in streams and rivers and involve diffusing an inert tracer gas (e.g., sulfur hexafluoride [SF_6]) at a constant rate at the upstream end of a stream reach and measuring how concentrations decline downstream of the injection point. Often a conservative salt (e.g., sodium chloride [$NaCl$] or sodium bromide [$NaBr$]) is also injected with the tracer gas to allow for correction of dilution from hydrologic inflows (referred to as "salt correction" hereafter).

65 Here, we present a continental-scale dataset of gas exchange rates for wadeable streams derived from NEON data. The substantial processing that was required to estimate gas exchange is described in detail below and archived alongside the dataset. The dataset presented here contains estimates of k_{600} , or k normalized to a Schmidt number of 600, and K_{600} , which is a depth-corrected rate ($K_{600} = k_{600}/z$) used in stream metabolism modeling, for 22 streams and v , z , and at-a-station hydraulic geometry for 24 streams (Figure 1).

Deleted:

Deleted: D

Formatted: No underline

Formatted: No underline

Formatted: No underline

Formatted: No underline

Formatted: No underline

Formatted: No underline

Formatted: No underline

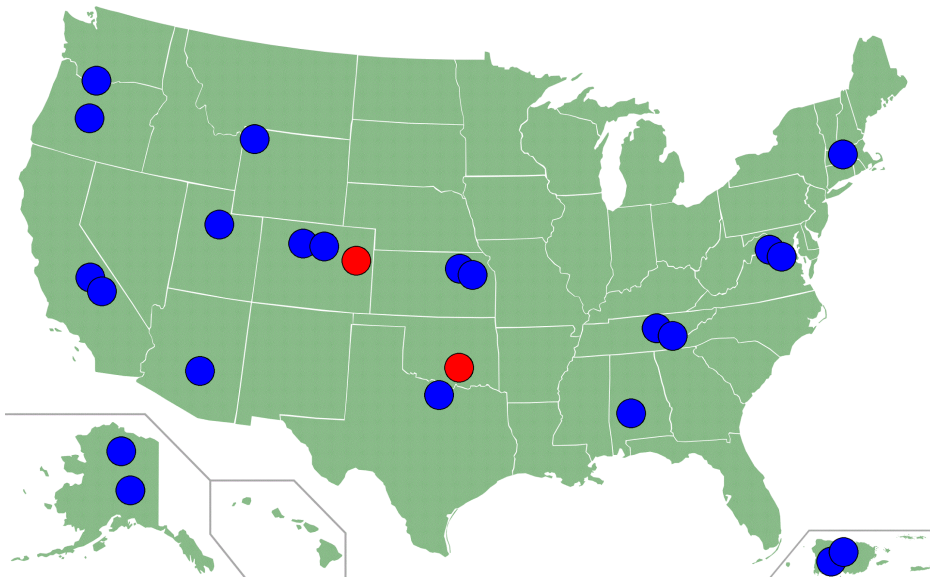


Figure 1. Map of NEON stream sites. Blue symbols indicate sites where NEON conducts full tracer-gas experiments and, thus, where we were able to estimate k_{600} , K_{600} , v , z , and at-a-station hydraulic geometry. Red symbols indicate sites where NEON only conducts NaCl slug injections and, thus, where we were able to calculate v , z , and at-a-station hydraulic geometry.

2 Methods

2.1 NEON tracer-gas experiments

NEON conducts tracer-gas experiments at 22 stream sites, which are distributed across the United States, from Puerto Rico to Alaska (Figure 1). For information about specific site characteristics, see the NEON website: <https://www.neonscience.org/field-sites/explore-field-sites>. In general, the NEON streams are relatively small; the median watershed size is 11.5 km², while the mean ± standard deviation watershed size is 27.5 ± 58.5 km². Walker Branch (WALK) drains the smallest watershed (1.1-km²) while Sycamore Creek (SYCA), an intermittent, desert stream, drains the largest (280-km²). Therefore, this dataset is only representative of streams and small rivers, and not large rivers. These experiments entail continuous injections of SF₆ and a conservative salt tracer (either NaCl or NaBr) at the upstream end of a ≤ 500-m stream reach (Figure 2). NEON uses SF₆ because it does not occur naturally, is not biologically or chemically reactive, and can be detected at low concentrations (Cole and Caraco, 1998; Ho et al., 2011; Maurice et al., 2017; Wanninkhof et al., 1985); although used in very small amounts in these experiments, SF₆ is a potent greenhouse gas and tracer-gas experiments are ceasing at sites with sufficient hydrologic coverage. When NaBr is used as the salt tracer, an additional NaCl “slug” injection is performed, which allows for the subsequent calculation of v and the derivation of z from paired Q measurements (via flowmeter or ADCP) and wetted width measurements taken at 30 points along the study reach. Before the injection,

Formatted: Not Superscript/ Subscript

Formatted: Not Superscript/ Subscript

Formatted: Not Superscript/ Subscript

Formatted: Not Superscript/ Subscript

Formatted: Not Superscript/ Subscript

Formatted: Superscript

Formatted: Superscript

95 NaCl or NaBr are collected at each of the four stations along the study reach; these data can later be used to correct NaCl or NaBr concentrations during the injection for background conditions. Once conductivity during the injection either reaches a plateau (for constant-rate NaCl injections) or returns to background levels (for NaCl slug injections) at the most downstream station, five replicate SF₆ and NaCl or NaBr samples are collected at each of the four stations located along the study reach.

100 Samples for SF₆ are collected via headspace equilibration in 60-ml syringes, stored in gas-tight evacuated vials (12-ml, Extainer), and run on a gas chromatograph with an electron capture detector (ECD). Samples for NaCl and NaBr are filtered to 0.7 μm, collected in 60-ml HDPE bottles, and run on an ion chromatograph. In addition, high-frequency (0.1-Hz) sensors are deployed to monitor NaCl conductivity at the upstream and downstream end of the study reach (Figure 2). NEON publishes SF₆ mixing ratios, NaCl and NaBr concentrations, wetted width data, and conductivity timeseries from these experiments as the Reaeration field and lab collection data product DP1.20190.001 (NEON, 2024b) and measurements of *Q* in the Discharge field collection data product DP1.20048.001 (NEON, 2024a). More detailed information on NEON's data collection procedures can be found on their website, <http://www.neonscience.org>.

105 NEON has conducted tracer-gas experiments 6 - 10 times per year for 6 - 8 years at all 22 sites to capture a range of discharge conditions. Presently, tracer-gas experiments are ceasing at sites with sufficient hydrograph coverage (<https://www.neonscience.org/impact/observatory-blog/protocol-change-reaeration-field-and-lab-collection-dp120190001>). However, NaCl slug injections will continue to be performed quarterly to collect high-frequency conductivity time-series data that allow for the calculation of *v* and the derivation of *z* from paired *Q* and wetted-width measurements. Similarly,

110 NaCl slug injections are and will continue to be conducted for the two sites where tracer-gas experiments are not collected (Blue River [BLUE], where wide channel widths and high discharges make tracer-gas studies challenging; Arikaree River [ARIK], where long travel times make tracer-gas studies infeasible).

115 The dataset presented here represents substantial processing of these published data (i.e., SF₆ mixing ratios; NaCl and NaBr concentrations; conductivity timeseries; wetted widths; and measurements of *Q*) to estimate *k*₆₀₀ or *K*₆₀₀ using the reaRate R package (Cawley et al., 2024). In addition, this dataset contains estimates of *v* from NaCl injections, which, as mentioned above, are performed both during tracer-gas experiments and at quarterly intervals at sites where tracer-gas experiments are not conducted or have ceased. Along with the paired *Q* measurement and the average wetted width for the study reach (*w*, units: *m*), the estimate of *v* was used to derive *z*. The dataset presented here contains estimates of *v* and *z* and at-a-station hydraulic geometry for all 24 NEON Wadeable streams. This dataset provides a large compilation of direct


120 measurements of tracer-gas experiments and at-a-station hydraulic geometry in small streams across the United States.

Deleted:

Formatted: Font: Not Bold

Deleted:

Deleted: values

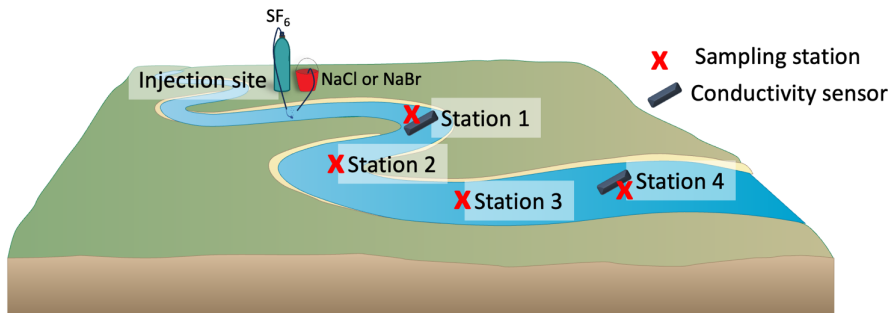

125 Figure 2. Diagram of a model study reach for NEON tracer-gas experiments. Each ~500-m study reach comprises an injection site and four downstream sampling stations (Stations 1 – 4). At the upstream injection site, SF₆ is diffused into the water column with an air stone and NaCl or NaBr is dripped into the stream. After plateau concentrations are reached at the downstream end of the study reach, injection rates are maintained and field quintuplicate samples for SF₆ and NaCl or NaBr concentrations are collected at four downstream stations spaced along the study reach. At the upper and lower stations, conductivity sensors are deployed and used to monitor either 1) when NaCl plateau concentrations are reached (for NaCl continuous injections) or 2) when a NaCl “slug”

peaks at each station (for NaBr continuous injections). Before each experiment, stream discharge is measured with a flow meter or ADCP and 30 wetted widths are collected across the study reach. Also, before each injection, background NaCl or NaBr concentrations are collected at all four sampling stations. This diagram uses modified imagery from University of Maryland Center for Environmental Science Integration and Application Network.

135 2.2 reaRates R package

The data processing pipeline described below uses the reaRate R package (Cawley et al., 2024). The package estimates k_{600} and K_{600} from data available on the NEON data portal. The package works by fitting an exponential, first-order decay function to the observed longitudinal decline in published SF₆ and solving for the longitudinal tracer-gas loss rate (K_d, m^{-1}):

$$140 \quad C_x = C_0 e^{-K_d x}, \quad (1)$$

where C_0 and C_x are tracer-gas concentrations at the top of the study reach and at a downstream point x , respectively, and K_d is the average distance traveled by an SF₆ molecule before it is emitted to the atmosphere. For sites where lateral inflows (e.g., groundwater inputs, overland flow, tributaries) appear to dilute SF₆ concentrations, the ratio of SF₆ to NaCl or NaBr is used to calculate a salt-corrected K_d value. The K_d values can then be converted to the gas exchange velocity for the tracer gas (e.g., $k_{SF_6}, m d^{-1}$):

$$145 \quad k_{SF_6} = \bar{z} v K_d. \quad (2)$$

This gas-specific k can be normalized to k_{600} using a Schmidt number of 600:

$$150 \quad k_{600} = k_{SF_6} \left(\frac{600}{S_{c,SF_6}} \right)^{-n}, \quad (3)$$

Where n is the Schmidt number exponent (0.5 for flowing waters) and S_{c,SF_6} is the temperature-dependent Schmidt number for SF₆ at water temperature T in degrees Celsius (Jähne et al., 1987; Raymond et al., 2012; Wanninkhof, 1992):

$$155 \quad S_{c,SF_6} = 3255.3 - 217.13 T + 6.8370 T^2 - 0.086070 T^3. \quad (4)$$

Reporting estimates of k_{600} is common; it allows for comparisons with existing work and can be scaled to other gases, including CO₂ and O₂, using the same approach as in equation 3 with gas-specific, temperature-dependent Schmidt numbers:

$$160 \quad k_{gas} = k_{600} \left(\frac{S_{c,gas}}{600} \right)^{-\frac{1}{2}}. \quad (5)$$

Some applications (e.g., metabolism, reoxygenation rates) explicitly include water depth in their modeling frameworks, and thus require a depth-dependent gas exchange rate (K, d^{-1}). In these cases, a normalized gas exchange rate (K_{600}) can be used and is related to k_{600} by dividing by z for the upstream reach corresponding to a length of at least $\frac{1}{K_d}$. Using the same scaling relationships shown in equations 3 and 5, K_{600} can be converted to gas-specific K_{gas} estimates.

165 The reaRate package uses NaCl breakthrough curves (i.e., either from continuous injection or slug injections) to estimate the travel time between the upstream and downstream stations and then calculates v as the distance between stations divided by the travel time. Using the continuity equation, z is calculated by dividing Q by v and w . Finally, k_{SF_6} and K_{SF_6} are calculated from K_d , v , and z (equation 2) and then normalized to k_{600} and K_{600} (equation 3). The reaRates package includes two approaches to estimate k_{600} and K_{600} : an un-pooled frequentist approach and a partially pooled Bayesian approach, both of which are described in more detail below. Implementation of the package and all processing described below were conducted in R 4.2.3 (R Core Team, 2023). More information about the package, including details about the individual functions and a processing pipeline, is provided in section 2.3.

170

2.3 Data processing

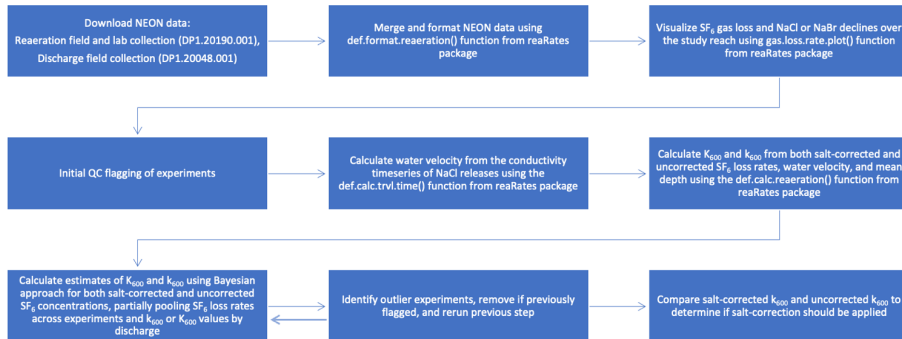


Figure 3. Overview of data processing to estimate k_{600} and K_{600} from NEON tracer-gas experiments.

Substantial processing was required to estimate k_{600} and K_{600} from the NEON data (Figure 3). All data used were downloaded from the NEON data portal. Downloads consisted of two NEON data products: Reaeration field and lab collection (DP1.20190.001) and Discharge field collection (DP1.20048.001). Data were from RELEASE-2023, plus nine additional experiments that were provisional but are now included in RELEASE-2024 (NEON, 2023a, b, 2024a, b). On a site-by-site basis, data were merged and formatted using the `def.format.reaeration()` function from the `reaRates` R package. This function compiles variables from across the downloaded data into a single data frame. These variables include Q , w , water temperature, station location as distance downstream from the injection point, and SF_6 and NaCl or NaBr concentrations for each station during the experiment. The function also applies a salt correction to the SF_6 data (e.g., SF_6 concentration divided by background-corrected NaCl or NaBr concentrations). The function removes outliers (points more extreme than $1.5 \times IQR$) from the quintuplet SF_6 and NaCl or NaBr concentrations for each station, calculates the mean and standard deviation SF_6 and NaCl or NaBr concentration for each station, and flags stations as “unmixed” when the coefficient of variation ($CV = \frac{sd}{mean}$) of the replicate SF_6 and NaCl or NaBr concentrations is greater than 10%.

Table 1. Sites and number of experiments

Site name	NEON site ID	Velocity experiments (n)	Tracer-gas experiments (n)
Arikaree River	ARIK	22	0
Upper Big Creek	BIGC	28	24
Blacktail Deer Creek	BLDE	17	15
Blue River	BLUE	21	0
Caribou Creek	CARI	38	34
Como Creek	COMO	37	33
Rio Cupeyes	CUPE	41	41
Rio Guilarte	GUIL	42	40
Lower Hop Brook	HOPB	45	40

Deleted: was

Deleted: was

Kings Creek	KING	19	14
LeConte Creek	LECO	37	31
Lewis Run	LEWI	46	40
Martha Creek	MART	33	31
Mayfield Creek	MAYF	43	43
McDiffett Creek	MCDI	32	18
McRae Creek	MCRA	28	26
Oksrukuyik Creek	OKSR	38	34
Posey Creek	POSE	44	39
Pringle Creek	PRIN	14	13
Red Butte Creek	REDB	39	39
Sycamore Creek	SYCA	20	19
Teakettle 2 Creek	TECR	21	18
Walker Branch	WALK	47	43
West St Louis Creek	WLOU	39	34

195 Next, SF₆ and NaCl or NaBr declines were visualized and quantified for each experiment and initial quality control flags were assigned. The `gas.loss.rate.plot()` function from the `reaRates` package was used to visualize and calculate both salt-corrected and uncorrected longitudinal gas loss rates over the length of the study reach (K_d). For the sites requiring a
200 salt-correction to account for lateral inflows, mean SF₆ mixing ratios at each station were first divided by mean background-corrected NaCl or NaBr concentration for the corresponding station. Station-specific outliers (i.e., values more extreme than first quartile - 1.5*IQR and third quartile + 1.5*IQR) were removed. SF₆ concentrations were then log-normalized and K_d was calculated from the resulting linear decline. A quality control flag was assigned to an individual experiment if any of the following criteria applied:

- Visually, the SF₆ gas-loss rate over the entire study reach was unduly affected by anomalous SF₆ concentrations (potentially indicating contamination, leaked vials, or analytical error)
- SF₆, NaCl, or NaBr concentrations increased in a downstream direction between any of the stations (likely indicating incomplete mixing in the water column)
- The salt-corrected K_d was larger than the uncorrected K_d (a salt-correction should correct for overestimation due to lateral inflows, with the reverse potentially indicating contamination or analytical error)

210 For each experiment, v was calculated from the conductivity time series using the `def.calc.trvl.time()` function. The function requires that the user manually select points either bracketing the rising limb (for constant rate injections) or the peak concentration (for slug injections). From within the user-selected bracket, the `def.calc.trvl.time()` function smooths the data using a loess function and then identifies the peak of the breakthrough by either finding where the first derivative is 0 (for a slug injection) or is at its maximum (for a constant rate injection). This function then calculates the breakthrough travel time between the two stations and uses the distance between stations to calculate v . Site-specific relationships between v and Q were visualized in log-log space and any anomalous values were reprocessed with the `def.calc.trvl.time()` to confirm that the user-selected bracketing allowed the function to pick the correct points on the timeseries. Finally, z was calculated using the `def.calc.trvl.time()` function, which divides Q by v and w .

Two separate approaches were used to estimate k_{600} or K_{600} values from the formatted data. The first approach used the `def.calc.reaeration()` function to multiply K_d for each individual experiment by the corresponding v and z values

220 (equation 2) to estimate k_{SF_6} , which were then converted to k_{600} (equation 3). The resulting k_{600} estimates were converted to K_{600} by dividing by water depth. This approach is subsequently referred to as the un-pooled, frequentist approach and is included in this data descriptor because it represents the current, prevailing approach for processing this type of data, is straightforward to implement, and represents the output of the `def.calc.reaeration()` function included in the `reaRate` package.

225 The second approach used Bayesian multilevel models that pooled experiments from the same site across releases. The models, coded in the Stan probabilistic programming language, used for this approach are also included in the `reaRate` package. A Bayesian approach provides flexibility in specifying models that consider repeat experiments at a site and current theory surrounding gas exchange. Bayesian inference allowed partial pooling of k_{600} estimates across releases in any one stream. Partial pooling reduces the error in any one estimate of k_{600} , and shrinks all k_{600} estimates to the site-level mean (as conditioned on discharge) if error in measuring SF_6 , NaCl, and/or NaBr is high.

230 The Bayesian approach included error at two levels. First, the models pooled k_{600} estimates across releases from the same site to estimate K_d from normalized SF_6 concentrations (both salt-corrected and uncorrected). For this step, the relationship between the SF_6 loss rate and the product of K_d and reach length was assigned a prior normal distribution with a normally distributed sigma (0, 0.2) and intercept (0, 0.1). We fully pooled the intercept with a strong prior near 0 because all SF_6 concentrations (i.e., measurements from Stations 1 - 4) were normalized to the SF_6 concentration at Station 1; this approach means that the intercept should be near 1, or 0 when logged. Thus, the model fit can be described as variable-slope, fixed-intercept linear regression. Second, the models pooled the estimates of k_{600} and K_{600} by Q , using linear relationships between Q and k_{600} or K_{600} . Priors were assigned for both the slope and the intercept based on predictions from an existing scaling model (equation 4 in Raymond et al., 2012). These priors were given large variances when possible (i.e., 10 for the intercept and 1 for the slope) to allow for divergence from the model predictions. However, at sites with a limited number of experiments (e.g., PRIN and KING), we used smaller variances to allow the model to converge. The site-specific priors used are listed in Table S1.

240 The two levels described can be referred to as a within-release model and an among-release model. The within-release model was a log-transformed (base e) exponential model. We log transformed because SF_6 is always positive (ambient = 0) and because errors in the measurement of SF_6 can scale with the magnitude of the concentration.

245 and
$$\log(S_{i,j}) = \log(S_0) - K_{D,j}x_{i,j} + \varepsilon_{i,j}$$

and

$$\varepsilon_{i,j} \sim \text{normal}(0, \sigma_{\text{release}}),$$

250 where $S_{i,j}$ is the SF_6 concentration normalized to the concentration at Station 1 for any one release (sample i in release j); S_0 is the normalized SF_6 concentration at Station 1; $x_{i,j}$ is the distance downstream to which the normalized concentration corresponds; and $\varepsilon_{i,j}$ is a normally distributed random variable with $\mu = 0$ and $sd = \sigma_{\text{release}}$. We then converted $K_{D,j}$ to gas exchange velocity $k_{SF_6,j}$ using equation 2 and normalized to $k_{600,j}$ using equation 3. The among-release model included a linear model predicting the parameter $k_{600,j}$ as a linear function of discharge:

$$\log(k_{600,j}) = a + b \times \log(Q_j) + \varepsilon_j$$

255 and

$$\varepsilon_j \sim \text{normal}(0, \sigma_{\text{stream}}),$$

260 where a and b are the intercept and slope parameters of a model regressing $\log(k_{600,j})$ and $\log(Q_j)$, where Q_j is the discharge during any one release and σ_{stream} is the residual variation. We also fit linear second-level models with $\log(K_{600,j})$, where $K_{600,j}$ is the per time gas exchange rate.

265 We fit models using Stan in the RStan package in R (Stan Development Team, 2023). The models were run for at least 5,000 iterations over four chains. Models were assessed according to the number of divergent transitions, the effective sample size (ESS) for each estimated parameter (>1,000), and posterior predictive checks with the `shinystan` R package (Gabry et al., 2023). In addition, the model fits for each experiment were visually assessed (Figure S1-S2). Finally, the median estimates for k_{600} and K_{600} were visualized in $\log(k_{600})$ - $\log(Q)$ or $\log(K_{600})$ - $\log(Q)$ space, respectively, along with 1,000 MCMC estimates of the $\log(k_{600})$ - $\log(Q)$ or $\log(K_{600})$ - $\log(Q)$ relationship, respectively. If an estimate of k_{600} and K_{600} fell outside the overall Q relationship and if that experiment's model fits showed signs of being unduly influenced by unrealistic gas loss patterns (e.g., very little decline indicating the study reach was too short, an abrupt decline indicating improper mixing), the experiment was assessed for the QC flags described above. If a QC flag had previously been assigned,

then that experiment was removed (e.g., it was identified as an outlier and could be attributed to experimental error), and the model was rerun without that experiment.

270 2.4 Recommended estimates

The processing pipeline outlined above in section 2.3 resulted in both un-pooled frequentist and Bayesian estimates of k_{600} and K_{600} , both with and without salt corrections. We include outputs from all four approaches in the dataset for completeness and to allow future users to decide which estimates best fit their needs and to compare the two approaches. The complete dataset is available in the gasExchange_ds_v2.csv file (Aho et al., 2024).

275 During data processing, we found that the NaCl and NaBr concentration data also could introduce errors and uncertainties into our estimates of k_{600} and K_{600} . For instance, background concentrations at a single station were occasionally so high that contamination was the likely explanation. Further, sometimes samples taken during the constant-rate injection could vary across the reach in unpredictable ways (e.g., increases across the reach, random peaks along the reach instead of the expected stable, declining concentrations), which was likely the result of incomplete mixing with the water column. In many cases, the quality of the salt-corrected SF_6 data precluded Bayesian-model convergence. Through 280 assessing the gas loss plots and salt concentration declines for all experiments and the failures to produce model convergence for salt-corrected data, we determined that salt corrections had the strong potential to either introduce errors into, or preclude, estimates of k_{600} and K_{600} . Therefore, we suggest only using salt-corrected data when clearly necessary (e.g., obvious lateral inflow) and possible in terms of data quality and model convergence. We determined that salt correction was 285 important for five sites: Como Creek (COMO), Rio Cupeyes (CUPE), Rio Yahuecas (GUIL), Martha Creek (MART), and Walker Branch (WALK). Notably, several of these sites have lateral inflows within the study reach under certain hydrologic conditions, which explains the necessity for the salt correction. For completeness, our dataset includes estimates for both uncorrected and salt-corrected k_{600} and K_{600} when a salt-correction is possible.

In addition to the complete dataset of all estimates (i.e., estimates from both frequentist and Bayesian approaches 290 for both uncorrected and salt-corrected data), we also include a curated dataset of recommended estimates of k_{600} and K_{600} . These recommended values are called “best_k600_mPerDay” and “best_K600_perDay” in the gasExchange_ds_v2.csv file. In all cases, the curated selection uses the Bayesian estimates because pooling across experiments and the use of informative priors resulted in more meaningful estimates than the non-Bayesian approach. The choice of whether we recommend an uncorrected or salt-corrected estimate stems from examining the relationships between uncorrected or salt-corrected 295 estimates (Figure S3).

3 Data description

3.1 Hydraulics

Our processing pipeline included calculating hydraulic parameters (v and z) for each NaCl injections and measurements of Q and w . These variables (v , z , Q , and w) for each NaCl release are available in the hydraulics_v2.csv file 300 (Aho et al., 2024). Here, we present those data in terms of at-a-station hydraulic geometries, which are commonly used to quantify reach-specific relationships between Q and w , z , and v (Leopold and Maddock, 1953):

$$w = aQ^b \quad (6)$$

$$z = cQ^f \quad (7)$$

$$v = kQ^m \quad (8)$$

305 In log-log space, these exponential relationships become linear relationships (e.g., $w = aQ^b$ becomes $\log(w) = \log(a) + b \times \log(Q)$), where the exponent is the slope log-linear relationship. Future users of NEON data can use these relationships along with discharge values from either the Continuous discharge data product (DP4.00130.001) or the Discharge field collection (DP1.20048.001) to approximate w , z , and v for NEON streams.

The hydraulic relationships are illustrated (Figures 4-6, Table 2). These geometries leverage field measurements of 310 w ($n=783$) and Q ($n=601$), estimates of v ($n=618$) from NaCl injections, and estimates of z ($n=581$) calculated from Q/v w . The timing of these measurements are denoted on site-specific hydrographs for each site (Figure S4) and their coverage of site-specific Q ranges are illustrated on flow duration curves (Figure S5). In general, $z - Q$ and $v - Q$ relationships were the

Deleted: ds

315 strongest, with all but three relationships having $R^2 > 0.5$ and relatively narrow 95% confidence intervals around the
coefficients from these relationships (Table 2). The $w - Q$ relationships are the weakest; 9 of the 24 sites have $R^2 < 0.5$ and
large 95% confidence intervals (Table 2). The $w - Q$ relationships may be weaker because our width estimates represent an
average of 30 measurements across the ~ 500-m study reach. It is possible that this across-reach averaging contributes to the
weaker relationships with Q and perhaps the relationships would be stronger if the measurement was only taken at the same
320 location as the Q measurement. However, this single point approach would be less compatible with v measured of the entire
reach and would alter the resulting calculations of z .

We assess the quality of our hydraulic parameters by examining the product of the constants ($a \times c \times k$) and sum
of the exponents ($b + f + m$) for unity on a site-by-site basis. These unity relationships stem from the fact that $Q = wzv$
(Leopold and Maddock, 1953). The products of the constants ranged from 0.93 to 1.04 and averaged 1.00; the site-specific
sum of the exponents ranged from 0.96 to 1.01 and averaged 1.00. There was one instance where the product of the
325 constants deviated more than 5% from unity (0.93, PRIN). Pringle Creek (PRIN) is a semi-arid, intermittent stream in
Texas, and so the deviation from unity may stem from logistical difficulties in measuring low and non-perennial stream
flows (Seybold et al., 2023; Shanafield et al., 2021). However, the remainder of the sites had both products of constants and
sums of exponents within 5% of unity.

We assess the representativeness of our hydraulic parameters by comparing to the literature values for the
330 exponents. Previous studies have shown large ranges for all three exponents, with ranges spanning 0 – 0.6 for b , 0-0.8 for f ,
and 0-0.8 for m (Park, 1977; Rhodes, 1977). In addition, exponents have not been shown to vary predictably with region or
climate (Park, 1977), but rather with channel geometry (Ferguson, 1986). Our parameters fall within published ranges and
our average values for each exponent ($b = 0.11$, $f = 0.33$, $m = 0.56$) are similar to averages in other studies that span
many streams ($b = 0.14$, $f = 0.30$ [Morel et al., 2020]; $b = 0.12$, $f = 0.37$, $m = 0.51$ [Dingman and Afshari, 2018]). In
335 sum, the hydraulics dataset and associated hydraulic-geometry relationships presented here can be used to characterize w , z ,
and v for NEON streams.

Deleted: (

Deleted:)

Deleted: (

Deleted:)

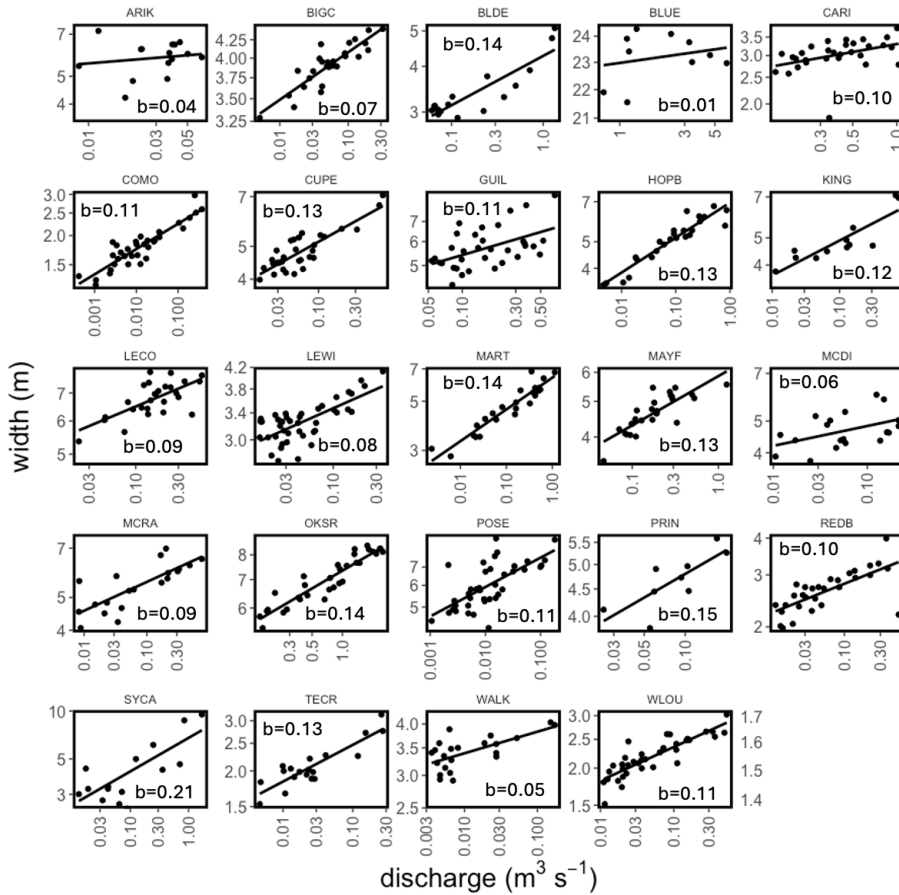


Figure 4. At-a-station hydraulic geometries for relationship between Q and w . The exponent b of the power law relationship $w = aQ^b$ is the linear slope of the relationship in log-log space and is denoted on each subplot.

Formatted: Font: 9 pt, Bold

Formatted: Font: 9 pt, Bold

Formatted: Font: 9 pt, Bold

Formatted: Font: 9 pt, Bold

Formatted: Font: 9 pt, Bold

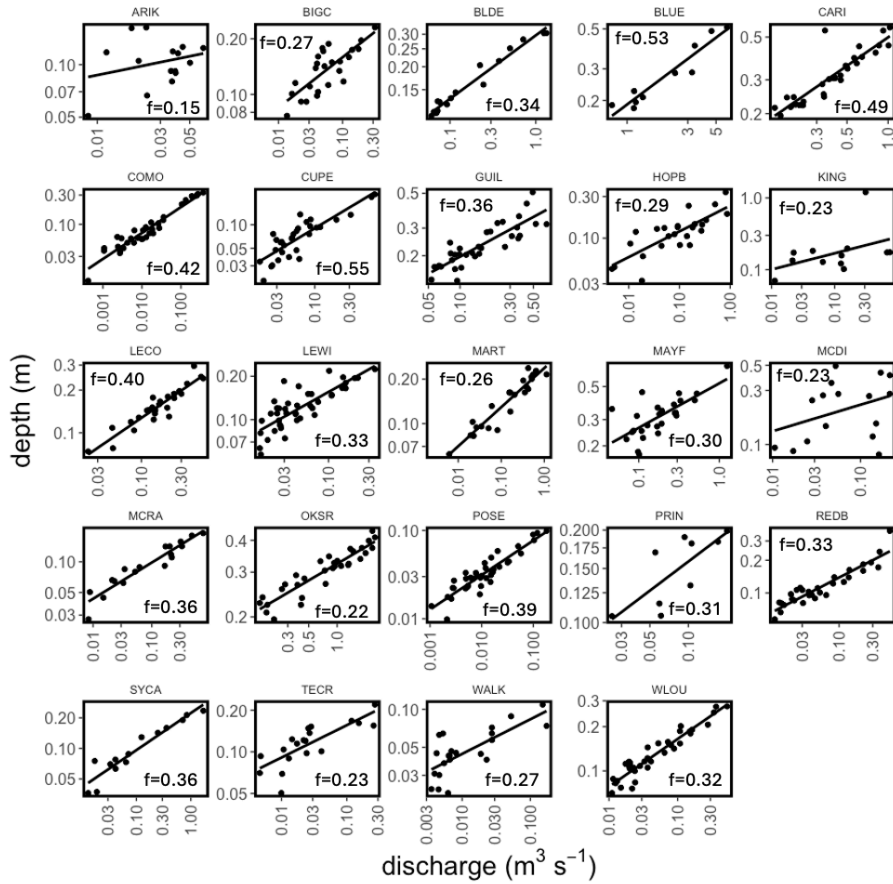


Figure 5. At-a-station hydraulic geometries for relationship between Q and z . The exponent f of the power law relationship $z = cQ^f$ is the linear slope of the relationship in log-log space and is denoted on each subplot.


Formatted: Font: (Default) +Headings (Times New Roman), 9 pt, Bold

Formatted: Font: (Default) +Headings (Times New Roman), 9 pt, Bold

Formatted: Font: (Default) +Headings (Times New Roman), 9 pt, Bold

Formatted: Font: (Default) +Headings (Times New Roman), 9 pt, Bold

Formatted: Font: (Default) +Headings (Times New Roman), 9 pt, Bold

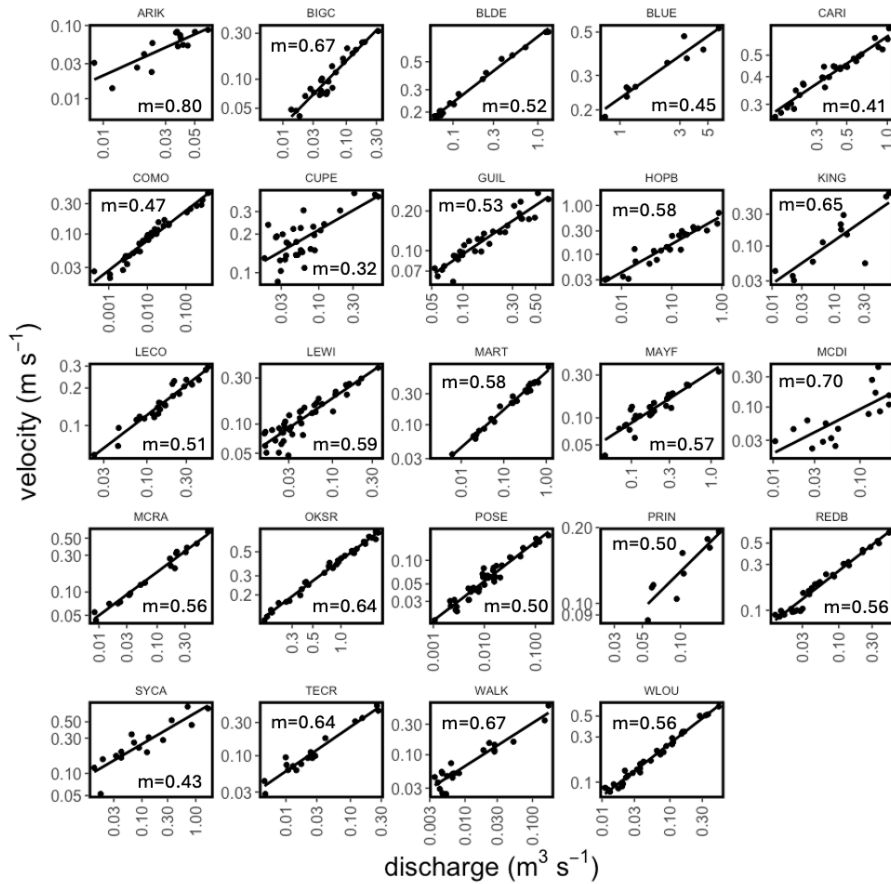

350 **Figure 6.** At-a-station hydraulic geometries for relationship between Q and v . The exponent of the power law relationship $v = kQ^m$ is the linear slope of the relationship in log-log space and is denoted on each subplot.

355

Formatted: Font: 9 pt, Bold

Formatted: Font: 9 pt, Bold

Formatted: Font: 9 pt, Bold

Formatted: Font: 9 pt, Bold

Table 2. Coefficients and exponents from at-a-station hydraulic geometries. The 95% confidence intervals for each coefficient and exponents are shown. In addition, the R² values from the log-linear relationships are also presented.

Site	$w = aQ^b$			$\bar{z} = cQ^f$			$v = kQ^m$								
	a	95% CI	b	95% CI	R ²	c	95% CI	f	95% CI	R ²	k	95% CI	m	95% CI	R ²
ARIK	6.7	(3.9,11)	0.04	(-0.11,0.19)	0.03	0.18	(0.06,0.56)	0.15	(-0.17,0.48)	0.08	0.84	(0.24,2.9)	0.80	(0.46,1.2)	0.66
BIGC	4.8	(4.6,5)	0.07	(0.05,0.08)	0.77	0.30	(0.22,0.4)	0.27	(0.18,0.37)	0.60	0.72	(0.55,0.95)	0.67	(0.58,0.76)	0.91
BLDE	4.3	(3.9,4.6)	0.14	(0.1,0.17)	0.78	0.30	(0.28,0.32)	0.34	(0.31,0.38)	0.97	0.79	(0.75,0.83)	0.52	(0.49,0.55)	0.99
BLUE	23	(22,24)	0.01	(-0.03,0.06)	0.06	0.19	(0.17,0.22)	0.53	(0.4,0.67)	0.91	0.23	(0.21,0.25)	0.45	(0.35,0.56)	0.92
CARI	3.3	(3.3,6)	0.10	(0.01,0.18)	0.16	0.50	(0.45,0.55)	0.49	(0.39,0.59)	0.80	0.61	(0.58,0.64)	0.41	(0.37,0.45)	0.94
COMO	2.9	(2.6,3.1)	0.11	(0.09,0.13)	0.82	0.51	(0.41,0.63)	0.42	(0.38,0.47)	0.92	0.68	(0.57,0.82)	0.47	(0.43,0.51)	0.95
CUPE	6.9	(6.3,7.5)	0.13	(0.1,0.16)	0.73	0.32	(0.22,0.47)	0.55	(0.42,0.68)	0.72	0.45	(0.32,0.63)	0.32	(0.2,0.44)	0.52
GUIL	7	(6.1,7.9)	0.11	(0.04,0.18)	0.26	0.45	(0.39,0.53)	0.36	(0.28,0.45)	0.73	0.32	(0.28,0.36)	0.53	(0.46,0.6)	0.90
HOPB	6.9	(6.6,7.3)	0.13	(0.11,0.15)	0.89	0.24	(0.18,0.31)	0.29	(0.2,0.39)	0.64	0.61	(0.47,0.79)	0.58	(0.49,0.66)	0.89
KING	6.5	(5.7,7.4)	0.12	(0.08,0.17)	0.76	0.28	(0.12,0.67)	0.23	(-0.1,0.55)	0.20	0.54	(0.24,1.2)	0.65	(0.35,0.95)	0.70
LECO	8	(7.4,8.6)	0.09	(0.05,0.13)	0.47	0.32	(0.28,0.37)	0.40	(0.34,0.47)	0.87	0.39	(0.35,0.43)	0.51	(0.45,0.56)	0.93
LEWI	4.2	(3.9,4.5)	0.08	(0.06,0.11)	0.51	0.33	(0.26,0.42)	0.33	(0.25,0.4)	0.66	0.72	(0.56,0.93)	0.59	(0.51,0.67)	0.84
MART	6.4	(6.6,8)	0.14	(0.12,0.16)	0.89	0.24	(0.22,0.26)	0.26	(0.22,0.3)	0.90	0.65	(0.6,0.7)	0.58	(0.55,0.61)	0.99
MAYF	5.9	(5.4,6.3)	0.13	(0.1,0.17)	0.68	0.53	(0.42,0.66)	0.30	(0.17,0.42)	0.50	0.32	(0.27,0.4)	0.57	(0.46,0.68)	0.83
MCDI	5.6	(4.7,6.6)	0.06	(0.0,0.12)	0.22	0.38	(0.14,1)	0.23	(-0.11,0.57)	0.13	0.46	(0.17,1.3)	0.70	(0.35,1)	0.57
MCRA	6.8	(6.1,7.5)	0.09	(0.05,0.12)	0.61	0.22	(0.19,0.27)	0.36	(0.29,0.42)	0.90	0.66	(0.58,0.75)	0.56	(0.52,0.61)	0.98
OKSR	7.3	(7.2,7.5)	0.14	(0.12,0.16)	0.87	0.32	(0.31,0.33)	0.22	(0.18,0.25)	0.85	0.42	(0.41,0.43)	0.64	(0.62,0.67)	0.99
POSE	9.7	(8.1,12)	0.11	(0.07,0.15)	0.46	0.19	(0.15,0.25)	0.39	(0.33,0.45)	0.84	0.54	(0.45,0.66)	0.50	(0.46,0.54)	0.94
PRIN	6.7	(5.1,8.9)	0.15	(0.04,0.25)	0.61	0.33	(0.17,0.61)	0.31	(0.07,0.56)	0.57	0.42	(0.24,0.72)	0.50	(0.26,0.73)	0.79
REDB	3.5	(3.1,4)	0.10	(0.06,0.14)	0.49	0.30	(0.26,0.35)	0.33	(0.28,0.39)	0.86	0.94	(0.84,1.1)	0.56	(0.53,0.6)	0.97
SYCA	6.8	(5.2,8.9)	0.21	(0.11,0.31)	0.65	0.22	(0.18,0.27)	0.36	(0.29,0.44)	0.91	0.67	(0.48,0.93)	0.43	(0.3,0.55)	0.80
TECR	3.3	(2.9,3.8)	0.13	(0.09,0.16)	0.79	0.27	(0.19,0.38)	0.23	(0.14,0.33)	0.62	1.10	(0.85,1.5)	0.64	(0.57,0.71)	0.95
WALK	4.3	(3.8,4.9)	0.05	(0.02,0.08)	0.43	0.16	(0.09,0.27)	0.27	(0.16,0.39)	0.55	1.50	(0.92,2.4)	0.67	(0.57,0.78)	0.90
WLOU	3.1	(2.8,3.3)	0.11	(0.09,0.14)	0.74	0.35	(0.31,0.39)	0.32	(0.29,0.36)	0.91	0.93	(0.85,1)	0.56	(0.53,0.58)	0.98

Formatted: Font: 9 pt, Bold

360

3.2 k_{600} and K_{600} estimates


As described above, k_{600} was estimated in two ways: 1) via an unpooled frequentist approach using the `def.calc.reacration()` function to estimate k_{600} independently for each experiment and 2) via a partially pooled Bayesian approach that partially pooled experiments from the same site according to Q . Both approaches were attempted for raw SF_6 concentrations and salt-corrected SF_6 concentrations. Salt-corrected SF_6 concentrations are only recommended for the five sites mentioned above (COMO, CUPE, GUIL, MART, WALK). All estimates are available in the `gasExchange_ds_v2.csv` file (Aho et al., 2024).

365
|
370 The relationship between the partially pooled and unpooled estimates (with salt-correction when appropriate) are shown in Figure 7. Any points falling above the 1:1 line are instances when partial pooling resulted in a lower estimate than no pooling, and vice versa. Overall, there are instances where partially pooled estimates are both higher and lower than unpooled estimates, suggesting that partial pooling successfully regularized estimates. This shrinkage is more obvious when both estimates are plotted against Q (Figure 8). We made recommendations (`best_k600_mPerDay` and `best_K600_perDay` in the `gasExchange_ds_v2.csv`) of which estimates to use; this curated dataset includes only Bayesian estimates, and a salt-correction was only recommended for the five sites where it was possible and necessary.

375
|
380 There are 339 estimates of k_{600} and K_{600} included in our recommended dataset (Figure 9, Table 3) that span large Q ranges at each site (Figure S4-S5). The number of estimates per site range from four (Kings Creek [KING] and Pringle Creek [PRIN]) to 29 (Posey Creek [POSE]). The `issueLog.csv` file documents the reason why 340 experiments did not successfully produce gas exchange estimates. These reasons are grouped into broad categories and summarized in Table S2. It is possible that some of the experiments that we removed could produce an estimate of k_{600} and K_{600} (e.g., if there was incomplete mixing at the first station, one could remove this station and only estimate k_{600} and K_{600} for stations two to four). However, this type of selective cleaning would have resulted in less comparable estimates (e.g., changing the length of the study reach), so we chose to include only the most comparable and high-quality experiments in this dataset.

385 The values for recommended estimates of k_{600} ranged from 0.1 m d^{-1} to 142 m d^{-1} . LeConte Creek (LECO) had the highest mean k_{600} (mean \pm sd: $53 \pm 35 \text{ m d}^{-1}$) while Pringle Creek (PRIN) had the lowest mean k_{600} (mean \pm sd: $1.1 \pm 0.1 \text{ m d}^{-1}$). Lower Hop Brook (HOPB) had the widest spread of k_{600} values, with estimates ranging almost two orders of magnitude ($1.5 - 124 \text{ m d}^{-1}$) while Pringle Creek (PRIN) had the smallest spread, with estimates only ranging from 0.9 to 1.2 m d^{-1} . The values for recommended estimates of K_{600} range from 1.3 to 481 d^{-1} . Like for k_{600} , LeConte Creek (LECO) had the highest mean K_{600} (mean \pm sd: $276 \pm 94 \text{ d}^{-1}$) while Pringle Creek (PRIN) had the lowest mean K_{600} (mean \pm sd: $7.0 \pm 1.9 \text{ d}^{-1}$). Also, Lower Hop Brook (HOPB) had the widest spread of K_{600} values, with estimates ranging from 30 to 368 d^{-1} while Pringle Creek (PRIN) had the smallest spread, with estimates ranging from 5.3 to 9.3 d^{-1} . These ranges, in part, reflect the various ranges of Q captured at each site (Table S3). HOPB was among the sites with the largest range of Q captured, while PRIN was among the sites with the smallest Q range captured (Table S3). Overall, this large compilation of k_{600} and K_{600} estimates indicate high variability both across and within sites.

395 Finally, to allow future users to scale k_{600} and K_{600} with Q , we include both the slope and intercept for the $k_{600} - Q$ and $K_{600} - Q$ relationships (Table 4) and the stanfit objects for the Bayesian models (Other Entities in the data release). The slope and intercept will allow future users a straightforward way to scale k_{600} or K_{600} as a function of Q at each site. The stanfit objects, on the other hand, will allow future users to sample from the posterior distribution of slope and intercept to assess uncertainty in the scaling relationships.

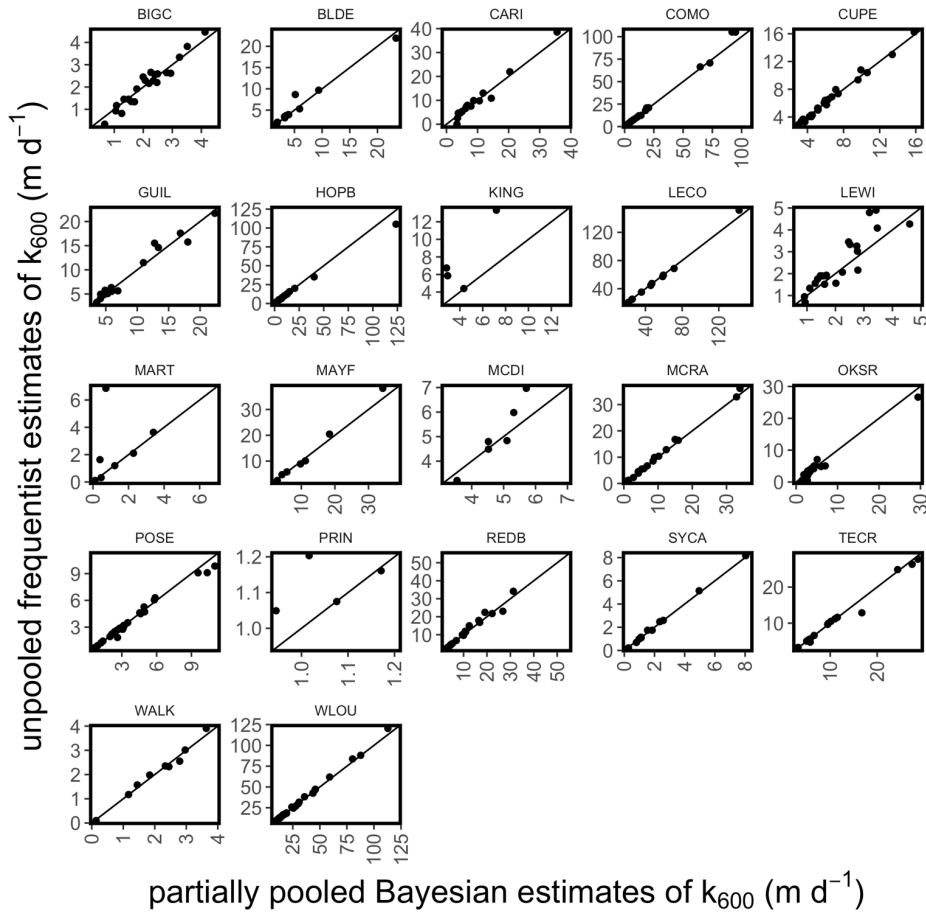

400


Figure 7. Comparison of partially pooled Bayesian and unpooled frequentist estimates of k_{600} . Black 1:1 lines overlay the points for reference.

Formatted: Font: 9 pt, Bold

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt, Bold

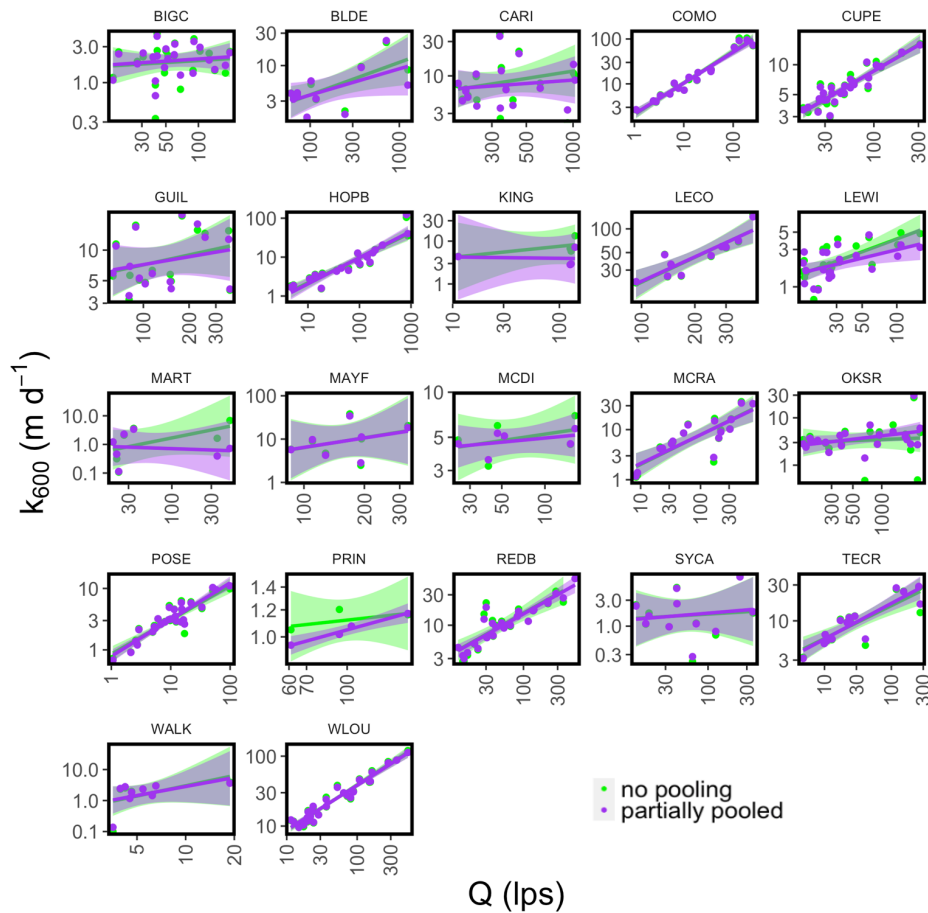

405 **Figure 8.** Relationship between Q and partially pooled Bayesian and unpooled frequentist estimates of k_{600} . The unpooled estimates are shown in green, with a green regression line with 95% confidence intervals, while the partially pooled estimates are shown in purple with a purple regression line with 95% confidence intervals.

Formatted: Font: 9 pt, Bold

Formatted: Font: 9 pt, Bold

Formatted: Font: 9 pt, Bold

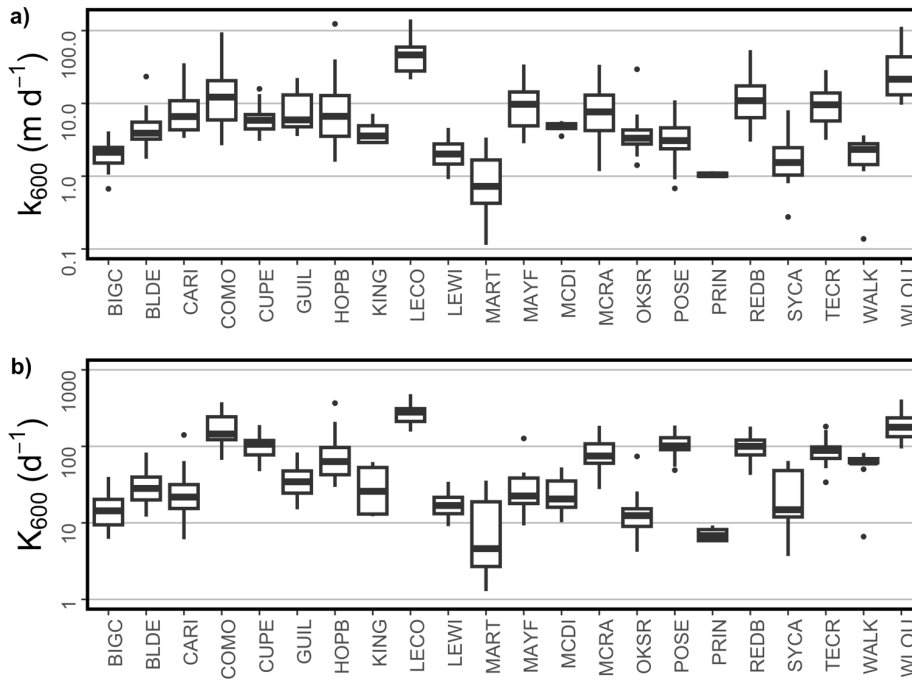


Figure 9. Box plots of the test estimates of a) k_{600} and b) K_{600} by site. Boxes represent the median and interquartile range (IQR), whiskers mark the lesser of first (third) quartile - ($+)$ 1.5 x IQR or minimum/maximum, and points denote outliers more extreme than first (third) quartile - ($+)$ 1.5 x IQR.

Deleted: k_{600}
 Deleted: K_{600}
 Formatted: Font: 9 pt, Bold

Table 3. Mean, standard deviation (s.d.), minimum, maximum, and count for k_{600} ($m d^{-1}$) and K_{600} (d^{-1}) estimates by site.

Site	n	k_{600} ($m d^{-1}$)				K_{600} (d^{-1})			
		mean	s.d.	min	max	mean	s.d.	min	max
BIGC	22	2.1	0.9	0.7	4.1	15.6	7.8	6.2	39.9
BLDE	11	5.9	6.2	1.7	23.4	33	19.9	12.1	83.1
CARI	16	9.5	8.3	3.4	35.6	31.7	32.5	6.1	140.9
COMO	17	26.8	32.1	2.7	94.8	182.7	91.9	66.6	377.3
CUPE	26	6.5	3.1	3.1	15.8	104.7	33.5	47.3	190.1
GUIL	15	9.3	6	3.6	22.4	39.7	21.7	15	83.1

Deleted: k_{600}
 Deleted: K_{600}
 Deleted: ¶
 Formatted: Font: 9 pt, Bold
 Formatted: Font: 9 pt, Bold
 Formatted: Font: 9 pt, Bold
 Deleted: k_{600}

HOPB	19	15	27.8	1.6	123.6	90.7	80.4	29.5	367.6
KING	4	4.3	2	2.8	7.2	34.5	25.6	12.2	62.4
LECO	10	53.2	35.4	21.4	142.2	275.7	94.4	156	481.4
LEWI	21	2.2	1	0.9	4.6	19.2	7.1	9.1	34.5
MART	7	1.2	1.2	0.1	3.4	12.3	13.3	1.3	35.7
MAYF	7	12.3	11	2.8	34.3	39	40.5	9.3	126.9
MCDI	6	4.8	0.8	3.5	5.7	26.8	16.7	10.2	53.2
MCRA	16	10.6	9.9	1.2	33.9	87.8	46.5	27.6	185.9
OKSR	21	4.8	5.8	1.4	29.4	15.4	14.4	4.2	74
POSE	29	3.8	2.6	0.7	11	108.6	35.5	48.9	187.4
PRIN	4	1.1	0.1	0.9	1.2	7.2	1.7	5.7	9.2
REDB	25	14.1	11.3	3	53.9	102.9	40.2	42.4	181.4
SYCA	11	2.3	2.3	0.3	8	30	23.8	3.7	64.6
TECR	15	12	8.4	3.2	28.7	93.5	42	33.9	181.9
WALK	9	2.1	1.1	0.1	3.6	59.9	22.2	6.6	82.2
WLOU	28	31.6	26	9.6	112.9	199.6	83.4	93.8	410

Table 4. Coefficients and exponents for $k_{600} - Q$ and $K_{600} - Q$ relationships. Estimates and standard deviations (SD) are given.

Site	$k_{600} = aQ^b$				$K_{600} = aQ^b$			
	a		b		a		b	
	estimate	SD	estimate	SD	estimate	SD	estimate	SD
BIGC	-0.31	1.55	0.11	0.18	3.55	1.57	-0.11	0.19
BLDE	-2.11	2.27	0.38	0.24	2.88	2.15	0.05	0.23
CARI	0.06	3.51	0.19	0.34	6.50	3.69	-0.32	0.36
COMO	-2.30	0.34	0.69	0.05	3.17	0.32	0.27	0.04
CUPE	-2.74	0.54	0.54	0.07	4.84	0.92	-0.03	0.11
GUIL	-0.51	2.84	0.27	0.30	4.50	2.58	-0.10	0.28
HOPB	-3.83	0.64	0.67	0.07	0.94	0.48	0.39	0.05
KING	-1.97	2.47	0.38	0.25	0.06	2.76	0.36	0.30
LECO	-5.68	2.21	0.97	0.23	0.66	1.85	0.50	0.19
LEWI	-2.18	1.78	0.36	0.23	3.48	1.78	-0.07	0.23
MART	-0.55	4.34	0.03	0.55	3.82	4.34	-0.23	0.54
MAYF	-3.44	5.44	0.59	0.57	-0.04	5.46	0.35	0.57
MCDI	0.40	2.02	0.13	0.24	0.29	4.06	0.33	0.48
MCRA	-3.07	1.06	0.57	0.12	2.37	0.93	0.22	0.11

Deleted: k600 – Q and K600 – Q r

Formatted: Font: 9 pt, Bold

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt, Bold

Deleted: k_{600}

Deleted: $= aQ^b$

OKSR	-1.41	1.94	0.25	0.18	2.30	2.04	0.02	0.19
POSE	-2.90	0.36	0.60	0.05	3.21	0.37	0.21	0.05
PRIN	-2.69	0.88	0.30	0.10	2.37	0.97	-0.05	0.11
REDB	-2.99	0.70	0.63	0.08	1.97	0.60	0.30	0.07
SYCA	-0.73	2.67	0.14	0.32	5.15	2.77	-0.25	0.33
TECR	-1.47	0.63	0.48	0.08	2.61	0.71	0.23	0.09
WALK	-4.03	3.48	0.73	0.56	0.96	3.09	0.48	0.50
WLOU	-2.15	0.30	0.64	0.04	2.48	0.31	0.33	0.04

4 Code and data availability

The Reaeration and Discharge data are available for download from the NEON data portal (<http://data.neonscience.org>). The reaRates R package is available at <https://doi.org/10.5281/zenodo.12786089> (Cawley et al., 2024). The dataset of hydraulic parameters and gas exchange estimates is available from the Environmental Data Initiative: <https://doi.org/10.6073/pasta/18dccc1871ee71cf0b69f2ee4082839d0> (Aho et al., 2024).

Deleted: <https://doi.org/10.6073/pasta/8faa6ed1b1d8d1e7ad6e9e897bcacc49>

5 Conclusions

Here, we present 339 estimates of gas exchange velocity (k_{600}) and gas exchange rate (K_{600}) from 22 NEON streams. To our knowledge, this dataset is the largest compilation of gas-exchange estimates from standardized tracer-gas experiments (i.e., standardized methods across all experiments and sites) published to date. Given the wide geographic spread of NEON streams (e.g., spanning from Puerto Rico to Alaska), this dataset will enable understanding gas exchange across biomes. In addition, in our estimation process, we leverage new Bayesian multilevel models that allow estimates of gas exchange to be partially pooled by site, according to Q ; this modeling approach can be applied to future studies where repeat tracer-gas experiments are conducted to characterize gas exchange as a function of Q . Here, we also present relationships between discharge and gas exchange (i.e., $k_{600} - Q$ and $K_{600} - Q$) from these models that will allow future users to scale k_{600} or K_{600} as a function of Q in NEON streams.

Deleted: for each

Deleted: s

Regarding hydraulics, we present hydraulic geometries for 24 NEON streams. These geometries leverage field measurements of w and Q , and estimate v and z . The coefficients and exponents from at-a-station hydraulic geometries are presented, and can be used in the future, along with Continuous discharge (DP4.00130.001), to estimate w , v , and z at NEON streams. In sum, this large dataset could allow for quantification of both within- and across-reach variability in hydraulics and gas exchange in streams, which could be useful to modeling stream metabolism, greenhouse gas emissions, and other biogeochemical fluxes in NEON streams. In addition, this dataset may facilitate the development of new predictive models of gas exchange in small streams.

Deleted: the

Deleted: ,

6 Author contribution

Conceptualization: KA, KC, RH, ROH, WD, KG; Methodology: KA, KC, RH, ROH with support from all authors; Software: KA, KC, ROH; Writing – Original Draft: KA with support from all authors; Writing – Review and Editing: KA, KC, RH, ROH, WD, KG.

7 Competing interests

465 The authors declare that they have no conflict of interest.

8 Acknowledgements

The idea for this dataset initially came from meetings of the National Ecological Observatory Network (NEON) Re-aeration Technical Working Group.

470 References

- Aho, K. S., Cawley, K., Hensley, R., Hall, R. O., Dodds, W., and Goodman, K.: Gas exchange velocities (k600), gas exchange rates (K600), and hydraulic geometries for streams and rivers derived from the NEON Reaeration field and lab collection data product (DP1.20190.001) ver 2, Environmental Data Initiative, <https://doi.org/10.6073/pasta/18dce1871ee71cf0b69f2ee4082839d0>, 2024.
- 475 Appling, A. P., Hall, R. O., Yackulic, C. B., and Arroita, M.: Overcoming Equifinality: Leveraging Long Time Series for Stream Metabolism Estimation, *J Geophys Res Biogeosci*, 123, 624–645, <https://doi.org/10.1002/2017JG004140>, 2018.
- Aristegi, L., Izagirre, O., and Elosegi, A.: Comparison of several methods to calculate reaeration in streams, and their effects on estimation of metabolism, *Hydrobiologia*, 635, 113–124, <https://doi.org/10.1007/s10750-009-9904-8>, 2009.
- 480 Cawley, K., Aho, K. S., and Hall, R. O.: reaRates R package, NEONScience/NEON-reaeration: v0.0.2, Zenodo, <https://doi.org/10.5281/zenodo.12786089>, 2024.
- Churchill, M. A., Elmore, H. L., and Buckingham, R. A.: The Prediction of Stream Reaeration Rates, in: *Advances in Water Pollution Research*, Elsevier, 89–136, <https://doi.org/10.1016/B978-1-4832-8391-3.50015-4>, 1964.
- Cole, J. J. and Caraco, N. F.: Atmospheric exchange of carbon dioxide in a low-wind oligotrophic lake measured by the addition of SF6, *Limnol Oceanogr*, 43, 647–656, <https://doi.org/10.4319/lo.1998.43.4.0647>, 1998.
- 485 Dingman, S. L. and Afshari, S.: Field verification of analytical at-a-station hydraulic-geometry relations, *J Hydrol (Amst)*, 564, 859–872, <https://doi.org/10.1016/j.jhydrol.2018.07.020>, 2018.
- Ferguson, R. I.: Hydraulics and hydraulic geometry, *Progress in Physical Geography: Earth and Environment*, 10, 1–31, <https://doi.org/10.1177/030913338601000101>, 1986.
- 490 Gabry, J., Veen, D., Team, S. D., Andrae, M., Betancourt, M., Carpenter, B., Gao, Y., Gelman, A., Goodrich, B., Lee, D., Song, D., and Trangucci, R.: shinystan: Interactive visual and numerical diagnostics and posterior analysis for Bayesian models, 2023.
- Genzoli, L. and Hall, R. O.: Shifts in Klamath River metabolism following a reservoir cyanobacterial bloom, *Freshwater Science*, 35, 795–809, <https://doi.org/10.1086/687752>, 2016.
- Hall, R. O. and Hotchkiss, E. R.: Stream Metabolism, in: *Methods in Stream Ecology*, Academic Press, 219–233, 2017.
- 495 Hall, R. O. and Ulseth, A. J.: Gas exchange in streams and rivers, *WIREs Water*, 7, 1–18, <https://doi.org/10.1002/wat2.1391>, 2020.
- Hall, R. O., Tank, J. L., Baker, M. A., Rosi-Marshall, E. J., and Hotchkiss, E. R.: Metabolism, Gas Exchange, and Carbon Spiraling in Rivers, *Ecosystems*, 19, 73–86, <https://doi.org/10.1007/s10021-015-9918-1>, 2016.
- 500 Ho, D. T., Schlosser, P., and Orton, P. M.: On Factors Controlling Air-Water Gas Exchange in a Large Tidal River, *Estuaries and Coasts*, 34, 1103–1116, <https://doi.org/10.1007/s12237-011-9396-4>, 2011.
- Hornberger, G. M. and Kelly, M. G.: Atmospheric Reaeration in a River Using Productivity Analysis, *Journal of the Environmental Engineering Division*, 101, 729–739, <https://doi.org/10.1061/JEEGAV.0000398>, 1975.
- Jähne, B., Münnich, K. O., Bösinger, R., Dutzi, A., Huber, W., and Libner, P.: On the parameters influencing air-water gas exchange, *J Geophys Res Oceans*, 92, 1937–1949, <https://doi.org/10.1029/JC092iC02p01937>, 1987.
- 505 Leopold, L. B. and Maddock, T. Jr.: The Hydraulic Geometry of Stream Channels and Some Physiographic Implications, *Geological Survey Professional Paper* 252, 1953.

Deleted: ¶

Deleted:

Formatted: Font: 10 pt

Formatted: Indent: Left: 0", Hanging: 0.25"

Deleted:

Deleted: 1

Deleted: <https://doi.org/10.6073/pasta/8faa6ed1b1d8d1e7ad6c9e897bcacc49>

Formatted: Indent: Hanging: 0.25"

Formatted: Indent: Left: 0", Hanging: 0.25"

- Liu, S., Kuhn, C., Amatulli, G., Aho, K., Butman, D. E., Allen, G. H., Lin, P., Pan, M., Yamazaki, D., Brinkerhoff, C., Gleason, C., Xia, X., and Raymond, P. A.: The importance of hydrology in routing terrestrial carbon to the atmosphere via global streams and rivers, *Proceedings of the National Academy of Sciences*, 119, 1–9, <https://doi.org/10.1073/pnas.2106322119>, 2022.
- 520 Maurice, L., Rawlins, B. G., Farr, G., Bell, R., and Goody, D. C.: The Influence of Flow and Bed Slope on Gas Transfer in Steep Streams and Their Implications for Evasion of CO₂, *J Geophys Res Biogeosci*, 122, 2862–2875, <https://doi.org/10.1002/2017JG004045>, 2017.
- McDowell, M. J. and Johnson, M. S.: Gas Transfer Velocities Evaluated Using Carbon Dioxide as a Tracer Show High Streamflow to Be a Major Driver of Total CO₂ Evasion Flux for a Headwater Stream, *J Geophys Res Biogeosci*, 123, 2183–2197, <https://doi.org/10.1029/2018JG004388>, 2018.
- 525 Morel, M., Booker, D. J., Gob, F., and Lamouroux, N.: Consistent Theoretical and Empirical Predictions of at-a-Station Hydraulic Geometry Exponents in Stream Reaches, *Water Resour Res*, 56, 1–16, <https://doi.org/10.1029/2020WR027242>, 2020.
- NEON: Discharge field collection (DP1.20048.001) RELEASE-2023, <https://doi.org/https://doi.org/10.48443/tys0-ze83>, 2023a.
- 530 NEON: Reaeration field and lab collection (DP.20190.001) RELEASE-2023, <https://doi.org/https://doi.org/10.48443/bk29-6c91>, 2023b.
- NEON: Discharge field collection (DP1.20048.001) RELEASE-2024, <https://doi.org/10.48443/3746-1981>, 2024a.
- NEON: Reaeration field and lab collection (DP1.20190.001) RELEASE-2024, <https://doi.org/10.48443/4z25-4b94>, 2024b.
- 535 O'Connor, D. J. and Dobbins, W. E.: Mechanism of Reaeration in Natural Streams, *Transactions of the American Society of Civil Engineers*, 123, 641–666, <https://doi.org/10.1061/TACEAT.0007609>, 1958.
- Park, C. C.: World-wide variations in hydraulic geometry exponents of stream channels: An analysis and some observations, *J Hydrol (Amst)*, 33, 133–146, [https://doi.org/10.1016/0022-1694\(77\)90103-2](https://doi.org/10.1016/0022-1694(77)90103-2), 1977.
- R Core Team: R: A language and environment for statistical computing, 2023.
- 540 Rathbun, R. E.: Reaeration Coefficients of Streams—State-of-the-Art, *Journal of the Hydraulics Division*, 103, 409–424, <https://doi.org/10.1061/JYCEAJ.0004734>, 1977.
- Raymond, P. A., Zappa, C. J., Butman, D., Bott, T. L., Potter, J., Mulholland, P., Laursen, A. E., McDowell, W. H., and Newbold, D.: Scaling the gas transfer velocity and hydraulic geometry in streams and small rivers, *Limnology and Oceanography: Fluids and Environments*, 2, 41–53, <https://doi.org/10.1215/21573689-1597669>, 2012.
- 545 Rhodes, D. D.: The b-f-m diagram; graphical representation and interpretation of at-a-station hydraulic geometry, <https://doi.org/10.2475/ajs.277.1.73>, 1977.
- Riley, A. J. and Dodds, W. K.: Whole-stream metabolism: Strategies for measuring and modeling diel trends of dissolved oxygen, *Freshwater Science*, 32, 56–69, <https://doi.org/10.1899/12-058.1>, 2013.
- 550 Rocher-Ros, G., Stanley, E. H., Loken, L. C., Casson, N. J., Raymond, P. A., Liu, S., Amatulli, G., and Sponseller, R. A.: Global methane emissions from rivers and streams, *Nature*, 621, <https://doi.org/10.1038/s41586-023-06344-6>, 2023.
- Seybold, E. C., Bergstrom, A., Jones, C. N., Burgin, A. J., Zipper, S., Godsey, S. E., Dodds, W. K., Zimmer, M. A., Shanafield, M., Detry, T., Mazor, R. D., Messenger, M. L., Olden, J. D., Ward, A., Yu, S., Kaiser, K. E., Shogren, A., and Walker, R. H.: How low can you go? Widespread challenges in measuring low stream discharge and a path forward, *Limnol Oceanogr Lett*, 8, 804–811, <https://doi.org/10.1002/lol2.10356>, 2023.
- 555 Shanafield, M., Bourke, S. A., Zimmer, M. A., and Costigan, K. H.: An overview of the hydrology of non-perennial rivers and streams, *Wiley Interdisciplinary Reviews: Water*, 8, 1–25, <https://doi.org/10.1002/wat2.1504>, 2021.
- Team, S. D.: RStan: the R interface to Stan, 2023.
- 560 Ulseth, A. J., Hall, R. O., Boix Canadell, M., Madinger, H. L., Niayifar, A., and Battin, T. J.: Distinct air–water gas exchange regimes in low- and high-energy streams, *Nat Geosci*, 12, 259–263, <https://doi.org/10.1038/s41561-019-0324-8>, 2019.
- Wanninkhof, R.: Relationship between wind speed and gas exchange over the ocean, *J Geophys Res*, 97, 7373–7382, <https://doi.org/10.1029/92JC00188>, 1992.
- Wanninkhof, R., Ledwell, J. R., and Broecker, W. S.: Gas exchange–wind speed relation measured with sulfur hexafluoride on a lake, *Science* (1979), 227, 1224–1226, <https://doi.org/10.1126/science.227.4691.1224>, 1985.

565 Zappa, C. J., McGillis, W. R., Raymond, P. A., Edson, J. B., Hints, E. J., Zemelink, H. J., Dacey, J. W. H., and Ho, D. T.:
Environmental turbulent mixing controls on air-water gas exchange in marine and aquatic systems, *Geophys Res Lett*,
34, <https://doi.org/10.1029/2006GL028790>, 2007.