



The Loobos ecosystem first tower dataset: meteorology, turbulent fluxes and net ecosystem exchange (1996 to 2021)

Hong Zhao¹, Han Dolman², Jan Elbers^a, Wilma Jans³, Bart Kruijt³, Eddy Moors⁴, Henk Snellen¹, Jordi Vila-Guerau de Arellano¹, Wouter Peters^{1, 5}, Maarten C. Krol¹, Ronald Hutjes³, Michiel van der Molen^{1,*}

- 5 1: Environmental Sciences Group, Meteorology and Air Quality, Wageningen University, Wageningen, the Netherlands
 - 2: Royal NIOZ, the Netherlands Institute for Sea Research, Den Burg, the Netherlands
 - 3: Earth Systems and Global Change group, Wageningen University, Wageningen, the Netherlands
 - 4: IHE Delft, Institute for Water Education, Delft, the Netherlands
- 5: Energy and Sustainability Research Institute Groningen (ESRIG), Centre for Isotope Research (CIO), University of Groningen, the Netherlands
 - a: Formerly at: Earth Systems and Global Change group, Wageningen University, Wageningen, the Netherlands
 - *: corresponding author: Michiel K. van der Molen (Michiel.vanderMolen@wur.nl)

15 Abstract

20

25

We describe a 25 years (1996-2021) observational dataset of meteorology, turbulent fluxes and net ecosystem exchange collected from the first tower at the Loobos site, the Netherlands (NL). This is one of the 17 first FLUXNET sites globally. The presented dataset contains six data streams, namely (1) the NL-Loo_BM stream including meteorological data: four-component radiation (radiation balance), air temperature and relative humidity, wind information, precipitation and throughfall, photosynthetic active radiation, bole temperature and soil heat flux), (2) the NL-Loo_Profile stream containing vertical profiles of CO₂ mole fraction, H₂O pressure, air temperature and relative humidity, (3) the NL-Loo_ST stream derived from the aforementioned two streams including total stored heat flux, H₂O and CO₂ fluxes below the canopy, (4) the NL-Loo_EC stream including EC measurements of CO₂ flux, sensible heat and latent heat fluxes, (5) the NL-Loo_Soil stream including vertical profiles of soil moisture and temperature and ground water level data, and (6) ancillary data including soil respiration, vegetation properties (i.e., tree height, stem width and dry aboveground biomass, Leaf Area Index, sap flow, needle foliage properties and the associated nutrient analysis) and ground water level. The data quality of these data streams is assured through standard operating procedures. To show the utility of gathering long-term and





comprehensive measurements, we present analyses of mean diurnal storage CO2 flux, the trend of NEE 30 over the last 25 years and the energy balance closure. Being one of the longest datasets of its kind in a temperate forest, this valuable dataset is anticipated to be used for investigating the performance of various gap-filling algorithms, semi-climatological trends including extreme climatic events (such as the heatwave of 2003 and the drought of 2018) and the role of forest ecosystem in the carbon, water and 35 energy cycle. Meanwhile, it is expected to be employed for validating modelled land-atmosphere CO2 and turbulent exchange fluxes, verifying model assumptions and serving as ground truth for satellite data retrievals. The dataset is accessible at https://doi.org/10.5281/zenodo.15721310 under a CC-BY4 open use license, where it is published as an associated station-like site and the same data will also be available at the European Fluxes Database Cluster. Hence, the data will be committed to the FLUXNET Data System Initiative too. It is noted that in 2021 a second tower was erected next to the first tower, which 40 was labelled as an ICOS Ecosystem Class 2 site in 2023 (Van Der Molen et al., 2025). Here we describe the first tower's instrumentation and data processing up to a Level 1 product (derived variables and quality checks, but not gap-filled).

1 Introduction

60

In 1995, a tower was built in the Loobos forest area in the Netherlands to measure water, heat and momentum fluxes for investigating forest evapotranspiration using the eddy covariance method (referred to as EC from here on) (Dolman et al., 1998). Following the Kyoto negotiations, which sought to operationalize the United Nations Framework Convention on Climate Change by committing industrialized countries and economies in transition to limit and reduce greenhouse gas emissions

(https://unfccc.int/kyoto_protocol, last access: 15 December 2024). One of the key questions raised by the Kyoto Protocol was how to calculate the changes in carbon stocks associated with land use changes and forestry activity (Igbp Terrestrial Carbon Working Group, 1998). This required to also observe the carbon dioxide (CO₂) balance for forest ecosystems (Valentini, 2000). Consequently, since 1996, CO₂ flux measurements have been conducted in Loobos, which subsequently became one of the 17 first FLUXNET sites globally (https://fluxnet.org/data/la-thuile-dataset/lathuile-data-summary/, last access: 15 December 2024).

The Loobos site is located near Kootwijk (52°9′59.50″N - 5°44′36.99″E). A 22 m tall tower was built on a small dune (please refer to photos in Appendix 0). The tower base is at 26.4 m above mean sea level. The main tree species is Scots pine (*Pinus sylvestris*). In all directions the forest extends for more than 1.5 km. The forest was planted around 1911 on bare sand (Kadaster, 2025) to control the drifting of the sand and provide wood for the mining industry. Before planting, sand dunes had formed with heights between 2 and 10 m relative to the valleys in between (see Fig. 2 in (Van Der Molen et al., 2025)). The trees are now



70

75

80

85

90

95



3

widely spaced with some open spots. In a radius of 500 m around the flux tower 89% of the area is covered with Scots pine (Pinus sylvestris), 3.3% with Corsican or black pine, 2.3% with birch, 1.3% with Douglas fir, 0.6% with oak (Quercus Robur) and 3.5% of the area is open and mostly covered with heather and grass (Moors, 2012). The average tree height increased from 15.3 m in 1996 to 20.6 m in 2020, with a mean annual growth rate of 0.22 m. Trees on top of dunes tend to be shorter than trees growing in the valleys, hence the local topography is not visible from above the canopy. The undergrowth of the forest has exhibited a notable increase in coverage over time, particularly since 1976. It consists of mosses (Polytrichum spp.), grasses (Deschampsia flexuosa), blueberries (Vaccinium myrtilus), and shrubs (dominated by American cherry of Prunus serotina and Amelanchier lamarckii) (Moors, 2012) (please refer to photos in Appendix 0). It is noteworthy that at the outset of the observation period, Vaccinium was absent, yet it now constitutes the majority of shrubs, indicating a notable increase in its spread over time (please refer to photos in Appendix 0). Because of the local topography caused by the sand dunes, the distance to the ground water table depends on the location. In the valleys, the ground water table is at a depth ranging from 2.5 to 4.3 m below the surface. More details on the soil and vegetation composition in the first period of the site can be found in the report by Moors (2012), while Van Der Molen et al. (2025) offer insights into Loobos's geological history and ecosystem composition.

The collected dataset contains measurements of meteorological (e.g., radiation components, precipitation, vertical profiles of wind, air temperature, humidity and CO2, soil temperature and moisture content), turbulent fluxes (i.e., latent heat and sensible heat and CO₂) at half-hourly intervals. The dataset from the first tower has been used in many national and international studies and has been cited more than 150 times in peer-reviewed articles, including papers in high impact journals like Nature (Keenan et al., 2013; Valentini, 2000; Enquist et al., 2003). The conducted studies range from: (1) the development of data quality control and gap-filling strategies for long term energy flux datasets (Falge, 2001; Falge et al., 2001; Reichstein et al., 2005; Pastorello et al., 2020; Meesters et al., 2012; Göckede et al., 2008), (2) data analysis including trend analysis (Dolman et al., 2002; Falge et al., 2002; Tong et al., 2023; Elbers et al., 2011) and to study the response of the ecosystem to droughts, heat waves and warm winters (Lansu et al., 2020; Van Der Horst et al., 2019; Granier et al., 2007; Zhou et al., 2024; Mallick et al., 2024; García-García et al., 2023; Vermeulen et al., 2015), (3) analyses of carbon and water fluxes exchange dynamics via model development and validation studies (Kramer et al., 2002; Veroustraete et al., 2002; Falge et al., 2003; Papale and Valentini, 2003; Hari et al., 2018; Aubinet et al., 1999; Wu et al., 2020; Strebel et al., 2023; Vermeulen et al., 2015), (4) the development of land surface models and parameter optimizations (Chen et al., 2016; Raoult et al., 2016; Harper et al., 2016; Largeron et al., 2018), (5) the development of the CarboEurope regional experiment strategy (Dolman et al., 2006), (6) ecological and land management studies (Van Wijk and Bouten, 1999; Dolman et al., 2003; Ceulemans et al., 2003; Balzarolo et al., 2016;



105

115

120

125



4

Churkina et al., 2003; Jansen et al., 2023; George et al., 2021), (7) serving as ground truth for satellite data retrievals such as evapotranspiration (Verstraeten et al., 2005; Hu et al., 2017; Petropoulos, 2024) and gross primary productivity (Verma et al., 2014; Joiner et al., 2014), and (8) groundwater management (Moors, 2012).

While the tower and its associated dataset were described in a limited manner (Dolman et al., 2002; Elbers et al., 2011), the purpose of this paper is to provide a comprehensive overview of the instrumentation, data processing and the resulting data archive, enabling its use in data analysis studies, model development and validation of satellite data retrievals. Sect. 2 describes the instrumentation, basic data processing, data quality control and obtained data records. Sect. 3 shows data evaluations by presenting data cross-check results, the mean diurnal storage flux in comparison to EC measured fluxes and total fluxes, seasonal and interannual variations in net ecosystem exchange of CO₂ flux and energy balance residual. Sect. 4 provides conclusions and information on data and code accessibilities.

2 Instrumentation and data processing

110 **2.1** In situ measurements

2.1.1 Meteorological variables

At the top of the scaffolding tower (highest platform at 22 m), standard meteorological measurements were conducted, including air temperature, relative humidity, horizontal wind speed and wind direction. Air pressure was measured at the site at 15 m height starting from February 1999. The four radiation components were measured individually: incoming and reflected shortwave (solar) radiation using two pyranometers, and incoming and emitted longwave (thermal infrared) radiation using two pyrgeometer equipped with a ventilated sensor to ensure reliable readings, particularly during dew and frost events. Additionally, quantum sensors were installed on 9 August 2001 to measure direct photosynthetically active radiation (PAR), diffuse PAR and reflected PAR. These data were sampled every 20 seconds and stored as half hourly means and standard deviations.

Precipitation was measured using tipping bucket rain gauges with a resolution of approximately 0.2 mm per tip. One rain gauge was located on top of the tower. Another rain gauge was installed in an open space nearby to minimize the error due to high wind. However, this open space measurement was discontinued after 9 January 2007 due to the regrowth of pine trees, which caused the area to no longer be open enough. Throughfall was measured from 2 June 1995 until 23 July 2014 using 36 manual gauges as well as a custom made tipping bucket rain gauge at the end of an approximately 10 meters long gutter through with a width of 10 cm. The manual gauges were set up at a 4 m distance from each other in a fixed square of 400 m². The area around these manual gauges was kept free of grass and shrubs. The resolution of the






5

tipping bucket gauge used for the throughfall trough is approximately 0.07 mm per tip depending on the exact surface of the gutter and the precipitation density. This tipping bucket, along with the one on top of the tower, was initially logged at a 5 minute intervals, with the tips accumulated over each interval. Since 16 June 2004, a Campbell logger has been recording data at 30 minutes intervals. Detailed information about the instruments, their manufacturers and their specific locations on the tower is provided in Table 1.

Table 1 List of instruments, installation height and measurement period.

Variable	Instrument	Manufactu	Tyme	Height shove ground (m)	Measurement
Variable Incoming/refl	Instrument	rer	Type	Height above ground (m)	period
ected short					
wave		Kipp&Zone			1995-Jan-05 to
radiation	Pyranometer	n	CM21	21.9	2023-Mar-30
Incoming/refl	1 yranometer		CIVIZI	21.7	2023 War 30
ected long					
wave		Kipp&Zone			1995-Jan-05 to
radiation	Pyranometer	n	CG1	21.9	2023-Mar-30
Temperature					
longwave					
radiation	Platinum	Kipp&Zone			1995-Jan-05 to
sensors	resistance	n	PT100	21.9	2023-Mar-30
Air	Platinum				1995-Jan-05 to
temperature	resistance	Vaisala	HMP35A	23.5, 7.5, 5.0	2023-Mar-30
					1996-July-22
					to 2023-Mar-
Air pressure	Analog barometer	Vaisala	PTB101C	15	30
Relative					1995-Jan-05 to
humidity	Capacitive sensor	Vaisala	HMP35A	23.5, 7.5, 5.0	2022-Dec-31
		Vector			1995-Jan-05 to
Wind speed	Cup anemometer	Instruments	A101ML	24.4, 7.5, 5.0	2022-Dec-31
Wind		Vector			1995-Jan-05 to
direction	Wind vane	Instruments	W200P	24	2022-Dec-31
					1995-Jan-05 to
Precipitation	Tipping bucket	EML	ARG100	23.9 (tower), 0.4 (open field)	2023-Mar-30
					1995-June-02
		IMAG-			to 2014-July-
Throughfall	Tipping bucket	DLO	_	1	23
Direct					
photosyntheti					2001-Aug-09
cally active		Delta-T			to 2023-Mar-
radiation	Quantum sensor	Devices	BF-3	24.5	30
Diffuse					
photosyntheti					2001-Aug-09
cally active		Delta-T	DE 4		to 2023-Mar-
radiation	Quantum sensor	Devices	BF-3	24.5	30
Reflected					2004
photosyntheti					2001-Aug-09
cally active	0 4	I I CCD	1110007	• •	to 2023-Mar-
radiation	Quantum sensor	LI-COR	LI-190SZ	21.9	30
	A single channel	PP		25.97, 23.22, 7.5, 5.0 and 2.5 m	1996-July-23
	infrared	Systems,	CIRAS-SC	before October 1999, and	to 2007-Oct







G0 1	gas analyser (IRGA)	modified NOAA system		25.97, 7.5, 5.0, 2.5 and 0.4m afterwards.	
CO ₂ mole fraction and H ₂ O pressure	AIRCOA: Autonomous Inexpensive Robust CO2 Analyzer	LI-COR	Li-Cor LI- 820	25.97, 7.5, 5.0, 2.5 and 0.4m	2007-Oct to 2021-Nov-12
	Sonic anemometer	Gill instruments	A Gill Solent 1012R2 sonic anemometer	27	1996-Aug-21 to 2001-June- 07
Turbulence components	Sonic anemometer	Gill instruments	Windmaster Pro	27	2001-June-07 to 2016-June- 01
	Sonic anemometer	Gill instruments	Gill R3-50 ultrasonic anemometer Krypton	27	2016-June-01 to 2022-Oct-11 1997-Jan-08 to
	KH2O		hygrometer Li-Cor LI- 6262	27 27	2001-June 1997-Jan-08 to 2001-June
CO ₂ /H ₂ O fluctuations	Infrared gas analyser	LI-COR	LI-7500 Li-COR LI- 7500A	27 27	2001-June to 2019-May 2019-May to 2019-Aug-08
			LI-7500RS		2019-Aug-08 to 2022-Oct-11
Soil moisture and temprature	FD sensor and thermistor	MUXCOM	Frequency domain (FD)	litter, -0.03, -0.20, -0.50, -1.0	1995-Mar-01 to 2000-Sep- 14
Soil moisture	FD sensor	Campbell Scientific	CS616	litter, -0.03, -0.20, -0.50, -1.0	2005-Apr-11 to 2023-May- 31
Soil temperature	Thermistor	Campbell Scientific	107	litter, -0.03, -0.20, -0.50, -1.0	2005-Apr-11 to 2023-May- 31
	TT		Similar to FHF05 series heat		1995-Jan-05 to
Soil heat flux	Thermopiles Thermopiles	Hukseflux TNO-TPD, SH1	flux sensor. PU43T, Hukseflux	-0.1 -0.1	1998-Jan 1998-Nov to 2017-Sep
Co.il	Thermopiles	Campbell instruments	HFP01SC	-0.1	2017-Sep to 2023-Mar-18
Soil respiration Leaf area index	Infrared gas analyser Plant canopy analyzer	PP Systems LI-COR	EGM-4 LAI-2000	-0.15	2001-Jun-28 to 2010-July-22 1996-May-22 to 2014-07-23
Bole temperature	Thermistor	Campbell Scientific	107	4	2005-Apr-11 to 2023-May-





Sap flow	Čermák system Thermal dissipation probes	Ecological Measuring Systems (Brno, Czech Republic)	Model P4.1 Model P4.1	15	1996-July-05 to 1998-Aug- 16 2011-Jan-01 to 2015-Nov-11
Photosynthesi s measurements (e.g., light response curve)	Intelligent Photosynthesis System	ADC Bioscientifi c Ltd.	LCpro-SD	15	1997- July/Aug/Nov, 1998- July/Aug, 2000-July
Groundwater level (filter depth)	Tube	Manual		-6.5, -4.8	1995-Jan-01 to 2018-Dec-19

135

140

145

150

155

2.1.2 Eddy covariance

An EC-system placed on the top of the tower at 27 m was used to measure turbulent fluxes (i.e., sensible and latent heat fluxes and CO₂ flux). The measuring system involved a 3D ultrasonic anemometer and a fast infrared gas analyser. In the first setup (from fall 1996 till June 2001) a Gill R2 was used in combination with a Li-COR LI-6262 and a Campbell Krypton hygrometer KH₂O (Table 1). Raw data were stored at 10 Hz using a HP Palmtop PC and PCMCIA cards. Since June 2001 a Windmaster Pro anemometer was installed in combination with an open path Li-COR LI-7500 (Table 1). The Li-COR LI-7500 was replaced by Li-COR LI-7500A in May 2019, and subsequently, on 8 August 2019 by LI-7500RS (Table 1). The Windmaster Pro anemometer was replaced by a Gill R3-50 ultrasonic anemometer on 1 June 2016 (Table 1).

2.1.3 Below canopy profile of CO₂ mole fraction, H₂O pressure and temperature

Together with turbulent flux measurements, a single channel infrared gas analyser (CIRAS-SC, PP Systems) and a solenoid switching system were deployed to measure CO₂ mole fraction at five levels above ground (25.97, 23.22, 7.5, 5.0, 2.5 m before 1st October 1999, and 25.97, 7.5, 5.0, 2.5, 0.4 m afterward, Table 1) in and above the canopy (Dolman et al., 2002). After October 2007 an Autonomous Inexpensive Robust CO₂ Analyzer (AIRCOA, NOAA) system (Stephens et al., 2006; Stephens et al., 2011) was deployed to measure profile CO₂ and H₂O model fraction (Elbers et al., 2011). Compared to the original system built for three levels, the system at the site was adjusted to sample gas model fraction at five levels (25.97, 7.5, 5.0, 2.5, 0.4 m, Table 1). The AIRCOA system was composed of: (1) a gas sampling system and a gas flow control system that regulates the alternating of calibration gas (H2, H1, L1, L2 and LT in Fig. 1) and ambient air (the black rectangle labelled 3 in Fig. 1) and the periodic calibration of the system; (2) An Infrared Gas Analyzer (IRGA, Li-COR LI-820) that measures the model



165

170

175



8

fraction of CO₂ using infrared absorption techniques; (3) A filtering (the black rectangle labelled 5 and 40 in Fig. 1) and drying system with nafion tubes and molecular and moisture sieves for obtaining clean and dry samples for IRGA analysis; (4) a section of CPU, DAQ (data acquisition), IO (input/output) power in a PC-based computer for performing automated data acquisition and valve control (Fig. 1). By alternating between ambient air and gas from cylinders containing calibration gases that were free from particulates and water vapor, CO₂ model fraction were measured by the IRGA and the IRGA was automatically calibrated on a daily basis. To obtain profiles of water vapor pressure, the relative humidity and temperature for sampled moist air were measured before entering the drying system (RH/T measured before 7th).

The IRGA datalogger was configured to record raw data in two seconds interval. Regarding the measurement accuracy, the two second filtered values exhibited one standard deviation root mean square error of 0.6 ppm, which averaged to 0.1 ppm over 100 seconds. The absolute accuracy of the CO₂ mole fraction measurements with the AIRCOA system was 0.2 ppm higher than 2 ppm with the CIRAS system (Elbers et al., 2011). The instrument switched the gas being analysed every 160 seconds in this case. Every 4 hours the instrument measured all four calibration gases to obtain an estimate of the calibration coefficients for the IRGA, and every 8 hours the instrument analysed the long-term surveillance gas (LT in Fig. 1). The CO₂ model fractions in five calibration cylinders provided by University of Groningen were steadily maintained throughout the whole period and the corresponding collected calibration data are listed in Table A1 in Appendix A for reference. Additionally, air temperature, wind speed and relative humidity measurements were collected at two more levels below the canopy (7.5 and 5.0 m, Table 1).



9

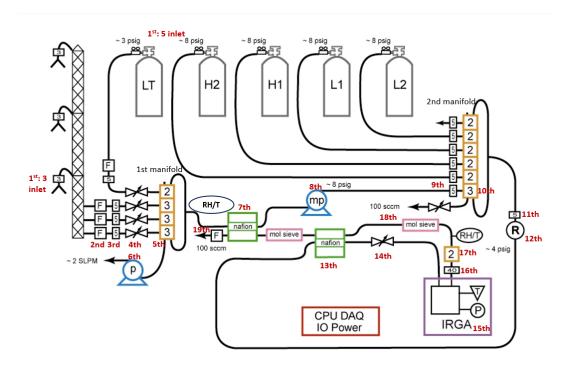


Figure 1 Schematic diagram of the 5-calibration inlet and 5-sample inlet AIRCOA system that was operational in 180 the Loobos first tower. This figure is adapted from Stephens et al. (2006) and only 3 inlets are shown for simplicity. The 5 calibration inlets are taken from the H2, H1, L1, L2 and LT cylinders, where LT stores a long-term surveillance gas for verifying the other four calibration gases. The 5 sample inlets are deployed at different levels in the tower. Each inlet stream (1^{st}) passes through a mass flow meter F (2^{nd}), and a 5 μ m metal filter labelled 5 in the following (3rd) and a needle valve (4th) before reaching a manifold of three-way (3) and two-way (2) solenoid valves 185 (5^{th}) . A diaphragm pump labelled $p(6^{th})$ in the blue circle flushes the sample lines to modulate the flow rate (e.g., 2 SLPM (standard liters per minute)) and system pressure. The gas selected by these valves passes through the Nafion driers (7^{th}) , and a smaller diaphragm pump in the blue circle (8^{th}) is used to compress the dry gas to increase pressure (e.g., into 8 psig). Then the gas passes through a second 5 µm metal filter (9th) and goes into a second manifold of three-way (3) and two-way (2) solenoid valves (10th). The second manifold selects either a sample gas 190 or a calibration gas for analysis. The select gas then passes through another 5 μ m metal filter (11th) and a miniature pressure regulator R in bold (12th). The gas next is dried by a Nafion drier (13th) and reduced in pressure by a needle valve (14th), which is normally used to adjust the sample flow to 100 sccm (standard cubic centimeters per minute). The gas is then analyzed by a LI-820 Infrared Gas Analyzer for measuring CO2 model fraction and pressure and temperature (T and P) as well (15^{th}). After leaving the IRGA, the gas goes through a metal filter of 40 195 μm (16th) and a valve used for leak check purposes, and a humidity and temperature sensor (RH/T) to verify drier performance (17^{th}) . The gas is further completely dried by molecular sieve (18^{th}) , and then goes through a final mass-flow meter (19th) followed by exhausting to the atmosphere at the end.

2.1.4 Soil properties, soil heat flux, profile soil moisture and soil temperature and soil respiration

Soil heat fluxes were measured by four thermopiles under the litter layer at a depth of 3 cm in the mineral soil at a total depth of 10 cm. Thermopile sensors arranged in a thin ring (similar in design to FHF05 series heat flux sensors, https://www.hukseflux.com/products/heat-flux-sensors/heat-flux-sensors/fhf05-





10

series-heat-flux-sensorss, last access: 15 December 2024) built by Hukseflux were used. After serious lightning damage to the sensors in January 1998, two new sensors (TNO, PU43T and SH1-Hukseflux thermal sensors, Table 1) were placed in November 1998 and remained operational until September 2017. This sensor was located in between the two soil moisture profiles (described below) directly on the mineral soil under the litter layer. Since September 2017 the HFP01SC soil heat flux plate (https://www.campbellsci.com/hfp01sc-l, last access: 15 December 2024) was deployed near the location for measurements until 18 March 2023.

A change of systems throughout the long measuring period occurred as well for soil temperature,

electrical conductivity and soil moisture measurements, which were initially measured at five different
depths in two profiles 1.5 to 2.0 m apart. The MUXCOM (IMAG-DLO, Multiplexed Control and
Monitoring) system containing frequency domain sensors at the 20 MHz frequency range was deployed in
two profiles for measurements until 14 September 2000. Every 30 minutes a measurement was made at
all sensors and stored on a palmtop PC. On 11 April 2005 Campbell water content reflectometer sensors

CS616 at the 70 MHz frequency range were deployed in one profile and remained operational until 31
May 2023 (Table 1). The Campbell sensors were logged by a Campbell logger that recorded all soil
measurements at 30 minutes intervals. To obtain an accurate estimation of the soil moisture content,
calibration curves were made using undisturbed soil samples with a diameter of 20 cm and a height of 20
cm taken at different depths.

Soil respiration measurements were conducted from 2001 to 2010 along one transect with 22 sampling points, extending from the tower to an open area (at the time of measurement). The transect included both updune and lowdune locations. At each point, the soil respiration chamber was inserted into the soil with a depth of 15 cm and the grass within the chamber (i.e., SRC-1 soil respiration chamber in this case) was cut if necessary, in order to exclude photosynthesis and plant respiration measurements. Soil CO₂ fluxes were measured using an EGM-4 infrared gas analyser (PP Systems, Table 1) with built-in soil temperature sensors. Soil moisture was simultaneously measured with Theta Probes (Delta-T Devices).

2.1.5 Vegetation properties

Tree inventory

Vegetation properties such as tree diameter at breast height and tree height were measured from 1996 to 2012. The main tree species is Pinus sylvestris (Moors, 2012), given the measured tree diameter and height, the above ground biomass (Table) was estimated by using the allometric relations (please refer to Schelhaas et al. (2022) and section 1.2.4 in Van Der Molen et al. (2025)).

Leaf Area Index (LAI)





The Leaf Area Index (LAI) was measured regularly between 1996 and 2014 with two LAI-2000 (LiCOR) simultaneously. Measurements were typically conducted biweekly during the growing season and monthly otherwise. One instrument was mounted atop the scaffolding tower providing a reference measurement of incoming light. Meanwhile, the other was used along the transect below the canopy measuring light attenuation, as such, LAI estimation was made. The setup consisted of 70-100 measurement points with a 3 m spacing below the canopy to provide better spatial representation. The LAI-2000 sensor measurements were calibrated by comparing them with results from destructive sampling (Moors, 2012). The LAI data are listed as ancillary data. Additionally, the Campbell thermistor was deployed since 11 April 2005 to measure bole temperature.

Sap flow

250

255

260

265

At the Loobos site sap flow was measured with a Tissue Heat Balance-system of Čermák (Ecological Measuring System, model P4.1, Brno, Czech Republic) from 1996 to 1998. By measuring temperature changes of the phloem, the amount of energy needed for heating and the specific heat of water, the sap flow was calculated without the necessity of calibrations (Lundblad et al., 2001). Detailed information can be found in Moors (2012).

Between 2012 and 2015 the sap flow was measured with thermal dissipation probes (Dynamax, Table 1) based on the temperature difference between the heated needle and the sapwood ambient temperature. Sapflux was calculated following Granier (1987). The supplied data were averages of two sensors deployed at six trees. The data gaps were mainly due to power shortages and mainly during nights and winter.

Needle foliage properties

A number of needle leaves from trees around the tower were collected to measure needle foliage area, dry weight and leaf mass per area. The foliage area was determined using image analysis software (https://imagej.net/ij/), the dry weight was obtained after oven-drying at 60°C, and the leaf mass per area was calculated as the ratio of dry weight to foliage area. Total carbon (C) and nitrogen (N) concentrations were determined using dry combustion of ground plant material with a CHNS/O elemental analyzer (PerkinElmer 2400 Series II). Total phosphorus (P) concentration was measured by digesting ground leaf material in 37% hydrochloric acid (HCL) followed by colorimetric measurement at 880 nm after reacting with molybdenum blue.

Photosynthesis measurements involving the light response curve, CO2 response curve and the daily and seasonal responses of photosynthesis were conducted with an intelligent portable photosynthesis system (ADC Bioscientific Ltd., Table 1). The measurements between 1997 and 1998 were performed on the top of the tower for sun-exposed leaves, and the measurements in 2000 were performed on the top of a tree randomly selected in the north of the tower. The experiments of obtaining light and CO₂ response curves



275

280

12

were conducted for two summer days in 1997 (Aug-07/18) and 2000 (July-19/20), and daily response measurements were on 1998-Aug-11. The seasonal response of photosynthesis was measured on 1997-July-29, 1997-Aug-04/11/21, 1997-Nov-22, 1998-July-22. Data of CO₂ assimilation rate, transpiration rate and stomatal conductance at the leaf level were obtained.

2.1.6 Ground water level

The data of the ground water level (GWL) were measured manually in two observing tubes (2.5 cm diameter). The error in the measurements is less than 1 cm. Due to the dunes there is a distinct local topography with a variation in height of about 2 m in the immediate surroundings of the tower, but at distances more than 100 m away, the dunes may reach 10 m above the valleys. It is unknown how this orography influences the GWL. Data presented as ancillary are from a tube (B15) +/- 30 m northeast of the flux tower in a local valley +/-2.7 m below the base of the flux tower.

2.2 Data processing

The general processing pipeline for continuous recorded datasets is schematically shown in Fig. 3. The recorded meteorological raw data was imported into a Paradox relational database management system and categorized into two streams: NL-Loo_BM and NL-Loo_Profile, where NL refers to the Netherlands and Loo denotes the site name.

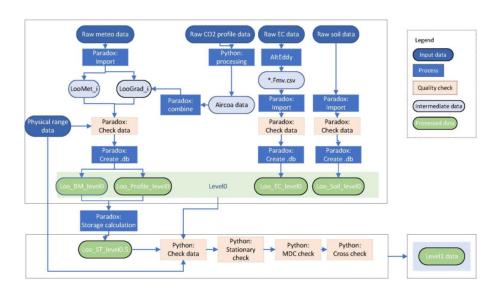


Figure 2 The workflow for processing data from the first tower at Loobos.



310



13

285 The NL-Loo BM stream contains fundamental meteorological variables, while the NL-Loo Profile stream primarily includes profile CO₂ and H₂O pressure data, which were derived from processing PP system and AIRCOA system measurements as described in Sect. 2.2.1. Following this, heat storage and fluxes beneath the canopy were calculated as described in Sect. 2.2.2. The recorded raw EC data were processed using AltEddy software to estimate fluxes (Elbers et al., 2011), as described in Sect. 2.2.3. The 290 resulting flux data, along with the recorded raw soil moisture and temperature data were also imported into the Paradox database. Data quality was verified using predefined physical ranges (Table A2 in Appendix E), and the data was further completed on a yearly scale by replacing missing data with NA values to ensure consistency across all datasets (Fig. 2). By combining meteorology, storage, EC and soil data, the net ecosystem exchange (NEE) rate of CO2, latent heat flux (LE) and sensible heat flux (H) were 295 computed with NEE being gap-filled, as described in Sect. 2.2.4. In total, four level 0 data streams—NL-Loo BM, NL-Loo Profile, NL-Loo EC and NL-Loo Soil-were obtained (Fig. 2), together with a level 0.5 data stream of NL-Loo ST that were derived from the Level 0 dataset. Level 0 implies raw data, as observed and/or based on basic computations. Level 0 and Level 0.5 data which undergo extensive quality control are lifted to Level 1 data.

Additionally, the datasets of soil respiration, vegetation properties (i.e., tree height, stem width and dry aboveground biomass, Leaf Area Index, sap flow, needle foliage properties and the associated nutrient analysis, and photosynthesis response curves) and ground water level are stored as ancillary data.

2.2.1 Calculation of profile CO₂ mole fraction and H₂O pressure

Using the recorded raw data at two-second intervals and the collected calibration data, CO₂ mole fractions at the five altitude levels were calculated, as illustrated in Fig. 3. The main procedures included (1) Screening the line data to match the appropriate level, (2) Calculating median values for each data level over a time block of 160 seconds, corresponding to the gas switch frequency in this case, (3) incorporating calibration data into each block, (4) Computing calibration curves for each eight hour cycle based on LT operation cycle, (5) Applying calibration coefficients to the level data at 15-minute intervals. The calibration effects can be viewed in Figs. A2 and A3 in Appendix C.



320

325



14

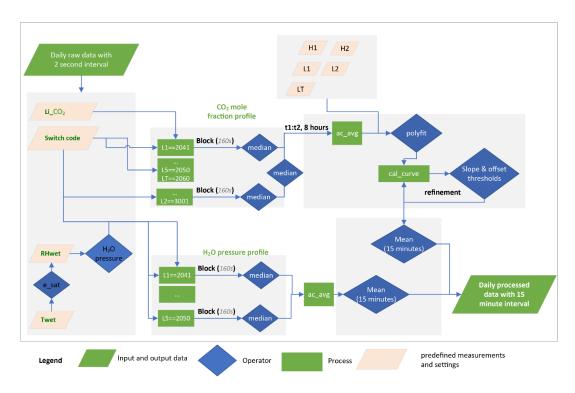


Figure 3 Flowchart for processing profile CO_2 mole fraction (ppm) and H_2O pressure (mbar) measured by AIRCOA.

The water vapor pressure at the five levels was derived from the measured relative humidity and temperature of the sampled gas before it entered the drying system (see Fig. 3), using standard equations (Eqs. (A1-A2) in Appendix B). Since H₂O sensors are stable and less affected by interferences from other gases and environmental factors, no additional calibration was required, unlike the CO₂ mole fraction measurements. The same aggregation method was applied to obtain the profile of the H₂O model fraction at 15-minute intervals. The flowchart illustrating the calculation process for the profile CO₂ and H₂O model fraction is presented in Fig. 3.

2.2.2 Calculation of heat storage and fluxes beneath the canopy

Sensible fluxes of sensible heat beneath the canopy were derived from the measured air temperature at the three levels, following the equations outlined in Appendix D (Eqs. (A3-A4)). In a similar manner, CO₂ and H₂O storage fluxes were derived using the measured CO₂ mole fraction and water vapor pressure at five levels. The storage data was saved for use in the NL-Loo_ST _level0.5 stream.



335

340

345

350

355



15

2.2.3 Estimate of turbulent fluxes

The turbulent fluxes are estimated as covariances between vertical wind speed and the scalar quantities of interest (heat, water vapor, CO₂). To derive these flux estimates from the raw EC measurements, the AltEddy software (Version 3.90, from Wageningen Environmental Research (WEnR), The Netherlands) was used. This software executes a series of essential processing steps, including detrending, time-lag correction, double coordinate rotation correction to align wind velocity components with the mean wind direction, angle of attack correction, density fluctuation compensation (Webb et al., 1980), normalized spectra and cospectra calculations. Detailed information about AltEddy software can be found at https://www.climatexchange.nl/projects/alteddy/, see also Mauder (2008), which demonstrated the capability of the AltEddy software in calculating CO₂ fluxes compared to those calculated by other software packages. The output data saved in the NL-Loo_EC_level0 stream contains the turbulent and CO₂ fluxes and the corresponding quality flag from Foken et al. (2004), as well as the means of wind and scalars and the turbulent and flux parameters including friction velocity (u*), stability parameter z/L, wind direction and the 80% distance integration of the flux derived from Schuepp et al. (1990).

2.3 Data quality control

Physical data ranges, including maximum and minimum values, maximum and minimum values of differences between consecutive time steps, and the maximum standard deviation of the interest of field, were applied to filter out abnormal values and missing data from level 0 NL-Loo_BM, NL-Loo_Profile and NL-Loo_Soil streams, as illustrated in Fig. 2 (light orange box). Table A2 shows the maximum and minimum physical ranges, maximum differences, and maximum standard deviations applied for variables.

Regarding the turbulent fluxes and CO_2 flux from the NL-Loo_EC stream, an initial quality flag was produced by running the AltEddy software. The data quality was further refined (Fig. 2). Specifically, flux subset data were created and used for the determination of the response of daytime flux to incoming solar radiation and of nighttime flux to air temperature. Subsequently, flux data were discarded when they fell outside tolerable ranges (a bin-average \pm 2 standard deviation), and the corresponding quality flag data were reassigned accordingly. Detailed descriptions can be found in Elbers et al. (2011).

The level 0 and level 0.5 data was further reviewed and refined into consistent level 1 data through four procedures (1) reapplying physical range criteria (Table A2), (2) filtering out stationary data within a three-hour window (with the exception of the NL-Loo_Soil stream and shortwave radiation in the NL-Loo_BM stream), (3) calculating the long-term mean diurnal cycle (MDC) and its standard deviations for CO₂ flux and accordingly filtering out daytime data not in the tolerable range, and (4) comparing similar fields from different streams for cross-checks.



365

16

We thus provide a level 1 data product, which consists of quality controlled measured variables and derived variables (e.g. eddy fluxes and storage fluxes). Here we do not provide gap filled data, since the gap-filling will be done centrally by ICOS/FLUXNET in a homogenised way. We anticipate that the gap-filled data will become available via ICOS and FLUXNET as part of the net FLUXNET Data System by December 2025.

2.4 Period of record

Please refer to the description Excel sheet to review the variables included in each data stream. The Level 1 data were stored in one CSV file per stream, where the variable name is consistent with ICOS standards. The ancillary data were stored in Excel per stream. Level 1 data availability is presented in both Fig. 4 and Table 1.

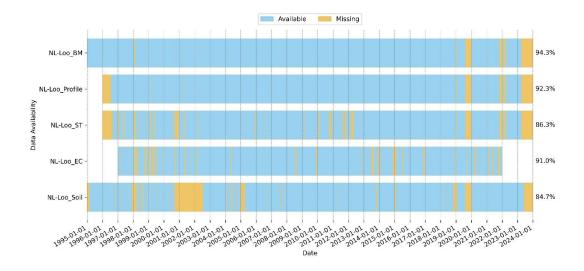


Figure 4 The availability of the five continuous data streams. NL-Loo denotes the origin of the site. The NL-Loo_BM stream includes biometeorological data, the NL-Loo_Profile stream contains vertical profile data, the NL-Loo_ST stream includes storage data, the NL-Loo_EC stream includes EC measurement data, and the NL-Loo_Soil stream includes soil moisture and temperature data.

3 Data evaluation

375 3.1 Data cross-checks

To validate the meteorological data measured by various sensors, statistical metrics including Pearson's correlation coefficient (R), mean bias (Bias) and root mean square error (RMSE) were calculated for air



385



17

temperature (TA) measured by Vaisala against sonic temperature, profile wind speed (WS) measured by cup anemometer against WS from sonic, and wind direction (WD) measured by the wind vane and sonic against WD from KNMI meteorological station at Deelen (https://www.knmi.nl/nederland-nu/klimatologie/daggegevens), the closest KNMI station to the Loobos first tower. Table 2 shows high R values for temperature and WS measured by different sensors. Compared to WD measured by sonic, the WD measured by the wind vane exhibits higher R and lower RMSE when compared with the KNMI daily dataset. The use of WS and WD from the wind vane is thus recommended for further analysis. Table 3 shows decent correlation coefficients (> 0.5) between CO2 mole fraction and H2O pressure measurements from the AIRCOA system and those from the EC system. These cross-check results demonstrate the consistency of datasets measured by different sensors.

Table 2 Statistics comparing meteorological data measured by different sensors from 1997 to 2022. TA is expressed in °C, WS is in unit of m/s and WD in degrees.

Name	R	Bias	RMSE
TA (Vaisala vs. sonic)	0.88	-3.4	4.7
WS_24.4 m (cup anemometer vs. sonic)	0.91	-0.1	0.5
WS_7.5m (cup anemometer vs. sonic)	0.80	-2.2	2.3
WS_5.0m (cup anemometer vs. sonic)	0.79	-2.2	2.3
WD (vane vs. KNMI)	0.78	-11.5	56.5
WD (sonic vs. KNMI)	0.21	-2.9	102.1
WD (sonic vs. vane)	0.26	6.3	87.1

390

395

Table 3 Statistics comparing profile CO_2 mole fraction and H_2O pressure data measured by different sensors at different altitude levels (from 1 to 5 representing 24.4, 7.5, 5.0, 2.5 and 0.4 m) in the canopy. CO_2 is expressed in unit of ppm and H_2O in mbar.

Name	R	Bias	RMSE
CO ₂ _1_1_1 & CO ₂ _2_1_1	0.68	-0.9	23.4
CO ₂ _1_1_1 & CO ₂ _2_2_1	0.63	-3.7	25.7
CO ₂ _1_1_1 & CO ₂ _2_3_1	0.62	-5.0	26.8
CO ₂ _1_1_1 & CO ₂ _2_4_1	0.59	-7.8	29.3
CO ₂ _1_1_1 & CO ₂ _2_5_1	0.56	-10.5	32.0
H ₂ O_1_1_1 & H ₂ O_2_1_1	0.58	-0.8	3.7
H ₂ O_1_1_1 & H ₂ O_2_2_1	0.57	-0.8	3.7
H ₂ O_1_1_1 & H ₂ O_2_3_1	0.59	-0.8	3.7
H ₂ O_1_1_1 & H ₂ O_2_4_1	0.59	-0.9	3.7
H ₂ O_1_1_1 & H ₂ O_2_5_1	0.58	-0.9	3.7

Regarding vegetation data, the tree height (Table 4) matches well with the tree height measured in the target area in the current years (Table 3 in Van Der Molen et al. (2025)). Two datasets suggest a growth



405

410



18

rate of 16 cm per year. As the Pinus sylvestris species dominate in the study area (Moors, 2012) during the period from 1996 to 2025, by assuming the average tree density of 499.1 trees ha⁻¹ (Van Der Molen et al., 2025), the above ground biomass was estimated by using the allometric relations (please refer to Schelhaas et al. (2022) and section 1.2.4 in Van Der Molen et al. (2025)) and measured tree height (Table 4) and diameter (Table 5). A larger biomass during this period (Table 6) is observed than that in the 2023 inventory based on over 1000 trees (Van Der Molen et al. (2025)). Nevertheless, the estimated biomass is in the same order of magnitude.

Here the tree density in 1996 is based on an inventory of 150 trees, while only for 56 trees the height and diameter were measured. Information about the plot size and consequent tree density in 2000 has been lost. By plotting the tree coordinates on a map, it has been derived that the plot size must have been between 45 x 45 m and 50 x 50 m. A written report claims a tree density of 499.1 trees ha⁻¹ in 2000 which is consistent with 103 trees in 0.21 ha (45.4 x 45.4 m). This is the plot size we assumed. In subsequent years, the tree density was decreased with the number of fallen trees in the inventory. In 2025 68 of the 103 original tree tags have been found. Others have disappeared or grown into the bark. In addition, 31 untagged trees were found in a 50 x 50 m square around those 68 trees. This implies that the tree density decreased from 465 in 2012 to 396 trees ha⁻¹ in 2025, a decrease of 17 trees in the quarter hectare plot in 13 years, which seems realistic considering the number of dead stems observed in the field. However, some stems have completely been decomposed in the meantime.

415 Table 4 Tree height measurements between 1996 and 2025.

Year	1996	2000	2005	2008	2012	2025
Average (m)	15.3	15.8	16.7	17.6	18.6	20.5
Standard error (m)	0.3	0.2	0.2	0.3	0.3	0.3
Count	56	103	100	99	98	102
Max (m)	22.8	22.0	21.5	24.4	28.5	26.0
Min (m)	9.0	8.7	9.0	8.0	12.0	11.0

Table 5 Tree diameter measurements between 1996 and 2025.

Year	1996	2000	2005	2008	2012	2025
Average (cm)	26.7	27.1	28.2	28.1	29.3	33.5
Standard error (cm)	0.6	0.5	0.6	0.6	0.6	0.7
Count	66	103	100	96	97	103
Max (cm)	41.6	43.0	43.0	41.7	42.5	49.7
Min (cm)	13.8	14.0	13.5	13.1	13.5	18.8



19

Table 6. Above ground biomass (ton dry matter ha⁻¹) estimated between 1996 and 2025. The 1996 tree density is low relative to 2000. In brackets the 2000 tree density and the resulting total above ground biomass estimate.

Year	1996	2000	2005	2008	2012	2025
Tree count	56	103	100	96	96	99
Plot size (ha)	0.15	0.21	0.21	0.21	0.21	0.25
Tree density (trees ha ⁻¹)	362 (499)	499	485	465	465	396
Average above ground tree mass (kg tree ⁻¹)	252	243	244	284	325	437
Total above ground biomass (ton ha ⁻¹)	91 (126)	121	118	132	151	173

The resulting LAI is 1.65 on average, but variable over the season (Fig. 5), with an increase after budburst in late spring and early summer, a clear maximum in August and a decline in fall, associated with partial leaf shedding. A distinct inter-annual variation was observed (Fig. 6), although it is unknown what the underlying cause is, we note that storms in 2007 caused trees and tree tops to break and 2003, 2013 to be dry years, 2007 and 2008 to be wet years. Additionally, Table 7 presents comparable needle foliage attributes measured between 1998 and 2012 with those from 2024 (Van Der Molen et al., 2025).

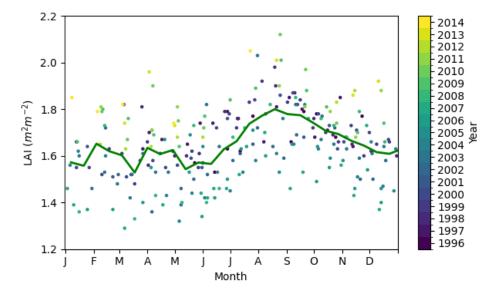


Figure 5 Seasonal cycle of Leaf Area Index. The colored points indicate the individual measurements and their year of measurements. The solid line shows the 14 day mean. Each data point is the average of 60 samples collected 10 m apart in two 300 m transects crossing at the first tower. The tick marks on the x-axis indicate the first day of the month.





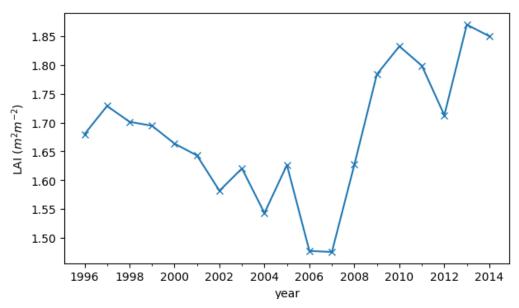


Figure 6 Interannual variation in Leaf Area Index.

Table 7 Area, dry weight and concentrations of carbon, nitrogen and phosphorus in foliar samples from 1998 to 2024.

Year	Number of needles	Area	Dry weight	Leaf mass per area	С	N	P	C/N
	-	mm²/needle	mg	g/m ²	g/kg	g/kg	g/kg	-
1998	39	140.3	31.5	220.0	NA	NA	NA	NA
1999	100	157.8	34.3	217.4	NA	19.2	1.0	NA
2000	100	123.0	26.7	217.4	NA	17.1	1.3	NA
2003	116	NA	16.9	NA	510.8	16.9	NA	30.4
2012	32	NA	NA	190.8	495.5	19.7	1.6	25.2
2024	300	125.9	26.0	206.5	528.8	17.8	1.4	29.7

3.1 Mean diurnal storage CO₂ flux

440


To understand how large the storage CO_2 flux is as a fraction of total CO_2 fluxes, the mean diurnal variations of NEE (total flux), EC and storage measurement were calculated separately (Eq. (1)). Fig. 7 shows the magnitude of NEE (total flux) and the EC and storage components. The CO_2 storage flux is typically in the order of 1 μ mol m⁻² s⁻¹, but in extreme situations it can be between -5 and +3 μ mol m⁻² s⁻¹. At moments around sunrise and sunset, the EC fluxes are close to zero, while the (negative) storage flux is largest around sunrise, indicating a release of carbon dioxides stored below the canopy at night.



460

21

Surprisingly, the release continues well until noon. In cumulative fluxes on a daily or longer timescale, the storage flux is negligible, but on hourly timescales the storage flux needs to be taken into account to represent the true ecosystem CO2 fluxes. Concludingly, the CO₂ storage flux is a significant but small fraction of the total NEE.

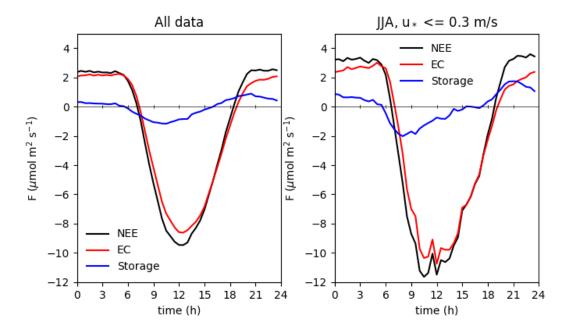

450 Figure 7 Magnitude of NEE (total CO₂ flux), and the individual EC and storage components at a height of 27 meters, visualised as the mean diurnal cycle of all available data (left) and under conditions of low turbulence (u* < 0.3 m s⁻¹) and large respiration fluxes in summer (JJA denotes June, July and August)

3.3 Seasonal and interannual variations in NEE

In an effort to verify the consistency of the EC dataset of carbon dioxide exchange over the years (Zhao et al., 2025), we show the mean monthly NEE per year (Fig 8.), Subsequently, we calculated the monthly mean diurnal cycle, which we integrated to a monthly CO₂ exchange. Because we integrate the mean diurnal cycle, the storage component may be ignored and hence this estimate represents the monthly NEE. Here we implicitly assume an absence of lateral outflow of nocturnal storage fluxes. The figure shows a clear and consistent seasonal cycle, with carbon uptake from March to September and release from October to February. The intensity of the winter respiration appears to decrease over time, whereas the intensity of the summer uptake is increasing. The mean annual uptake between 1997-2006 is around 350 gC m⁻² yr⁻¹ and between 2007 and 2016 around 550 gC m⁻² yr⁻¹. In 2018 and 2019 the mean uptake grew to an average of 820 gC m⁻² yr⁻¹, partially because of the reduction in wintertime net fluxes.



We stress that this dataset is based on eddy covariance measurements and is not gap-filled. Fig. 9 shows the completeness of the dataset. Without u* filtering all months have a completeness larger than 85% of the half hours. The u* filtering reduces the completeness to an average of 82%, not considering the periods with fully lacking data. Upgrading Level 1 data into a Level 2 gap-filled dataset and analysing the trend of NEE, total LE and H are beyond the scope of this study.

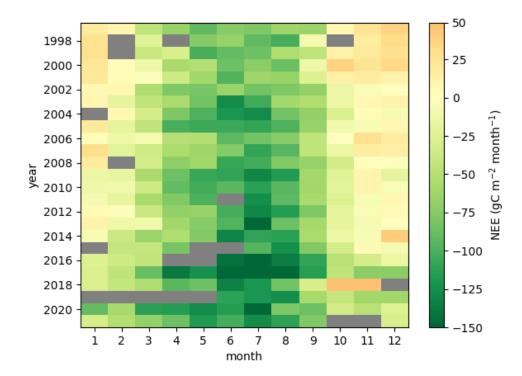


Figure 8 Seasonal and interannual variation in net carbon dioxide exchange, based on the eddy covariance measurements. The values represent the monthly mean diurnal cycle integrated to a monthly total. Gray colors indicate a data availability less than 30%.





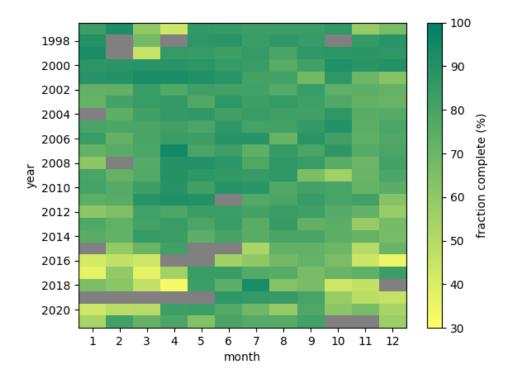


Figure 9 Completeness of the eddy covariance carbon dioxide data. Gray colors indicate a data availability less than 30%.

3.4 Energy balance residual

475

480

The energy balance closure (R_n -G vs. LE-H) was calculated. With the inclusion of storage fluxes of water and heat, Fig. 10 demonstrates an improved energy balance closure, supported by an enhanced regression relationship reflected in the slope and coefficient of determination (R^2) between available energy (i.e., Rnet-G) and turbulent fluxes (i.e., LE+H), which aligns with findings from previous studies (Leuning et al., 2012). The point colors indicate the hour of the day, suggesting that energy balance closure is lower in the mornings than in the afternoon, which could be related to unaccounted for energy storage in biomass. Detailed analysis of surface energy balance is beyond the scope of this study.



495

500

505

24

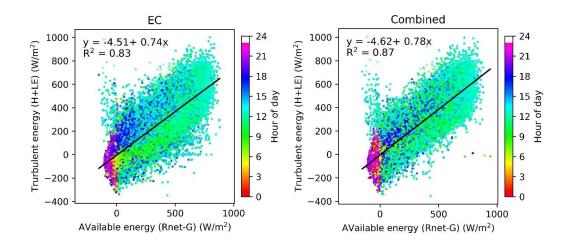


Figure 10 Energy balance closure of the Loobos first tower datasets at a height of 27 meters. The left graph shows turbulent fluxes based solely on EC fluxes, and the right graph indicates turbulent fluxes combined with storage fluxes.

4 Discussion and conclusion

Being one of the longest datasets of its kind (<a href="https://fluxnet.org/data/la-thuile-dataset/lathuile-

The Loobos tower has been running almost without major interruption for more than 25 years now, serving as a robust platform for various scientific studies and educational activities. Over the years, diverse experiments with different objectives have been conducted at and around the tower, ranging from nitrogen deposition research (https://ruisdael-observatory.nl/wp-content/uploads/2018/12/Ewout-Melman-PDF.pdf, last access: 15 December 2024), remote sensing studies (https://ruisdael-observatory.nl/wp-content/uploads/2023/03/New-Loobos-ecosystem-site-compressed.pdf, last access: 15 December 2024) to educational activities for field training courses at Wageningen University. In summary, in addition to its role as a unique and well-equipped platform, the Loobos site offers a rich data set for continued research and analyses.



515

520

535



25

As a component of the Ruisdael Observatory (https://maq-observatory.nl/loobos/, https://maq-observations.nl/, last access: 15 December 2024), the Loobos Pine forest site represents one of the major land surface types in the Netherlands. It is typical for the extensive Veluwe region, which is aerodynamically rough, forested, located on well-drained sandy soils and vulnerable to summer drought (Granier et al., 2007). The site is downwind from an area with intensive livestock farming and is exposed to high ammonia deposition. In combination with high NO_x emissions from the cities and highways further upwind, high ozone and particulate matter (PM) model fractions may develop. Both the high input of reactive nitrogen, and the high ozone and PM concentrations may affect ecosystem growth (De Vries and Du, 2024; Visser et al., 2021; Visser et al., 2022; Grantz et al., 2003). To better understand these dynamics, we intermittently measure ammonia dry deposition fluxes in cooperation with the National Institute for the Environment for Public Health and the Environment (RIVM) (Van Der Molen et al., 2025) and seek further funding to measure fluxes of reactive compounds.

Within the Ruisdael Observatory, the Loobos site, along with the Veekampen site (representing rural grassland (https://maq-observations.nl/, last access: 15 December 2024)) and the Cabauw site (representing rural, grass and peat land (Bosveld et al., 2020)) collectively form a triangle network of comprehensive observation sites. This network provides valuable opportunities to understand changes in the land-atmosphere interaction and validate high resolution climate and land surface models.

Data availability

The Loobos first tower dataset in Level 1 and ancillary data can be accessed at

https://doi.org/10.5281/zenodo.15721310 (Zhao et al., 2025) under a CC-BY4 open use license. The

Level 1 data will also be available at the European Fluxes Database Cluster. The Level 2 gap filling and
partitioning data based on the ONEFlux processing pipeline (Pastorello et al., 2020) for the FLUXNET
release will be accessible at the ICOS carbon portal (https://www.icos-cp.eu/observations/carbon-portal)
at the end of 2025.

530 Code availability

The Python codes for processing Level 0 into Level 1 dataset, and for plotting figures shown in the text can be found at https://git.wur.nl/zhao133/nl-loo_first_tower_project.git.

Author contribution

JE, HD, EM and WJ built the first tower, collected data and maintained the site until 2018. JE, HD and EM, BK, WJ and RH wrote the research proposal to secure funding for building-up and maintaining the tower. MvdM, BK and HS started maintaining the site and collected data in 2018. MvdM and HZ



550

555



26

conceptualized this study. HZ wrote the manuscript and verified the datasets. WP, MK and JV wrote the research proposal to get the Ruisdael funding for supporting the continuation of the Loobos infrastructure. All authors reviewed and edited the manuscript.

540 Competing interests

The contact author has declared that none of the authors has any competing interests.

Acknowledgments

We acknowledge the original AIRCOA design by NOAA (Britt Stevens) and adapted it for use with the CR100 logger by Jan Elbers. We thank University of Groningen for providing cylinders with calibration gases used in the AIRCOA system. We acknowledge the support of Wim Snijders in the field.

The Loobos measurements described in this paper were made possible through the grants below:

- The 'CarboEurope-Integrated project' supported by the European Commission through contract GOCE-CT2003-505572.
- The 'EUROFLUX project (ENV-CT95-0078)' funded by the European Union Fourth Framework Programme.
- The 'Infrastructure for Measurements of the European Carbon Cycle (IMECC) project' funded by the European Union (Framework Program 6).
- The 'GHG-Europe project' funded by the European Union (Framework Program 7).
- The 'Hydrology and water balance of forest in the Netherlands project' funded by the Dutch Ministry of Agriculture, Fisheries and Nature Management, the Dutch Forestry Commission (SBB).
 - The 'Integrated observations and modelling of greenhouse gas budgets at the ecosystem level in the Netherlands project (ME1)' supported by the Dutch National Research Program Climate Changes Spatial Planning.
- The 'Climate Research Program on Climate Change of Wageningen University and Research' supported by the Ministry of Agriculture, Nature and Food Safety of the Netherlands.
 - The Ruisdael Observatory funded by the Dutch Research Council (NWO) through a National Roadmap for Large-Scale Research Facilities.





Appendix

0. Photos taken at Loobos site





Figure A1-1. The left photo was taken in 1995 and the right photo in 2017.





Figure A1-2. The left photo was taken in 2012 and the right photo in 2018.

Figure A1 Photos taken at the Loobos site.

A. Profile CO₂ mole fraction measurements

The CO₂ profile measurements were calibrated twice a day (section 2.2.1). The table below shows the CO₂ mole fractions in the cylinders.

Table A1. CO₂ mole fraction of calibration cylinders provided by University of Groningen in the AIRCOA system deployed at the first tower in Loobos.

Start date	H2	H1	L1	L2	LT
2007-Jan-01	429.77	410.88	370.65	349.46	390.55
2012-Apr-11	537.14	430.57	375.46	328.83	390.55
2017-Mar-29	498.12	447.41	402.6	352.07	390.55
2020-Oct-27	464.62	418.5	387.91	367.93	390.55





580 B. Water vapor pressure calculations

The Maghus-Tetens empirical formula is used to calculate the pressure of saturated water vapor in air (e_{sat}) at a given temperature (T).

$$e_{sat} = e_o \times 10^{\frac{a \cdot T}{b + T}} \tag{A1}$$

 e_o is valued of 6.107 mbar for liquid water. a and b are constants specific to either water or ice. a is valued of 7.5°C and b of 237.3°C for water, and a of 9.5°C and b of 265.5°C for ice.

$$e_{actual} = \frac{RH}{100} * e_{sat} \tag{A2}$$

585 C. AIRCOA CO₂ mole fraction calibration results





Figure A2. The calibrated CO₂ mole fraction against the observations on 12/04/2015 shown as an example. The ls and hs represent L and H calibration described in the text. The results indicate a good





calibration.

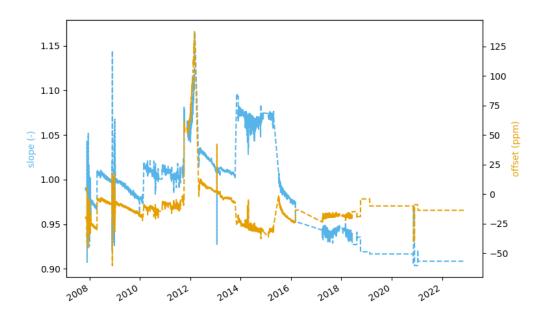

590

Figure A3. The calibration slope and offset in time series. It shows the value of the slope greater than 0.90 and smost values of the offset within 30 ppm.

595 D. Calculations of CO₂ and H₂O storages under the canopy

The integrated heat, CO₂ and H₂O model fraction under the canopy above the ground are calculated by equations below,

$$\begin{split} H_content &= \sum_{i=1}^{Z} \Delta z_i T_i \, \rho_i C_p \ (i=1,2,3,4,5,6) \\ LE_content &= \sum_{i=1}^{Z} \Delta z_i [H_2 O]_i \, \rho_{air} C_p \gamma_{(T_i,p)} \ (i1,2,3,4,5,6) \\ CO_2_content &= \sum_{i=1}^{Z} \Delta z_i \frac{[co_2]_i}{M} \rho_{air} \ (i=1,2,3,4,5,6) \\ CO_2_content_2.5m &= \sum_{i=5}^{Z} \Delta z_6 \frac{[co_2]_i}{M} \rho_{air} \ (i=5,6) \end{split}$$



605

610



30

where $[H_2O]_i$ and $[CO_2]_i$ mole fraction measurements were conducted at five layers of 25.97 (i=1), 7.5, 5.0, 2.5, 0.4 (i=5) m, i=1 denotes the ground layer, and T_i were measured at the three levels (23.5, 7.5 and 5.0 m). The integration starts from the ground level of 0 m. ρ_{air} denotes air density, which is determined by air temperature, water vapor pressure and air pressure. C_p denotes the specific heat of air (at a constant pressure of 1005.0 mbar) J (kg⁻¹ K⁻¹). $\gamma_{(T_i,p)}$ denotes a rate of change related to the latent heat of vaporization, which is determined by air temperature T_i and air pressure p, M denotes the molecular weight of dry air at 0.028966 kg mol⁻¹. H_content and LE_content have a unit of J/m², and CO_2 _content and CO_2 _content_2.5m have a unit of μ mol m⁻².

The integrated heat, CO₂ and H₂O fluxes under the canopy above the ground are calculated by equations below,

$$SH_{-}1_{-}1 = H_{-}strg = \frac{H_{-}content_{t+1} - H_{-}content_{t}}{1800}$$

$$SLE_{-}1_{-}1 = LH_{-}strg = \frac{LH_{-}content_{t+1} - LH_{-}content_{t}}{1800}$$
(A4)

$$SC_{-1}_{-1}_{-1} = CO_{2_strg}$$

$$= \frac{[CO_{2_content}]_{t+1} - [CO_{2_content}]_{t}}{1800}$$

$$CO_{2_strg}_{-2.5m}$$

$$= \frac{CO_{2_content}_{-2.5m_{t+1}} - CO_{2_content}_{-2.5m_{t}}}{1800}$$

Where t refers to time and t+1 denotes next time stamp. H_strg and LH_strg have a unit of W m⁻², and CO_2_strg and CO_2_strg and CO_2_strg and CO_3_strg have a unit of μ mol m⁻² s⁻¹.

E. Physical ranges for assuring data quality

Table A2 Values of physical ranges for assuring the quality of data from NL-Loo_BM and NL-Loo Profile streams. Information about variable names can be found in the description Excel sheet.

		Data_strea			Sdma	Difma	Difmi
Variable	Unit	m	Max	Min	X	X	n
SW_IN_1_1_1	W m ⁻²	NL-Loo_BM	1000	0	400	500	0
SW_OUT_1_1_1	$W m^{-2}$	NL-Loo_BM	200	0	50	50	0
LW_IN_1_1_1	$W m^{-2}$	NL-Loo_BM	450	180	40	100	0.0001
LW_OUT_1_1_1	$W m^{-2}$	NL-Loo_BM	500	180	10	50	0.0001
G_1_1_1	$W m^{-2}$	NL-Loo_BM	50	-10	2	4	0





fapp	$W m^{-2}$	NL-Loo_BM	50	-10	2	4	0
G_3_1_1	$W m^{-2}$	NL-Loo_BM	50	-10	2	4	0
G_4_1_1	$W m^{-2}$	NL-Loo_BM	100	-20	2	6	0
RH_1_1_1	%	NL-Loo_BM	100	20	10	25	0
T_1_1_1	°C	NL-Loo_BM	35	-20	2	5	0
LW_T_BODY_1_1_			4.0	• 0	_	_	
1 LW T DODY 2-1	°C	NL-Loo_BM	40	-20	2	5	0
LW_T_BODY_2_1_ 1	°C	NL-Loo_BM	40	-20	2	5	0
WS_1_1_1	m s ⁻¹	NL-Loo_BM	10	0	2	5	0
WD_1_1_1	0	NL-Loo_BM	360	0		360	0.0001
WD_1_1_1	mm/30minut	NE LOO_BIVI	300	O		300	0.0001
P_1_1_1	e	NL-Loo_BM	8	0		8	
PA_1_1_1	hPa	NL-Loo_BM	1040	900		10	0
PPFD_DIR_1_1_1	μmol m ⁻² s ⁻¹	NL-Loo_BM	2000	0	800	1000	0
PPFD_OUT_1_1_1	μmol m ⁻² s ⁻¹	NL-Loo_BM	200	0	100	200	0
PPFD_DIF_1_1_1	μmol m ⁻² s ⁻¹	NL-Loo_BM	2000	0	800	2000	0
H ₂ O_1_1_1	μmol m ⁻² s ⁻¹	NL-Loo_BM	1250	100	100	250	0
CO ₂ _1_1_1	μmol m ⁻² s ⁻¹	NL-Loo_BM	30	11	5	5	0
	·	NL-					
$H_2O_1_1_1$	mbar	Loo_Profile	25	1		5	0.001
GO 1 1 1		NL-		220		100	0.1
CO ₂ _1_1_1	ppm	Loo_Profile	550	320		100	0.1
RH_	%	NL- Loo_Profile	100	0.1	25	0	
MI_	70	NL-	100	0.1	23	O	
WS_1_2_1	$m s^{-1}$	Loo_Profile	20	0.01			
		NL-					
WS_1_3_1	m s ⁻¹	Loo_Profile	20	0.01			
		NL-	4.0	• •	_		
TA	°C	Loo_Profile	40	-20	5	0	
LE_content	J.m-2	NL-Loo_ST		1			
CO ₂ _content	umol.m-2	NL-Loo_ST		1			
CO ₂ _content_2.5m	umol.m-2	NL-Loo_ST		1			
SC_1_1_1	μmol m ⁻² s ⁻¹	NL-Loo_ST	3	-5			
H_1_1_1	W m ⁻²	NL-Loo_EC	600	-250			
LE_1_1_1	W m ⁻²	NL-Loo_EC	600	-250			
FC_1_1_1	$\mu mol m^{-2} s^{-1}$	NL-Loo_EC	20	-40			
H_2O	mmol/mol	NL-Loo_EC	25	1	5	0.001	
CO_2	ppm	NL-Loo_EC	600	320	100	0.1	
T_SONIC_1_1_1	°C	NL-Loo_EC	50	-20	5	0	
WS_1_1_1	m s ⁻¹	NL-Loo_EC	10	0.01			
WD_1_1_1	0	NL-Loo_EC	360	0	360		
ZL_1_1_1	-	NL-Loo_EC	10	-10			
USTAR_1_1_1	m s ⁻¹	NL-Loo_EC	3	0	1		
TS	°C	NL-Loo_Soil	40	-20	5	0	
SWC	m ³ m ⁻³	NL-Loo_Soil	1	0	0.5		





615 F. Mean diurnal variations

$$MDV = \frac{1}{N_t} \sum_{i=1}^{N_t} NEE_{t,i}$$
 Where $NEE_{t,i}$ refers to NEE value at time t on day i . N_t denotes the numbers of days with NEE data at

time t.



650



33

References

https://unfccc.int/kyoto protocol, last access: 15 December.

- Aubinet, M., Grelle, A., Ibrom, A., Rannik, Ü., Moncrieff, J., Foken, T., . . . Bernhofer, C.: Estimates of the annual net carbon and water exchange of forests: the EUROFLUX methodology, in: Advances in ecological research, 1, Academic Press, 113-175, https://doi.org/10.1016/S0065-2504(08)60018-5, 1999.
 - Balzarolo, M., Vicca, S., Nguy-Robertson, A., Bonal, D., Elbers, J., Fu, Y., . . . Peñuelas, J.: Matching the phenology of Net Ecosystem Exchange and vegetation indices estimated with MODIS and FLUXNET insitu observations, Remote Sens. Environ., 174, 290-300, https://doi.org/10.1016/j.rse.2015.12.017, 2016.
 - Bosveld, F. C., Baas, P., Beljaars, A. C. M., Holtslag, A. A. M., de Arellano, J. V.-G., and van de Wiel, B. J. H.: Fifty Years of Atmospheric Boundary-Layer Research at Cabauw Serving Weather, Air Quality and Climate, Bound.-Layer Meteorol., 177, 583-612, 10.1007/s10546-020-00541-w, 2020.
- Ceulemans, R., Kowalski, A., Berbigier, P., Dolman, A., Grelle, A., Janssens, I., . . . Vesala, T.: Coniferous forests (Scots and Maritime Pine): carbon and water fluxes, balances, ecological and ecophysiological determinants, in: Fluxes of carbon, water and energy of European forests, Springer, Berlin, Heidelberg, 71-97, https://doi.org/10.1007/978-3-662-05171-9 5, 2003.
- Chen, Y., Ryder, J., Bastrikov, V., McGrath, M. J., Naudts, K., Otto, J., . . . Valade, A.: Evaluating the performance of land surface model ORCHIDEE-CAN v1. 0 on water and energy flux estimation with a single-and multi-layer energy budget scheme, Geosci. Model Dev., 9, 2951-2972, https://doi.org/10.5194/gmd-9-2951-2016, 2016.
 - Churkina, G., Tenhunen, J., Thornton, P., Falge, E. M., Elbers, J. A., Erhard, M., . . . Sprinz, D.: Analyzing the ecosystem carbon dynamics of four European coniferous forests using a biogeochemistry model, Ecosyst., 6, 0168-0184, https://doi.org/10.1007/s10021-002-0197-2, 2003.
- 640 de Vries, W. and Du, E.: Nitrogen deposition and its impacts on forest ecosystems, in: Atmospheric Nitrogen Deposition to Global Forests, Academic Press, 1-13, https://doi.org/10.1016/B978-0-323-91140-5.00013-0, 2024.
 - Dolman, A., Moors, E., and Elbers, J.: The carbon uptake of a mid latitude pine forest growing on sandy soil, Agric. For. Meteorol., 111, 157-170, https://doi.org/10.1016/S0168-1923(02)00024-2, 2002.
- Dolman, A., Moors, E., Grunwald, T., Berbigier, P., and Bernhofer, C.: Factors controlling forest atmosphere exchange of water, energy, and carbon, in: Fluxes of carbon, water and energy of European forests, Springer, Berlin, Heidelberg, 207-223, https://doi.org/10.1007/978-3-662-05171-9 10, 2003.
 - Dolman, A., Noilhan, J., Durand, P., Sarrat, C., Brut, A., Piguet, B., . . . Loustau, D.: The CarboEurope regional experiment strategy, Bull. Am. Meterol. Soc., 87, 1367-1380, https://doi.org/10.1175/BAMS-87-10-1367, 2006.
 - Dolman, A. J., Moors, E. J., Elbers, J. A., and Snijders, W.: Evaporation and surface conductance of three temperate forests in the Netherlands, Ann. For. Sci., 55, 255-270, https://doi.org/10.1051/forest:19980115, 1998.





- Elbers, J., Jacobs, C., Kruijt, B., Jans, W., and Moors, E.: Assessing the uncertainty of estimated annual totals of net ecosystem productivity: A practical approach applied to a mid latitude temperate pine forest, Agric. For. Meteorol., 151, 1823-1830, https://doi.org/10.1016/j.agrformet.2011.07.020, 2011.
 - Enquist, B. J., Economo, E. P., Huxman, T. E., Allen, A. P., Ignace, D. D., and Gillooly, J. F.: Scaling metabolism from organisms to ecosystems, Nature, 423, 639-642, https://doi.org/10.1038/nature01671, 2003.
- Falge, E., Baldocchi, D., Olson, R., Anthoni, P., Aubinet, M., Bernhofer, C., . . . Dolman, H.: Gap filling strategies for long term energy flux data sets, Agric. For. Meteorol., 107, 71-77, https://doi.org/10.1016/S0168-1923(00)00235-5, 2001.
- Falge, E., Baldocchi, D., Tenhunen, J., Aubinet, M., Bakwin, P., Berbigier, P., . . . Davis, K. J.: Seasonality of ecosystem respiration and gross primary production as derived from FLUXNET measurements, Agric.
 For. Meteorol., 113, 53-74, https://doi.org/10.1016/S0168-1923(02)00102-8, 2002.
 - Falge, E., Tenhunen, J., Aubinet, M., Bernhofer, C., Clement, R., Granier, A., . . . Rannik, Ü.: A model-based study of carbon fluxes at ten European forest sites, in: Fluxes of carbon, water and energy of European forests, Springer, Berlin, Heidelberg, 151-177, https://doi.org/10.1007/978-3-662-05171-9_8, 2003.
- 670 Falge, E., Baldocchi, D., Olson, R., Anthoni, P., Aubinet, M., Bernhofer, C., Burba, G., Ceulemans, R., Clement, R., Dolman, H. and Granier, A.,: Gap filling strategies for defensible annual sums of net ecosystem exchange, Agric. For. Meteorol., 107, 43-69, https://doi.org/10.1016/S0168-1923(00)00225-2, 2001.
- Foken, T., Göockede, M., Mauder, M., Mahrt, L., Amiro, B., and Munger, W.: Post-field data quality control, in: Handbook of micrometeorology: a guide for surface flux measurement and analysis, Springer, Dordrecht, 181-208, https://doi.org/10.1007/1-4020-2265-4 9, 2004.
 - García-García, A., Cuesta-Valero, F. J., Miralles, D. G., Mahecha, M. D., Quaas, J., Reichstein, M., . . . Peng, J.: Soil heat extremes can outpace air temperature extremes, Nat. Clim. Change., 13, 1237-1241, https://doi.org/10.1038/s41558-023-01812-3, 2023.
- 680 George, J.-P., Yang, W., Kobayashi, H., Biermann, T., Carrara, A., Cremonese, E., . . . Pisek, J.: Method comparison of indirect assessments of understory leaf area index (LAIu): A case study across the extended network of ICOS forest ecosystem sites in Europe, Ecol. Indic., 128, https://doi.org/10.1016/j.ecolind.2021.107841, 2021.
- Göckede, M., Foken, T., Aubinet, M., Aurela, M., Banza, J., Bernhofer, C., . . . Clement, R.: Quality control of CarboEurope flux data–Part 1: Coupling footprint analyses with flux data quality assessment to evaluate sites in forest ecosystems, Biogeosciences, 5, 433-450, https://doi.org/10.5194/bg-5-433-2008, 2008.
 - Granier, A.: Evaluation of transpiration in a Douglas-fir stand by means of sap flow measurements, Tree physiology, 3, 309-320, 1987.
- 690 Granier, A., Reichstein, M., Bréda, N., Janssens, I. A., Falge, E., Ciais, P., . . . Wang, Q.: Evidence for soil water control on carbon and water dynamics in European forests during the extremely dry year: 2003, Agric. For. Meteorol., 143, 123-145, https://doi.org/10.1016/j.agrformet.2006.12.004, 2007.





- Grantz, D. A., Garner, J. H., and Johnson, D. W.: Ecological effects of particulate matter, Environ Int, 29, 213-239, https://doi.org/10.1016/S0160-4120(02)00181-210.1016/S0160-4120(02)00181-2, 2003.
- 695 Hari, P., Noe, S., Dengel, S., Elbers, J., Gielen, B., Kerminen, V.-M., . . . Mammarella, I.: Prediction of photosynthesis in Scots pine ecosystems across Europe by a needle-level theory, Atmos. Chem. Phys., 18, 13321-13328, https://doi.org/10.5194/acp-18-13321-2018, 2018.
- Harper, A. B., Cox, P. M., Friedlingstein, P., Wiltshire, A. J., Jones, C. D., Sitch, S., . . . Bodegom, P. v.: Improved representation of plant functional types and physiology in the Joint UK Land Environment Simulator (JULES v4.2) using plant trait information, Geosci. Model Dev., 9, 2415-2440, https://doi.org/10.5194/gmd-9-2415-2016, 2016.
 - Hu, Z., Wu, G., Zhang, L., Li, S., Zhu, X., Zheng, H., . . . Yu, G.: Modeling and Partitioning of Regional Evapotranspiration Using a Satellite-Driven Water-Carbon Coupling Model, Remote Sens., 9, https://doi.org/10.3390/rs9010054, 2017.
- 705 IGBP Terrestrial Carbon Working Group, S., W., Noble, I., Canadell, J., Apps, M., Schulze, E.D. and Jarvis, P.G.,: The terrestrial carbon cycle: implications for the Kyoto Protocol, Science, 280, 1393-1394, https://doi.org/10.1126/science.280.5368.1393, 1998.
 - Jansen, F. A., Jongen, H. J., Jacobs, C. M. J., Bosveld, F. C., Buzacott, A. J. V., Heusinkveld, B. G., . . . Teuling, A. J.: Land Cover Control on the Drivers of Evaporation and Sensible Heat Fluxes: An
- 710 Observation-Based Synthesis for the Netherlands, Water Resour. Res., 59, https://doi.org/10.1029/2022WR034361, 2023.
 - Joiner, J., Yoshida, Y., Vasilkov, A. P., Schaefer, K., Jung, M., Guanter, L., . . . Belelli Marchesini, L.: The seasonal cycle of satellite chlorophyll fluorescence observations and its relationship to vegetation phenology and ecosystem atmosphere carbon exchange, Remote Sens. Environ., 152, 375-391, https://doi.org/10.1016/j.rse.2014.06.022, 2014.
 - https://topotijdreis.nl/kaart/1911/@179163,464208,8.71, last access: February 25, 2025.
 - Keenan, T. F., Hollinger, D. Y., Bohrer, G., Dragoni, D., Munger, J. W., Schmid, H. P., and Richardson, A. D.: Increase in forest water-use efficiency as atmospheric carbon dioxide concentrations rise, Nature, 499, 324-327, https://doi.org/10.1038/nature12291, 2013.
- Kramer, K., Leinonen, I., Bartelink, H., Berbigier, P., Borghetti, M., Bernhofer, C., . . . Gracia, C.: Evaluation of six process-based forest growth models using eddy-covariance measurements of CO2 and H2O fluxes at six forest sites in Europe, Glob. Change Biol., 8, 213-230, https://doi.org/10.1046/j.1365-2486.2002.00471.x, 2002.
- Lansu, E. M., van Heerwaarden, C., Stegehuis, A. I., and Teuling, A. J.: Atmospheric aridity and apparent soil moisture drought in European forest during heat waves, Geophys. Res. Lett., 47, e2020GL087091, https://doi.org/10.1029/2020GL087091, 2020.
 - Largeron, C., Cloke, H., Verhoef, A., Martinez-de la Torre, A., and Mueller, A.: Impact of the Representation of the Infiltration on the River Flow during Intense Rainfall Events in JULES, ECMWF Technical Memorandum, https://doi.org/10.21957/nkky9s1hs, 2018.





- 730 Leuning, R., van Gorsel, E., Massman, W. J., and Isaac, P. R.: Reflections on the surface energy imbalance problem, Agric. For. Meteorol., 156, 65-74, https://doi.org/10.1016/j.agrformet.2011.12.002, 2012.
 - Lundblad, M., Lagergren, F., and Lindroth, A.: Evaluation of heat balance and heat dissipation methods for sapflow measurements in pine and spruce, Ann. For. Sci., 58, 625-638, 2001.
- Mallick, K., Sulis, M., Jiménez-Rodríguez, C. D., Hu, T., Jia, A., and Drewry, D. T.: Soil and Atmospheric Drought Explain the Biophysical Conductance Responses in Diagnostic and Prognostic Evaporation Models Over Two Contrasting European Forest Sites, J. Geophys. Res. G: Biogeosciences, 129, https://doi.org/10.1029/2023jg007784, 2024.
- Mauder, M., Foken, T., Clement, R., Elbers, J.A., Eugster, W., Grünwald, T., Heusinkveld, B. and Kolle,
 O.: Quality control of CarboEurope flux data—Part 2: Inter-comparison of eddy-covariance software,
 Biogeosciences, 5, https://doi.org/10.5194/bg-5-451-2008, 2008.
 - Meesters, A., Tolk, L., Peters, W., Hutjes, R., Vellinga, O., Elbers, J., . . . Meijer, H.: Inverse carbon dioxide flux estimates for the Netherlands, J. Geophys. Res. Atmos., 117, https://doi.org/10.1029/2012JD017797, 2012.
- Moors, E. J.: Water use of forests in the Netherlands, Vrije Universiteit, Amsterdam, http://www.hydrology.nl/images/docs/dutch/2012.05.22 Eddy Moors.pdf, 2012.
 - Papale, D. and Valentini, R.: A new assessment of European forests carbon exchanges by eddy fluxes and artificial neural network spatialization, Glob. Change Biol., 9, 525-535, https://doi.org/10.1046/j.1365-2486.2003.00609.x, 2003.
- Pastorello, G., Trotta, C., Canfora, E., Chu, H., Christianson, D., Cheah, Y. W., . . . Papale, D.: The FLUXNET2015 dataset and the ONEFlux processing pipeline for eddy covariance data, Sci Data, 7, 225, https://doi.org/10.1038/s41597-020-0534-3, 2020.
 - Petropoulos, G. P.: Extending our understanding on the retrievals of surface energy fluxes and surface soil moisture from the "triangle" technique, Environ. Model. Softw., 181,
- 755 https://doi.org/10.1016/j.envsoft.2024.106180, 2024.
 - Raoult, N. M., Jupp, T. E., Cox, P. M., and Luke, C. M.: Land-surface parameter optimisation using data assimilation techniques: the adJULES system V1.0, Geosci. Model Dev., 9, 2833-2852, https://doi.org/10.5194/gmd-9-2833-2016, 2016.
- Reichstein, M., Falge, E., Baldocchi, D., Papale, D., Aubinet, M., Berbigier, P., . . . Granier, A.: On the separation of net ecosystem exchange into assimilation and ecosystem respiration: review and improved algorithm, Glob. Change Biol., 11, 1424-1439, https://doi.org/10.1111/j.1365-2486.2005.001002.x, 2005.
 - Schelhaas, M., Teeuwen, S., Oldenburger, J., Beerkens, G., Velema, G., Kremers, J., . . . Daamen, W.: Zevende Nederlandse Bosinventarisatie: methoden en resultaten (Seventh Dutch Forest Inventory: Methods and results), Wettelijke Onderzoekstaken Natuur & Milieu2352-2739, 127, 10.18174/571720, 2022.
 - Schuepp, P., Leclerc, M., MacPherson, J., and Desjardins, R.: Footprint prediction of scalar fluxes from analytical solutions of the diffusion equation, Bound.-Layer Meteorol., 50, 355-373, https://doi.org/10.1007/BF00120530, 1990.





- Stephens, B., Watt, A., and Maclean, G.: An autonomous inexpensive robust CO2 analyzer (AIRCOA),
 Proc. 13th WMO/IAEA Meeting of Experts on Carbon Dioxide Concentration and Related Tracers
 Measurement Techniques, Boulder, Colorado, 95-99,
 - Stephens, B. B., Miles, N. L., Richardson, S. J., Watt, A. S., and Davis, K. J.: Atmospheric CO2 monitoring with single-cell NDIR-based analyzers, Atmospheric Measurement Techniques, 4, 2737-2748, https://doi.org/10.5194/amt-4-2737-2011, 2011.
- Strebel, L., Bogena, H., Vereecken, H., Andreasen, M., Aranda, S., and Hendricks Franssen, H.-J.: Evapotranspiration prediction for European forest sites does not improve with assimilation of in-situ soil water content data, Earth Syst. Sci., 2023, 1-38, https://doi.org/10.5194/hess-28-1001-2024, 2023.
 - Tong, X., Xiao, J., Liu, P., Zhang, J., Zhang, J., Yu, P., . . . Li, J.: Carbon exchange of forest plantations: global patterns and biophysical drivers, Agric. For. Meteorol., 336,
- 780 <u>https://doi.org/10.1016/j.agrformet.2023.109</u>379, 2023.
 - Valentini, R., Matteucci, G., Dolman, A.J., Schulze, E.D., Rebmann, C.J.M.E.A.G., Moors, E.J., Granier, A., Gross, P., Jensen, N.O., Pilegaard, K. and Lindroth, A.,: Respiration as the main determinant of carbon balance in European forests, Nature, 404, 861-865, https://doi.org/10.1038/35009084, 2000.
- Van Der Horst, S. V., Pitman, A. J., De Kauwe, M. G., Ukkola, A., Abramowitz, G., and Isaac, P.: How representative are FLUXNET measurements of surface fluxes during temperature extremes?, Biogeosciences, 16, 1829-1844, https://doi.org/10.5194/bg-16-1829-2019, 2019.
 - van der Molen, M., Snellen, H., Holzinger, R., Barten, S., Zhao, H., Peters, W., . . . Kruijt, B.: The Loobos ecosystem site: a pine forest on sandy soil, 2025.
- Van Wijk, M. and Bouten, W.: Water and carbon fluxes above European coniferous forests modelled with artificial neural networks, Ecol. Model., 120, 181-197, https://doi.org/10.1016/S0304-3800(99)00101-5, 1999.
 - Verma, M., Friedl, M. A., Richardson, A. D., Kiely, G., Cescatti, A., Law, B. E., . . . Propastin, P.: Remote sensing of annual terrestrial gross primary productivity from MODIS: an assessment using the FLUXNET La Thuile data set, Biogeosciences, 11, 2185-2200, https://doi.org/10.5194/bg-11-2185-2014, 2014.
- 795 Vermeulen, M. H., Kruijt, B. J., Hickler, T., and Kabat, P.: Modelling short-term variability in carbon and water exchange in a temperate Scots pine forest, Earth Syst. Dyn., 6, 485-503, https://doi.org/10.5194/esd-6-485-2015, 2015.
 - Veroustraete, F., Sabbe, H., and Eerens, H.: Estimation of carbon mass fluxes over Europe using the C-Fix model and Euroflux data, Remote Sens. Environ., 83, 376-399, https://doi.org/10.1016/S0034-4257(02)00043-3, 2002.
 - Verstraeten, W. W., Veroustraete, F., and Feyen, J.: Estimating evapotranspiration of European forests from NOAA-imagery at satellite overpass time: Towards an operational processing chain for integrated optical and thermal sensor data products, Remote Sens. Environ., 96, 256-276, https://doi.org/10.1016/j.rse.2005.03.004, 2005.
- Visser, A. J., Ganzeveld, L. N., Finco, A., Krol, M. C., Marzuoli, R., and Boersma, K. F.: The Combined Impact of Canopy Stability and Soil NOx Exchange on Ozone Removal in a Temperate Deciduous Forest, J. Geophys. Res. G: Biogeosciences, 127, https://doi.org/10.1029/2022jg006997, 2022.





- Visser, A. J., Ganzeveld, L. N., Goded, I., Krol, M. C., Mammarella, I., Manca, G., and Boersma, K. F.:
 Ozone deposition impact assessments for forest canopies require accurate ozone flux partitioning on
 diurnal timescales, Atmos. Chem. Phys., 21, 18393-18411, https://doi.org/10.5194/acp-21-18393-2021,
 2021.
 - Webb, E. K., Pearman, G. I., and Leuning, R.: Correction of flux measurements for density effects due to heat and water vapour transfer, Q. J. R. Meteorol. Soc., 106, 85-100, https://doi.org/10.1002/qj.49710644707, 1980.
- Wu, M., Scholze, M., Kaminski, T., Voßbeck, M., and Tagesson, T.: Using SMOS soil moisture data combining CO2 flask samples to constrain carbon fluxes during 2010–2015 within a Carbon Cycle Data Assimilation System (CCDAS), Remote Sens. Environ., 240, https://doi.org/10.1016/j.rse.2020.111719, 2020.
- Zhao, H., van der Molen, M., Dolman, H., Elbers, J., Jans, W., Kruijt, B., . . . Hutjes, R.: The Loobos ecosystem first tower dataset: meteorology, turbulent fluxes and net ecosystem exchange (1996 to 2021) [dataset], https://doi.org/10.5281/zenodo.15721310, 2025.
 - Zhou, J., van der Molen, M., and Teuling, A. J.: Contrasting Below-and Above-Canopy Temperature Service of a Temperate Forest During Heatwaves, Available at SSRN 4717853, http://dx.doi.org/10.2139/ssrn.4717853, 2024.