

CAMELS-GB v2: hydrometeorological time series and landscape attributes for 671 catchments in Great Britain

Gemma Coxon¹, Yanchen Zheng^{1,2}, Rafael Barbedo³, Hollie Cooper³, Felipe Fileni⁴, Hayley J. Fowler⁴, Matt Fry³, Amy Green⁴, Tom Gribbin³, Helen Harfoot^{6,7}, Elizabeth Lewis⁸, Germano Gondim Ribeiro Neto¹, Xiaobin Qiu⁴, Saskia Salwey^{2,9}, Doris E. Wendt^{1,10}

¹ School of Geographical Sciences, University of Bristol, Bristol, UK

² School of Civil, Aerospace and Design Engineering, University of Bristol, Bristol, UK

³ UK Centre for Ecology & Hydrology, Maclean Building, Crowmarsh Gifford, Wallingford, United Kingdom

⁴ School of Engineering and Tyndall Centre for Climate Change Research, Newcastle University, Newcastle upon Tyne, United Kingdom

⁵ British Geological Survey, Keyworth, United Kingdom

⁶ Environment Agency, Romsey, Hampshire, United Kingdom

⁷ School of Geography and Environmental Science, University of Southampton, Highfield, Southampton, United Kingdom

⁸ Civil Engineering and Management, University of Manchester, Manchester, United Kingdom

⁹ Department of Physical Geography, Faculty of Geosciences, Utrecht University, Utrecht, the Netherlands

¹⁰ British Geological Survey, Edinburgh, United Kingdom

Correspondence to: Gemma Coxon (gemma.coxon@bristol.ac.uk)

Abstract. Large-sample hydrological datasets containing data for tens to thousands of catchments are invaluable for hydrological process understanding and modelling. CAMELS (Catchment Attributes and MEteorology for Large-sample Studies) datasets provide hydro-meteorological timeseries, catchment attributes and catchment boundaries. Here, we present the second version of CAMELS-GB. CAMELS-GB v2 collates millions of observations from across Great Britain at hourly to monthly timescales, including quality-controlled daily river flows, catchment boundaries, and catchment characteristics from the UK National River Flow Archive. The new features include (1) extended daily hydro-meteorological timeseries from 1970- 2022 including meteorological timeseries from new observed climate datasets, (2) hourly precipitation, river flow and level timeseries, (3) groundwater level timeseries and attributes for 55 groundwater wells, and (4) new catchment attributes characterising changing land cover, peak flows and human influences. These data are provided for 671 catchments across Great Britain spanning a diverse range of geophysical characteristics and human influences. CAMELS-GB v2 represents a step change for environmental and modelling analyses across Great Britain, particularly for the characterisation of sub-daily hydrological processes, and is made available as an open dataset (Coxon et al., 2025; <https://doi.org/10.5285/9a46d428-958f-4ac1-86eb-94eee70c0955>).

1 Introduction

Large-sample hydrological (LSH) datasets are invaluable for hydrological process understanding and modelling. LSH datasets provide data for tens to thousands of catchments over national (e.g. Australia, Fowler et al., 2021; Austria, Klingler et al., 2021; Brazil, Almagro et al., 2021; Chagas et al., 2020; Chile, Alvarez-Garreton et al., 2018 ; Great Britain, Coxon et al., 2020;

Deleted: new

Deleted: new

Field Code Changed

Haiti, Bathelemy et al., 2024; Iceland, Helgason and Nijssen, 2024; Spain, Senent-Aparicio et al., 2024; Sweden, Teutschbein, 2024; Switzerland, Höge et al., 2023; USA, Addor et al., 2017), continental (e.g. Europe, do Nascimento et al., 2024; North America, Arsenault et al., 2020) and global (e.g. CARAVAN, Kratzert et al., 2023; Global Streamflow Indices and Metadata Archive; Do et al., 2018) scales. While the core data underpinning LSH datasets are streamflow data, LSH datasets also often include meteorological timeseries, simulated timeseries from hydrological models, catchment boundaries and catchment attributes at various spatial and temporal scales. This enables robust benchmarking of hydrological models across a diverse range of catchments (e.g. David et al., 2022; Lees et al., 2021), improved understanding of hydrological processes across environmental gradients (e.g. Addor et al., 2018; Coxon et al., 2024; McMillan et al., 2022), characterisation and prediction of extreme events (e.g. Chagas et al., 2022b; Rasheed et al., 2024) and assessment of the impacts of climate and land management on streamflow (e.g. Chagas et al., 2022a; Slater et al., 2024). Increasingly, LSH datasets have adopted FAIR (findable, accessible, interoperable, and reusable) principles to ensure (1) the large-sample dataset and their source datasets are open-access, and (2) the software tools used to create the large-sample hydrology datasets are open and accessible (Fowler et al., 2025). ~~There is now a growing community of LSH datasets and these datasets are expanding rapidly. The CARAVAN dataset, which included data for 6830 catchments when published in 2023 (Kratzert et al., 2023), now contains data for more than 20,000 catchments.~~

Deleted: and

Deleted: is has enabled

Deleted: , such as t

Deleted: but

CAMELS (Catchment Attributes and MEteorology for Large-sample Studies) datasets are a family of large-sample hydrology datasets that contain hydro-meteorological timeseries, catchment attributes and boundaries for large-samples of catchments for specific countries or regions. CAMELS-GB v1 was the first large-sample, open access dataset for Great Britain (Coxon et al., 2020; Coxon, 2020). It consists of hydro-meteorological time series (spatially aggregated to catchment boundaries), catchment attributes (describing topography, climate, hydrology, land cover, soils, hydrogeology, and human influences), and catchment boundaries for 671 catchments. It has been used to understand human impacts on river flows (Bloomfield et al., 2021; Coxon et al., 2024), analyse the spatial sensitivity of river flooding to changes in climate and land cover (Slater et al., 2024), calibrate and evaluate hydrological models (Kiraz et al., 2023) and to benchmark data-driven runoff models (Lees et al., 2021). It has also been incorporated into continental (do Nascimento et al., 2024) and global catchment datasets (Kratzert et al., 2023). While CAMELS-GB v1 is a valuable dataset, there are important gaps in the current dataset. Firstly, it only contains daily hydro-meteorological timeseries, when sub-daily timeseries are often needed for flood characterisation in small catchments across Great Britain. Secondly, it only contains static catchment attributes (i.e. one snapshot of a geophysical property in time) which makes it challenging to use for trend analyses. Thirdly, groundwater is an important resource in Great Britain, yet there are no timeseries available for groundwater levels in CAMELS-GB v1.

Deleted: catchment

Deleted: are

This paper addresses these data needs by providing a new version of CAMELS-GB. CAMELS-GB v2 contains new datasets including hourly hydro-meteorological timeseries, groundwater level timeseries, dynamic catchment attributes characterising changes in land cover and static catchment attributes characterising groundwater timeseries and reservoirs. We also update the existing data in CAMELS-GB to lengthen the daily hydro-meteorological timeseries and to include the latest rainfall and

potential evapotranspiration data for Great Britain. Key differences between the two versions of CAMELS-GB are summarised in [Table 1](#). CAMELS-GB v2 is open access and available on the Environmental Information Data Centre (EIDC). The remainder of the paper describes the changes between v1 and v2, a full description of any new data and advice for users of CAMELS-GB v2.

Deleted: Table 1

80 2 Catchment selection and boundaries

CAMELS-GB v2 contains data for the same 671 catchments as CAMELS-GB v1. These catchments were selected from the UK National River Flow Archive (NRFA) Service Level Agreement (SLA) network (see Dixon et al., 2013; Hannaford, 2004), excluding catchments from Northern Ireland (due to a lack of consistent climate and landscape datasets across the UK) and two gauges where no suitable catchment boundary could be derived. The SLA network ensures a core network of stations for long-term records that undergo additional quality control and validation on the NRFA (Dixon et al., 2013; Muchan and Dixon, 85 2014). The resulting 671 catchments span a diverse range of hydrological characteristics that represent rivers across GB.

As with CAMELS-GB v1, catchment boundaries are provided in CAMELS-GB v2 as shapefiles in the OSGB 1936 co-ordinate system (British National Grid). The catchment boundaries were derived using the same underlying data and method as for CAMELS-GB v1 (see Section 3 from Coxon et al, 2020 for more details) but updated to better reflect the accuracy of the 90 stations' outlet locations, with minimal influence on the attributes of the final dataset. The catchment boundaries are mostly identical to those provided in CAMELS-GB v1; only two catchments have more than 1% difference in catchment area, with a maximum difference of 1.5%.

To calculate catchment areal averages for time series and catchment attributes, the exactextract Python package (Baston, 2025) [was](#) used to extract [and spatially aggregate](#) data from gridded datasets based on catchment boundary polygons. This tool 95 computes catchment average values [while](#), accounting for grid cells that are only partially covered by a polygon. Precisely determining the fractional coverage of each grid cell within a catchment is especially important for small catchments, where coarse approximations can lead to significant differences in the extracted values.

Deleted: is

Deleted: by

3 Timeseries Data

Daily and hourly hydro-meteorological timeseries are provided for 671 catchments, alongside daily and monthly groundwater level timeseries for 55 boreholes. This section describes the CAMELS-GB v2 timeseries in detail including the source datasets and differences between products. [Further details on quality flags, comparisons between datasets and identification of outliers can be found in the supplementary information \(Figures S1-8, Text S1 and Tables S1-4\).](#) 100

Deleted: s

Deleted: .

3.1 Daily hydro-meteorological timeseries

Daily hydro-meteorological time series are provided for the 671 catchments (Table 2). The daily time series data includes key hydro-meteorological variables (streamflow, rainfall, potential evapotranspiration and temperature) from 1st October 1970 – 30th September 2022 to provide a valuable, long-term dataset as input and evaluation data for hydrological models, trend analysis and characterisation of hydrological processes.

3.1.1 Daily meteorological timeseries

To provide consistency with CAMELS-GB v1, we derive the daily timeseries from the same underlying meteorological datasets; rainfall from UK Centre for Ecology & Hydrology Gridded Estimates of Areal Rainfall (CEH-GEAR) dataset, potential evapotranspiration and temperature from the Climate hydrology and ecology research support system (CHES). These datasets were selected due to their high spatial resolution (1 km²), long temporal coverage (>50 years) and basis on the UK climate monitoring network. However, these meteorological datasets are no longer consistently updated and do not cover the full time period required. Consequently, in CAMELS-GB v2 we also provide meteorological timeseries of catchment average precipitation, potential evapotranspiration and temperature from a new UK dataset of gridded climate observations (HadUK-Grid; Hollis et al., 2019). A national comparison of the different products are shown in Figure 1, while a more detailed comparison of the different products for two catchments can be found in Figure S1 and S2.

Deleted: see


Deleted: Table 2

Deleted: CEH

Deleted: rainfall

Deleted: with a

Deleted: .

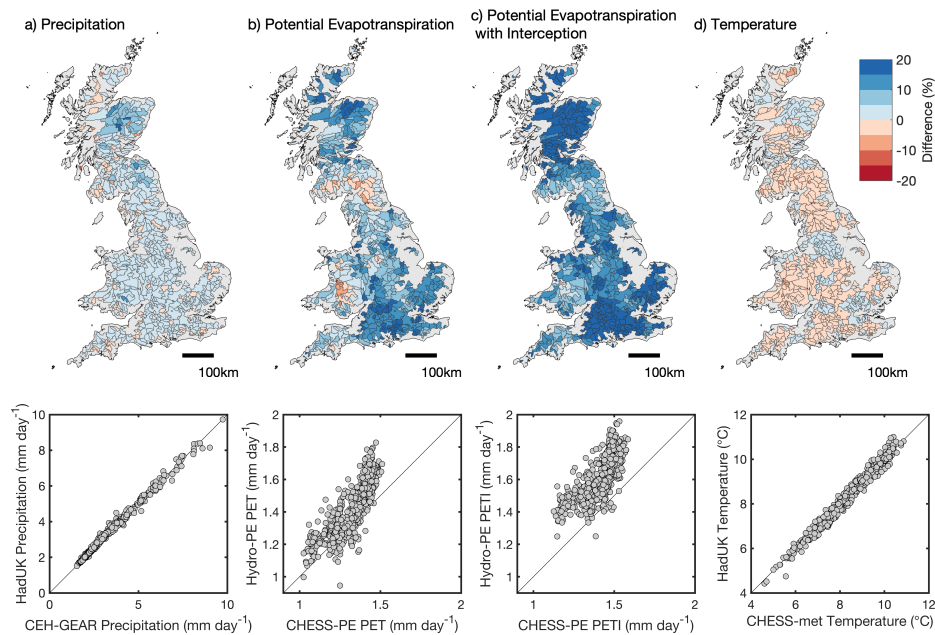

130 **Figure 1.** National comparison of mean daily a) precipitation (mm day⁻¹) between HadUK-Grid and CEH-GEAR, b) potential
 135 evapotranspiration (PET, mm day⁻¹) between Hydro-PE and CHES-PE PET products, c) potential evapotranspiration with
 interception (PETI, mm day⁻¹) between Hydro-PE and CHES-PE PETI products and d) temperature (degrees C) between
 HadUK-Grid and CHES-met. The average of the mean daily flows are calculated from 1st October 1970 – 30th September
 2022 for the 671 CAMELS-GB catchments. The blue colours indicate that the HadUK/Hydro-PE daily averages are higher
 than the CEH-GEAR/CHES datasets, while the red colours indicate that the HadUK/Hydro-PE daily averages are lower than
 the CEH-GEAR/CHES datasets, as a percentage of the CEH-GEAR/CHES datasets. Contains OS data © Crown Copyright
 and database right 2025.

Deleted: rainfall

Deleted: Mean daily

Deleted: averages

140 Daily rainfall timeseries were derived from two national products; the CEH Gridded Estimates of Areal Rainfall dataset (CEH-
 GEAR; Keller et al., 2015; Tanguy, 2021) and the HadUK-Grid dataset (Hollis et al., 2019). Both consist of 1 km² gridded
 estimates of daily rainfall and are based on quality-controlled precipitation data from the Met Office UK rain gauge network.
 However, the two datasets cover different time periods and use different interpolation methods. CEH-GEAR covers 1890 –
 2019 whereas HadUK-Grid rainfall is available from 1836 – 2023. The CEH-GEAR dataset uses natural neighbour
 interpolation, whereas HadUK-Grid uses inverse-distance weighted interpolation to generate the daily rainfall grids. Given the
 similarities in their underlying datasets, the difference between the two rainfall products is small for most CAMELS-GB

Deleted: the two datasets

Deleted: to interpolate the data

150 catchments (Figure 1a, S1). However, there can be differences of up to 20% in mean annual rainfall totals and larger differences in daily totals for individual catchments (Figure S2).

Daily temperature timeseries were derived from the Climate Hydrology and Ecology research Support System meteorology dataset (CHESS-met; Robinson et al., 2017a) and the HadUK-Grid dataset (Hollis et al., 2019). CHESS-met contains 1 km² gridded estimates of daily mean air temperature (K) from 1961–2019 derived from the Met Office Rainfall and Evaporation Calculation System (MORECS) dataset (Hough and Jones, 1997). MORECS is a 40 km gridded dataset of daily temperature derived from Met Office synoptic stations. For the temperature data in CHESS-met, the MORECS temperature data was interpolated from 40 km resolution to 1 km resolution using a bicubic spline and then the temperatures were adjusted to the elevation of each 1 km square using the same lapse rate. HadUK-Grid contains 1 km² gridded estimates of daily maximum and minimum air temperature (°C) from 1960–2023 derived by interpolating temperature observations from climate observing stations in the Met Office's Integrated Data Archive System (MIDAS). In the HadUK-Grid daily climate variables, the maximum air temperature is measured between 09:00 UTC on day D and 09:00 UTC on day D+1, while the minimum air temperature is measured between 09:00 UTC on day D–1 and 09:00 UTC on day D (Robinson et al., 2023). Therefore, daily mean temperatures have been calculated by averaging maximum air temperature on day D and minimum air temperature on day D+1 to ensure both values represent the same 24-hour period for each day. On average, the difference in mean daily temperature between the two products is relatively small (0.14°C; Figure 1d); however, differences can be larger for individual timesteps (Figure S1, S2).

Daily potential evapotranspiration (PET) timeseries were derived from the Climate Hydrology and Ecology research Support System Potential Evapotranspiration dataset (CHESS-PE; Robinson et al., 2016) and the Hydro-PE HadUK-Grid dataset (Hydro-PE; Brown, 2022; Robinson et al., 2023). Both datasets consist of daily 1 km² gridded estimates of potential-evapotranspiration for Great Britain calculated using the Penman-Monteith equation for well-watered grass. They also both provide daily potential evapotranspiration with (PETI) and without (PET) an interception correction. Core differences between the datasets are that the PET datasets cover different time periods; 1969–2022 for Hydro-PE and 1961–2019 for CHESS-PE. They also provide different PET estimates, with the Hydro-PE HadUK-Grid dataset providing higher mean annual estimates of PET (on average 0.1 mm day⁻¹ higher across the CAMELS-GB catchments) and PETI (on average 0.2 mm day⁻¹ higher across the CAMELS-GB catchments) for most CAMELS-GB catchments (Figure 1b, c). This is due to differences in the underlying data and methodologies used to derive the PET estimates. CHESS-PE is derived from CHESS-met variables (Robinson et al., 2017a) that have been downscaled from the Met Office Rainfall and Evaporation Calculation System (MORECS) dataset (Hough and Jones, 1997), whereas Hydro-PE is derived from HadUK-Grid meteorological data (Hollis et al., 2019). Wind speeds are higher and specific humidity is lower in the HadUK-Grid dataset, and many of the variables in the Hydro-PE HadUK-Grid dataset have been temporally downscaled from monthly to daily using a simple smooth interpolation (for a full discussion of the differences, see Section 5.1 in Robinson et al., 2023). This leads to different estimates of daily PET

Deleted: -

Deleted: Since i

Deleted: D

Deleted: -

Deleted: -

and PETI between the different datasets across all CAMELS-GB catchments (Figures S1 and S2, [see Section 3.3 for guidance on dataset selection](#)).

190 As the meteorological timeseries from HadUK-Grid covers the full time period, we use these data to derive the climate catchment attributes described in Section 5.2.

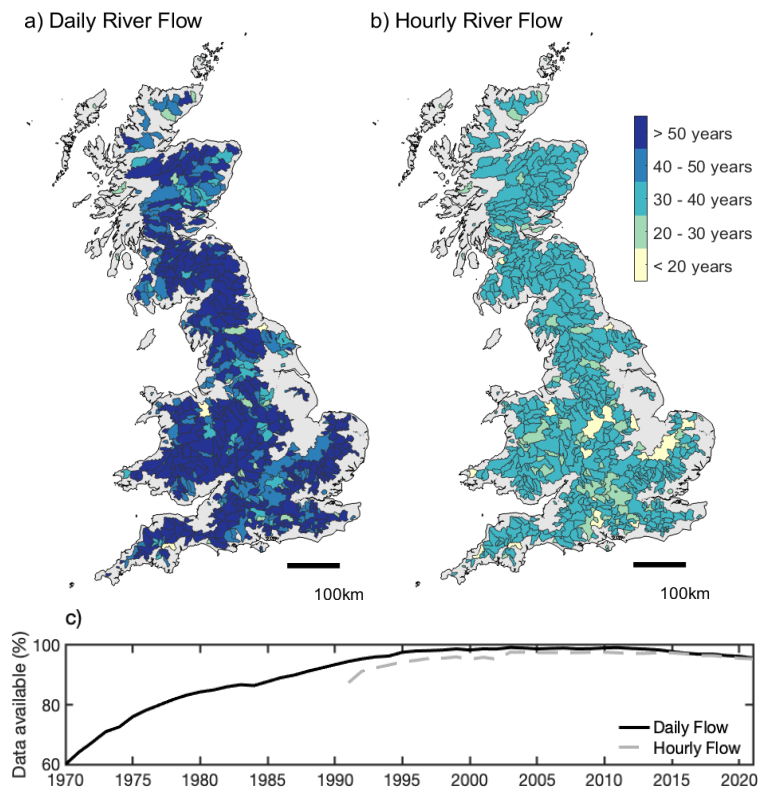


Figure 2. Flow data availability a) length of daily flow timeseries available for each catchment, b) length of hourly flow timeseries available for each catchment, c) percentage of daily and hourly data available for each year from 1970-2022 and 1990-2022. Contains OS data © Crown Copyright and database right 2025.

3.1.2 Daily hydrological timeseries

Daily streamflow data for the 671 gauges were taken from the UK NRFA on the 7th January 2025 (<https://nrfaapps.ceh.ac.uk/nrfa/nrfa-api.html>, last access 22nd January 2025). Streamflow data on the NRFA are provided by measuring authorities who operate the river flow monitoring network, including the Environment Agency (EA) in England, Natural Resources Wales (NRW) in Wales and Scottish Environmental Protection Agency (SEPA) in Scotland. The streamflow data undergo quality control by the measuring authorities and the UK NRFA before being uploaded to the NRFA site. This quality control process removes flow values that are perceived to be erroneous, while retaining as complete a series as possible through the use of a range of infilling techniques. (Dixon et al., 2013). Streamflow data in CAMELS-GB v2 are provided as volumetric discharge ($\text{m}^3 \text{s}^{-1}$) and specific discharge (mm day^{-1}).

Deleted: The streamflow data undergo additional quality control before being uploaded on the NRFA site.

Figure 2 shows the daily flow data availability for all gauges contained in the CAMELS-GB v2 dataset (Figure 2a) and how this availability changes over time (Figure 2c). Nearly all (666) of the gauges have at least 20 years of daily flow data, and 86 % (577) of the gauges have at least 40 years of daily flow data (Figure 2a). Overall, there is good spatial coverage of long flow time series across Great Britain, with slightly shorter time series concentrated in the north, Midlands and south-east GB. Data availability increases over the time period with 60% of the daily flow data available in 1970, peaking to 99% in the early 2000's and slightly dropping to 96% by 2022 (Figure 2c).

3.2 Hourly hydro-meteorological timeseries

Hourly hydro-meteorological time series of rainfall, river flow and river level are provided for the 671 catchments from 1st October 1990 09:00 UTC to 1st October 2022 08:00 UTC (Table 3). All timeseries data in CAMELS-GB are reported in UTC with no daylight saving time adjustment. Rainfall on a given hour refers to the amount accumulated over the previous hour, whereas river level and flow are reported as hourly averages, representing the mean value over the previous hour. The hourly hydro-meteorological timeseries provide a long-term, high-temporal resolution dataset for model forcing and evaluation, catchment characterisation and analysis of extremes (particularly short-term flood events). Hourly PET is not included in the hourly hydro-meteorological timeseries due to a lack of hourly PET datasets and observed hourly climate variables to calculate hourly PET.

Deleted: and

Deleted: Table 3

Deleted: .

Deleted: is

Deleted: s

Deleted: being available

3.2.1 Hourly meteorological timeseries

Hourly rainfall timeseries are derived from two national products so users have the choice from multiple products.

The UK Centre for Ecology and Hydrology Gridded Estimates of hourly Areal Rainfall for Great Britain (CEH-GEAR1hr; Lewis et al., 2018, 2022) consists of 1 km² gridded estimates of hourly rainfall from 1990-2016. The hourly rainfall estimates are derived from the temporal disaggregation of the CEH-GEAR daily data (described in Section 3.1.1) using hourly gauge data from the Met Office, EA, NRW and SEPA. The hourly gauge data are quality controlled to identify and reject erroneous

hourly values in the gauge rainfall input dataset by comparing the gauge data with the CEH-GEAR daily dataset and by
230 implementing a series of quality control tests (Lewis et al., 2018). The nearest neighbour interpolation methodology was used
to generate the gridded hourly estimates which were subsequently used to disaggregate the daily data.

Hourly rainfall time series are also derived from the Gauge-Radar Precipitation Dataset (1 hour and 1 km) for Great Britain,
GRaD-GB(1H1K), which takes advantage of the accuracy of gauge rainfall and the spatial information of radar rainfall field
(Qiu et al., 2026a). The dataset consists of 1km² gridded estimates of hourly rainfall for Great Britain from 1 January 2006 to
235 31 December 2023 and is produced by blending 5-min NIMROD composite radar rainfall (Met Office, 2024) with sub-hourly
rainfall observations of ~1800 rain gauge network from the UK Met Office, EA, NRW and SEPA. To produce the hourly
rainfall dataset, the radar rainfall and sub-hour rainfall observations are first aggregated to hourly data. Then a quality control
framework is applied to improve the underestimation (radar beam blockage) and overestimation (radar malfunction, ground
clutter, and random noise) issues in the radar rainfall data (Qiu et al., 2026b). The quality control procedure that was employed
240 in CEH-GEAR1hr (Lewis et al., 2018) is applied to the gauge rainfall data. A Gauss Blending method was then used to merge
the radar rainfall with gauge rainfall. Maintenance work on the rainfall radars means that 3.5% of the hourly timeseries are
missing for the CAMELS-GB catchments due to missing radar data. Analysis of GRaD-GB(1H1K) shows that the dataset can
capture extreme rainfall events missed by rain-gauges (i.e. severe flash flooding in Coverack, Cornwall, 18 July 2017) (Qiu et
al., 2026a).

245 A comparison of the hourly rainfall timeseries from CEH-GEAR1hr and GRaD-GB(1H1K) (Figure 3) shows that on average,
GRaD-GB(1H1K) hourly rainfall estimates are 10% higher than CEH-GEAR1hr (range of -25 - 65%) when calculating the
average hourly rainfall using the full timeseries. There is more variability between the two products in the north of Great
Britain (Figure 3a). The higher average rainfall for the GRaD-GB(1H1K) dataset is partially explained by a higher proportion
of wet hours (an hour with >0.1 mm of rainfall) in GRaD-GB(1H1K) (Figure 3b), however, when the average hourly rainfall
250 is calculated using only hours with >0.1 mm of rainfall, the relationship reverses and CEH-GEAR1hr has higher average hourly
rainfall despite a lower proportion of wet hours (Figure S3). The CEH-GEAR1hr data are based on gauge data corrected to the
daily total and it specifically seeks to preserve intense sub-daily rainfall characteristics in the interpolation method it uses.
Therefore, it has fewer wet hours and more intense hourly rainfall than GRaD-GB(1H1K). There is also a relationship with
elevation where catchments with lower median elevation have higher average rainfall in the GRaD-GB(1H1K) dataset
255 compared to catchments with higher median elevation (Figure 3c). An example of the differences between the hourly rainfall
datasets for individual catchments is shown in Figure S4 and S5.

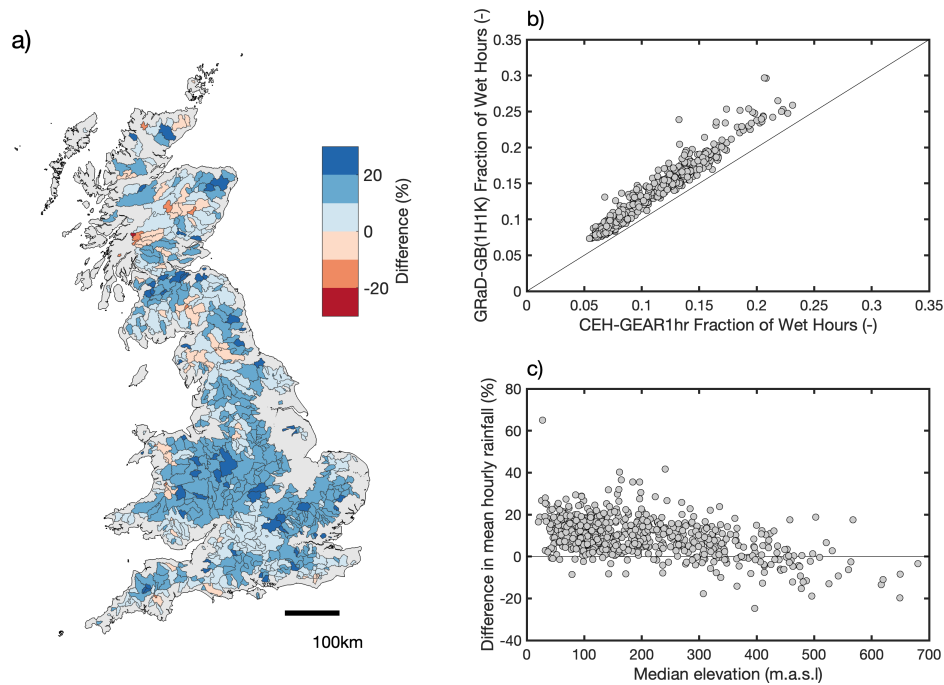


Figure 3. National comparison of average hourly rainfall (mm hour^{-1}) from 1st January 2006 to 31st December 2016 between CEH-GEAR1hr and the GRaD-GB(1H1K) datasets for the 671 CAMELS-GB catchments, a) Difference in average hourly rainfall (average hourly rainfall calculated using all timesteps) (%), b) Fraction of wet hours (wet hours are defined as any hour that recorded rainfall $>0.1\text{mm}$), c) Relationship between median elevation and difference in average hourly rainfall (%). The blue colours indicate that the GRaD-GB(1H1K) hourly rainfall averages are higher than the CEH-GEAR1hr hourly rainfall averages, while the red colours indicate that the GRaD-GB(1H1K) hourly rainfall averages are lower than the CEH-GEAR1hr hourly rainfall averages, as a percentage of the CEH-GEAR1hr dataset. Contains OS data © Crown Copyright and database right 2025

3.2.2 Hourly hydrological timeseries

Hourly river flows and levels are provided for 664 and 570 gauges respectively in CAMELS-GB v2 from 1st October 1990 – 30th September 2022. These hourly river flow and level data combined with the hourly rainfall data provide a wealth of additional information beyond the daily data, particularly for flood analyses, convective storm responses, and other short-

270 duration extremes. Below, we describe the source datasets of the hourly hydrological timeseries, how the timeseries were produced and the quality control applied to the dataset. Further details on the quality flags can be found in the Supplementary Information (Text S1, Figure S6 and Tables S1-3).

Deleted: (Figures S4 and S5).

Sub-daily river flows and levels are collected by the measuring authorities. The level data were obtained from SEPA via the timeseries data service (<https://timeseriesdoc.sepa.org.uk/>; last access 23rd September 2025), from EA primarily through the Hydrology Data Explorer (<https://environment.data.gov.uk/hydrology>; last access 23rd September 2025) and, where unavailable, with staff assistance, and from NRW entirely with staff assistance. The hourly flow data were obtained from the same sources but derived from the UK-Flow15 dataset (Fileni et al., 2025, 2026a). UK-Flow15 is a quality-controlled 15-minute flow dataset for the UK, using records from over 1,300 gauging stations including the EA, SEPA and NRW, in addition to the Department for Infrastructure in Northern Ireland and the UK Centre for Ecology & Hydrology.

Deleted: (Fileni et al, 2025)

280 Here, the 15-minute flow and level data have been aggregated to hourly using a next-hour resample (e.g. 10:00 flow value is the mean of flow recorded at 9:15, 9:30, 9:45 and 10:00). Most gauges (650) have at least 20 years of hourly flow data and 86% (579) of the gauges have at least 30 years of hourly flow data (Figure 2b). There is good spatial coverage of long hourly flow time series across Great Britain, with shorter time series concentrated in the Midlands and south-east of Great Britain. Similar to the daily data, there is greater missing flow data in the earlier part of the record (1990-1995, Figure 2c). There is also good availability of level data where 80% (542) of gauges have at least 20 years of hourly level data and 74% (499) of gauges have at least 30 years of hourly level data.

Deleted: The flow data have been quality controlled using both visual/manual inspection and automated quality control, including novel quality assessment techniques to assess the plausibility of extreme flow events (Fileni et al, 2025). ¶

290 The hourly flow and level timeseries are also provided with quality control flags. The hourly flow and level data have been quality controlled using both visual/manual inspection and automated quality control, including novel quality assessment techniques to assess the plausibility of extreme flow events (Fileni et al., 2026b). This quality control process is different to the quality control process applied to the daily flow data. Erroneous daily flow data are removed as part of the quality control process by measuring authorities and the UK NRFA, thus the daily flow data are the best estimate available and considered suitable for analysis and modelling without reference to flags. However, the quality control process for the hourly flow and level data acknowledges that some of these data may be incorrect and addresses this by applying flags to alert users of data issues, rather than removing data. It is therefore important that users use the flag-based system on the hourly flow and level data to identify, remove, or interpolate potentially problematic data as per their study requirements.

Moved (insertion) [2]

300 The quality flag for the corresponding hour in the flow and level data was selected according to an order of priority (i.e. which flag was deemed to be most important; see Text S1 and Figure S6). No flow or level data have been removed or modified by the quality control process so users can decide which data they want to include as part of their analyses. The flags are grouped into three categories; (1) comparison with other data products (such as the daily NRFA data), (2) traditional QC checks (such as negative values, truncated low/high flows, spikes), and (3) high-flow QC checks (with comparison to antecedent rainfall

Deleted: flow and level data are also provided with quality control flags. ...

Moved up [2]: The flow and level data are also provided with quality control flags.

Moved down [1]: Users are strongly encouraged to use the flag-based system to identify, remove, or interpolate potentially problematic data as per their study requirements to ensure that only good-quality data are utilised (see Fileni et al, 2025 for a more detailed assessment of the quality control process).

and assessment of unrealistically high values) (see Tables S1-3 for a full description of the quality control codes). The levels data underwent less extensive quality control than the flow dataset, and do not include quality control flags for some anomaly checks, comparisons with other UK hydrological products and hydrological similarity flags (see Text S1).

320 The most common flag for hourly river flow (Figure S8) are where there is a mismatch of >5% between the 15-min values recorded in UK-Flow15 (aggregated to daily) and the National River Flow Archive daily values – this flag is recorded in the timeseries of 539 stations and can appear for over 90% of the timeseries for some gauging stations. The hourly flow data will not always be consistent with the daily NRFA flow data because of rating curve changes, version control inconsistencies, and station-specific issues.

325 The other flags typically affect a relatively small proportion of the timeseries (this is expected as many flags focus on extremes) but will be important for users to identify, remove, or interpolate potentially problematic data as per their study requirements.

Deleted:

Users seeking a simpler way to select a subset of stations that are suitable for a range of applications are recommended to use the “station quality” categorical information contained within the hydrometry attribute file (see Section 5.7).

3.3 Guidance on selection of hydro-meteorological datasets

Formatted: Heading 2

330 CAMELS-GB v2 contains hydro-meteorological timeseries from different products, over different timescales and at different resolutions. Multiple products enable users to reflect some of the uncertainty in these data and make use of multiple forcing data at once (e.g. Kratzert et al. 2021). To help users to select the most appropriate dataset for their study, we have the following recommendations.

335 Firstly, timeseries from multiple meteorological products are used (where possible) in hydrological data and model analyses to reflect the uncertainty in these data. While differences between the two daily rainfall products (CEH-GEAR and HadUK rainfall) and the two daily temperature products (CHESS-met and HadUK-Grid air temperature) are generally small across most CAMELS-GB catchments, they can be larger for individual catchments or at specific timesteps (Figures S1 and S2). Differences between the two daily PET products are larger, with Hydro-PE PET estimates, on average, 10-20% higher than CHESS-PE. Differences between the two hourly rainfall products are also larger with GRaD-GB (IHIK) hourly rainfall estimates, on average, 10% higher than CEH-GEAR 1hr data.

340 Secondly, the HadUK-Grid daily meteorological timeseries are used in combination with the derived climatic signatures and hydrological indices (described in Section 5.2 and 5.3) from CAMELS-GB v2 as these timeseries were used to derive these attributes.

345 Thirdly, users should carefully consider which products they use for different applications. For long-term trend analyses, we recommend using the daily hydro-meteorological timeseries. If users are looking for the longest timeseries available, the HadUK-Grid and Hydro-PE datasets extend to 2022 in CAMELS-GB v2, whereas CEH-GEAR and CHESS-met are updated

less frequently than the HadUK-Grid datasets and currently end in 2019. It is worth noting that many of the variables used to derive Hydro-PE daily PET and PETI were temporally downscaled from monthly to daily resolution. Therefore, these products may be more suitable for seasonal to long-term analyses, and less appropriate for event-scale or short-term applications. For analysis of short-term extremes (e.g. flood analyses), we recommend using the hourly hydro-meteorological timeseries.

Finally, users should carefully consider the quality of the hourly flow and level timeseries before use in studies. We recommend using the flag-based system on the hourly flow and level timeseries to identify, remove, or interpolate potentially problematic data as per their study requirements to ensure that only good-quality data are utilised (see Fileni et al. 2026b for a more detailed assessment of the quality control process). Users can also select stations based on the station quality information (see Section 5.7). For low flow studies, we would suggest the daily flow data are best to use as they provide a good representation of slowly changing low flows and has been given additional quality control by the UK National River Flow Archive. For mean flow analyses, we recommend removing any stations where major issues have been identified. For high flow analyses, we recommend only using stations that have good quality high-flow data and for flood event quantification and flood frequency analysis we recommend only using stations with the highest quality flow data (see Section 5.7).

4 Groundwater levels

Groundwater level time series for 55 boreholes across Great Britain were obtained from the British Geological Survey (BGS) (Figure 4). These boreholes were selected to fall within CAMELS-GB catchments and represent the main aquifers in Great Britain. Groundwater level data are provided by the measuring authorities (EA, NRW and SEPA) to the National Groundwater Level Archive (NGLA) maintained by the British Geological Survey. Data are measured in meters above Ordnance Datum

Formatted: Normal, Space After: 0 pt, Line spacing: single, No bullets or numbering

Formatted: Font: Not Italic

Deleted: <#>Users are strongly encouraged to use the flag-based system to identify, remove, or interpolate potentially problematic data as per their study requirements to ensure that only good-quality data are utilised (see Fileni et al., 2025 for a more detailed assessment of the quality control process).

Deleted: <#>

Deleted: Figure 4

Formatted: Font: Not Bold

Field Code Changed

Newlyn (mAOD), which indicates the groundwater level height at a particular site relative to mean sea level using the national height datum in Britain.

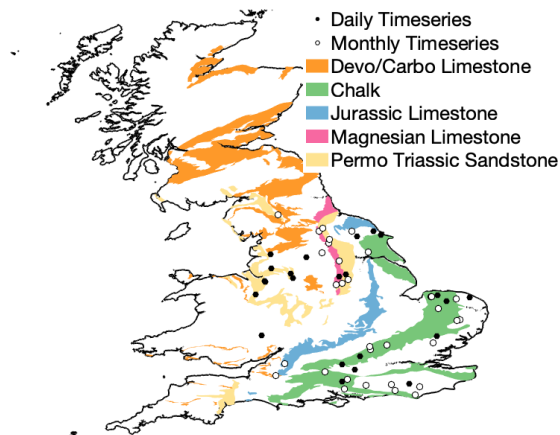


Figure 4. Location of 55 groundwater level timeseries in CAMELS-GB v2. Underlying map shows main aquifers across Great Britain. Devo/Carbo is abbreviated from Devonian/Carboniferous. Contains British Geological Survey materials © UKRI [2025] and OS data © Crown Copyright and database right 2025.

Deleted: -

375 The groundwater level data were provided at irregular time intervals. To provide a standardised dataset for CAMELS-GB v2,
the data were (1) aggregated to monthly values by taking an average of all measurements in each calendar month to provide
monthly groundwater level timeseries for all boreholes, and (2) also provided at daily timescale where consistent daily or
subdaily groundwater level observations were provided. Consequently, monthly groundwater level time series are provided
for all 55 boreholes and daily groundwater time series are also provided for 23 of these boreholes. The monthly groundwater
380 timeseries are available for 7 – 72 years with the earliest records beginning in the 1950s. The earliest daily groundwater
timeseries start from 1993 and are occasionally averaged from subdaily data. For 23 of the boreholes, outliers in the monthly
groundwater level timeseries were flagged as readings 1) diverted from the expected range, or 2) were close to the Datum (see
Table S4).

Deleted: ¶

Groundwater well attributes are also provided in CAMELS-GB v2, describing reference and hydrogeological information
385 relating to the wells and boreholes where groundwater level timeseries are provided. For each groundwater well, the name,
location (latitude, longitude, easting and northing), datum, depth and aquifer are provided. The start date, end date and
percentage complete of the daily and/or monthly groundwater level timeseries provided in CAMELS-GB v2 are also provided.

5 Catchment attributes

Catchment attributes characterising location, topography, climate, hydrology, land cover, soils, hydrogeology, hydrometry and human influences are provided in CAMELS-GB v2. Most catchment attributes (location, topography, climate, hydrology, soils and hydrogeology) are the same as CAMELS-GB v1 and are re-calculated using the new catchment boundaries or re-extracted from the same source (to account for any changes) (Table 1). Key changes are made for (1) land cover, where changing land cover over multiple years are now provided, (2) hydrometry, where new peak flow information is provided and (3) human influences, where new abstraction, discharge and reservoir attributes are provided (Table 1). This section describes the CAMELS-GB v2 catchment attributes including the source datasets, processing and limitations.

Deleted: Table 1

Deleted: Table 1

5.1 Location, area and topographic data

Catchment attributes describing the location and topography are kept consistent with CAMELS-GB v1 but are re-extracted for each catchment from the NRFA to ensure the latest version of these data. Catchment elevation (min, 10th, 50th, 90th, max) within the catchment mask is derived from CEH's 50m Integrated Hydrological Digital Terrain Model. Mean elevation and mean drainage path slope (index of catchment steepness) are also provided based on methods developed for the Flood Estimation Handbook (Bayliss, 1999), except for two catchments (18011 and 26006) where catchment boundaries could not be automatically derived. For more information see Section 6.1 of Coxon et al. (2020).

Deleted: ,

5.2 Climatic indices

The same suite of climatic indices is calculated as CAMELS-GB v1 (and other CAMELS datasets). These climatic indices characterise long-term (i.e. mean precipitation and PET, aridity index), seasonal (i.e. rainfall seasonality and fraction of snow), and short-term (i.e. frequency, duration and timing of high and low precipitation events) climate dynamics. The climatic indices in CAMELS-GB v2 are derived over the time period 1970-2022 using the HadUK-Grid catchment daily rainfall, potential evapotranspiration (without correction for interception as it has more consistency with other global and national PET products), and temperature time series described in Section 3.1.1 of this paper. These data were chosen (rather than the CEH-GEAR and CHESS-PE data) as the HadUK-Grid data cover the full timeseries available.

Climatic indices calculated from the hourly data are not provided as the long term and seasonal climate indices are very similar regardless of the temporal resolution of the data. While the short-term (i.e. frequency, duration and timing of high and low precipitation events) climatic indices would be different when calculated using hourly data for some catchments, analysis of the impacts of temporal resolution on catchment attributes (including careful consideration of choice of indices) is beyond the scope of this paper.

Deleted:

5.3 Hydrologic signatures

The same suite of hydrologic signatures is calculated as CAMELS-GB v1 (and other CAMELS datasets). The hydrologic signatures characterise long-term (i.e. mean flow, runoff ratio, streamflow elasticity, baseflow index), seasonal (i.e. the half flow date), and short-term (i.e. high and low flow percentiles, frequency and duration of high and low streamflow events) streamflow dynamics. [Seven catchments have a runoff ratio greater than one; gauge ID 26006 and 27038 have the highest runoff ratios of 3.01 and 2.74 respectively. Catchments with a runoff ratio greater than one are either \(1\) groundwater dominated catchments where the groundwater catchment greatly exceeds the topographical catchment or \(2\) impacted by human activities with water being imported into the catchment for water supply or hydro-electricity.](#)

The hydrologic signatures in CAMELS-GB v2 are derived using the HadUK-Grid catchment daily rainfall and streamflow time series from 1 October 1970 to 30 September 2022 (Section 3.1.1 and 3.1.2). Users should consider the availability of streamflow data (i.e. length and percentage missing) when comparing hydrologic signatures across catchments (McMillan et al., 2023).

5.4 Land cover attributes

Land cover for multiple years is provided in CAMELS-GB v2. Land cover attributes for each catchment were derived from the UK Land Cover Map 1990, 2015, 2017, 2018, 2019, 2020, 2021 and 2022 produced by UK CEH (Marston et al., 2022, 2024; Morton et al., 2020a, b, c, 2021; Rowland et al., 2017, 2020). While there are also land cover maps produced by UK CEH for 2000 and 2007, these do not use a consistent methodology for derivation of their land cover classes, preventing straightforward analysis of changes in land cover over time.

The land cover maps are derived by classifying satellite imagery into 21 classes based on the Joint Nature Conservation Committee (JNCC) broad habitats. Like CAMELS-GB v1, these 21 classes are mapped to eight land cover classes that describe deciduous woodland, evergreen woodland, grass and pasture, shrubs, crops, suburban and urban, inland water, bare soil, and rocks. For CAMELS-GB v2, we use the 25 m raster data from the range of LCM products consisting of the most likely land cover type for each grid cell. For each catchment, the percentage of the catchment covered by each of the eight land cover types was calculated and is provided in CAMELS-GB v2 for 1990, 2015, 2017, 2018, 2019, 2020, 2021 and 2022 (Table 5).

Users should be aware that while advances in methods means [that](#) land cover is more consistent between years, there are still issues around accuracy, stability between years and the strength of the change signal. This means that while some of the land cover change between years is real, there is also noise in the variability between years. This could be due to (1) the timing and quality of satellite imagery, particularly in high elevation catchments where there is often limited satellite imagery due to snowy/cloudy conditions, (2) differences in methods applied between years and (3) confusion in land cover classes (Rowland et al., 2024). As an example, we show changes in urban land cover for catchments in CAMELS-GB v2 in Figure S9. While a trend of increasing [urban](#) land cover over time is apparent for many catchments, there is variability between years and most

catchments experience a decrease in urban cover from 2021-2022 that is unlikely to be reflected in the real world.

455 Consequently, we recommend users carefully consider how these data are incorporated in change detection analyses and consider pooling data for recent years together to reflect the uncertainty in the change signal.

5.5 Soil attributes

Soil attributes are the same as CAMELS-GB v1 but derived using the updated catchment boundaries described in Section 2. A brief summary of the underlying data is provided here, with a full summary provided in Section 6.5 of Coxon et al., (2020).

460 Soil attributes of depth available to roots, percentage sand, silt and clay content, organic carbon content, bulk density, and total available water content for each catchment were calculated from the European Soil Database Derived Data product (Hiederer, 2013a, b). Saturated hydraulic conductivity and porosity (saturated volumetric water content) were also estimated from these variables using two pedo-transfer functions (based on Cosby et al, 1984 and Wosten et al, 1999, 2000, 2001). A weighted mean of the topsoil and subsoil data was calculated for all 1km grid cells and then used to calculate average soil properties for
465 each catchment either by calculating the arithmetic mean or harmonic mean (for saturated hydraulic conductivity, Samaniego et al., 2010) of all 1km grid cells within the catchment boundary. To capture the spatial heterogeneity and data availability of the soils data, the 5th, 50th, and 95th percentile and percentage of no-data values of all grid cell values falling within the catchment boundaries are also provided.

5.6 Hydrogeological attributes

470 Hydrogeological attributes are the same as CAMELS-GB v1 but derived using the updated catchment boundaries described in Section 2. A brief summary of the underlying data is provided here, with a full summary provided in Section 6.6 of Coxon et al., (2020).

Hydrogeological attributes were derived from products produced by the British Geological Survey; the UK bedrock hydrogeological map (BGS, 2019) and a superficial deposit productivity map. These two datasets were merged to categorise
475 the uppermost geological layer into nine classes that account for superficial deposits (where present) and bedrock (where superficial deposits are absent). The nine classes indicate how hydrogeology affects river flow behaviour by characterising the proportion of the catchment that is covered by deposits that have high, moderate, or low productivity, and whether the dominant water flow is through fractures or between grains (Table 5).

5.7 Hydrometry and discharge uncertainty attributes

480 The hydrometry and discharge uncertainty attributes describe the gauging station type (i.e. the type of weir, structure, or measurement device used to measure flows), period of flow data available (i.e. start date, end date and percentage complete), gauging station discharge uncertainty, peak flow information (i.e. the maximum gauged flow and percentage of extrapolation and channel characteristics (such as bankfull) (Table 5). Many of these attributes are the same as CAMELS-GB v1. The

Deleted: ,

Deleted: ,

Deleted: Table 5

Deleted: see

Deleted: Table 5

490 gauging station type was re-extracted from the NRFA with changes for a small number of stations where the gauging station
type has changed since CAMELS-GB v1. The channel characteristics were also re-extracted from the NRFA with changes for
a small number of stations. These data are useful for flood analyses, but it is worth noting there is a large proportion of missing
data for these attributes as they (1) may not be relevant for some gauging stations (e.g. an open channel station has no structure
and therefore no structure-full flow), and (2) are often modelled and this modelling may not have not been undertaken at many
495 stations. Furthermore, these data are not routinely updated by the NRFA so may, in some cases, reflect older assessments
that pre-date rating changes, and should therefore be used cautiously. The period of flow data were updated for the daily
timeseries and new catchment attributes added to describe the period of hourly flow data. The gauging station discharge
uncertainties were calculated using the same method from Coxon et al., (2015) but updated so that discharge uncertainties were
calculated from flow percentiles from the longer streamflow timeseries. A full description of the discharge uncertainty
attributes is provided in Section 6.7 of Coxon et al., (2020).

Deleted: and channel characteristics

Deleted: ere

500 New hydrometry attributes were added describing the quality of the flow data collected at each station.
This includes categorical information from the UK NRFA to help understand the quality of high flow measurements and
qualitative information on any issues found during analysis of the 15minute flow data (Fileni et al., 2026b). Stations that are
suitable for QMED (station_quality_qmed) can be used for high-flow estimation; however, measurements are more likely to
505 deviate from the true values, particularly for the largest flows, while stations that are suitable for pooling
(station_quality_pooling) have the highest quality high-flow measurements and are recommended for flood event
quantification and flood frequency analysis. ▼

Deleted:

Deleted: ,


Deleted: ,

New hydrometry attributes were also added describing peak flow information; including the (1) maximum gauging flow (the
highest manual measurement of flow taken at a gauging station) and the date this maximum gauging flow was taken, (2) the
maximum daily/hourly flow recorded in the catchment timeseries in CAMELS-GB v2, and (3) the percentage of time
510 (excluding NaNs) that the daily/hourly flow timeseries in CAMELS-GB v2 is higher than the maximum gauging flow. These
new attributes contain important information about the uncertainty at high flows as users can identify where (and how often)
the daily/hourly flow timeseries exceed the highest manual measurement of flow taken at a gauging station and therefore are
based on extrapolation of the rating curve which can result in significant uncertainties (Juston et al, 2014). Figure 5 shows that
for most gauges (70% for daily and 69% for hourly), the flow is extrapolated above the maximum flow gauging for a small
515 proportion (<1%) of the time series, with relatively few gauges exceeding 1% of the timeseries (4% of gauges for daily flow
and 5% for hourly). However, one gauge (NRFA gauge ID 40010) has more than 30% of the flow timeseries extrapolated
above the maximum flow gauging and for some gauges the highest hourly/daily flow can be more than 10x bigger than the
maximum flow gauging (Figure 5c). For 16% (daily) and 36% (hourly) of the gauges where maximum flow gauging is
available, the maximum daily/hourly flow is 2x bigger than the maximum flow gauging. It is worth noting that (1) peak flow
520 information is not available for 26% of CAMELS-GB gauges as they have no maximum flow gauging recorded on the NRFA
website, (2) the discharge uncertainty estimates provided in CAMELS-GB v2 are based on an older set of gaugings so there

Deleted: ↓

530 | ~~may be some inconsistencies between the maximum flow gauging and where uncertainty bounds can be calculated~~ and (3) sometimes the maximum daily/hourly flow is lower than the maximum gauging flow because a higher flow has occurred at the gauging station outside of the time period provided in CAMELS-GB v2.

~~Deleted:~~ which means that there might
~~Deleted:~~ where we are able to calculate
~~Deleted:~~ with the peak flow discharge uncertainties

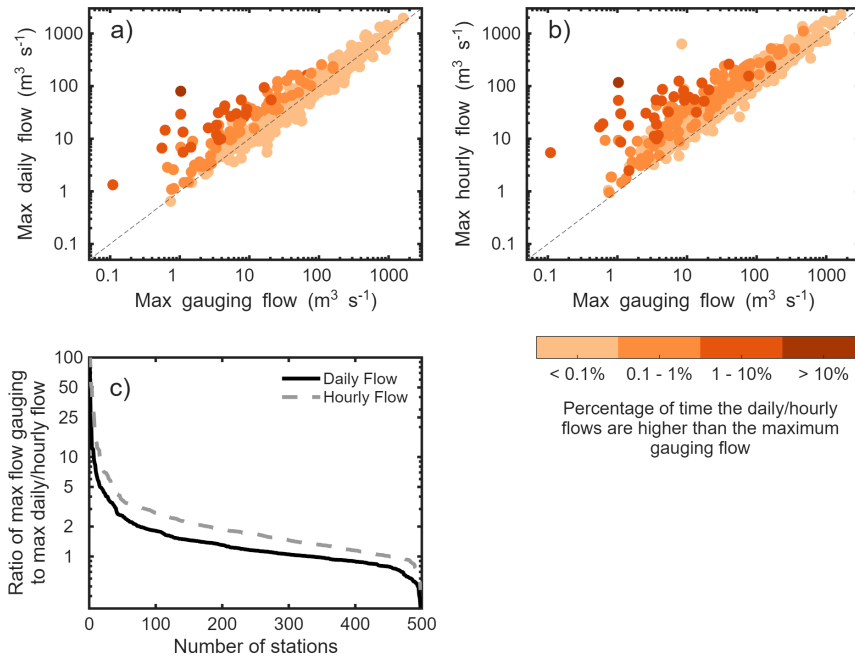

535 | **Figure 5.** Comparison of the maximum gauging flow with a) maximum daily flow and b) maximum hourly flow recorded in the catchment timeseries in CAMELS-GB v2, where dots are coloured by the percentage of time (excluding NaNs) that the daily/hourly flow timeseries in CAMELS-GB v2 is higher than the maximum gauging flow. c) ratio of maximum flow gauging to maximum daily/hourly flow in flow timeseries in CAMELS-GB v2.

5.8 Human influence attributes

CAMELS-GB contains many catchments impacted by human activities, so we aim to provide attributes that help users quantify and characterise human influences in each of the catchments. ~~CAMELS-GB v2 uses new, open-source datasets to quantify~~

~~Deleted:~~ N
~~Deleted:~~ are used

545 ~~abstractions~~ and ~~discharges~~ in each catchment, and ~~provides~~ new reservoir attributes characterising the size and location of the
reservoirs.

Deleted: average

Deleted: we

Deleted: relative to the gauge

5.8.1 Benchmark catchments

The UK Benchmark Network contains 146 catchments where human impacts on flow regimes are assumed to be minimal (Harrigan et al., 2018). All CAMELS-GB catchments are flagged according to whether they belong to the UK Benchmark Network, providing users with an indication of which catchments are relatively near-natural and therefore more suitable for studies requiring minimal human impact. Users should be aware that to ensure coverage in the south and east of GB (where there are lots of human influences on river flows), some human impacts were accepted.

Deleted: All CAMELS-GB catchments are identified as either being part of this network or not to provide users with an indication of 'near-natural' catchments and suitable for studies where human impacts need to be minimal.

5.8.2 Abstraction and discharges

Average daily abstraction and discharge rates are provided again in CAMELS-GB v2 but based on a new dataset of abstractions and discharges (Rameshwaran et al., 2025). This new dataset is based on the same underlying data as used in CAMELS-GB v1 but underwent additional quality control and is now available open source.

The abstraction data consist of the total water quantity (in most cases measured using a water meter) that has been abstracted for each license and each month from 1999 to 2014 in England on a 1km grid. These monthly abstraction data were averaged to provide a mean monthly abstraction from 1999 to 2014 for each abstraction licence and then aggregated for each catchment to provide a mean daily abstraction rate for all English catchments in CAMELS-GB v2 for groundwater and surface water sources. The use of the abstracted water (agriculture, amenities, environmental, industrial, energy, or water supply) is also provided and how much of the abstracted water is consumed/lost (high ~~-~~100%, medium – 60%, low – 3% and very low – 0.3%). For example, cress pond throughflow is described as very low loss, whilst farming and water supply is classed as medium loss, and trickle irrigation is classed as high. These loss factors are only used for billing purposes and are therefore indicative of the true water consumption.

Deleted: -

The discharges data consist of recent actual discharges for England from the WRGIS (Water Resources Geographic Information System). These data represent discharges from sewage treatment works and other 'significant' discharges (typically those $>20 \text{ m}^3 \text{ day}^{-1}$) using an estimate of recent actual summer discharge. For each catchment, we calculate a sum of all the discharges that fall within the catchment boundary and then convert into millimetres per day using catchment area to provide a mean daily discharges rate.

There are several limitations associated with these data. Firstly, these catchment attributes are only available for England and there are many catchments where either (1) no data are available (identified by "NaN"), (2) abstractions or discharges are recorded in zero when in reality they are not, or (3) only a proportion of the abstractions/discharges are accounted for, as the catchments lie on the border of England–Wales or England–Scotland. Secondly, the topographical catchment mask was used

to define which abstraction returns were included in each catchment which will not be representative for groundwater abstractions that lie within the topographical catchment but do not have a direct impact on the catchment streamflow or those that lie outside the catchment but have an impact on that catchment's streamflow. Thirdly, this is not the full picture of human influences within each catchment. Not all licence types/holders are required to submit records to the Environment Agency; the abstraction data used here does not hold returns for abstractions less than 20 m³ day⁻¹, and from 2008, abstraction licence-holders less than 100 m³ day⁻¹ were no longer required to submit records of abstraction. Furthermore, there is large inter-annual and intra-annual variation in the abstraction and discharges data, and its impacts will be different across the flow regime. Finally, while abstractions represent water removed from surface water or groundwater sources, some of this water will be returned to catchment storages. This is partially represented by the loss factor and discharges information but the relationship between discharge consent data and water returned from abstractions will often be more complex than these simple attributes.

5.8.3 Reservoirs

For CAMELS-GB v2, several reservoir attributes are derived for each catchment by determining the reservoirs that lie within the catchment mask from the reservoir locations and then calculating (1) the number of reservoirs in each catchment; (2) their combined capacity; (3) the fraction of that capacity that is used for hydroelectricity, navigation, drainage, water supply, flood storage, and environmental purposes; (4) the year when the first and last reservoirs in the catchment were built, and (5) the contributing area and normalised upstream capacity.

The first four sets of reservoir attributes are the same as CAMELS-GB v1 and calculated from the open-source UK reservoir inventory (Durant and Counsell, 2018) supplemented with information from SEPA's publicly available controlled reservoirs register. For CAMELS-GB v2, we excluded 43 reservoirs from the inventory as they could not be placed on the river network largely because their outflow or inflow location was unclear (see Figure S1 in Salwey et al., 2023) and therefore the new reservoir attributes could not be calculated. This leads to only minor differences with CAMELS-GB v1 (Figure S10).

Two new reservoir attributes are included in CAMELS-GB v2; contributing area and normalised upstream capacity. These attributes were chosen due to previous studies finding clear links between the size and location of upstream reservoirs and the associated flow alteration for UK catchments (Salwey et al., 2023).

Contributing area describes the percentage of the overall catchment surface area that is drained through reservoirs:

$$\text{Contributing area (\%)} = \frac{\text{catchment area drained by reservoirs (km}^2\text{)}}{\text{total catchment area (km}^2\text{)}} \times 100$$

Equation 1

In CAMELS-GB v2, the mean contributing area is 18%, with a maximum of 100%. The contributing area is complemented by the normalised upstream capacity, which compares the capacity of a reservoir to the average volume of precipitation received by the catchment in a year:

Formatted: Keep with next

Formatted: Right

Normalised upstream capacity

$$= \frac{\text{total upstream reservoir capacity (mm}^3\text{)}}{\text{total catchment area (mm}^2\text{)} * \text{average annual catchment precipitation (mm)}}$$

615

Equation 2

Formatted: Keep with next

Formatted: Right

In CAMELS-GB v2, the average normalised upstream capacity is 0.08 (i.e. the reservoir is large enough to store 8% of average annual rainfall) with a maximum of 2.5 (i.e. the reservoir is large enough to store 250% of average annual rainfall). [Twelve catchments have a normalised upstream capacity greater than 0.2 where the highest degree of alteration is typically found in the UK \(Salwey et al. 2023\)](#).

Deleted: Ten

Deleted: 5

620 6 Data availability

The CAMELS-GB v2 dataset [is available under an Open Government License via the UK Centre for Ecology & Hydrology Environmental Information Data Centre \(Coxon et al., 2025; <https://doi.org/10.5285/9a46d428-958f-4ac1-86eb-94eee70c0955>\)](#). The data contain catchment boundaries, hydro-meteorological and groundwater time series (at hourly, daily and monthly time-scales), catchment attributes and groundwater well attributes as described above.

625

The data format ([including the file naming conventions](#)) is described in the supporting documentation available on the UK Centre for Ecology & Hydrology Environmental Information Data Centre.

Field Code Changed

7 Code availability

The exactextract Python package (<https://pypi.org/project/exactextract/0.2.0/>, last access: 22 January 2026, Baston, 2025) is used to extract catchment average data from gridded datasets based on the catchment boundary polygons described in Section 2. The code from <https://github.com/naddor/camels> (last access: 23rd September 2025) was used to generate the climatic indices and hydrological signatures.

630

Deleted: (Baston, 2025)

8 Conclusions

This paper presents the second version of CAMELS-GB. CAMELS-GB v2 collates millions of observations from across Great Britain at hourly to monthly timescales, including quality-controlled daily river flows, catchment boundaries, and catchment characteristics from the UK National River Flow Archive. The new features include (1) extended daily hydro-meteorological timeseries up to 2022 including meteorological timeseries from new observed climate datasets, (2) new hourly precipitation,

635

river flows and level timeseries, (3) new groundwater level timeseries and attributes for 55 groundwater wells, and (4) new catchment attributes characterising changing land cover, peak flows and human influences.

CAMELS-GB v2 provides exciting new opportunities for environmental and modelling analyses across Great Britain. This includes enabling the development of common frameworks for model evaluation and benchmarking at regional to national scales and the analysis of hydrologic variability across the UK. The new sub-daily hydro-meteorological timeseries provide a wealth of additional information beyond the daily data, particularly for flood analyses, convective storm responses, and other short-duration extremes. The new catchment attributes enable users to explore how different catchment characteristics control river flow behaviour, particularly in human-influenced catchments. Future updates to the dataset will concentrate on greater spatial and temporal coverage of the groundwater level data and river network characteristics (e.g. Strahler Index).

650 9 Author Contribution

GC led and produced CAMELS-GB v2 with the following contributions: (1) YZ derived all the catchment timeseries data from gridded datasets, (2) FF produced the hourly flow and level timeseries with contributions from HF, EL, MF, HC and HH, (3) XQ produced the GRaD-GB(1HIK) with contributions from HF, AG and EL, (4) MF and RB provided the daily streamflow data, catchment boundaries and all catchment attributes sourced from the National River Flow Archive, (5) TG provided the groundwater level timeseries, DEW processed these timeseries and produced the groundwater attributes, (6) GN derived the soils and abstraction attributes, (7) SS derived the climatic attributes, hydrologic signatures, hydrogeology attributes and the reservoir attributes, (8) HC facilitated the upload of the dataset to the EIDC. All co-authors contributed to the design of the dataset. The manuscript was prepared by GC with contributions from all co-authors.

10 Acknowledgments

660 The authors would like to express their great appreciation to all the data collectors, processors, and providers who made this work possible, particularly at the UK Centre for Ecology & Hydrology, the National River Flow Archive, UK Met Office, Environment Agency, Natural Resources Wales, Scottish Environmental Protection Agency, British Geological Survey and the National Groundwater Level Archive. In particular, many thanks to the staff from the Environment Agency, Natural Resources Wales and Scottish Environmental Protection Agency involved in the provision of sub-daily flow/[level and](#)
665 [groundwater level](#) data.

Many thanks to Professor Louise Slater (University of Oxford) and Clare Rowland (UK Centre for Ecology & Hydrology) who provided valuable advice on the land cover data. Many thanks also to Dr Rosanna Lane (UK Centre for Ecology & Hydrology) for valuable advice on the soil catchment attributes.

This work was supported by the Natural Environment Research Council (NERC-UKRI) as part of the Floods and Droughts
670 Research Infrastructure (FDRI) project. The views and opinions expressed are those of the authors alone. NERC-UKRI is not
responsible for any application of the data/information.

This work was made possible through the Environment Agency Flood Hydrology Improvement Programme.

DEW and TG [publish with the permission of the Executive Director of the British Geological Survey \(UKRI\)](#).

Deleted: publish with the permission of the Director, British Geological Survey (UKRI).

11 Financial Support

675 GC, YZ, DEW and GN were supported by a United Kingdom Research and Innovation Future Leaders Fellowship
(MR/V022857/1). GC and YZ were also supported by the Natural Environmental Research Council Large Grant
SMARTWATER (NE/X018865/1). SS was funded by the DAFNI Centre of Excellence for Resilient Infrastructure Analysis
(ST/Y003713/1) and the European Union (ERC, MultiDry, Grant Agreement number: 101075354). FF was funded by a NERC
680 sponsored ONE Planet Doctoral Training Partnership (NE/S007512/1). [DEW and TG were supported by the British Geological
Survey via UK Natural Environment Research Council's \(NERC/UKRI\) national capability funding.](#)

12 References

- Addor, N., Newman, A. J., Mizukami, N., and Clark, M. P.: The CAMELS data set: catchment attributes and meteorology for
large-sample studies, *Hydrol. Earth Syst. Sci.*, 21, 5293–5313, <https://doi.org/10.5194/hess-21-5293-2017>, 2017.
- 685 Addor, N., Nearing, G., Prieto, C., Newman, A. J., Le Vine, N., and Clark, M. P.: A Ranking of Hydrological Signatures Based
on Their Predictability in Space, *Water Resources Research*, 54, 8792–8812, <https://doi.org/10.1029/2018WR022606>, 2018.
- Almagro, A., Oliveira, P. T. S., Meira Neto, A. A., Roy, T., and Troch, P.: CABra: a novel large-sample dataset for Brazilian
catchments, *Hydrology and Earth System Sciences*, 25, 3105–3135, <https://doi.org/10.5194/hess-25-3105-2021>, 2021.
- 690 Alvarez-Garreton, C., Mendoza, P. A., Boisier, J. P., Addor, N., Galleguillos, M., Zambrano-Bigiarini, M., Lara, A., Puelma,
C., Cortes, G., Garreaud, R., McPhee, J., and Ayala, A.: The CAMELS-CL dataset: catchment attributes and meteorology for
large sample studies – Chile dataset, *Hydrology and Earth System Sciences*, 22, 5817–5846, <https://doi.org/10.5194/hess-22-5817-2018>, 2018.
- Arsenault, R., Brissette, F., Martel, J.-L., Troin, M., Lévesque, G., Davidson-Chaput, J., Gonzalez, M. C., Ameli, A., and
Poulin, A.: A comprehensive, multisource database for hydrometeorological modeling of 14,425 North American watersheds,
Sci Data, 7, 243, <https://doi.org/10.1038/s41597-020-00583-2>, 2020.
- 695 Baston, D.: exactextract, 2025.
- Bathelemy, R., Brigode, P., Andréassian, V., Perrin, C., Moron, V., Gauchere, C., Tric, E., and Boisson, D.: Simbi: historical
hydro-meteorological time series and signatures for 24 catchments in Haiti, *Earth System Science Data*, 16, 2073–2098,
<https://doi.org/10.5194/essd-16-2073-2024>, 2024.

- BGS hydrogeology 625k: <https://www.bgs.ac.uk/products/hydrogeology/maps.html>, last access: 8 October 2019.
- Bloomfield, J. P., Gong, M., Marchant, B. P., Coxon, G., and Addor, N.: How is Baseflow Index (BFI) impacted by water resource management practices?, *Hydrology and Earth System Sciences*, 25, 5355–5379, <https://doi.org/10.5194/hess-25-5355-2021>, 2021.
- 705 Brown, E. M., M. J.;Robinson, E. L.;Kay, A. L.;Chapman, R.;Bell, V. A.;Blyth: Potential evapotranspiration derived from HadUK-Grid 1km gridded climate observations 1969-2021 (Hydro-PE HadUK-Grid), , <https://doi.org/10.5285/9275ab7e-6e93-42bc-8e72-59c98d409deb>, 2022.
- Brown, M. J., Robinson, E. L., Kay, A. L., Chapman, R., Bell, V. A., and Blyth, E. M.: Potential evapotranspiration derived from HadUK-Grid 1km gridded climate observations 1969-2022 (Hydro-PE HadUK-Grid), 2023.
- 710 Chagas, V. B. P., Chaffe, P. L. B., Addor, N., Fan, F. M., Fleischmann, A. S., Paiva, R. C. D., and Siqueira, V. A.: CAMELS-BR: hydrometeorological time series and landscape attributes for 897 catchments in Brazil, *Earth System Science Data*, 12, 2075–2096, <https://doi.org/10.5194/essd-12-2075-2020>, 2020.
- Chagas, V. B. P., Chaffe, P. L. B., and Blöschl, G.: Climate and land management accelerate the Brazilian water cycle, *Nat Commun*, 13, 5136, <https://doi.org/10.1038/s41467-022-32580-x>, 2022a.
- 715 Chagas, V. B. P., Chaffe, P. L. B., and Blöschl, G.: Process Controls on Flood Seasonality in Brazil, *Geophysical Research Letters*, 49, e2021GL096754, <https://doi.org/10.1029/2021GL096754>, 2022b.
- Coxon, G., Freer, J., Westerberg, I. K., Wagener, T., Woods, R., and Smith, P. J.: A novel framework for discharge uncertainty quantification applied to 500 UK gauging stations, *Water Resour. Res.*, n/a-n/a, <https://doi.org/10.1002/2014WR016532>, 2015.
- Coxon, G., Addor, N., Bloomfield, J. P., Freer, J., Fry, M., Hannaford, J., Howden, N. J. K., Lane, R., Lewis, M., Robinson, E. L., Wagener, T., and Woods, R.: CAMELS-GB: hydrometeorological time series and landscape attributes for 671 catchments in Great Britain, *Earth System Science Data*, 12, 2459–2483, <https://doi.org/10.5194/essd-12-2459-2020>, 2020.
- Coxon, G., McMillan, H., Bloomfield, J. P., Bolotin, L., Dean, J. F., Kelleher, C., Slater, L., and Zheng, Y.: Wastewater discharges and urban land cover dominate urban hydrology signals across England and Wales, *Environ. Res. Lett.*, 19, 084016, <https://doi.org/10.1088/1748-9326/ad5bf2>, 2024.
- 725 Coxon, G., Zheng, Y., Barbedo, R., Cooper, H., Fileni, F., Fowler, H., Fry, M., Green, A., Gribbin, T., Harfoot, H., Lewis, E., Qiu, X., Salwey, S., Wendt, D. E., and Neto, G. G. R.: Catchment boundaries, daily and sub-daily hydrometeorological time series, groundwater level time series and attributes for 671 catchments in Great Britain (CAMELS-GB v2), 2025.
- Coxon, R., G.;Addor, N.;Bloomfield, J. P.;Freer, J.;Fry, M.;Hannaford, J.;Howden, N. J. K.;Lane, R.;Lewis, M.;Robinson, E. L.;Wagener, T.;Woods: Catchment attributes and hydro-meteorological timeseries for 671 catchments across Great Britain (CAMELS-GB), , <https://doi.org/10.5285/8344e4f3-d2ea-44f5-8afa-86d2987543a9>, 2020.
- 730 David, P. C., Chaffe, P. L. B., Chagas, V. B. P., Dal Molin, M., Oliveira, D. Y., Klein, A. H. F., and Fenicia, F.: Correspondence Between Model Structures and Hydrological Signatures: A Large-Sample Case Study Using 508 Brazilian Catchments, *Water Resources Research*, 58, e2021WR030619, <https://doi.org/10.1029/2021WR030619>, 2022.
- Dixon, H., Hannaford, J., and Fry, M. J.: The effective management of national hydrometric data: experiences from the United Kingdom, *Hydrological Sciences Journal*, 58, 1383–1399, <https://doi.org/10.1080/02626667.2013.787486>, 2013.

- Do, H. X., Gudmundsson, L., Leonard, M., and Westra, S.: The Global Streamflow Indices and Metadata Archive (GSIM) – Part 1: The production of a daily streamflow archive and metadata, *Earth System Science Data*, 10, 765–785, <https://doi.org/https://doi.org/10.5194/essd-10-765-2018>, 2018.
- 740 Durant, M. J. and Counsell, C. J.: Inventory of reservoirs amounting to 90% of total UK storage, NERC Environmental Information Data Centre, <https://doi.org/https://doi.org/10.5285/f5a7d56c-cea0-4f00-b159-c3788a3b2b38>, 2018.
- Fileni, F., Fowler, H. J., Lewis, E., Fry, M., Cooper, H., Swain, O., Coxon, G., McLay, F., Bruce, E., Yang, L., and Archer, D.: Sub-hourly river flow data observations from 1369 river gauges in the UK, 1948-2023 (UK-Flow15), 2025.
- Fileni, F., Fowler, H. J., Lewis, E., Fry, M., Cooper, H., Swain, O., McLay, F., Coxon, G., Bruce, E., Yang, L., and Archer, D.: UK-Flow15 Part 1: Development of a coherent national-scale 15-min flow dataset, *Earth System Science Data Discussions*, 745 2026, 1–26, <https://doi.org/10.5194/essd-2026-152>, 2026a.
- Fileni, F., Fowler, H. J., Lewis, E., McLay, F., Coxon, G., Archer, D., Bruce, E., Yang, L., Fry, M., Cooper, H., and Swain, O.: UK-Flow15-QC: A quality control framework for better river flow data in hydrological research, *EGUsphere*, 2026, 1–29, <https://doi.org/10.5194/egusphere-2026-277>, 2026b.
- 750 Fowler, H. J., Coxon, G., and White, C. J.: Hydrology in the 21st century: challenges in science, to policy and practice, *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 383, 20240299, <https://doi.org/10.1098/rsta.2024.0299>, 2025.
- Fowler, K. J. A., Acharya, S. C., Addor, N., Chou, C., and Peel, M. C.: CAMELS-AUS: hydrometeorological time series and landscape attributes for 222 catchments in Australia, *Earth System Science Data*, 13, 3847–3867, <https://doi.org/10.5194/essd-13-3847-2021>, 2021.
- 755 Harrigan, S., Hannaford, J., Muchan, K., and Marsh, T. J.: Designation and trend analysis of the updated UK Benchmark Network of river flow stations: the UKBN2 dataset, *Hydrology Research*, 49, 552–567, <https://doi.org/10.2166/nh.2017.058>, 2018.
- Helgason, H. B. and Nijssen, B.: LamaH-Ice: LARge-SaMple DATA for Hydrology and Environmental Sciences for Iceland, *Earth System Science Data*, 16, 2741–2771, <https://doi.org/10.5194/essd-16-2741-2024>, 2024.
- 760 Hiederer, R.: Mapping Soil Properties for Europe- Spatial Representation of Soil Database Attributes, Luxembourg, 2013a.
- Hiederer, R.: Mapping soil typologies: spatial decision support applied to the European Soil Database., Publications Office, Luxembourg, 2013b.
- Höge, M., Kauzlaric, M., Siber, R., Schönenberger, U., Horton, P., Schwanbeck, J., Floriancic, M. G., Viviroli, D., Wilhelm, S., Sikorska-Senoner, A. E., Addor, N., Brunner, M., Pool, S., Zappa, M., and Fenicia, F.: CAMELS-CH: hydro-meteorological time series and landscape attributes for 331 catchments in hydrologic Switzerland, *Earth System Science Data*, 15, 5755–5784, <https://doi.org/10.5194/essd-15-5755-2023>, 2023.
- Hollis, D., McCarthy, M., Kendon, M., Legg, T., and Simpson, I.: HadUK-Grid—A new UK dataset of gridded climate observations, *Geoscience Data Journal*, 6, 151–159, <https://doi.org/10.1002/gdj3.78>, 2019.
- 770 Hough, M. N. and Jones, R. J. A.: The United Kingdom Meteorological Office rainfall and evaporation calculation system: MORECS version 2.0-an overview, *Hydrology and Earth System Sciences*, 1, 227–239, <https://doi.org/https://doi.org/10.5194/hess-1-227-1997>, 1997.

- Keller, V. D. J., Tanguy, M., Prosdocimi, I., Terry, J. A., Hitt, O., Cole, S. J., Fry, M., Morris, D. G., and Dixon, H.: CEH-GEAR: 1 km resolution daily and monthly areal rainfall estimates for the UK for hydrological and other applications, *Earth System Science Data*, 7, 143–155, <https://doi.org/https://doi.org/10.5194/essd-7-143-2015>, 2015.
- 775 Kiraz, M., Coxon, G., and Wagener, T.: A Signature-Based Hydrologic Efficiency Metric for Model Calibration and Evaluation in Gauged and Ungauged Catchments, *Water Resources Research*, 59, e2023WR035321, <https://doi.org/10.1029/2023WR035321>, 2023.
- Klingler, C., Schulz, K., and Hermegger, M.: LamaH-CE: LArge-SaMple DAta for Hydrology and Environmental Sciences for Central Europe, *Earth System Science Data*, 13, 4529–4565, <https://doi.org/10.5194/essd-13-4529-2021>, 2021.
- 780 Kratzert, F., Nearing, G., Addor, N., Erickson, T., Gauch, M., Gilon, O., Gudmundsson, L., Hassidim, A., Klotz, D., Nevo, S., Shalev, G., and Matias, Y.: Caravan - A global community dataset for large-sample hydrology, *Sci Data*, 10, 61, <https://doi.org/10.1038/s41597-023-01975-w>, 2023.
- Ladson, A. R., Brown, R., Neal, B., and Nathan, R.: A Standard Approach to Baseflow Separation Using The Lyne and Hollick Filter, *Australasian Journal of Water Resources*, 17, 25–34, <https://doi.org/10.7158/13241583.2013.11465417>, 2013.
- 785 Lees, T., Buechel, M., Anderson, B., Slater, L., Reece, S., Coxon, G., and Dadson, S. J.: Benchmarking data-driven rainfall–runoff models in Great Britain: a comparison of long short-term memory (LSTM)-based models with four lumped conceptual models, *Hydrology and Earth System Sciences*, 25, 5517–5534, <https://doi.org/10.5194/hess-25-5517-2021>, 2021.
- Lewis, E., Quinn, N., Blenkinsop, S., Fowler, H. J., Freer, J., Tanguy, M., Hitt, O., Coxon, G., Bates, P., and Woods, R.: A rule based quality control method for hourly rainfall data and a 1 km resolution gridded hourly rainfall dataset for Great Britain: CEH-GEAR1hr, *Journal of Hydrology*, 564, 930–943, <https://doi.org/10.1016/j.jhydrol.2018.07.034>, 2018.
- 790 Lewis, E., Quinn, N., Blenkinsop, S., Fowler, H. J., Freer, J., Tanguy, M., Hitt, O., Coxon, G., Bates, P., Woods, R., Fry, M., Chevuturi, A., Swain, O., and White, S. M.: Gridded estimates of hourly areal rainfall for Great Britain 1990-2016 [CEH-GEAR1hr] v2, 2022.
- Marsh, T. J. and Hannaford, J.: UK Hydrometric Register, Centre for Ecology and Hydrology, Wallingford, UK, 2008.
- 795 Marston, C., Rowland, C. S., O'Neil, A. W., and Morton, R. D.: Land Cover Map 2021 (25m rasterised land parcels, GB), , <https://doi.org/10.5285/a1f85307-cad7-4e32-a445-84410efd7a70>, 2022.
- Marston, C. G., Morton, R. D., O'Neil, A. W., and Rowland, C. S.: Land Cover Map 2022 (25m rasterised land parcels, GB), , <https://doi.org/10.5285/c9449b15-b8f6-4a1c-b3eb-0d70575cba39>, 2024.
- McMillan, H. K., Gnann, S. J., and Araki, R.: Large Scale Evaluation of Relationships Between Hydrologic Signatures and Processes, *Water Resources Research*, 58, e2021WR031751, <https://doi.org/10.1029/2021WR031751>, 2022.
- 800 Met Office: Met Office Rain Radar Data from the NIMROD System, 2024.
- Morris, D. G. and Flavin, R. W.: A digital terrain model for hydrology, in: Proc 4th International Symposium on Spatial Data Handling, Zürich, 250–262, 1990.
- Morton, R. D., Marston, C. G., O'Neil, A. W., and Rowland, C. S.: Land Cover Map 2017 (25m rasterised land parcels, GB), , <https://doi.org/10.5285/499212cd-d64a-43ba-b801-95402e4d4098>, 2020a.

- Morton, R. D., Marston, C. G., O'Neil, A. W., and Rowland, C. S.: Land Cover Map 2018 (25m rasterised land parcels, GB), <https://doi.org/10.5285/25c6451b-5c88-40da-9a63-c3ec473e4874>, 2020b.
- Morton, R. D., Marston, C. G., O'Neil, A. W., and Rowland, C. S.: Land Cover Map 2019 (25m rasterised land parcels, GB), <https://doi.org/10.5285/f15289da-6424-4a5e-bd92-48c4d9c830cc>, 2020c.
- 810 Morton, R. D., Marston, C. G., O'Neil, A. W., and Rowland, C. S.: Land Cover Map 2020 (25m rasterised land parcels, GB), <https://doi.org/10.5285/6c22cf6e-b224-414e-aa85-900325baedbd>, 2021.
- do Nascimento, T. V. M., Rudlang, J., Höge, M., van der Ent, R., Chappon, M., Seibert, J., Hrachowitz, M., and Fenicia, F.: EStreams: An integrated dataset and catalogue of streamflow, hydro-climatic and landscape variables for Europe, *Sci Data*, 11, 879, <https://doi.org/10.1038/s41597-024-03706-1>, 2024.
- 815 Pelletier, J. D., Broxton, P. D., Hazenberg, P., Zeng, X., Troch, P. A., Niu, G., Williams, Z. C., Brunke, M. A., and Gochis, D.: Global 1-km Gridded Thickness of Soil, Regolith, and Sedimentary Deposit Layers, ORNL DAAC, <https://doi.org/https://doi.org/10.3334/ORNLDAAC/1304>, 2016.
- Qiu, X., Green, A. C., Blenkinsop, S., and Fowler, H. J.: Developing a radar-rain gauge hourly blended precipitation dataset for Great Britain using the Gauss Blending Method, *Journal of Hydrology*, 668, 134954, <https://doi.org/10.1016/j.jhydrol.2026.134954>, 2026a.
- 820 Qiu, X., Green, A. C., Blenkinsop, S., and Fowler, H. J.: Quality control of the composite radar quantitative precipitation estimation product for Great Britain, *Journal of Hydrology*, 666, 134755, <https://doi.org/https://doi.org/10.1016/j.jhydrol.2025.134755>, 2026b.
- Rameshwaran, P., Bell, V. A., Davies, H. N., Sadler, P., Beverton, A., Thornton, R., and Rhodes-Smith, M.: Gridded actual groundwater, surface water and tidal water abstraction, discharge and Hands-off Flow datasets for England (1999 to 2014), <https://doi.org/10.5285/18886F95BA84447F997EFAC96DF456AD>, 2025.
- Rasheed, Z., Aravamudan, A., Zhang, X., Anagnostopoulos, G. C., and Nikolopoulos, E. I.: Combining global precipitation data and machine learning to predict flood peaks in ungauged areas with similar climate, *Advances in Water Resources*, 192, 104781, <https://doi.org/10.1016/j.advwatres.2024.104781>, 2024.
- 830 Robinson, E. L., Blyth, E., Clark, D. B., Comyn-Platt, E., Finch, J., and Rudd, A. C.: Climate hydrology and ecology research support system potential evapotranspiration dataset for Great Britain (1961-2015) [CHESS-PE], NERC Environmental Information Data Centre, <https://doi.org/https://doi.org/10.5285/8ba805d-39ce-4dac-b224-c926ada353b7>, 2016.
- Robinson, E. L., Blyth, E., Clark, D. B., Comyn-Platt, E., Finch, J., and Rudd, A. C.: Climate hydrology and ecology research support system meteorology dataset for Great Britain (1961-2015) [CHESS-met] v1.2, NERC Environmental Information Data Centre, <https://doi.org/https://doi.org/10.5285/b745e7b1-626c-4ccc-ac27-56582e77b900>, 2017a.
- 835 Robinson, E. L., Blyth, E. M., Clark, D. B., Finch, J., and Rudd, A. C.: Trends in atmospheric evaporative demand in Great Britain using high-resolution meteorological data, *Hydrology and Earth System Sciences*, 21, 1189–1224, <https://doi.org/https://doi.org/10.5194/hess-21-1189-2017>, 2017b.
- Robinson, E. L., Blyth, E. M., Clark, D. B., Comyn-Platt, E., Rudd, A. C., and Wiggins, M.: Climate hydrology and ecology research support system meteorology dataset for Great Britain (1961-2019) [CHESS-met], 2023a.
- 840

- Robinson, E. L., Blyth, E. M., Clark, D. B., Comyn-Platt, E., Rudd, A. C., and Wiggins, M.: Climate hydrology and ecology research support system potential evapotranspiration dataset for Great Britain (1961-2019) [CHESS-PE], 2023b.
- Robinson, E. L., Brown, M. J., Kay, A. L., Lane, R. A., Chapman, R., Bell, V. A., and Blyth, E. M.: Hydro-PE: gridded datasets of historical and future Penman–Monteith potential evaporation for the United Kingdom, *Earth System Science Data*, 15, 4433–4461, <https://doi.org/10.5194/essd-15-4433-2023>, 2023c.
- Rowland, C. E., Morton, D., Marston, C., and Maskell, L.: Recent Land Cover Change, 2024.
- Rowland, C. S., Morton, R. D., Carrasco, L., McShane, G., O’Neil, A. W., and Wood, C. M.: Land Cover Map 2015 (25m raster, GB), <https://doi.org/10.5285/bb15e200-9349-403c-bda9-b430093807c7>, 2017.
- Rowland, C. S., Marston, C. G., Morton, R. D., and O’Neil, A. W.: Land Cover Map 1990 (25m raster, GB) v2, <https://doi.org/10.5285/1be1912a-916e-42c0-98cc-16460fac00e8>, 2020.
- Salwey, S., Coxon, G., Pianosi, F., Singer, M. B., and Hutton, C.: National-Scale Detection of Reservoir Impacts Through Hydrological Signatures, *Water Resources Research*, 59, e2022WR033893, <https://doi.org/10.1029/2022WR033893>, 2023.
- Samaniego, L., Kumar, R., and Attinger, S.: Multiscale parameter regionalization of a grid-based hydrologic model at the mesoscale, *Water Resources Research*, 46, <https://doi.org/10.1029/2008WR007327>, 2010.
- 855 Senent-Aparicio, J., Castellanos-Osorio, G., Segura-Méndez, F., López-Ballesteros, A., Jimeno-Sáez, P., and Pérez-Sánchez, J.: BULL Database – Spanish Basin attributes for Unravelling Learning in Large-sample hydrology, *Sci Data*, 11, 737, <https://doi.org/10.1038/s41597-024-03594-5>, 2024.
- Slater, L., Coxon, G., Brunner, M., McMillan, H., Yu, L., Zheng, Y., Khouakhi, A., Moulds, S., and Berghuijs, W.: Spatial Sensitivity of River Flooding to Changes in Climate and Land Cover Through Explainable AI, *Earth’s Future*, 12, e2023EF004035, <https://doi.org/10.1029/2023EF004035>, 2024.
- Tanguy, V. D. J., M.; Dixon, H.; Prosdoci, I.; Morris, D. G.; Keller: Gridded estimates of daily and monthly areal rainfall for the United Kingdom (1890-2019) [CEH-GEAR], <https://doi.org/10.5285/dbf13dd5-90cd-457a-a986-f2f9dd97e93c>, 2021.
- Teutschbein, C.: CAMELS-SE: Long-term hydroclimatic observations (1961–2020) across 50 catchments in Sweden as a resource for modelling, education, and collaboration, *Geoscience Data Journal*, n/a, <https://doi.org/10.1002/gdj3.239>, 2024.

865

Tables

Table 1 Summary of changes to CAMELS-GB dataset for version 2

Data		Data provided in CAMELS-GB v1	Change for CAMELS-GB v2	Section
Catchments		671 catchments across Great Britain	No change to number of catchments or catchment selection. Catchment boundaries updated.	2
Timeseries	Daily hydro-meteorological timeseries	Timeseries available from 1 st October 1970 - 30 th September 2015 for streamflow, rainfall, potential evapotranspiration, temperature, wind speed, humidity, short-wave and long-wave radiation.	New timeseries data for rainfall, PET and temperature from the HadUK dataset to provide multiple estimates of climatic variables with an extended timeseries up to 30 th September 2022. CEH-GEAR rainfall and CHESSTimeseries are extended to 30 th September 2019. No longer providing wind speed, humidity, short-wave radiation and long-wave radiation as these were rarely used.	3.1
	Hourly hydro-meteorological timeseries	None provided	Hourly streamflow, river level and rainfall (from two products) from 1 st October 1990 – 30 th September 2022.	3.2
	Groundwater level timeseries	None provided	Daily groundwater level timeseries for 23 wells from 1993-2025 and monthly groundwater level timeseries for 55 wells from 1952-2025.	4
Catchment Attributes	Location and Topography	Hydrometry attributes included gauge ID, location, catchment area and elevation percentiles	The same attributes are provided but updated to the latest information from the UK National River Flow Archive.	5.1
	Climatic	Climatic indices including mean rainfall and PET,	The same climatic indices are provided but calculated using the	5.2

		aridity index, seasonality, snow fraction and frequency, duration and timing of climatic extremes were provided for each catchment. Derived using daily meteorological timeseries.	extended Had-UK daily rainfall, temperature and PET timeseries.	
	Hydrologic	Hydrologic signatures including mean streamflow, runoff ratio, slope of the flow duration curve, baseflow index, frequency, duration and timing of low/high flow events were provided for each catchment. Derived using daily hydro-meteorological timeseries.	The same hydrologic signatures are provided but calculated using the extended Had-UK daily rainfall and daily streamflow timeseries.	5.3
	Land Cover	Land cover percentages for eight land cover classes provided for each catchment for a single year (2015).	Land cover for multiple years is provided including 1990, 2015, 2017, 2018, 2019, 2020, 2021 and 2022. Same land cover classes are provided.	5.4
	Soils	Soil attributes characterising the soil texture, porosity, saturated conductivity and depth.	The same soil attributes are re-calculated using the same underlying data but with the new catchment boundaries (very little change).	5.5
	Hydrogeology	Hydrogeological attributes characterising the upper geological layer describing the proportion of the catchment covered by deposits of high, moderate, or low productivity and whether this is	The same hydro-geological attributes are re-calculated using the same underlying data but with the new catchment boundaries (very little change).	5.6

		predominantly via fracture or intergranular flow.		
	Hydrometry	Hydrometry and discharge uncertainty attributes describing the gauging station type, period of flow data available, gauging station discharge uncertainty and channel characteristics were provided for each catchment.	The same attributes are provided but updated to latest information from the UK National River Flow Archive. New hydrometry attributes are provided to characterise peak flow information <u>and quality of flow data</u> .	5.7
	Human Influences	Human influence attributes describing abstractions, discharges and reservoir attributes were provided for each catchment.	Abstractions and discharges are based on a new open-access dataset and new attributes added describing the loss factor of abstractions. New attributes added describing the reservoir contributing area and normalised upstream capacity.	5.8
Groundwater well attributes	Groundwater Wells	None provided	Groundwater well attributes are provided, describing reference and hydrogeological information relating to the wells and boreholes where groundwater level timeseries are provided.	4

Formatted: Font: 10 pt

Formatted: Font: 10 pt

Table 2 Summary table of catchment daily hydro-meteorological timeseries available in CAMELS-GB v2

Timeseries Class	Timeseries Name	Description	Unit	Data Source
Meteorological Timeseries (available from	precipitation_cehgear	catchment averaged daily precipitation	mm day ⁻¹	CEH-GEAR (Keller et al., 2015; Tanguy, 2021)

1 st October 1970 – 30 th September 2022)	precipitation_haduk	catchment averaged daily precipitation	mm day ⁻¹	HadUK-Grid (Hollis et al., 2019)
	pet_chess	catchment averaged daily potential evapotranspiration for a well-watered grass (Penman-Monteith equation)	mm day ⁻¹	CHESS-PE (Robinson et al., 2017b, 2023b)
	peti_chess	catchment averaged daily potential evapotranspiration for a well-watered grass (Penman-Monteith equation with a correction added for interception on days where rainfall has occurred)	mm day ⁻¹	
	pet_hydrope	catchment averaged daily potential evapotranspiration for a well-watered grass (Penman-Monteith equation)	mm day ⁻¹	Hydro-PE (Brown et al., 2023; Robinson et al., 2023c)
	peti_hydrope	catchment averaged daily potential evapotranspiration for a well-watered grass (Penman-Monteith equation with a correction added for interception on days where rainfall has occurred)	mm day ⁻¹	
	temperature_chess	catchment averaged daily temperature	°C	CHESS-met (Robinson et al., 2023a)
	temperature_haduk	catchment averaged daily temperature	°C	HadUK-Grid (Hollis et al., 2019)
Hydrological Timeseries (available from 1 st October 1970 – 30 th September 2022)	discharge_spec	catchment specific discharge (converted to mm day ⁻¹ using catchment areas described in Section 2)	mm day ⁻¹	UK National River Flow Archive using the NRFA API*
	discharge_vol	catchment discharge	m ³ s ⁻¹	

* <https://nrfaapps.ceh.ac.uk/nrfa/nrfa-api.html>, data downloaded on the 7th January 2025, last access to website 23rd September 2025

Table 3 Summary table of catchment hourly hydro-meteorological timeseries available in CAMELS-GB v2

Timeseries Class	Timeseries Name	Description	Unit	Data Source
Meteorological Timeseries (available from 1 st October 1990 09:00 <u>UTC</u> – 1 st October 2022 08:00 <u>UTC</u>)	precipitation_cehgear	catchment hourly averaged precipitation from 1 st October 1990 - 31 st December 2019	mm hour ⁻¹	CEH-GEAR 1hr (Lewis et al., 2018, 2022)
	precipitation_gradgb	catchment hourly averaged precipitation from 1 st January 2006 - 31 st December 2023	mm hour ⁻¹	Gauge-Radar Precipitation Dataset (1 hour and 1 km) for Great Britain, GRAD-GB(1H1K) (Qiu et al., 2026a, b)
Hydrological Timeseries (available from 1 st October 1990 09:00 <u>UTC</u> – 1 st October 2022 08:00 <u>UTC</u>)	discharge_specific	catchment specific discharge (converted to mm hour ⁻¹ using catchment areas described in Section 2)	mm hour ⁻¹	The flows and level data were obtained from SEPA via the timeseries data service (https://timeseriesdoc.sepa.org.uk/ ; last access 23 rd September 2025), from EA primarily through the Hydrology Data Explorer (https://environment.data.gov.uk/hydrology ; last access 23 rd September 2025) and, where unavailable, with staff assistance, and from NRW entirely with staff assistance. Flags were derived from UKFlow-15 (Fileni et al., 2025).
	discharge_volume	catchment discharge	m ³ s ⁻¹	
	discharge_flag	numeric flag that indicates the quality of the flow data (full description of flags can be found in Figure S5 and Table S1-S3)	-	
	level	height of the river (measured in metres above river bed)	m	
	level_flag	numeric flag that indicates the quality of the level data (full description of flags can be found in Figure S5 and Table S1-S3)	-	

Table 4. Summary table of daily and monthly groundwater level timeseries available in CAMELS-GB v2

Timeseries Class	Timeseries Name	Description	Unit	Data Source
Groundwater Level Timeseries (daily and monthly timeseries for variable time periods)	groundwater_level	groundwater level for a specific borehole at either daily or monthly timesteps.	mAOD	British Geological Survey (BGS), National Groundwater Level Archive [online]. Available at: https://www2.bgs.ac.uk/groundwater/datainfo/levels/ngla.html (Accessed: 01 Feb 2025).

Table 5. Summary table of attributes available in CAMELS-GB v2

Attribute Class	Attribute Name	Description	Unit	Data Source
Location and Topography	gauge_id	catchment identifier (corresponds to the gauging station ID provided by the NRFA)	-	UK National River Flow Archive using the NRFA API*
	gauge_name	gauge name (river name followed by gauging station name)	-	
	gauge_lat	gauge latitude	°	
	gauge_lon	gauge longitude	°	
	gauge_easting	gauge easting	m	
	gauge_northing	gauge northing	m	
	gauge_elev	gauge elevation	m.a.s.l	
	area	catchment area	km ²	CEH's Integrated Hydrological Digital Terrain Model (Morris and Flavin, 1990)
	dpsbar	catchment mean drainage path slope	m km ⁻¹	
	elev_mean	catchment mean elevation	m.a.s.l	
	elev_min	catchment minimum elevation	m.a.s.l	
	elev_10	catchment 10 th percentile elevation	m.a.s.l	
	elev_50	catchment median elevation	m.a.s.l	
	elev_90	catchment 90 th percentile elevation	m.a.s.l	
elev_max	catchment maximum elevation	m.a.s.l		
Climatic Indices (computed for 1st Oct 1970 to 30th Sept 2022)	p_mean	mean daily precipitation	mm day ⁻¹	Catchment timeseries of precipitation, potential evapotranspiration and temperature described in Section 3.1.1 and Table 2 .
	pet_mean	mean daily PET (Penman-Monteith equation without interception correction)	mm day ⁻¹	
	aridity	aridity, calculated as the ratio of mean daily potential evapotranspiration to mean daily precipitation	-	
	p_seasonality	seasonality and timing of precipitation (estimated using sine curves to represent the annual temperature and precipitation cycles; positive (negative) values indicate that precipitation peaks in summer	-	

Deleted: Table 2

Formatted: Font: 10 pt

		(winter) and values close to zero indicate uniform precipitation throughout the year)		
	frac_snow	fraction of precipitation falling as snow (for days colder than 0°C)	-	
	high_prec_freq	frequency of high precipitation days (≥ 5 times mean daily precipitation)	days yr ⁻¹	
	high_prec_dur	average duration of high precipitation events (number of consecutive days ≥ 5 times mean daily precipitation)	days	
	high_prec_timg	season during which most high precipitation days (≥ 5 times mean daily precipitation) occur. If two seasons register the same number of events, a value of NaN is given.	season	
	low_prec_freq	frequency of dry days ($< 1\text{mm day}^{-1}$)	days yr ⁻¹	
	low_prec_dur	average duration of dry periods (number of consecutive days $< 1\text{mm day}^{-1}$)	days	
	low_prec_timg	season during which most dry days ($< 1\text{mm day}^{-1}$) occur. If two seasons register the same number of events, a value of NaN is given.	season	
Hydrologic Signatures (computed for 1st Oct 1970 to 30th Sept 2022)	q_mean	mean daily discharge	mm day ⁻¹	Catchment timeseries of streamflow and precipitation described in Sections 3.1.2 and 3.1.1 respectively, and Table 2 .
	runoff_ratio	runoff ratio, calculated as the ratio of mean daily discharge to mean daily precipitation	-	
	stream_elas	streamflow precipitation elasticity (sensitivity of streamflow to changes in precipitation at the annual timescale, using the mean daily discharge as reference)	-	

Deleted: Table 2

Formatted: Font: 10 pt

	slope_fdc	slope of the flow duration curve (between the log-transformed 33 rd and 66 th streamflow percentiles)	-	
	baseflow_index	baseflow index (ratio of mean daily baseflow to daily discharge, hydrograph separation performed using the Ladson et al., 2013 digital filter)	-	
	baseflow_index_cch	baseflow index (ratio of mean daily baseflow to daily discharge, hydrograph separation performed using the Gustard et al., 1992 method)	-	
	hfd_mean	mean half-flow date (date on which the cumulative discharge since 1 October reaches half of the annual discharge)	days since 1st October	
	Q5	5% flow quantile (low flow)	mm day ⁻¹	
	Q95	95% flow quantile (high flow)	mm day ⁻¹	
	high_q_freq	frequency of high-flow days (> 9 times the median daily flow)	days yr ⁻¹	
	high_q_dur	average duration of high flow events (number of consecutive days >9 times the median daily flow)	days	
	low_q_freq	frequency of low flow days (< 0.2 times the mean daily flow)	days yr ⁻¹	
	low_q_dur	average duration of low flow events (number of consecutive days < 0.2 times the mean daily flow)	days	
	zero_q_freq	frequency of days with Q = 0	%	
Land Cover Attributes	dwood_perc_Y YYY	percentage cover of deciduous woodland for that year (YYYY)	%	25 m raster data, Land Cover Map 1990, 2015, 2017, 2018, 2019, 2020, 2021,
	ewood_perc_Y YYY	percentage cover of evergreen woodland for that year (YYYY)	%	
	grass_perc_YY YY	percentage cover of grass and pasture for that year (YYYY)	%	

Deleted: described in Appendix A

	shrub_perc_YY YY	percentage cover of medium scale vegetation (shrubs) for that year (YYYY)	%	2022 (Marston et al., 2022, 2024; Morton et al., 2020a, b, c, 2021; Rowland et al., 2017, 2020)
	crop_perc_YYY Y	percentage cover of crops for that year (YYYY)	%	
	urban_perc_YY YY	percentage cover of suburban and urban for that year (YYYY)	%	
	inwater_perc_Y YYY	percentage cover of inland water for that year (YYYY)	%	
	bares_perc_YY YY	percentage cover of bare soil and rocks for that year (YYYY)	%	
Soil Attributes Each soil attribute is accompanied by the percentage missing and the 5th, 50th and 95th percentile (apart from percentage sand, silt, clay and organic content) of that attribute across the catchment	sand_perc	percentage sand	%	European Soil Database Derived Data product (Hiederer, 2013a, b), and the modelled depth to bedrock global product (Pelletier et al., 2016)
	silt_perc	percentage silt	%	
	clay_perc	percentage clay	%	
	organic_perc	percentage organic content	%	
	bulkdens	bulk density	g cm ⁻³	
	tawc	total available water content	mm	
	porosity_cosby	volumetric porosity (saturated water content estimated using a pedotransfer function based on sand and clay fractions)	-	
	porosity_hyres	volumetric porosity (saturated water content estimated using a pedotransfer function based on silt, clay and organic fractions, bulk density and topsoil)	-	
	conductivity_co sby	saturated hydraulic conductivity (estimated using a pedotransfer function based on sand and clay fractions)	cm h ⁻¹	
	conductivity_hy pres	saturated hydraulic conductivity (estimated using a pedotransfer function based on silt, clay and organic fractions, bulk density and topsoil)	cm h ⁻¹	
root_depth	depth available for roots	m		
soil_depth_pelle tier	depth to bedrock (maximum 50m)	m		

Hydrogeology Attributes	inter_high_perc	significant intergranular flow – high productivity	%	British Geological Survey hydrogeology map (BGS hydrogeology 625k, 2019) and superficial deposits map
	inter_mod_perc	significant intergranular flow – moderate productivity	%	
	inter_low_perc	significant intergranular flow – low productivity	%	
	frac_high_perc	flow through fractures – high productivity	%	
	frac_mod_perc	flow through fractures – moderate productivity	%	
	frac_low_perc	flow through fractures – low productivity	%	
	no_gw_perc	rocks with essentially no groundwater	%	
	low_nsig_perc	generally low productivity (intergranular flow) but some not significant aquifer	%	
nsig_low_perc	generally not significant aquifer but some low productivity (intergranular flow)	%		
Hydrometry	station_type	gauging station type denoted by the following abbreviations (B Broad-crested weir; C Crump profile single-crest weir; CB Compound broad-crested weir; CC Compound Crump weir; EM Electromagnetic gauging station; EW Essex weir; FL Flume; FV Flat V triangular profile weir; IV Index Velocity; MIS Miscellaneous; TP Rectangular thin-plate weir; US Ultrasonic gauging station; VA Velocity-area gauging station; VN Triangular (V notch) thin-plate weir); XC Cross Correlation. Two abbreviations may be applied to each station relating to the measurement of low or high flows.	-	UK National River Flow Archive using the NRFA API*

daily_flow_period_start	first date that daily flow time series provided in CAMELS-GB v2 is available for this gauging station	-	Catchment timeseries of daily streamflow described in Section 3.1.2
daily_flow_period_end	end date that daily flow time series provided in CAMELS-GB v2 are available for this gauging station	-	
daily_flow_percentage_complete	percentage of days with flow time series available from 1 st October 1970 – 31 st September 2022	%	
hourly_flow_period_start	first date that hourly flow time series provided in CAMELS-GB v2 is available for this gauging station	-	Catchment timeseries of hourly streamflow described in Section 3.2.2
hourly_flow_period_end	end date that hourly flow time series provided in CAMELS-GB v2 are available for this gauging station	-	
hourly_flow_percentage_complete	percentage of hours with flow time series available from 1 st October 1990 09:00:00 UTC – 1 st October 2022 08:00:00 UTC	%	
bankfull_flow	flow at which the river begins to overlap the banks at a gauging station (obtained from stage-discharge relationships so may be derived by extrapolation)	m ³ s ⁻¹	UK National River Flow Archive using the NRFA API*, catchment timeseries of streamflow described in Section 3.1.2 and 3.2.2
structurefull_flow	flow at which the river begins to overlap the wingwalls of a structure at a gauging station (obtained from stage-discharge relationships so may be derived by extrapolation)	m ³ s ⁻¹	
max_gauging_flow_date	date and time when the maximum gauging flow was taken	-	
max_gauging_flow	the maximum gauging flow - the highest manual measurement of flow taken at a gauging station	m ³ s ⁻¹	

max_daily_flow	the maximum daily flow recorded in the daily flow time series times provided in CAMELS-GB v2	$m^3 s^{-1}$	Derived from Coxon et al (2015)
daily_flow_ext ap_dur	the percentage of time (excluding NaNs) that the daily flow timeseries is higher than the maximum gauging flow	%	
max_hourly_flow	the maximum hourly flow recorded in the hourly flow time series times provided in CAMELS-GB v2	$m^3 s^{-1}$	
hourly_flow_ext rap_dur	the percentage of time (excluding NaNs) that the hourly flow timeseries is higher than the maximum gauging flow	%	
qXX_uncert_upper	upper bound of the discharge uncertainty interval for the XX percentile flow given as a percentage of the XX percentile flow – estimates for XX values of 5, 25, 50, 75, 95, 99 are provided	%	
qXX_uncert_lower	lower bound of the discharge uncertainty interval for the XX percentile flow given as a percentage of the XX percentile flow – estimates for XX values of 5, 25, 50, 75, 95, 99 are provided	%	
quncert_meta	metadata describing the reasons why discharge uncertainty estimates are (not) provided; Calculated discharge uncertainties; No stage-discharge measurements available; Less than 20 stage-discharge measurements available for most recent rating; Discharge uncertainty estimates not provided as the estimated uncertainty bounds were deemed to not accurately reflect the discharge uncertainty or	-	

Deleted: %

Deleted: %

		because there was no sensible relationship between stage and discharge.		
	<u>station_quality_pooling</u>	<u>indicates measurement suitability at the station, specifically that flows up to the 3rd highest annual maximum on record are likely to be within 30% of their true values (TRUE indicates the station is suitable for pooling, while FALSE indicates that it is not)</u>	<u>TRUE/FALSE</u>	<u>UK National River Flow Archive (https://nrfa.ceh.ac.uk/data/about_data/peak-flow-data/indicative-suitabilities)</u>
	<u>station_quality_qmed</u>	<u>indicates measurement suitability at the station, specifically that flows up to QMED (the median of the annual maximum flows or 1-in-2 year event) are likely to be within 30% of its true value (TRUE indicates the station is suitable for QMED, while FALSE indicates that it is not).</u>	<u>TRUE/FALSE</u>	
	<u>station_quality_hourlyflow_issues</u>	<u>metadata describing if any station quality issues were found in the hourly flow timeseries including no data (no_data), truncated values for entire record (full_truncation) or specific parts of the timeseries (partial_truncation), continuity issues such as abrupt changes in flow regimes or prolonged gaps inconsistent with expected patterns for entire record (full_continuity) or specific parts of the timeseries (partial_continuity), very short periods of data availability prior to main period of record (partial_tracedata), and other issues (full_other_issues or partial_other_issues).</u>	<u>-</u>	<u>(Fileni et al., 2026a, b)</u>

Field Code Changed

	station_quality_hourlyflow_comment	provides a detailed description of any station quality issues found in the hourly flow timeseries	-	
Human Influence Attributes	benchmark_catchment	benchmark catchment (Y indicates the catchment is part of the UK Benchmark Network, while N indicates that it is not)	Y/N	UK National River Flow Archive; Harrigan et al. (2018)
	surfacewater_abstractions	mean surface water abstraction	mm day ⁻¹	1 km × 1 km abstractions for multiple purposes (csv file) and 1 km × 1 km discharges for multiple purposes (RACT netcdf file) (Rameshwaran et al., 2025)
	groundwater_abstractions	mean groundwater abstraction	mm day ⁻¹	
	discharges	mean discharges (daily discharges into water courses from water companies and other discharge permit holders reported to the Environment Agency)	mm day ⁻¹	
	abs_agriculture_perc	percentage of total (groundwater and surface water) abstractions in catchment for agriculture	%	
	abs_amenities_perc	percentage of total (groundwater and surface water) abstractions in catchment for amenities	%	
	abs_energy_perc	percentage of total (groundwater and surface water) abstractions in catchment for energy production	%	
	abs_environmental_perc	percentage of total (groundwater and surface water) abstractions in catchment for environmental purposes	%	
	abs_industry_perc	percentage of total (groundwater and surface water) abstractions in catchment for industrial, commercial and public services	%	

Deleted: .

abs_watersupply_perc	percentage of total (groundwater and surface water) abstractions in catchment for water supply	%	
abs_highloss_perc	percentage of total (groundwater and surface water) abstractions in catchment that is classified as 'high loss'	%	
abs_mediumloss_perc	percentage of total (groundwater and surface water) abstractions in catchment that is classified as 'medium loss'	%	
abs_lowloss_perc	percentage of total (groundwater and surface water) abstractions in catchment that is classified as 'low loss'	%	
abs_verylowloss_perc	percentage of total (groundwater and surface water) abstractions in catchment that is classified as 'very low loss'	%	
num_reservoir	number of reservoirs in the catchment	-	UK Reservoir Inventory (Durant and Counsell, 2018), SEPA's publicly available controlled reservoirs register (http://map.sepa.org.uk/reservoirsfloodmap/Map.htm , last access: 2 nd September, 2025) and Salwey et al (2023)
reservoir_cap	total storage capacity of reservoirs in the catchment in megalitres	ML	
reservoir_contributing_area	percentage of the overall catchment surface area that is drained through reservoirs	%	
reservoir_normalised_upstream_capacity	ratio of the capacity of a reservoir to the average volume of precipitation received by the catchment in a year	-	
reservoir_he	percentage of total reservoir storage in catchment used for hydroelectricity	%	
reservoir_nav	percentage of total reservoir storage in catchment used for navigation	%	
reservoir_drain	percentage of total reservoir storage in catchment used for drainage	%	
reservoir_wr	percentage of total reservoir storage in catchment used for water resources	%	

Deleted: .

	reservoir_fs	percentage of total reservoir storage in catchment used for flood storage	%	
	reservoir_env	percentage of total reservoir storage in catchment used for environmental	%	
	reservoir_nouse_data	percentage of total reservoir storage in catchment where no use data were available	%	
	reservoir_year_first	year the first reservoir in the catchment was built	-	
	reservoir_year_last	year the last reservoir in the catchment was built	-	
Groundwater Wells	gw_well_id	groundwater well identifier (corresponds to the ID provided by the British Geological Survey)	-	UK Hydrometric Register (Marsh and Hannaford, 2008)
	gw_well_name	groundwater well name	-	
	gw_well_lat	groundwater well latitude	°	
	gw_well_lon	groundwater well longitude	°	
	gw_well_easting	groundwater well easting	m	
	gw_well_northing	groundwater well northing	m	
	gw_well_datum	the altitude of the point from which measurements are taken at a particular site	mAOD	
	gw_well_depth	depth of the groundwater well	m	
	aquifer	aquifer to which the water level variations in the wells are attributed	-	
	daily_gwlevel_period_start	first date that daily groundwater level series provided in CAMELS-GB v2 is available for this groundwater well	-	Groundwater level timeseries

Deleted: -

Deleted: -

daily_gwlevel_p eriod_end	end date that daily groundwater level series provided in CAMELS-GB v2 is available for this groundwater well	-	described in Section 4 4
daily_gwlevel_p erc_complete	percentage of days with groundwater level data	%	
monthly_gwlev el_period_start	first date that monthly groundwater level series provided in CAMELS-GB v2 is available for this groundwater well	-	
monthly_gwlev el_period_end	end date that monthly groundwater level series provided in CAMELS-GB v2 is available for this groundwater well	-	
monthly_gwlev el_perc_complet e	percentage of months with groundwater level data	%	

Deleted: -

Deleted: -