

# Lagoon temperature and hydrodynamics of Reao Atoll (Tuamotu Archipelago, French Polynesia) before and during the 2024 El-Niño Marine Heatwave

Esther Ladet<sup>1</sup>, Carla Chevillard<sup>1</sup>, Romain Le Gendre<sup>2,3</sup>, Thomas Trophime<sup>4</sup>, Sébastien Petton<sup>5</sup>, Simon Van Wynsberge<sup>1</sup>

<sup>1</sup>Ifremer, IRD, ILM, UPF, UMR 241 SECOPOL, Vairao, 98725, Tahiti, French Polynesia

<sup>2</sup>Ifremer, UMR 9220 ENTROPIE (Ifremer, IRD, Univ. Réunion, Univ. Nouvelle-Calédonie, CNRS), BP 32078, 98897 Nouméa CEDEX, New Caledonia

<sup>3</sup>Université de Toulouse, LEGOS (CNES/CNRS/IRD/UT3), Nouméa, Nouvelle-Calédonie, France

<sup>4</sup>Direction des Ressources Marines, Papeete, 98713, Tahiti, French Polynesia

<sup>5</sup>Ifremer, Univ. Brest, CNRS, IRD, LEMAR, F-29840, Argenton, France

*Correspondence to:* Simon Van Wynsberge ([simon.van.wynsberge@ifremer.fr](mailto:simon.van.wynsberge@ifremer.fr)) and Romain Le Gendre ([romain.le.gendre@ifremer.fr](mailto:romain.le.gendre@ifremer.fr))

Code de champ modifié

**Abstract.** In French Polynesia, semi-closed atolls of the eastern Tuamotu Archipelago are home to fisheries and mariculture activities based on giant clam resources. These activities are increasingly vulnerable to global warming, as evidenced by the mass bleaching event observed in Reao atoll in March 2024, triggered by the most intense and prolonged Marine Heatwave (MHW) ever recorded in this lagoon. The GAIA project (manaGement strAtegy evaluation for small-scale fisheries in Atoll lagoons) was launched to address this issue and aimed to explore the sustainability of giant clam fisheries under climate change, with a particular focus on processes driving thermal exposure during MHWs. To achieve this, spatial and temporal temperature fluctuations, lagoon circulation, and water exchange dynamics between ocean and lagoon across the atoll rim were monitored using moored autonomous oceanographic sensors. A total of 6 monitoring periods took place between December 2016 and May 2025, with the most extensive instrumentation covering the entire February-March 2024 MHW event. The strength of these observations lies not only in their coverage of a unique and poorly sampled ecosystem, but also in their comprehensive documentation of an exceptional MHW event, from its onset and peak to its dissipation, providing an unprecedented record of the full life cycle of a major thermal anomaly in a tropical semi-closed atoll lagoon. This dataset also supports future modelling efforts to simulate temperature dynamics and identify thermal refugia in atoll lagoons under changing climate scenarios. All data were post-processed, quality-controlled, and formatted into interoperable NetCDF files. The full dataset is openly accessible through the SEANOE marine data platform: <https://doi.org/10.17882/105885> (Le Gendre et al., 2025a).

## 29    **1 Introduction**

30    Semi-closed lagoons are widespread in the eastern Tuamotu Archipelago, French Polynesia, yet they represent unique  
31    hydrodynamic systems primarily shaped to their geomorphological configuration (Rougerie, 1995; Andréfouët and Paul,  
32    2023). Unlike previously documented lagoons (Bruyère et al., 2023), semi-closed atolls are characterized by the absence of  
33    reef pass, with shallow channels (approximately 1-2 meters deep) crossing the rim (“*hoa*”) found only on one side of the atoll.  
34    In semi-open atolls (those including passes), water inflows through the *hoa* and the reef pass are mainly driven by tide and  
35    oceanic incident waves, and outflow of excess water is drained mostly through the pass (Dumas et al., 2012; Aucan et al.,  
36    2021). However, for semi-closed atolls, hydrodynamic behaviour can differ markedly and these lagoons may become  
37    temporarily isolated from the ocean (Van Wynsberge, 2016). Water exchange from the ocean into these lagoons occurs only  
38    when offshore wave energy reaches a threshold sufficient to drive oceanic water across the atoll rim, through *hoa*. This  
39    threshold is likely modulated by tidal range and regional sea level anomalies. During periods of low swell, or when swell  
40    direction is not congruent with the open rim’s orientation, exchanges become minimal or even interrupted, causing lagoon  
41    water levels to drop significantly due to enhanced evaporation — a condition locally referred to as *ranoa*. Consequently, these  
42    atolls can experience long periods of highly restricted water renewal, during which they are particularly sensitive to  
43    atmospheric conditions and heat fluxes (Andréfouët et al., 2022). While semi-closed lagoons can become temporarily isolated  
44    from the ocean, they are also highly vulnerable to the opposite extreme. Extreme surges generated by prolonged, powerful  
45    incident swells, and associated land flooding (Storlazzi et al., 2018; Andréfouët et al., 2023), are exacerbated in semi-closed  
46    lagoons, due to the lack of a pass to drain excess water. Monitoring lagoon water levels during such events provides key  
47    insights into lagoon responses to extreme hydrodynamic forcing.

48    When these lagoons temporarily behave as closed systems, thermal stress imputed to marine organisms can be aggravated  
49    (Van Wynsberge et al., 2017; in press), sometimes leading to mass mortalities (Van Wynsberge & Andréfouët, 2017;  
50    Andréfouët et al., 2022). These dynamics have important consequences for giant clam populations (*Tridacna maxima*), a  
51    species of ecological, economic, and cultural significance across Indo-Pacific coral reef ecosystems (Neo et al., 2015; Mies et  
52    al., 2017). In the semi-closed lagoons of the Tuamotu Archipelago, giant clams can form dense aggregations that support local  
53    fisheries and mariculture (Gilbert et al., 2005; Remoissenet & Wabnitz, 2012; Van Wynsberge et al., 2016; Andréfouët et al.,  
54    2025). However, their symbiotic relationship with Symbiodiniaceae makes them vulnerable to thermal stress  
55    (Teaniniuraitemoana et al., 2025), raising concerns under climate change scenarios. In particular, recurrent mass bleaching  
56    events linked to El Niño-driven marine heatwaves (MHWs) have impacted *T. maxima* stocks, with implications for both the  
57    fishery and the aquarium trade (Andréfouët et al., 2018; Van Wynsberge et al., in press). In this context, characterizing the  
58    spatial and temporal variability of local temperature regimes, and understanding their drivers is essential, notably with  
59    intensifying climate extremes.

This study presents a rare and comprehensive dataset of multi-year monitoring of temperature and sea level inside the semi-closed lagoon of Reao, spanning December 2016 to May 2025. Modelling work of Van Wynsberge et al. (in press) evidenced that this lagoon experienced more than 20 MHW over the past decade, with strongest events that occurred in March-April 2016 (duration: 40 days; maximum intensity: 1.8°C above the climatology), in January-February 2017 (38 days; 1.8°C), and in February-March 2024 (41 days; 2.4°C). Here a more extensive instrumentation setup (see Figure 3) enabled enhanced lagoon sampling before and during the most prolonged and intense MHW ever recorded locally (Van Wynsberge et al., in press), which was associated with the 2024 strong mixed El Niño (Pagli et al., 2025). The sampling strategy captured both horizontal and vertical temperature variability via moored sensors at relevant lagoon sites and depths, as well as through vertical profiles (from CTD casts). Continuous measurements of lagoon level, circulation, and ocean-lagoon exchanges have also been acquired during the austral summer 2023-2024. Instrumenting the diverse geomorphological strata, including *hoa*, the inner reef slope, lagoon patch reefs, and deep lagoon areas, provides a system-wide view of the hydrodynamic variability and processes within the lagoon before and during such an extreme event, and sheds light on the hydrodynamic and atmospheric forcings that control intensity and duration of MHW inside semi-closed atoll lagoons. After a presentation of the study site in Section 2, the instruments and deployment methods are described in Section 3, followed by the sampling strategy (Section 4) and the data processing and quality control procedures in Section 5. Finally, illustrative observations of this semi-closed atoll dynamics are shown in Section 6.

## 2 Study site

Reao Atoll (18.45°S–18.6°S; 136.25°W–136.5°W) located at the eastern end of the Tuamotu archipelago (French Polynesia ; Fig.1.B) is a shallow atoll known for harboring one of the world’s highest densities of the giant clam *Tridacna maxima* (Van Wynsberge and Andréfouët, 2017). Its population (329 inhabitants according to the 2022 census) lives mainly in the village located on the northwestern part of the atoll, and largely rely on giant clam resources (for flesh or aquarium trade). Reao is classified as a semi-closed atoll, with a fully and permanently emerged rim in its north-eastern part, and a southern rim segmented by an alternation of low-lying sandy islets, locally known as *motu*, and numerous shallow natural channels (*hoa*), which allow limited water exchange between the lagoon and the open ocean (Fig. 1). Large swell events (eventually combined with spring tides) can overtop the reef and fill *hoa* with water. This generates variable lagoon aperture (defined as the ratio of the sum of the widths of all functional channels to the atoll perimeter) in time, ranging from 1% to 13% depending on water level (Andréfouët et al., 2022). The numerous *hoa* vary greatly in shape (see Fig.1.C and Appendix A, Fig. A2), width and depth, but the most active ones are located in the central part of the southern rim (Tarahaero; Fig. 1C). The atoll rim delimits a lagoon of 38.33 km<sup>2</sup> with an average depth of 16 m (maximum depth: 32 m). Elongated along a northwest–southeast axis, the lagoon comprises three distinct basins, the northwestern (NW), the intermediate, and the southeastern (SE) basins, which progressively widen and deepen from north to south (Fig. 1.A; Quéré et al., 2025). Overall, the three basins exhibit a bowl-shaped morphology, with shallower margins surrounding deeper central areas.

92 Four distinct daily wind regimes (WRs) affect the area (Dutheil et al., 2020). The dominant regime (WR1) corresponds to a  
93 persistent trade-wind pattern, characterized by a strong homogeneous east-southeast flow (WR1,  $6.3 \text{ m s}^{-1}$ ,  $\sim 100^\circ\text{N}$ ). Two  
94 additional easterly regimes (WR2 and WR3), differ mainly in intensity (resp.  $4.4$  and  $3.9 \text{ m s}^{-1}$ ) or orientation (resp.  $107.5^\circ\text{N}$   
95 and  $75.3^\circ\text{N}$ ). A fourth regime (WR4) associated with weaker north-easterly winds ( $64.9^\circ\text{N}$ ,  $3 \text{ m s}^{-1}$ ) predominates during the  
96 austral summer and disappears in austral winter (in opposition to WR1). Regarding the wave climate, the region is dominated  
97 in austral winter by high-amplitude, long period southwesterly incoming swells (R1,  $H_s = 2.5\text{m}$ ,  $T_p = 13.4\text{s}$  and coming from  
98  $190^\circ\text{N}$ ). During austral summer, northwesterly swells (R3) of lower amplitude ( $235^\circ\text{N}$ ,  $2 \text{ m}$ ) but similar periods prevail; yet  
99 Reao Atoll remains largely unaffected due to its impermeable northern rim. South-southeast wind waves (R2) generated by  
100 tradewinds also occur year-round with a peak in May-July (Dutheil et al., 2021). Finally regarding offshore tide, the  
101 approximate tidal range is  $0.93\text{m}$  (FES2012 global tide solution) in the open ocean south of Reao. The oceanic tidal regime is  
102 semi-diurnal in this region (Form factor =  $0.058$ ).  
103

a supprimé: ,

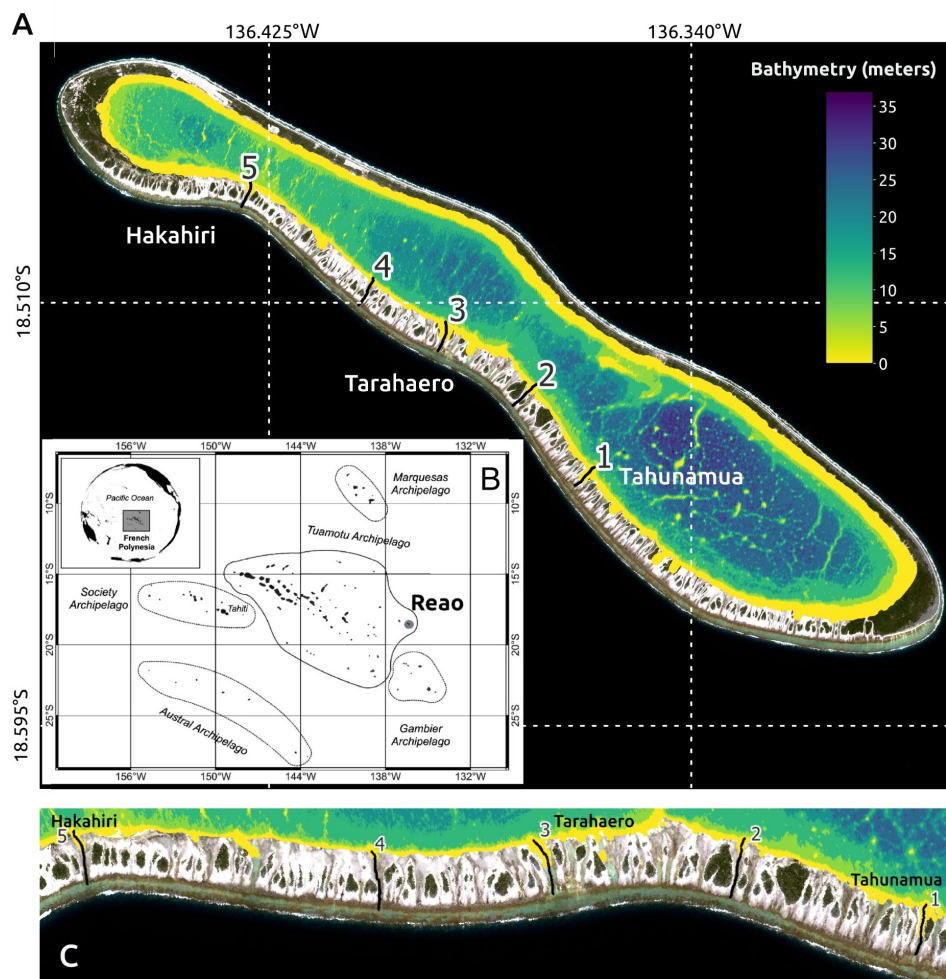


Figure 1: A) Map of Reao (A) with locality of the five main hoas (1-5). Background color refers to satellite-derived bathymetry retrieved from Sentinel-2 imagery (Copernicus Sentinel-2, 2021; Quéré et al., 2025a, 2025b) using the method of Amrari et al. (2021). B) Location of Reao within the French Polynesian archipelagos (Credit: Oriane Bruyère). C) Zoom on the southern rim and its hoas. Numbers indicate the 5 main hoas that were selected for instrumentation. Hoas n°3 (locally called Tarahaero), located


110 along the central section of the southern rim, is associated with the highest ocean-lagoon exchange efficiency, whereas *hoa n°1* (locally  
111 called *Tahunamua*), located along the southern section of the southern rim, is associated with the lowest.

112

### 113 3 Instruments, methods and deployments

114 Various physical oceanographic instruments were deployed during the GAIA project to monitor thermal variability, ocean-  
115 lagoon exchanges and lagoon dynamics (Figure 3). A total of six legs were conducted, each leg corresponding to the  
116 observation period between the deployment of instruments and their subsequent withdrawal. These included moored compact  
117 loggers dedicated to temperature and pressure (stations labeled with “T”), as well as different types of current meters: point-  
118 measurement devices (stations labeled with “L”) and vertical profilers (stations labeled with “A” or “ADCP”). During each  
119 field campaign, conductivity–temperature–depth (CTD) profiles (stations labeled with “M”) were performed throughout the  
120 lagoon allowing to capture the vertical structure of the water column. All profiles were performed manually from a boat. A  
121 detailed list of all instruments, including manufacturer, model, raw and processed parameters, deployment location, logging  
122 frequency, and deployment period, is provided in Appendix A (Table A1).

123 All moorings were deployed by scuba diving and adapted to the seabed habitats and deployment sites to ensure stability during  
124 highly energetic events. Mooring supports were constructed from a variety of materials, including concrete blocks, steel bars,  
125 and equipped with sacrificial anodes to prevent corrosion or electrolysis damage (see Fig. 2). To minimize biological fouling,  
126 Acoustic Doppler Current Profilers (ADCPs) were coated with cayenne pepper and grease and then wrapped with electrical  
127 tape, while smaller compact loggers were enclosed in perforated plastic cylinders (see Fig. 2a) to allow water circulation while  
128 providing protection against biofouling and mechanical damage. Mooring depths were measured using a dive computer (for  
129 sensors without pressure) or derived from the mean water depth over the whole deployment period (for sensors equipped with  
130 pressure). All moored instruments were autonomous, containing internal batteries and memory to support long-term  
131 deployment.

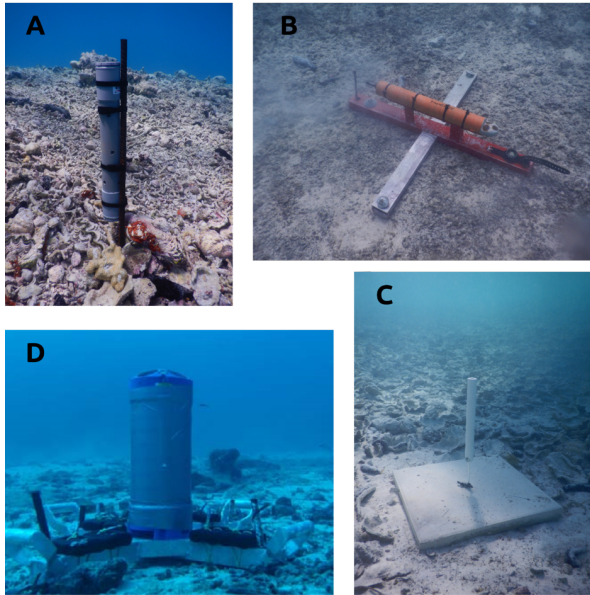

**Figure 2: Photos of the moored sensors deployed in Reao Lagoon: RBRduet/SBE56 inside its protective PVC tube (A), Nortek Aquadopp (B), Lowell TCM-4 (C), Teledyne RDI ADCP Sentinel (D). Photo credit: Simon Van Wynsberge.**

### 3.1 Compact loggers: Temperature and Pressure

Three types of compact loggers were used across the various deployments to monitor either temperature or temperature and pressure. The first set of sensors included 15 SBE56 loggers (Sea-Bird Scientific Inc.: <https://www.seabird.com/sbe-56-temperature-sensor/product?id=54627897760> ; last access: 7 November 2025). All SBE56 deployed during the GAIA project were new and directly came from the manufacturer, thus, given the specifications of these high-accuracy sensors, the data are delivered with a maximum uncertainty of  $\pm 0.01^{\circ}\text{C}$ . The typical sampling period was 1 min (Appendix A - Table A1). The second set of compact loggers consisted of two RBR Ltd. models, namely TWR-2050 and RBduet T.D ([https://www.bodc.ac.uk/data/documents/nodb/pdf/rbr\\_tide\\_wave\\_07apr2011.pdf](https://www.bodc.ac.uk/data/documents/nodb/pdf/rbr_tide_wave_07apr2011.pdf) ; <https://rbr-global.com/products/compact-loggers/rbrduet-td/> ; last access to webpage: 7 November 2025). The TWR-2050, a 10 dbar range sensor, was deployed during the first deployment period only (2016–2017) and sampled water level and temperature every 30min. Its maximum uncertainty regarding pressure was estimated around 0.5% of full scale ( $\pm 5$  cm) and  $\pm 0.01^{\circ}\text{C}$  for temperature. All RBRduet Temperature-Depth sensors (RBR Ltd) were returned from the manufacturer recalibration just

147 before the start of sampling. Based on their specifications, a maximum uncertainty of less than 1 cm in level and 0.004 °C in  
148 temperature. can be expected. Typical sampling periods were set to 1Hz.

149 **3.2 Current meters**

150 Two types of current meters, namely drag-tilt current meters and ADCPs, were installed in Reao lagoon to monitor the austral  
151 summer 2023-2024. The Lowell TCM-4 drag-tilt current meter is an autonomous, low-cost instrument that estimates current  
152 velocity and direction from sensor tilt, while also recording temperature ([https://lowellinstruments.com/tilt-current-](https://lowellinstruments.com/tilt-current-meters/tcm-4-tilt-current-meter/)  
153 [meters/tcm-4-tilt-current-meter/](https://lowellinstruments.com/tilt-current-meters/tcm-4-tilt-current-meter/);last access : 7 November 2025). Five TCM4 were used during the GAIA project sampling.  
154 All these sensors were new at the beginning of their deployment (Leg 4) thus providing a maximum uncertainty of 5 cm s<sup>-1</sup> in  
155 current speed, 5° in direction and 0.1°C in temperature. Their typical sampling period was set to 1 min. ADCP Sentinel V  
156 series (Teledyne RD Instruments; [https://www.teledynemarine.com/en-](https://www.teledynemarine.com/en-us/products/SiteAssets/RD%20Instruments/Sentinel_V_combined.pdf)  
157 [us/products/SiteAssets/RD%20Instruments/Sentinel\\_V\\_combined.pdf](https://www.teledynemarine.com/en-us/products/SiteAssets/RD%20Instruments/Sentinel_V_combined.pdf); last access : 7 November 2025) provide current  
158 profiling over the water column in coastal environments. Two models were deployed: a Sentinel V20 and two Sentinel V50.  
159 The Sentinel V-series provides three-dimensional velocity measurements as well as bottom temperature and pressure  
160 observations. The northern basin was equipped with a V20 (1000 kHz), and two Sentinel V50 (500 kHz) were deployed in the  
161 intermediate and southern basins. Globally, bursts were programmed every 20 min, with 90 pings per burst (1 s ping interval).  
162 Cell sizes were set to 0.5 m for the V20 and 1 m for the V50 and the first measured cell above the blanking zone was at 1.01  
163 m (resp 2.22 m) for V20 (resp. V50). Both awaited standard deviation for current speed was 0.74 cm s<sup>-1</sup>. The Aquadopp  
164 (Nortek) is an acoustic current meter used to measure current speed, direction, temperature, and pressure in shallow  
165 environments (<https://www.nortekgroup.com/products/aquadopp-profiler2-1-mhz>; last access: 7 November 2025). During the  
166 GAIA project the two models were 2MHz side-looking heads deployed in *hoa*. Burst sampling period was programmed to 20  
167 min, with a cell size of 0.2 m, and a blanking distance of 0.2 m leading to precision of horizontal velocity observations of 2.3  
168 cm s<sup>-1</sup>.

169 **3.3 CTD Profiles**

170 The CTD (Conductivity Temperature Depth) profiles were obtained using a Sea-Bird 19Plus V2 SeaCAT Profiler CTD (Sea-  
171 Bird Scientific ; <https://www.seabird.com/sbe-19plus-v2-seacat-profiler-ctd/product?id=60761421596>; last access: 7  
172 November 2025), which measures conductivity, temperature, and pressure at a sampling frequency up to 4Hz. The SBE19Plus  
173 V2 provides high-resolution and highly reliable measurements. Its last maintenance and manufacturer recalibration date back  
174 to 2022, which ensures high measurement accuracy (maximum uncertainty lower than that of moored loggers). During each  
175 cast, the CTD was hand-lowered from the boat, stabilized near 2 m depth during 1 min, then returned to near the surface before  
176 being lowered at a constant rate of approx 10 m min<sup>-1</sup> to the lagoon bottom and immediately brought back to the surface at  
177 20–40 m min<sup>-1</sup>. Only profiles acquired during the descent were retained in the NetCDF dataset made available.

a supprimé: Acoustic Doppler Current Profilers (

a supprimé: )

a supprimé:

## 181 4 Sampling strategy

182 The sampling design implemented under the GAIA project evolved throughout its duration to progressively address both  
183 thermal and sea-level vulnerabilities of semi-closed atoll lagoons. Prior to the GAIA project, an early historical 7-month  
184 deployment of a temperature and pressure sensor was performed (Leg 1, Station T1 from 17 December 2016 to 29 June 2017)  
185 and helped design the project sampling.

186 At the early stage of the project, a first temperature logger was deployed in June 2021 (Figure 3 - Station T2 - Leg 2 to 6)  
187 during a first fieldwork dedicated to giant clam stock assessment and health monitoring. The initial objective was to begin a  
188 continuous interannual record of lagoon temperature, providing a baseline reference and ensuring long-term monitoring of  
189 Reao's lagoon temperature observations that are included in the SNO (National Observation Service) ReefTEMPS network  
190 (Le Gendre et al., 2025). Following the acquisition of additional instruments within the GAIA project, the spatial coverage of  
191 the monitoring network was substantially increased, allowing a refined characterization of thermal dynamics across key lagoon  
192 sectors.

193 Subsequent field campaigns (Legs 4 to 6; from June 2023 to May 2025) implemented a more advanced experimental design  
194 using up to 18 moored instruments, aimed at better understanding of the hydrodynamic functioning of the lagoon, including  
195 ocean–lagoon exchanges, lagoonal circulation, and spatial and vertical temperature dynamics through multi-depth moorings.

### 196 4.1 Ocean-lagoon exchanges and lagoon level

197 One of the key objectives of the GAIA sampling strategy was to better understand the mechanisms governing water exchanges  
198 between the ocean and the lagoon through the *hoa*. The selection of *hoa* to be instrumented (see Fig 1.B and Fig A.3) was  
199 made following extensive field reconnaissance during the beginning of Leg 4, combining direct observations of their  
200 functioning with geomorphological characteristics (depth, width, orientation) and local knowledge of their hydrodynamic  
201 behaviour.

202 The monitoring design aimed to cover *hoa* distributed across different sectors of the reef rim and representative of the three  
203 main lagoonal basins (northern, intermediate, and southern). To this end, five Lowell TCM-4 drag-tilt current meters were  
204 deployed at stations L1 to L5 during Leg 4 (Fig 3.A). These autonomous instruments recorded current speed and direction,  
205 together with temperature, providing insights into the temporal variability of ocean–lagoon fluxes.

206 During Leg 5, the setup was complemented by two Nortek Aquadopp current profilers deployed at stations A1 and A2,  
207 corresponding respectively to the TCM-4 sites L3 and L1. These profilers allowed finer characterization of velocity structure  
208 across selected *hoa*, while also documenting temperature and sea-level variability.


209 Lagoon water level variability was monitored during several legs of the GAIA project. The first observations were obtained  
210 during Leg 1 using an RBR TWR-2050 sensor deployed at station T1, followed by an RBRduet T.D logger installed at station  
211 T11 from legs 3 to 5.  
212 These long-term pressure records were specifically designed to document lagoon-level variability under varying environmental  
213 conditions, notably the influence of incident oceanic swells and sea-level anomalies. During Leg 5, additional sea level  
214 measurements were available from pressure records provided by the Aquadopp profilers positioned in the *hoa* (stations A1  
215 and A2, Fig 3.A), as well as from the three ADCP Sentinel V instruments deployed within the lagoon.

216 **4.2 Lagoonal circulation**

217 The three ADCPs (stations B1 to B3, Fig. 3.A) were strategically located to capture current profiles from the surface to the  
218 bottom in each of the three main lagoonal basins and broadly positioned along the atoll’s main axis. This configuration enabled  
219 the characterization of internal lagoon circulation patterns and their response to hydrodynamic forcing, including wind stress  
220 and ocean–lagoon exchange processes. Combined, these complementary observations provide a comprehensive view of  
221 lagoon-level variability and circulation dynamics under contrasting meteorological and oceanic conditions.

222 Building on this carefully designed sampling strategy, the following section describes the procedures applied to process,  
223 validate, and standardize the collected data to produce a high-quality, interoperable dataset.

224

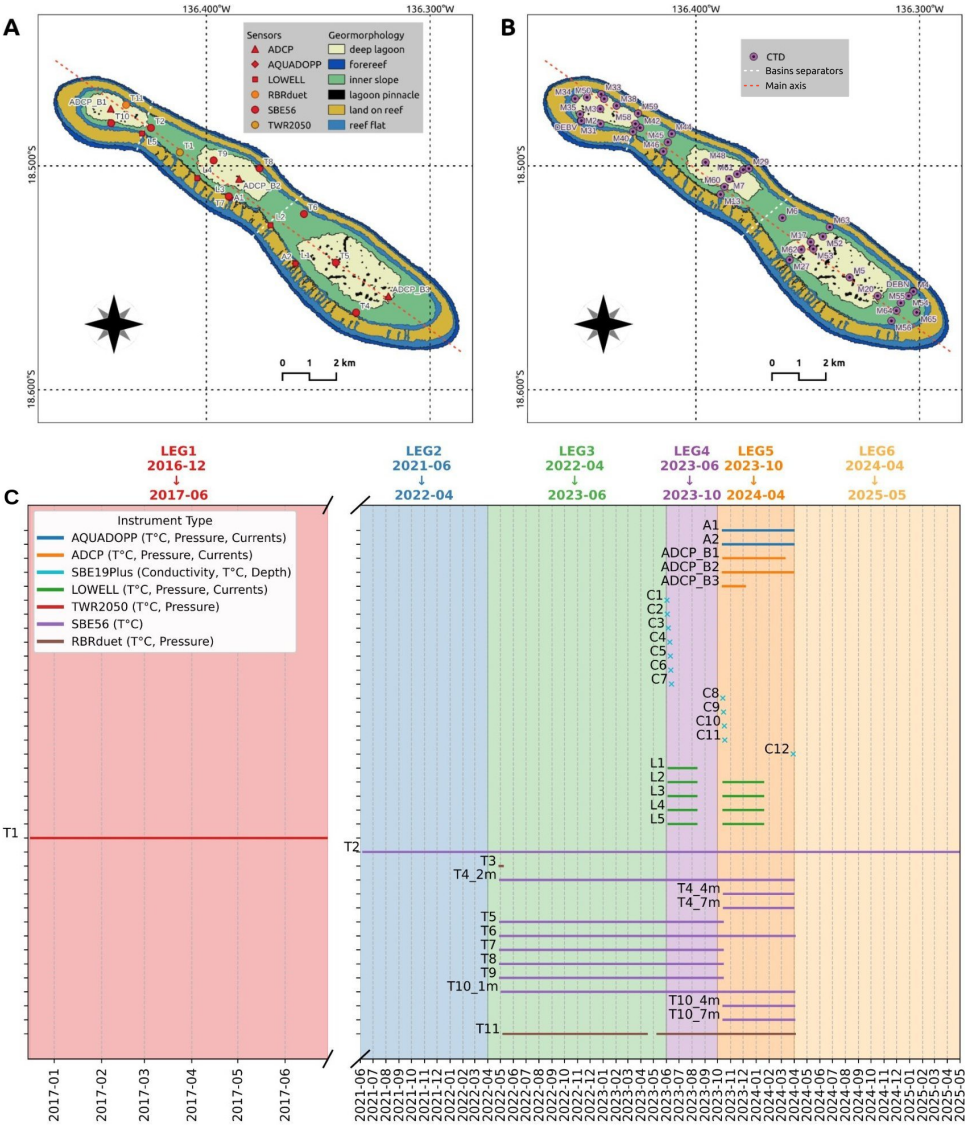

**Figure 3: Spatial and temporal coverage of the observation network at Reao Atoll. (A) Deployment location of moored loggers and (B) Reference stations during Conductivity, Temperature, Depth (CTD) vertical casts. Background colors on the map refer to reef geomorphology, from Andrefouet et al. (2012). The timeline (bottom panel, C) details the temporal coverage of all deployed instruments, including the initial campaign (December 2016 to June 2017) and the subsequent legs conducted under the GAIA project (June 2021 to May 2025). For the SBE19Plus CTD profiles, each marker C1 - C12 indicates a distinct date where several stations shown in (B) were sampled (Le Gendre et al., 2025a).**

### 4.3 Spatial and vertical temperature variability

To characterize spatial temperature variability, a network of moored SBE56 loggers was deployed across different lagoonal and rim environments (stations T1 to T11; Fig. 3A), covering the northern, intermediate, and southern basins for periods ranging from 6 to 34 months, depending on the sensor (Table A1). Temperature loggers were placed in the 1-3 m depth range where giant clams are preferentially found. However, two lagoon patch reefs (stations T4 and T10) were instrumented with additional loggers placed deeper (4.5 and 7 m depth) to set up vertical temperature sensor arrays during Leg 5 (6 months), which includes the February-March 2024 MHW event. Vertical stratification of temperature was further characterized with CTD vertical profiles performed in June 2023 (2–13 June), October 2023 (13–18 October), and during the 2024 MHW, on 29 March. CTD profiles were spatially distributed to cover the Northern basin, where mariculture activities take place, and along five radials crossing the lagoon widthwise according to a distance gradient to the open rim (Fig. 3B). Because CTD profiles measured both temperature and salinity, they also provided insights on water renewal, basin characteristics and vertical stability of water masses.

## 5 Data processing and quality controls

The processing and quality control procedures applied to this dataset build upon extensive prior experience in lagoon monitoring. To ensure both data quality and interoperability—using consistent file formats and instrument types—the same methods for processing, formatting, and quality control as described in previous studies were applied (Bruyère et al., 2022; Bruyère et al., 2023a; Bruyère et al., 2023b).

Raw data were retrieved from each instrument using the manufacturer’s software and saved on a secure network drive. Each file was renamed following a standardized nomenclature containing key deployment information: Atollname\_Station\_Instrument-Model\_SerialNumber\_Depth\_LegNumber.filetype. Data were then visually inspected to identify and remove bad records (e.g., out-of-water readings, spikes, or outliers) and to determine the exact start and end times of valid observations (based on our field notes and confirmed using pressure and temperature plots).

Data was subsequently converted into formats suitable for processing with Python 3 routines, typically ASCII or MATLAB files, processed as needed and finally exported as NetCDF files. Each NetCDF file includes temperature, pressure, current, or other relevant variables, together with comprehensive metadata such as deployment dates, time reference (expressed in UTC

for all instruments), geospatial coordinates, depth, instrument model and serial number, project and investigator information, processing history, and comments to ensure reusability.

Specific processing steps were applied depending on instrument type:

- RBRduet T.D sensors: pressure data were corrected for a constant atmospheric pressure (101 325 Pa) to minimize weather-related variability. No precise vertical referencing by DGPS was possible due to deployment conditions. Water level was calculated relative to the long-term mean depth. For wave analysis, pressure records were filtered using a Fourier transform to obtain a pressure spectrum (3–25 s period), and linear wave theory with a homogenous cut-off frequency (0.33) was applied to compute wave parameters. Two output files were generated: one with 1-minute resolution for temperature and water level, and another with 1-hour resolution containing derived wave parameters.
- Current meters (ADCPs, Aquadopps, and Lowell TCM-4): vertical profiles near the surface were removed to avoid contamination from acoustic reflections or noise. Data were converted to consistent coordinate systems (East - North - Up), and orientation conventions were harmonized with oceanographic standards. Temporal and vertical resolutions were retained according to deployment settings.
- Compact loggers (SBE56): temperature data were generally retained at the original sampling frequency without additional processing.
- CTD casts: standard processing using SeatermV2 software was applied, including conversion to .cnv, low-pass filtering, alignment of sensors, derivation of secondary parameters, and vertical bin averaging (0.5 m). No specific treatments for handling salinity spikes were required as no such spikes were recorded in the data.

After processing, all datasets were visually inspected using Ferret and NetCDF tools to certify the quality of the time series and detect eventual anomalies. Any remaining outliers or unusual observations were flagged in the NetCDF global attributes. Metadata were systematically checked to verify the completeness and correctness of global and variables' attributes. These procedures ensure a high-quality, standardized, and interoperable dataset suitable for scientific analysis and long-term monitoring of lagoon dynamics.

## 6 Overview of observations

In this datapaper, an overview of observations is provided in order to highlight the quality and scientific interest of the dataset. This section is, however, not intended to provide an extensive analysis and interpretation of data. To enhance trust-building, external sources of wind, wave, sea surface temperature (SST) and tide data have hereafter been used and aligned with our temperature, water level and current data. Winds, waves and SST were extracted from ERA5 reanalysis (<https://cds.climate.copernicus.eu/datasets/reanalysis-era5-single-levels?tab=overview> ; Hersbach et al., 2020). Tidal

287 harmonics were extracted from the Finite Element Solution oceanographic model, version 2012 (Stammer et al., 2014), and  
288 tidal recomposition was performed using the first 8 harmonics. Winds and SST data were extracted at the grid point closest to  
289 the center of the atoll (18.5°S, 136.5°W), while incident waves and tidal harmonics were extracted at an oceanic grid point at  
290 the vicinity of the southern rim of Reao (18.75°S, 136.6°W). Finally, marine heat waves categories were determined using the  
291 long-term series of lagoon temperatures modeled by Van Wynsberge et al. (in press) as climatology. Briefly, they used the in-  
292 situ temperature time series to train and validate Generalized Additive Models (gam) that infer the daily minimum temperature  
293 and the diurnal temperature range, from oceanic and atmospheric regional data.

a supprimé: long term

#### 294 6.1 Ocean-lagoon exchanges and lagoon level


295 Lagoon water level was strongly influenced by ocean-lagoon exchanges. Figure 4 shows the temporal variability of ocean-  
296 lagoon exchanges over a 5-day subset for the five instrumented *hoa*, highlighting differences in exchange intensity and  
297 dynamics among sites, together with lagoon-level variations at station T11. This period was selected as it encompasses a short  
298 but energetic incident swell event (from 22 to 24 October 2023, Fig. 4).

299 Briefly, inflow and outflow were calculated using scatter plots of current speed (y-axis) as function of current  
300 directions (x-axis), with dots representing observations in their initial sampling frequency (every 1 min for Lowell  
301 inclinometers and every 20 min for Aquadopp currentmeters). These scatter plots of data were similar to two  
302 gaussians, centered on the direction of inflow and outflow, respectively. The direction for which the  
303 current speed reached its maximum was considered as the main direction of the *hoa*. We then defined  
304 inflow currents as currents entering the *hoa* with the main direction  $\pm 90^\circ$ . Other currents were  
305 characterised as outflows.

306 Globally, a good synchronicity in the patterns of inflow/outflow between the five instrumented *hoa* was observed (based on  
307 velocity projections along each *hoa*'s main axis). For all of them, inflows and outflows followed the offshore tidal trend, with  
308 inflows dominating between mid-flood and mid-ebb, and vice versa (Fig. 4). During this period, current speed in the *hoa*  
309 reached values exceeding  $1 \text{ m s}^{-1}$  (station L2 at the peak of the event). Within the lagoon, tidal variability ranges from a  
310 complete absence of tidal signal during Ranoa phases (when no exchanges between ocean and lagoon) to only a few centimeters  
311 of tidal amplitude (maximum observed 25 cm) when lagoon water levels are particularly high (Fig. 6). It is noteworthy that  
312 during the swell episode shown in Fig. 4, the most active *hoa*—i.e., those exhibiting the strongest inflowing currents—were  
313 the central ones along the southern rim (L3, A1, and L2). At the peak of the event, all *hoa* were almost exclusively inflowing  
314 for about two consecutive tidal cycles. Similarly, lagoon drainage appears to occur mainly through the central *hoa* (L4, L3, A1  
315 and L2), which exhibit longer durations and higher intensities of outgoing currents compared to those located at the northern  
316 and southern extremities. Figure 4 also demonstrates good congruence between Aquadopp and Lowell-TMC4 records, since

318 similar currents speed and direction were found for instruments A1 and L3, which were positioned a few meters apart, in the  
 319 same *hoa*. Finally, the lagoon water level rises more rapidly during the filling phase than it falls during the drainage phase,  
 320 with an increase in lagoon level exceeding 30 cm in less than 24 hours.

321 At the beginning of the time series, A2 currents exhibit intra-phase flow reversal alternating between inflow and outflow within  
 322 a single drainage or filling phase. This inconsistent behaviour of A2 currents with other currents might be explained by the  
 323 location of the sensor in a *hoa* with a coarser complex bathymetry (see locations of sensors in the different *hoa* in Appendix  
 324 A2) and the slightly different orientation of this section of rim. Such location appears to have an impact on A2 currents when  
 325 current speed is rather low in other *hoa*. When currents' speed increase due to swell events, a better coherence is observed  
 326 with A2.  
 327

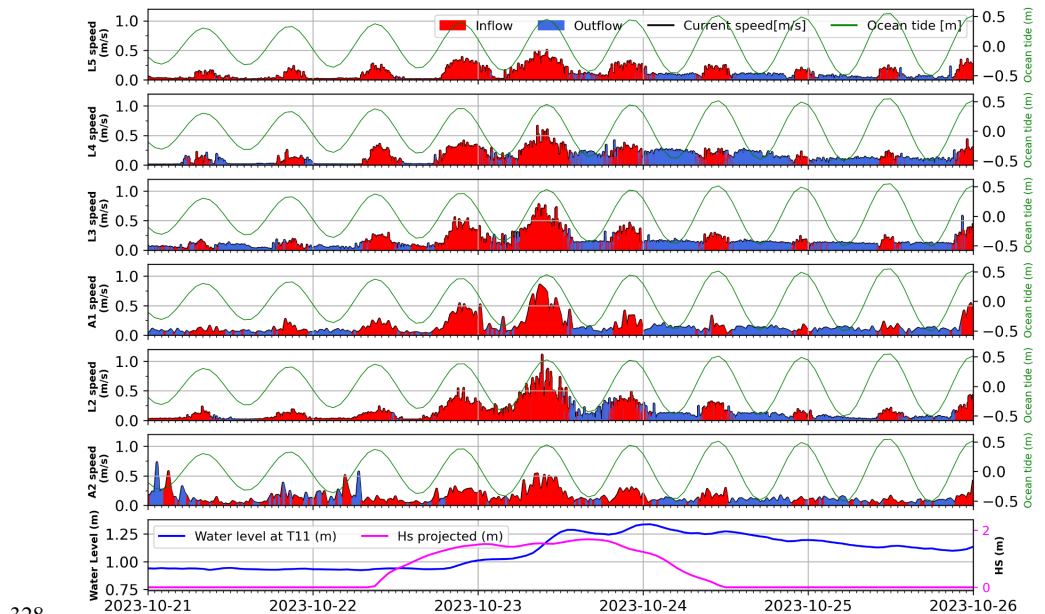

328 **Figure 4:** Current speed and direction (inflow in red, outflow in blue) recorded by Lowell-TCM4 L2, L3, L4, L5) and Aquadopp  
 329 (A1, A2) in *hoa*. Instruments A1 and L3 were positioned a few meters apart within the same *hoa*. The ocean tide (recomposed from  
 330 FES2012 global tidal harmonics at 18.75°S, 136.6°W) is shown as solid green lines in each panel. The bottom panel displays the  
 331 lagoon water level at T11 (blue) and ERA5 projected significant wave height (pink,  $H_s$  at 18.75°S, 136.6°W) projected onto the  
 332 direction normal to the southern rim (210°).  
 333  
 334

a mis en forme : Police :9 pt, Gras

a supprimé: )

a mis en forme : Non Exposant/ Indice

## 6.2 Lagoonal circulation

Globally, current velocities display very low magnitudes (average velocities around  $2.5 \text{ cm s}^{-1}$  for the three instruments, and for all cells across the profiles). Depth-averaged current velocities generally exhibit relatively stronger currents in the northern basin than in the intermediate and southern basins (up to 0.1, 0.07,  $0.06 \text{ m s}^{-1}$  maximum current velocities respectively for B1, B2 and B3). Fig. 5 presents a 7-day example (25 November–1 December 2023) of circulation observed by the three current profilers (stations B1, B2 and B3) in relation to wind-induced slope. Winds and currents are both projected along Reao's main axis and slope is computed as the difference in depth anomalies between B1 and B3. During most of the period, positive projected wind values indicate weak trade winds (blowing from east-southeast), which induce a slight sea surface slope (up to 2 cm approximately). Over the displayed period, currents exhibit vertically sheared structures at all stations and the subsurface currents mainly tend to flow slowly southeastward (note that the first few meters from the surface were discarded to avoid "contaminated" values). Around 28 November, a wind reversal event (northwest slight wind burst) is observed. The effects of this reversal are most clearly visible at station B3. During this event, surface currents in B3 are predominantly directed southeastward, in agreement with the wind forcing, while subsurface currents show a marked intensification northwestward. This results in a temporary reorganization of the vertical current structure compared to the preceding period. At stations B1 and B2, this signal is present but less clearly defined although currents in the intermediate part of the water column also show a reversal and intensification toward the northwest. These patterns suggest the existence of overturning circulations as described in Dumas et al. (2012) for the case of Ahe atoll. At this stage, we cannot determine whether these circulation cells are specific to each basin, but further hydrodynamics modeling will provide insights about these patterns..

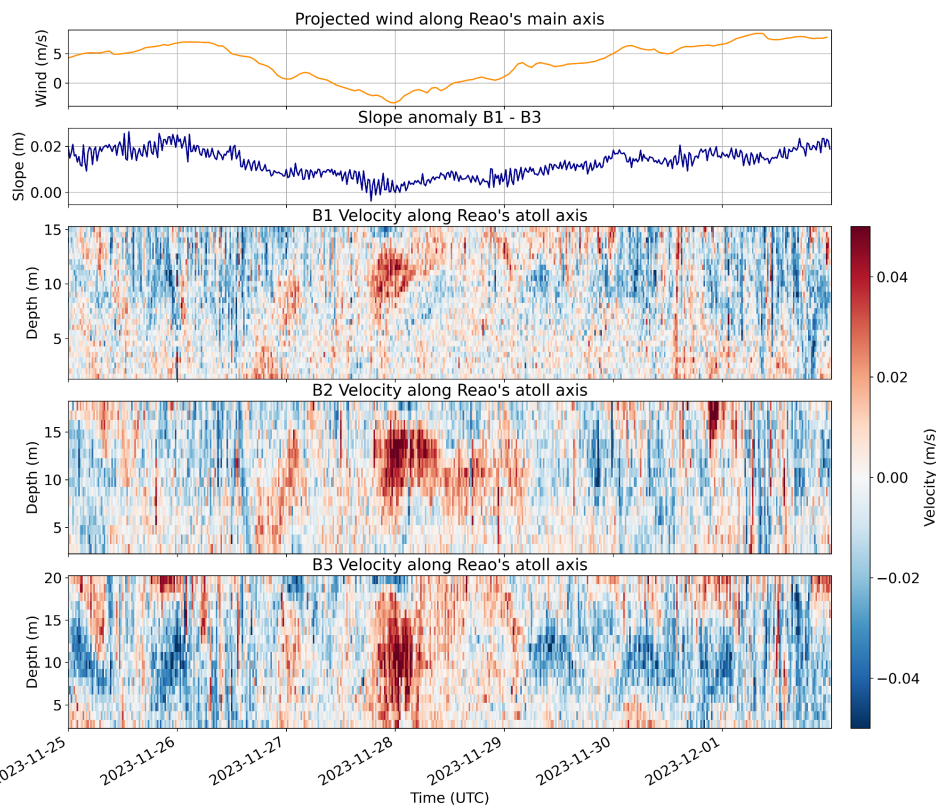


Figure 5: From top to bottom: ERA5 winds (18.5°S, 136.5°W) projected onto Reao's major axis (positive values indicate winds blowing from southeast toward northwest); Time-varying sea surface slope, computed from sea level anomalies between ADCP B1 and ADCP B3; positive values indicate higher water levels at B1 relative to B3; Profiles of projected current velocities along Reao's main axis (positive values indicate currents flowing toward the northwest along the same axis). Note that all variables are expressed as projections onto the atoll's main axis (Figure 3), which is oblique relative to geographic directions; therefore, the color scale represents along-axis flow components rather than strictly zonal or meridional directions

### 6.3 Observed thermal patterns with a focus on the 2024 MHW event

The temperature time series allowed us to characterize the seasonal trend of temperature in Reao's lagoon. As already described in other atoll lagoons (Van Wynsberge et al., 2017), lagoon temperature showed a greater annual amplitude than ocean SST


365 (here ERA5 SST at 18.75°S, 136.6°W), with higher lagoon temperature than ocean SST in austral summer, and vice versa in  
366 austral winter (Fig. 6.A). Although not shown in the figures presented here, the Reao dataset also highlighted differences in  
367 temperature within the lagoon depending on reef geomorphology, bathymetry, and proximity to ocean-water exchanges, which  
368 is a common feature of atoll systems (Rogers et al., 2016; Green et al., 2019; Grimaldi et al., 2023; Reid et al., 2020).

369 During the GAIA sampling, the Reao lagoon experienced four distinct MHWs: three short category I events and one category  
370 III event (Van Wynsberge et al., in press). The category I events spanned 13 days (25 March–7 April 2023), 5 days (24–29  
371 April 2023), and 6 days (3–9 January 2024). MHW categories are defined, following Hobday et al. (2018), based on the  
372 difference between the daily SST 90th percentile and the SST climatology (here computed on the 1993-2022 period) for the  
373 corresponding day of the year. Briefly, if the SST on a given day reaches the climatology plus this difference, the event is  
374 classified as a Category I MHW; if it reaches twice the difference, it is a Category II MHW, and higher multiples correspond  
375 to higher categories.

376 The category III event, which occurred from 19 February to the end of March 2024, persisted for 41 days and resulted in mass  
377 bleaching of giant clams (Van Wynsberge et al. in press). During this period, both oceanic SST and lagoon temperature  
378 increased, but the lagoon warmed more rapidly, remaining at 1 m depth on average 1.42 °C (at maximum 1.7°C) above SST  
379 at T2, 1.45°C (max 1.77°C) above SST at T10, 1.45°C (max 1.76°C) above SST at T11, and 1.27°C (max 1.55°C) above SST  
380 at T4. Although not shown in the figure presented here, it is worth noting that during the 2024 MWH, slightly higher  
381 temperature was found at T10 in the shallow northern basin than at T4 located in the deep wide southern basin (0.15°C  
382 difference in mean at 4.5 m depth). This is in congruence with previous temperature gradients reported across Reao's lagoon  
383 during austral summer (Van Wynsberge et al., 2024). Only weak vertical temperature gradients were observed between 1 m,  
384 4 m, and 7 m depths at station T10, although the diurnal amplitude was more pronounced at 1 m (Fig. 6.B). Temperature  
385 recorded in the middle of the lagoon at 22 m depth at the B2 station followed the same general trend, with a delayed response  
386 and smoother daily variability, indicating greater thermal inertia of deep lagoon waters. The apparent flattening of the diurnal  
387 signal at B2 during the night can be explained by higher wind speeds during the day than at night. Stronger daytime winds  
388 enhance vertical mixing, allowing the daily temperature cycle to reach deeper layers, whereas weaker nighttime winds limit  
389 this mixing. Overall, during this unprecedented event, the lagoon alternated between high-level of water and *ranoa* phases,  
390 and winds were blowing mostly from E/SE. Unexpectedly, oceanic (exacerbated ocean-lagoon exchanges during certain  
391 periods such as the end of February 2024) and wind forcings seemed to have little affected the high temperature trends. This  
392 suggests that exceptionally strong solar fluxes, likely associated with anomalously warm air temperatures, were the primary  
393 contributing factors, although assessing the validity of this hypothesis requires further analyses (i.e., heat budget calculations)  
394 which are beyond the scope of this datapaper.

395

a supprimé: 6

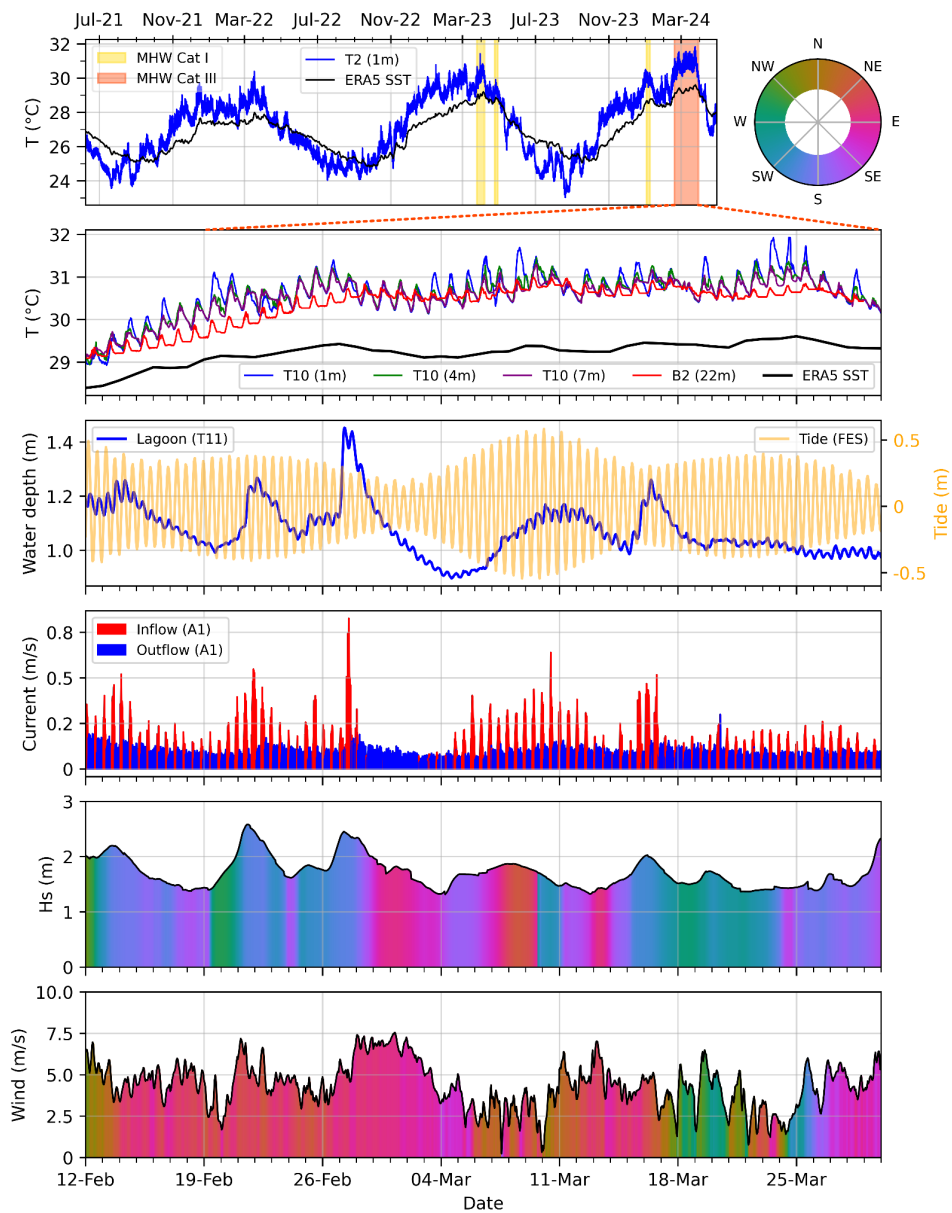

398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422

**Figure 6: From top to bottom: (A) Temperature interannual time series at T2 station (blue) and ERA5 SST at 18.5°S, 136.5°W (black). Marine heatwave categories were computed from a statistical hindcast model of temperature (Van Wynsberge et al., in revision), following Hobday et al. 2016 method, without any detrending of time series and using the period 1993–2022 as climatology (30 years). (B) Zoom on the 2024 MHW category III event at T10 (1 m, 4 m, 7 m), ADCP B2 station and outside the lagoon (ERA5 SST). (C) Lagoon water level at T11 and oceanic tide (recomposed from FES2012 global tide solution at 18.75°S, 136.6°W) and . (D) Current speed and direction (as inflow/outflow between ocean and lagoon) in hoa at A1. (E) Significant wave height and wave direction extracted from ERA5 at 18.75°S, 136.6°W. (F) Wind speed and direction computed from wind components extracted from ERA5 at 18.5°S, 136.5°W.**

Figure 7 displays CTD profiles at two different sampling dates (17 October 2023 and 29 March 2024). Globally, CTD network evidenced a southeast-northwest gradient across the three basins, the northwest basins showing warmer and more saline waters. Toward the southeastern part of the lagoon, temperature and salinity decreased at both dates. CTD profiles network (that did not cover the southeast part of the lagoon) captured on 17 October 2023 shows quite marked vertical stratification, due to low wind before and during the period of measurement. In the shallow Northwest basin, a thermocline and a halocline were well formed, with surface water (~0-5 m depth) warmer and less saline than deeper water. Although similar patterns were observed at some stations in the intermediate basin, stations located closer to the hoa exhibited an inverted temperature profile, with lower temperatures in the surface layer, associated with a pronounced salinity stratification (nearly 0.6 PSU less in surface water than bottom values). These differences are explained by the inflow of fresher and less saline water than the lagoon through the hoa, which primarily affects the surface layer at these stations. During the 2024 MHW event (29 March 2024), water columns displayed limited vertical stratification in terms of both temperature and salinity, probably because of higher wind speed at the time of measurements. Spatial differences nevertheless persisted between basins (highest temperature and salinity in the northwestern basin), and lowest temperatures were found at immediate proximity of hoa (e.g M40, M15, 341 Fig. 3.B) in the intermediate basin.

a supprimé:

424

425  
426  
427  
428

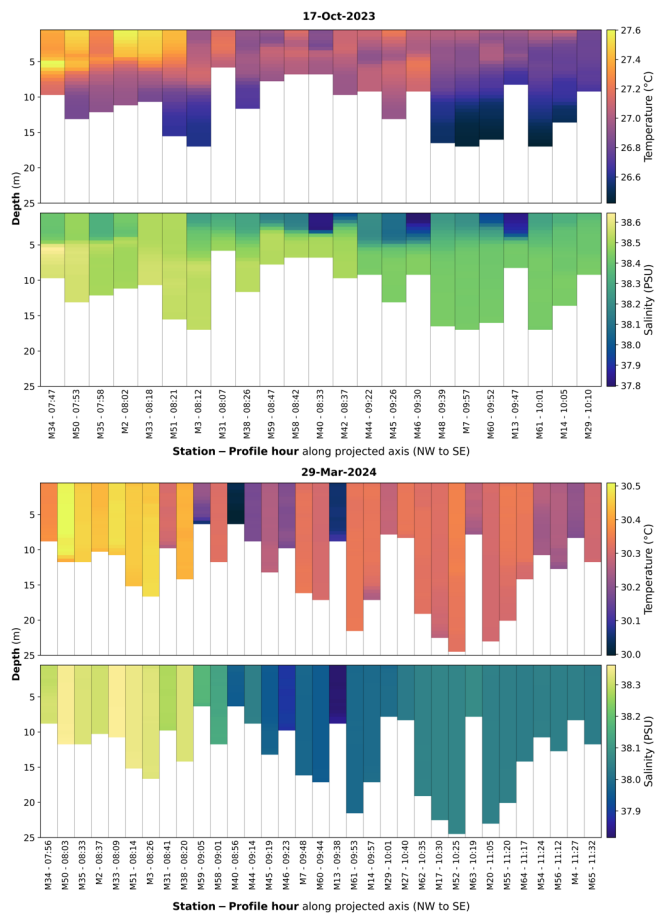


Figure 7: Temperature and salinity profiles for stations projected along Reao's main axis. Profiles are arranged from northwest (left) to southeast (right) across the atoll lagoon. Top: CTD profiles on 17 October 2023. Bottom: CTD Profiles during the 2024 MHW event on 29 March 2024. CTD cast times are given in local time (UTC-10).

a supprimé:

a supprimé: .

431 **7. Data Availability**

432 The whole dataset presented herein is publicly available in NetCDF format through the SEANOE open data platform  
433 (<https://www.seanoe.org/>, Seanoe, 2023) in a dedicated repository.  
434 DOI: <https://doi.org/10.17882/105885> (Le Gendre et al., 2025a).

435 **8. Conclusions**

436 Our dataset presented for the lagoon of Reao Atoll provides a unique and comprehensive record of thermal fluctuations and  
437 hydrodynamics in a semi-closed tropical ecosystem, including an exceptional MHW event in summer 2024. Multi-year and  
438 multi-depth observations will allow for a detailed characterization of the spatial and vertical variability of temperature, ocean-  
439 lagoon exchanges through the *hoa*, internal circulation, and lagoon water level dynamics. Beyond improving our understanding  
440 of the functioning of semi-closed atolls and their vulnerability to thermal stress, these data will provide valuable support for  
441 future modeling (e.g statistical or hydrodynamics) and remote sensing analyses. The availability of the data in a standardized  
442 NetCDF format, along with comprehensive metadata, facilitates reuse for future works.

443

444 **Author contributions.** SVW set up the ANR GAIA project and raised funds. RLG and SVW designed and conducted the  
445 experiments as principal investigators. EL and CC organized, processed, checked, and archived the data sets. EL prepared the  
446 initial version of the paper and designed the figures, with contributions from all co-authors.

447 **Competing interests.** The contact author has declared that none of the authors has any competing interests.

448 **Acknowledgements.** This work was supported by the Agence National de la Recherche [ANR-21-CE32-0011-01 GAIA] and  
449 the Direction des Ressources Marine (DRM). We thank Pahuatini Michel, Liao Vetea, Maamaatuaiahutapu Moana, Moeroa  
450 Matangi, Remoissenet Georges, Richmond Teriipaia, and Varillon David for their assistance with logger maintenance, and the  
451 mayor of Reao Mr M. Lenoir for giving us permission to deploy the instruments in the lagoon. We also extend our gratitude  
452 to Serge Andréfouët and Oriane Bruyère for their advice that helped design the sampling strategy and for providing the map  
453 of French Polynesia.

454 **Financial support.** This research has been supported entirely by the *Agence National de la Recherche* [ANR-21-CE32-0011-  
455 01 GAIA] and the *Direction des Ressources Marines* (DRM) of French Polynesia.

456 **References**

- 457 Amrari, S., Bourassin, E., Andréfouët, S., Soulard, B., Lemonnier, H., and Le Gendre, R.: Shallow Water Bathymetry Retrieval  
 458 Using a Band-Optimization Iterative Approach: Application to New Caledonia Coral Reef Lagoons Using Sentinel-2 Data,  
 459 Remote Sensing, 13, 4108, <https://doi.org/10.3390/rs13204108>, 2021.
- 460 Andréfouët, S. and Paul, M.: Atolls of the world: A reappraisal from an optical remote sensing and global mapping perspective,  
 461 Marine Pollution Bulletin, 194, 115400, <https://doi.org/10.1016/j.marpolbul.2023.115400>, 2023.
- 462 Andréfouët, S., Desclaux, T., Buttin, J., Jullien, S., Aucan, J., Le Gendre, R., and Liao, V.: Periodicity of wave-driven flows  
 463 and lagoon water renewal for 74 Central Pacific Ocean atolls, Marine Pollution Bulletin, 179, 113748,  
 464 <https://doi.org/10.1016/j.marpolbul.2022.113748>, 2022.
- 465 Andréfouët, S., Bruyère, O., Liao, V., and Le Gendre, R.: Hydrodynamical impact of the July 2022 ‘Code Red’ distant mega-  
 466 swell on Apataki Atoll, Tuamotu Archipelago, Global and Planetary Change, 228, 104194,  
 467 <https://doi.org/10.1016/j.gloplacha.2023.104194>, 2023.
- 468 Andréfouët, S., Van Wynsberge, S., and Remoissenet, G.: A typology of giant clam shell deposits in eastern Tuamotu-Gambier  
 469 atolls (French Polynesia) to guide conservation and exploitation measures, Regional Studies in Marine Science, 89, 104364,  
 470 <https://doi.org/10.1016/j.rsma.2025.104364>, 2025.
- 471 Aucan, J., Desclaux, T., Le Gendre, R., Liao, V., and Andréfouët, S.: Tide and wave driven flow across the rim reef of the  
 472 atoll of Raroia (Tuamotu, French Polynesia), Marine Pollution Bulletin, 171, 112718,  
 473 <https://doi.org/10.1016/j.marpolbul.2021.112718>, 2021.
- 474 Bruyère, O., Soulard, B., Lemonnier, H., Laugier, T., Hubert, M., Petton, S., Desclaux, T., Van Wynsberge, S., Le Tesson, E.,  
 475 Lefèvre, J., Dumas, F., Kayara, J.-F., Bourassin, E., Lalau, N., Antypas, F., and Le Gendre, R.: Hydrodynamic and hydrological  
 476 processes within a variety of coral reef lagoons: field observations during six cyclonic seasons in New Caledonia, Earth System  
 477 Science Data, 14, 5439–5462, <https://doi.org/10.5194/essd-14-5439-2022>, 2022.
- 478 Bruyère, O., Le Gendre, R., Chauveau, M., Bourgeois, B., Varillon, D., Butscher, J., Trophime, T., Follin, Y., Aucan, J., Liao,  
 479 V., and Andréfouët, S.: Lagoon hydrodynamics of pearl farming atolls: the case of Raroia, Takapoto, Apataki and Takaroa  
 480 (French Polynesia), Earth System Science Data, 15, 5553–5573, <https://doi.org/10.5194/essd-15-5553-2023>, 2023.
- 481 Bruyère, O., Le Gendre, R., Liao, V., and Andréfouët, S.: Lagoon hydrodynamics of pearl farming islands: the case of Gambier  
 482 (French Polynesia), Earth System Science Data, 16, 667–679, <https://doi.org/10.5194/essd-16-667-2024>, 2024.
- 483 Dumas, F., Le Gendre, R., Thomas, Y., and Andréfouët, S.: Tidal flushing and wind driven circulation of Ahe atoll lagoon  
 484 (Tuamotu Archipelago, French Polynesia) from in situ observations and numerical modelling, Marine Pollution Bulletin, 65,  
 485 425–440, <https://doi.org/10.1016/j.marpolbul.2012.05.041>, 2012.
- 486 Dutheil, C., Andrefouët, S., Jullien, S., Le Gendre, R., Aucan, J., and Menkes, C.: Characterization of south central Pacific  
 487 Ocean wind regimes in present and future climate for pearl farming application, Marine Pollution Bulletin, 160, 111584,  
 488 <https://doi.org/10.1016/j.marpolbul.2020.111584>, 2020.

489 Dutheil, C., Jullien, S., Aucan, J., Menkes, C., Le Gendre, R., and Andréfouët, S.: The wave regimes of the Central Pacific  
490 Ocean with a focus on pearl farming atolls, *Marine Pollution Bulletin*, 162, 111751,  
491 <https://doi.org/10.1016/j.marpolbul.2020.111751>, 2021.

492 Gilbert, A., Yan, L., Remoissenet, G., Andréfouët, S., Payri, C., and Chancerelle, Y.: Extraordinarily high giant clam density  
493 under protection in Tatakoto atoll (Eastern Tuamotu archipelago, French Polynesia), *Coral Reefs*, 24, 495–495,  
494 <https://doi.org/10.1007/s00338-005-0494-2>, 2005.

495 Green, R. H., Lowe, R. J., Buckley, M. L., Foster, T., & Gilmour, J. P. (2019). Physical mechanisms influencing localized  
496 patterns of temperature variability and coral bleaching within a system of reef atolls. *Coral Reefs*, 38(4), 759-771.

497 Grimaldi, C. M., Lowe, R. J., Benthuyssen, J. A., Cuttler, M. V. W., Green, R. H., & Gilmour, J. P. (2023). Hydrodynamic and  
498 atmospheric drivers create distinct thermal environments within a coral reef atoll. *Coral Reefs*, 42(3), 693-706.

499 Hobday, A. J., Alexander, L. V., Perkins, S. E., Smale, D. A., Straub, S. C., Oliver, E. C. J., Benthuyssen, J. A., Burrows, M.  
500 T., Donat, M. G., Feng, M., Holbrook, N. J., Moore, P. J., Scannell, H. A., Sen Gupta, A., and Wernberg, T.: A hierarchical  
501 approach to defining marine heatwaves, *Progress in Oceanography*, 141, 227–238,  
502 <https://doi.org/10.1016/j.pocean.2015.12.014>, 2016.

503 Hobday, A., Oliver, E., Sen Gupta, A., Benthuyssen, J., Burrows, M., Donat, M., Holbrook, N., Moore, P., Thomsen, M.,  
504 Wernberg, T., and Smale, D.: Categorizing and Naming Marine Heatwaves, *Oceanog.*, 31,  
505 <https://doi.org/10.5670/oceanog.2018.205>, 2018.

506 Hersbach, H., Bell, B., Berrisford, P., Hirahara, S., Horányi, A., Muñoz-Sabater, J., ... & Thépaut, J. N. (2020). The ERA5  
507 global reanalysis. *Quarterly journal of the royal meteorological society*, 146(730), 1999-2049.

508 Le Gendre, R., Ladet, E., Chevillard, C., Trophime, T., Bruyere, O., and Van Wynsberge, S.: Lagoon temperature and  
509 hydrodynamics of Reao atoll (Tuamotu Archipelago), <https://doi.org/10.17882/105885>, 2025a.

510 Le Gendre, R., Varillon, D., Fiat, S., Hocdé, R., de Ramon N'Yeurt, A., Andréfouët, S., Aucan, J., Cravatte, S., Duphil, M.,  
511 Ganachaud, A., Gaudron, B., Kestenare, E., Liao, V., Pelletier, B., Peltier, A., Schaefer, A.-L., Trophime, T., Van Wynsberge,  
512 S., Dandonneau, Y., Allenbach, M., and Menkes, C.: ReefTEMPS: the Pacific Islands coastal temperature network, *Earth*  
513 *System Science Data*, 17, 5277–5301, <https://doi.org/10.5194/essd-17-5277-2025>, 2025b.

514 McCabe, R. M., Estrade, P., Middleton, J. H., Melville, W. K., Roughan, M., and Lenain, L.: Temperature variability in a  
515 shallow, tidally isolated coral reef lagoon, *Journal of Geophysical Research: Oceans*, 115,  
516 <https://doi.org/10.1029/2009JC006023>, 2010.

517 Mies, M., Dor, P., Güth, A. Z., and Sumida, P. Y. G.: Production in Giant Clam Aquaculture: Trends and Challenges, *Reviews*  
518 *in Fisheries Science & Aquaculture*, 25, 286–296, <https://doi.org/10.1080/23308249.2017.1285864>, 2017.

519 Neo, M. L., Eckman, W., Vicentuan, K., Teo, S. L.-M., and Todd, P. A.: The ecological significance of giant clams in coral  
520 reef ecosystems, *Biological Conservation*, 181, 111–123, <https://doi.org/10.1016/j.biocon.2014.11.004>, 2015.

a mis en forme : Police :10 pt

a mis en forme : Justifié, Espace Avant : 12 pt, Après : 12 pt, Interligne : Multiple 1,15 li

a mis en forme : Police :10 pt

a mis en forme : Police :10 pt

a supprimé: ¶

522 Pagli, B., Izumo, T., Barboni, A., Chevillard, C., Dutheil, C., Legrand, R., Menkes, C., Rocuet, C., and Cravatte, S.: Marine  
 523 Heatwaves across the central South Pacific: characteristics, mechanisms, and modulation by the El Niño Southern  
 524 Oscillation, *EGUsphere*, 1–35, <https://doi.org/10.5194/egusphere-2025-4166>, 2025.

525 Pirazzoli, A., Delibrias, G., Montaggioni, L. F., Saliège, J. F., and Vergnaud-Grazzini, C.: Vitesse de croissance latérale des  
 526 platiers et évolutions morphologiques récentes de l’atoll de Reao, Iles Tuamotu, Polynésie Française, *Annales de l’Institut*  
 527 *Océanographique*, 63, 57–68, 1987.

528 Quéré, R., Friot, C., Van Wynsberge, S., and Le Gendre, R.: Bathymetry of the lagoon and ho of Reao, Tuamotu Archipelago,  
 529 <https://doi.org/10.17882/108293>, 2025

530 Quere, R., Van Wynsberge, S., and Le Gendre, R.: Optimisation d’une bathymétrie dérivée satellite pour le lagon de Reao,  
 531 Tuamotu, <https://archimer.ifremer.fr/doc/00971/108285>, 2025.

532 Reid, E. C., Lentz, S. J., DeCarlo, T. M., Cohen, A. L., & Davis, K. A. (2020). Physical processes determine spatial structure  
 533 in water temperature and residence time on a wide reef flat. *Journal of Geophysical Research: Oceans*, 125(12),  
 534 e2020JC016543.

535 Rogers, J. S., Monismith, S. G., Kowech, D. A., Torres, W. I., & Dunbar, R. B. (2016). Thermodynamics and hydrodynamics  
 536 in an atoll reef system and their influence on coral cover. *Limnology and oceanography*, 61(6), 2191-2206.

537 Rougerie, F.: Nature et fonctionnement des atolls des Tuamotu (Polynésie Française), *Oceanologica Acta*, 18, 61–78, 1995.

538 Storlazzi, C. D., Gingerich, S. B., van Dongeren, A., Cheriton, O. M., Swarzenski, P. W., Quataert, E., Voss, C. I., Field, D.  
 539 W., Annamalai, H., Piniak, G. A., and McCall, R.: Most atolls will be uninhabitable by the mid-21st century because of sea-  
 540 level rise exacerbating wave-driven flooding, *Science Advances*, 4, eaap9741, <https://doi.org/10.1126/sciadv.aap9741>, 2018.

541 Stammer, D., Ray, R. D., Andersen, O. B., Arbic, B. K., Bosch, W., Carrere, L., ... & Yi, Y. (2014). Accuracy assessment of  
 542 global barotropic ocean tide models. *Reviews of geophysics*, 52(3), 243-282.

543 Teaniniuraitemoana, V., Monaco, C. J., Célariès, M., Jauffrais, T., and Van Wynsberge, S.: Light intensity modulates the effect  
 544 of thermal stress on giant clams and their symbiotic zooxanthellae, *Coral Reefs*, 44, 1449–1465,  
 545 <https://doi.org/10.1007/s00338-025-02708-8>, 2025.

546 Van Wynsberge, S. and Andréfouët, S.: The Future of Giant Clam-Dominated Lagoon Ecosystems Facing Climate Change,  
 547 *Curr Clim Change Rep*, 3, 261–270, <https://doi.org/10.1007/s40641-017-0078-6>, 2017.

548 Van Wynsberge, S., Andréfouët, S., Gaertner-Mazouni, N., Wabnitz, C. C. C., Gilbert, A., Remoissenet, G., Payri, C., and  
 549 Fauvelot, C.: Drivers of density for the exploited giant clam *Tridacna maxima*: a meta-analysis, *Fish and Fisheries*, 17, 567–  
 550 584, <https://doi.org/10.1111/faf.12127>, 2016.

551 Van Wynsberge, S., Menkes, C., Le Gendre, R., Passfield, T., and Andréfouët, S.: Are Sea Surface Temperature satellite  
 552 measurements reliable proxies of lagoon temperature in the South Pacific?, *Estuarine, Coastal and Shelf Science*, 199, 117–  
 553 124, <https://doi.org/10.1016/j.ecss.2017.09.033>, 2017.

554 Van Wynsberge, S., Quéré, R., Andréfouët, S., Autret, E., and Le Gendre, R.: Spatial variability of temperature inside atoll  
555 lagoons assessed with Landsat-8 satellite imagery, Remote Sensing Applications: Society and Environment, 36, 101340,  
556 <https://doi.org/10.1016/j.rsase.2024.101340>, 2024.

557 Wynsberge, S. V.: Approche comparée, intégrée et spatialisée pour la gestion d’une ressource emblématique exploitée en  
558 Polynésie française et Nouvelle-Calédonie le cas du bénitier *Tridacna maxima* : le cas du bénitier (*Tridacna maxima*), thesis,  
559 Polynésie française, 2016.

560 **Appendix A**

561

562 **Table A1.** Detailed list of instruments moored at the Reao lagoon.

| Station  | Instrument | Raw parameters                 | Date Start (UTC)    | Date End (UTC)      | Longitude (deg W) | Latitude (deg S) | Freq       | Depth (m) | Processed parameters                                  | Legs |
|----------|------------|--------------------------------|---------------------|---------------------|-------------------|------------------|------------|-----------|-------------------------------------------------------|------|
| A1       | AQUA DOPP  | Current, pressure, temperature | 2023-10-13 22:00:00 | 2024-03-30 00:40:00 | - 136.389478      | - 18.51418       | 20 minutes | 1.45      | Current speed and direction, temperature, water level | 5    |
| A2       | AQUA DOPP  | Current, pressure, temperature | 2023-10-13 22:00:00 | 2024-03-30 00:00:00 | - 136.360166      | - 18.543549      | 20 minutes | 1.77      | Current speed and direction, temperature, water level | 5    |
| AD CP_B1 | ADCP       | Current, pressure, temperature | 2023-10-14 19:40:00 | 2024-03-08 11:00:00 | - 136.442767      | - 18.474505      | 20 minutes | 17.54     | Current speed and direction, temperature, water level | 5    |
| AD CP_B2 | ADCP       | Current, pressure, temperature | 2023-10-14 01:00:00 | 2024-03-29 08:40:00 | - 136.385366      | - 18.505844      | 20 minutes | 21.71     | Current speed and direction, temperature, water level | 5    |
| AD CP_B3 | ADCP       | Current, pressure, temperature | 2023-10-14 01:00:00 | 2023-12-05 00:00:00 | - 136.318634      | - 18.558222      | 20 minutes | 22.92     | Current speed and direction, temperature, water level | 5    |

|     |            |                                  |                     |                     |              |             |            |      |                                                       |               |
|-----|------------|----------------------------------|---------------------|---------------------|--------------|-------------|------------|------|-------------------------------------------------------|---------------|
| CTD | SBE19 Plus | Conductivity, temperature, depth | 2023-06-02 19:01:00 | 2024-03-29 21:32:00 | X            | X           | 4 Hz       | X    | Conductivity, Temperature, Depth                      | 4, 5          |
| L1  | LOWE LL    | Inclination, temperature         | 2023-06-06 10:00:00 | 2023-08-11 09:59:00 | - 136.389495 | - 18.514144 | 1 minute   | 1.6  | Current speed and direction, temperature, water level | 4             |
| L2  | LOWE LL    | Inclination, temperature         | 2023-06-06 10:00:00 | 2024-01-17 09:59:00 | -136.42875   | - 18.485563 | 1 minute   | 2.0  | Current speed and direction, temperature, water level | 4, 5          |
| L3  | LOWE LL    | Inclination, temperature         | 2023-06-06 10:00:00 | 2024-01-17 09:59:00 | - 136.389495 | - 18.514144 | 1 minute   | 1.6  | Current speed and direction, temperature, water level | 4, 5          |
| L4  | LOWE LL    | Inclination, temperature         | 2023-06-06 10:00:00 | 2024-01-17 09:59:00 | -136.42875   | - 18.485563 | 1 minute   | 2.0  | Current speed and direction, temperature, water level | 4, 5          |
| L5  | LOWE LL    | Inclination, temperature         | 2023-06-06 10:00:00 | 2024-01-17 09:59:00 | -136.42875   | - 18.485563 | 1 minute   | 2.0  | Current speed and direction, temperature, water level | 4, 5          |
| T1  | TWR2 050   | Pressure, temperature            | 2016-12-17 00:00:00 | 2017-06-29 03:30:00 | - 136.411855 | - 18.494014 | 30 minutes | 3.6  | Temperature, water level                              | 1             |
| T2  | SBE56      | Temperature                      | 2021-06-08 10:01:25 | 2025-04-28 09:49:03 | - 136.424779 | - 18.483047 | 20 minutes | 1.25 | Temperature                                           | 2, 3, 4, 5, 6 |
| T3  | RBRd uet   | Pressure, temperature            | 2022-04-29 10:13:29 | 2022-05-06 09:58:29 | - 136.435944 | - 18.472807 | 15 minutes | 1.7  | Temperature, water level                              | 3             |

|        |       |             |                        |                        |                      |                     |                   |      |             |            |
|--------|-------|-------------|------------------------|------------------------|----------------------|---------------------|-------------------|------|-------------|------------|
| T4_2m  | SBE56 | Temperature | 2022-04-30<br>10:00:00 | 2024-03-30<br>09:56:02 | - 136.33306<br>52994 | - 18.56552<br>56421 | 30<br>minu<br>tes | 1.72 | Temperature | 3,<br>4, 5 |
| T4_4m  | SBE56 | Temperature | 2023-10-16<br>10:21:50 | 2024-03-29<br>09:51:50 | - 136.33297<br>96838 | - 18.56549<br>73138 | 30<br>minu<br>tes | 4.5  | Temperature | 5          |
| T4_7m  | SBE56 | Temperature | 2023-10-16<br>10:27:23 | 2024-03-29<br>09:57:23 | - 136.33287<br>95619 | - 18.56548<br>19472 | 30<br>minu<br>tes | 7.0  | Temperature | 5          |
| T5     | SBE56 | Temperature | 2022-04-30<br>10:00:00 | 2023-10-13<br>09:56:07 | - 136.34220<br>1     | - 18.54318          | 30<br>minu<br>tes | 1.8  | Temperature | 3, 4       |
| T6     | SBE56 | Temperature | 2022-04-30<br>10:00:00 | 2024-04-01<br>09:50:25 | - 136.35637<br>7     | - 18.52148<br>2     | 30<br>minu<br>tes | 1.25 | Temperature | 3,<br>4, 5 |
| T7     | SBE56 | Temperature | 2022-04-30<br>10:00:00 | 2023-10-13<br>09:42:32 | - 136.39000<br>2     | - 18.51360<br>7     | 30<br>minu<br>tes | 1.15 | Temperature | 3, 4       |
| T8     | SBE56 | Temperature | 2022-04-30<br>10:00:00 | 2023-10-13<br>09:53:42 | - 136.37624<br>1     | - 18.50116          | 30<br>minu<br>tes | 1.4  | Temperature | 3, 4       |
| T9     | SBE56 | Temperature | 2022-04-30<br>10:00:00 | 2023-10-13<br>09:41:03 | - 136.39676<br>5     | - 18.49756<br>8     | 30<br>minu<br>tes | 1.4  | Temperature | 3, 4       |
| T10_1m | SBE56 | Temperature | 2022-05-04<br>10:29:59 | 2024-03-31<br>09:55:22 | - 136.44257<br>0405  | - 18.48093<br>29083 | 30<br>minu<br>tes | 1.15 | Temperature | 3,<br>4, 5 |

|        |          |                       |                     |                     |                  |                 |            |        |                          |         |
|--------|----------|-----------------------|---------------------|---------------------|------------------|-----------------|------------|--------|--------------------------|---------|
| T10_4m | SBE56    | Temperature           | 2023-10-15 10:23:08 | 2024-03-31 09:53:08 | - 136.4425084927 | - 18.4808935738 | 30 minutes | 4.5    | Temperature              | 5       |
| T10_7m | SBE56    | Temperature           | 2023-10-15 10:25:07 | 2024-03-31 09:55:07 | - 136.4424286355 | - 18.4807671817 | 30 minutes | 7.0    | Temperature              | 5       |
| T11    | RBRd uet | Pressure, temperature | 2022-05-08 10:05:56 | 2024-04-01 17:29:00 | - 136.435903     | - 18.472794     | 15 minutes | 1.0238 | Temperature, water level | 3, 4, 5 |

563  
564  
565  
  
566  
  
567  
  
568

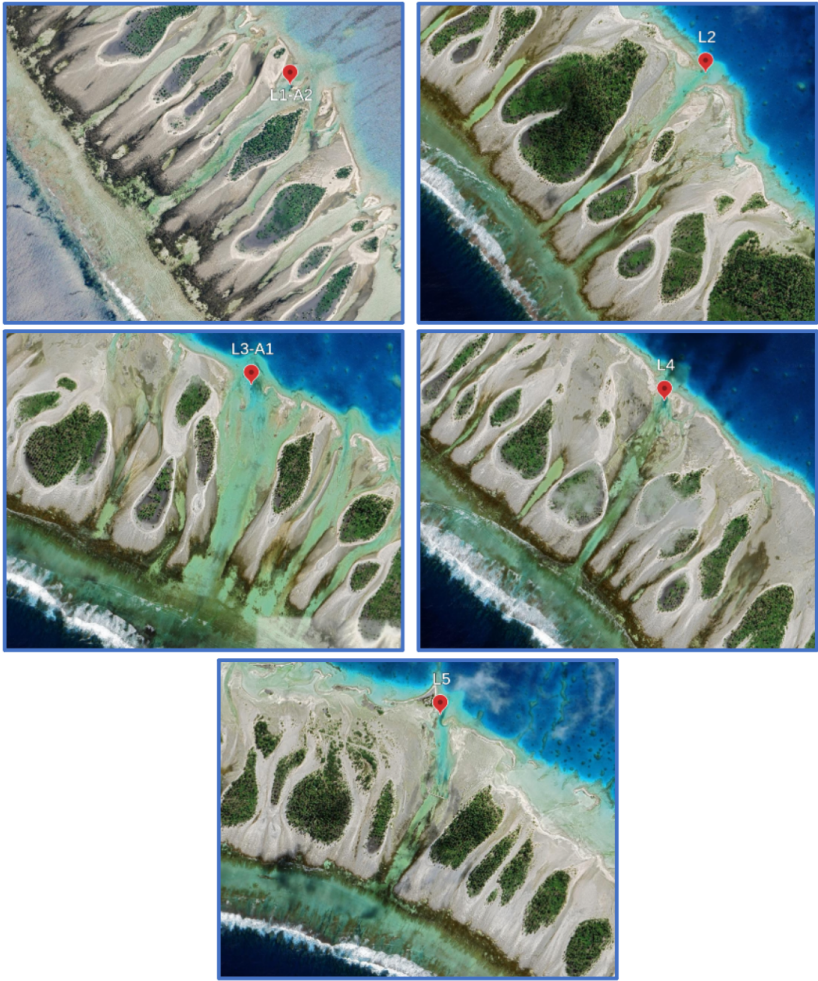


Figure A1: Zooms on the locations of the five instrumented *hoa* (© Google Maps)