

A long-term dataset on hydrology and suspended sediments in the Kamech catchment from the OMERE Observatory

Radhouane Hamdi^{1,2,3,*}, Damien Raclot^{1,*}, Insaf Mekki², Mohamed Gasmi³, and Jean Albergel¹

¹ LISAH, Univ Montpellier, AgroParisTech, INRAE, Institut Agro, IRD, Montpellier, France

² INRGREF, National Research Institute for Rural Engineering, Water and Forestry, Carthage University, Tunis, Tunisia

³ FSB, Faculty of Sciences, Bizerte, Carthage University, Tunis, Tunisia

*These authors contributed equally to this work.

Correspondence: Raclot Damien (damien.raclot@ird.fr)

Abstract

The Mediterranean region is characterized by a highly variable climate marked by prolonged dry spell interspersed with intense rainfall events mainly in autumn. ~~These climatic extremes exacerbate droughts, flash floods and soil erosion, resulting in significant environmental and agricultural challenges across Mediterranean catchments. The dynamics of water and sediment fluxes in these environments are the result of complex interactions between climate, land use and management.~~ Understanding these dynamics of water and sediment fluxes in this climatic context is crucial for recommending effective management strategies to mitigate erosion and runoff impacts. However, high-frequency datasets for both hydrology and sediment fluxes are often lacking for small Mediterranean catchments in North Africa, thus rendering these processes poorly understood.

In this context, the Kamech Critical Zone Observatory was established in 2004 to document high-frequency rainfall, discharge, and sediment fluxes across the 2.63 km² Kamech catchment in Cape Bon, Tunisia. The landscape is characterised by hilly terrain, and the soil type is dominated by Vertisols, which crack for approximately half of the year. This catchment's land is mainly used to cultivate annual cereals and leguminous crops. This catchment, which is dominated by Vertisols. The monitoring system comprises four nested hydrological stations, ranging in scale from the a 1.3-hectare plot to the outlet of the 263-hectare catchment area. The longest time series covers almost 30 years. This article synthesizes the datasets of the observatory related to evaporation, rainfall, discharge and suspended sediment concentration. It describes the methodologies used to collect and process the data, including procedures for assessing data quality. It also suggests additional homogenizedsynthetic_ time series to facilitate subsequent hydrological analysis. Finally, it presents some preliminary explorations of the datasets and it suggests avenues for

further studies. All datasets referenced in this work are openly accessible via the repository:
<https://doi.org/10.23708/PPPPDL> (Raclot and Hamdi, 2025).

1. Introduction

Mediterranean areas face major challenges linked to soil erosion by water, due to their marked relief, frequently sparse vegetation caused by drought or fire, high frequency of intense rainfall and lithologies that are sensitive to meteorological conditions (García-Ruiz et al., 2013). These challenges are also induced by a long history of human occupation with cultivation prone to erosion such as vineyards (Cerdan et al., 2010). Furthermore, the shift from extensive to intensive agriculture during the 20th century has further exacerbated flood and erosion phenomena in some places (Patault, 2018). All these natural and anthropogenic factors explain that ~~sediment yield measurements of erosion exports~~ in watercourses are ranked among the highest in the world (Woodward, 1995; Vanmaercke et al., 2011), generating sedimentation in water bodies, reducing dam capacity, safety and cost effectiveness (Palmieri et al., 2001) and impacting long-term water availability (de Araújo et al., 2014).

The global changes taking place in the Mediterranean region are likely to amplify the threat to water and soil resources (Raclot et al., 2018). In a recent study, Vicente-Serrano et al. (2025) showed that the Mediterranean region is undergoing a process of increasing climatic aridity due to ~~a stationary of~~ annual precipitation and a significant increase in atmospheric evaporative demand. ~~Although~~ precipitation ~~has largely~~ remained largely stationary from 1871 to 2020, ~~these~~ authors identified significant multi-decadal and interannual variability. Moreover, Diodato and Bellocchi (2014) identified a significant increase in extreme precipitation. Long-term data sets from observatories are one of the most effective means of understanding the impact of climate change on the hydrological response and anticipating and adapting to future conditions (Vallebona et al., 2015; Cid et al., 2017; Folton et al., 2020).

Long-term hydrological monitoring infrastructures have been developed to document the hydrological response and the key factors and processes involved. They aim to provide a solid basis for anticipating the hydro-erosive risk and defining mitigation strategies to reduce these negative impacts. Among them, we may cite the “Critical Zone Collaborative Network” (CZNet, <https://criticalzone.org/>), which is the next phase of NSF’s Critical Zone research initiative, or the “Critical Zone Observatories: Research and Application (OZCAR, <https://www.ozcar-ri.org/>), which is a French distributed research infrastructure dedicated to the observation and monitoring of the Critical Zone.

In ~~small~~-Mediterranean catchments, interest in hydro-sedimentary observations stems from the complex interaction between climate, geological composition, agricultural practices, and hydrological dynamics in a context of intermittent regime. Although several comprehensive hydro-sedimentary datasets covering watercourses in the Mediterranean region have already been published (e.g., Nord et al., 2017; Francke et al., 2018; Müller et al., 2021; Klotz et al., 2023; Matthews et al., 2023), it appears that the southern part of the Mediterranean region is severely under-represented, or even entirely absent, when looking for multi-year data series. By analyzing the response of eight small Mediterranean

~~catchments across different environments, Smetanová et al. (2018) showed that the runoff and erosive response occurs generally in a very limited number of days by year (i.e., high time compression). These authors also demonstrated that the extent and seasonality of the hydro-erosive response can differ significantly between catchments, and that this information is crucial for selecting and sizing flood and erosion risk mitigation measures adapted to local conditions.~~

OMERE observatory (<https://www.obs-omere.org/>) is a long-term observatory of soil and water resources, in interaction with agricultural and land management in Mediterranean hilly catchments. It was created in 2002 to fill the lack of long-term environmental observatories in the Mediterranean region (Molenat et al., 2018). It is part of the French network of critical zone observatories OZCAR (Gaillardet et al., 2018) and the European eLTER (European Long-Term Ecosystem, critical zone and socio-ecological Research) network. The OMERE observatory is composed of two Mediterranean agricultural catchments, the Roujan catchment located in France and the Kamech catchment located in Tunisia. Molenat et al. (2018) detailed the specificities and complementarities of these two catchments. A significant feature of the Kamech catchment is the high proportion of vertisols, which exhibit shrinkage cracks for much of the year as a result of swelling and shrinkage processes (Inoubli et al. 2016).

As continuous hydro-sedimentary measurements covering almost thirty years are extremely rare in small southern Mediterranean catchments, it is important to make these observations publicly available. Indeed, it will provide the international scientific community, where comparable datasets are scarce, with a valuable reference for comparative studies, model calibration and designing management and adaptation strategies.

In this paper, we present the data related to hydrological and suspended-sediment fluxes at four nested hydrometrics stations in the Kamech catchment, as well as the precipitation and evaporation data related to climatic forcing. The paper first describes the study site and the monitoring system. It then details the monitoring and data-processing procedures, by describing -This paper details how the data is collected and processed, the types of instruments used, the acquisition protocol, the pre-processing procedures (e.g., using height-discharge rating curve or a water balance model, when applicable) and the assessment of data quality. A first exploration of the database then provides some key elements on the hydro-erosive response observed in the Kamech catchment, ~~and investigates trends in the rainfall, runoff and erosion time-series.~~ In the final section, the interest of the data presented is highlighted by a selection of previous studies and open questions.

2. Presentation of the Kamech catchment and the monitoring infrastructure

The Kamech catchment area (36.877° N, 10.878° E) is located on the Cap Bon peninsula in northern Tunisia (Fig. 1).

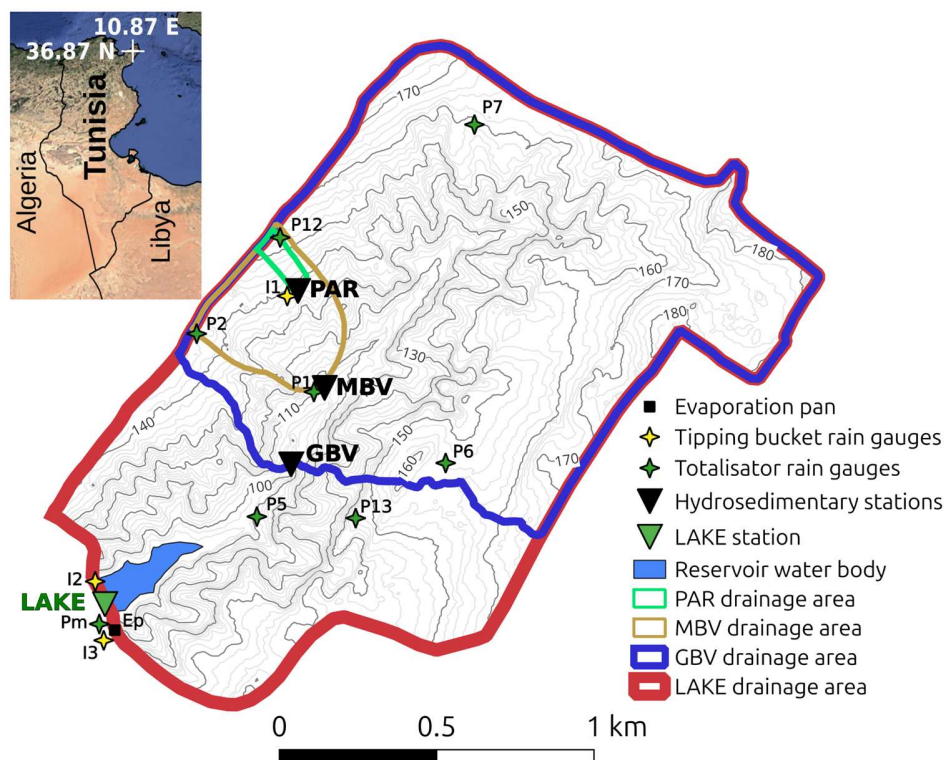


Figure 1. Long-term monitoring infrastructure related to rainfall, discharge and suspended sediment in the Kamech catchment (OMERE observatory).

The Kamech catchment area ~~featuresis~~ a hilly landscape, with altitudes ranging from 95 to ~~190203~~ m and with a moderate to fairly steep relief including slopes that locally exceed 100%. The main parent material in the region is a slightly calcareous laminated mudstone inherited from Miocene marine deposits. The top of the slopes is made up of sandstone outcrops inherited from intercalations of hard sandstone in the parent material. The soils along the hillslopes are directly developed mainly with colluvial processes over and from the Miocene deposits. In descending order of importance, soils can be classified as Vertisols, Calcisols, Cambisols and Leptosols (IUSS Working Group WRB, 2022). According to Khairallah (2025), “soils in the study site area are very clayey (mean and median value to 49 and 53 %, respectively), with a very low fraction of coarse elements (mean and median value to 1.7 and 0.6 %, respectively), with pH ranging from 8 to 9, and very low to moderate soil inorganic carbon content varying from 1 to 30 g kg⁻¹”. Approximately two-thirds of the soils in the catchment show ~~significant-active~~ shrink-swell processes that significantly impact water and sediment delivery (Inoubli et al., 2016). This high proportion of soils dominated by shrink-swell processes makes Kamech an original observatory among existing Mediterranean agro-hydrological observatories. Land use is dominated by annually tilled farmland, including cereal crops and, to a lesser extent, leguminous crops. The remaining area consists of more or less degraded rangelands, housing, tracks and a small water reservoir at the catchment outlet. This reservoir was built in 1994 with an initial storage capacity of 142,000 m³. Its main function is to trap sediment and protect the larger, multi-purpose Lebna reservoir, which is located further downstream. By 2023, it had lost around half of its initial storage capacity. The regulation of the reservoir is limited

to opening a bottom gate when there is a significant risk of overflow. Only a small amount of the water stored in the reservoir is used, and this is for very localised irrigation and for providing water for a small number of livestock. The climate is Mediterranean, predominantly semi-arid, and characterised by pronounced seasonal variations. Summer is very dry, with daily temperatures often exceeding 30 °C and winter is rainy with temperatures averaging around 15 °C. Mean annual rainfall is 620 mm. More details on the rainfall dataset are given in Section 3.2.

The strategy for observing water and sediment flows involves high-frequency acquisition of water levels and concentrations of suspended matter in runoff water. This is achieved using four ~~spatially-nested~~ hydrometric stations ~~that monitoring nested~~ areas ranging from a single 1.3-hectare cultivated plot to the entire 263-hectare catchment area, as shown in Fig. 1. The four hydrometric stations are illustrated in Fig. 2 and the ~~main~~ morphometric characteristics and soil properties of their catchmentimphuvium area are summarised in Table 1.

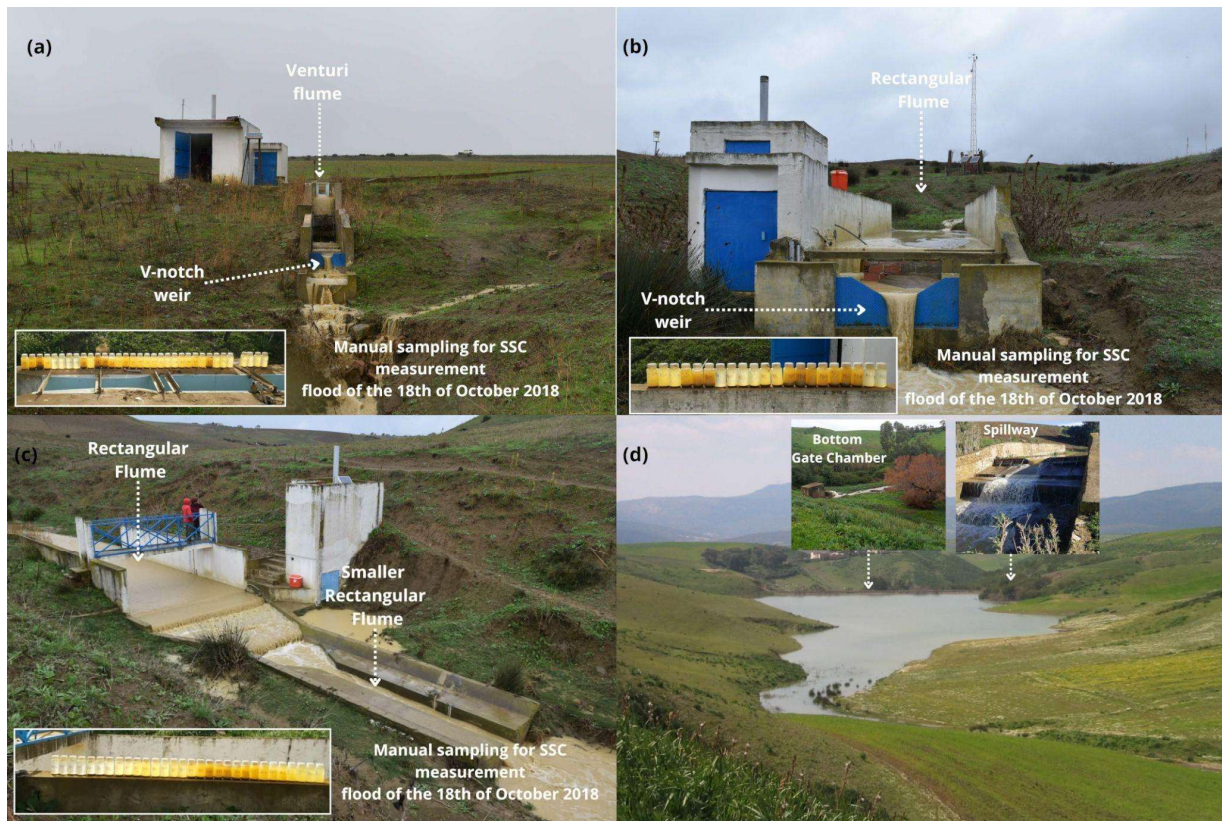


Figure 2. Series of photos illustrating the four hydrometric stations in the Kamech catchment observatory : (a) PAR station-, (b) MBV station, (c) GBV station, (d) LAKE station. ~~Photo-copyright: © Damien Raelot for the main four photos and © Radhouane Hamdi for the additional small photos.~~

Table 1. Main characteristics of the catchment drainage areaimphuvium for the four hydrometric stations.

		Impluvium			
<u>Name</u>	<u>Main characteristics</u>	PAR	MBV	GBV	LAKE
<u>Catchment area</u>	<u>Surface km²</u>	0.013	0.15	1.75	2.63
<u>slope, %</u>	Mean	9.8	11.4	13.3	13.7
	Median	9.3	10.4	10.3	10.5
	Max	25.0	49.9	120.4	120.4
<u>Soil types</u> (% of area)	Vertisols	81.6	66.3	54.3	53.5
	Calcisols	14.1	11.5	23.0	21.3
	Cambisols	0	20.7	13.4	15.9
	Leptosols	4.3	1.5	9.3	9.3
	Cultivated area	109	72.3	74.6	71.6
<u>Land Use</u> (% of area)	Rangelands	10	27.4	18.4	21.4
	Other (housing area + tracks + lake...)	0	0.3	7	7
	<u>Lake (water body)</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>3</u>

3. Data

This section describes the data relating to precipitation, evaporation and water and suspended-sediment fluxes measured on a nested observation system in the Kamech catchment. The summary of the whole measured variables with acquisition periods is presented in Fig. 3. All the automatic devices are equipped with solar panels and batteries. They are all connected to a data loggers (CR1000 or CR300 models, Campbell Scientific, UK) which controls the acquisition of the sensors, stores the data and, since 2018, uploads them remotely to a server.

~~This paper details how the data is collected and processed, the types of instruments used, the acquisition protocol, the pre-processing procedures (e.g., using height discharge rating curve or a water balance model, when applicable) and the assessment of data quality.~~

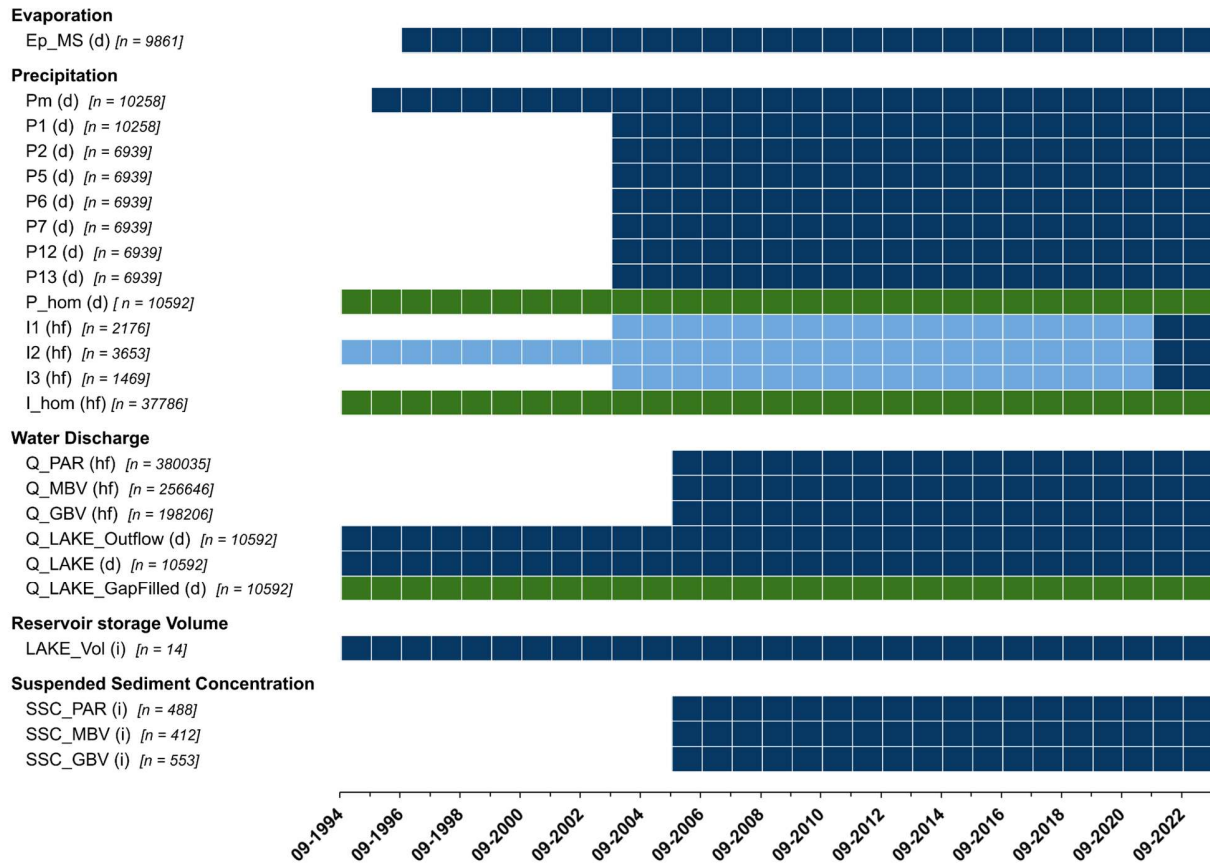


Figure 3. Overview of the acquisition periods for each variable in the dataset (1994-2023). The periods shown in dark blue or dark green correspond to the data in the shared database. Light blue indicates data that is still being qualified and has not yet been entered into the shared database. Blue indicates qualified data in the database, light blue indicates data not yet in the database. Dark green indicates homogenized time series. See Fig. 1 for the location of each acquisition device. The text ‘(d)’ is specified for daily time series, and ‘(i)’ stands for intermittent instantaneous time series, and ‘(hf)’ for high-frequency time series, i.e., with a variable sampling interval to capture temporal dynamics at fine temporal resolution (typically 5 minutes), typically with a resolution time step of 5 minutes or less. The number given in brackets corresponds to the total number of records in each time series in the database.

Codes for sources and quality qualification are presented in Table 2. Most of the data are qualified with a **RAWMB** source, meaning that the data are from raw measurement. For data that have undergone corrections, a distinction is made between low- and high-magnitude corrections (i.e., **LoCMFAC** and **HiCMFOC** source code, respectively). Data that are calculated from raw data, such as discharge which is derived from water level measurement, are qualified with the ‘**CALC**’ source code. Five quality codes have been distinguished to provide qualitative information on the level of data reliability as described in Table 2. When the distinction between the degree of reliability according to codes **F1**, **F2** and **F3** is not relevant, a single “**F**” code has been used to designate reliable data.

To facilitate future analysis of the dataset, this paper also proposed additional ~~homogenized~~~~synthetic~~ precipitation and discharge time series, which are developed from a combination of several individual variables or derived from gap-filled procedures.

Table 2. Codes to ~~indicate the~~~~quality~~ quality and source of each dataset.

Source code	MBRAW	LoCMFAC	HiCMFOC	IND	CALC
Meaning	Raw measurements	Weak Lowly corrected measurements	Highly corrected measurements	Indeterminate (unknown)	Calculated values
Quality code	F3	F2	F1	IND	NF
Meaning	Highly reliable	Moderately reliable	Lowly reliable	Indeterminate (unknown)	Non-reliable

3.1. Evaporation

3.1.1. Measurement

Daily evaporation is manually measured using a 1 m² Colorado-type evaporation pan, ~~which is labelled~~ ~~located at the~~ ~~Meteorological Station~~ ~~Ep in Fig. 1,~~ ~~abbreviated as MS~~. Every day around 8 a.m. UTC, an operator measures the volume of water that needs to be added or removed to return to a reference level in the tank of the evaporation pan.

3.1.2. Data processing and qualification

Daily evaporation amount (in mm) is then evaluated as the difference between the volume of water measured each day in the evaporation pan and the daily rainfall measured locally in Pm (see Fig. 1)~~the MS~~. Measurement accuracy is estimated at 0.5 mm.

By default, measurements are qualified with a RAWMB source code and a F3 quality code. On the infrequent days when the operator has been unable to take the measurement, a value of 'NA' is indicated with an 'IND' source code and an 'IND' quality code. The daily evaporation value for the day following a period with 'NA' is indicated with a 'RAWMB' source code and a 'NF' quality code, and a comment is added to clarify indicating that it is a cumulative value ~~is added~~.

3.2. Precipitation

3.2.1. Measurement

The measurement of rainfall began in 1994 using with a tipping bucket rain gauge (tipping threshold: 0.5 mm), and a ~~standard-totalisator direct-reading~~ rain gauge, which are labelled I2 and Pm, respectively, in Fig. 1-located at the Meteorological Station. The measuring equipment was subsequently supplemented in 2003 by a series of 2 additional tipping bucket rain gauges (I1 and I3, with tipping threshold of 0.25 mm ~~or~~ and 0.52 mm, respectively) and a series of 7 additional ~~standard-totalisator direct-reading~~ rain gauges within the catchment area (i.e., P1; P2; P5; P6; P7; P12 and P13). The model is 'SPIEA, FR' for totalisator rain gauges and 'PRECIS MECANIQUE #3029, FR' for tipping bucket rain gauges. All the rain gauges have a receiving cone surface of 400 cm². Data for tipping bucket rain gauges are stored in a logger system that records tipping times. Measures of S~~standard totalisator direct-reading~~ rain gauges are ~~madetaken~~ daily at around 9 a.m. local time (i.e., 8 a.m. UTC) by an operator, providing a daily rainfall measurement with an accuracy of 0.25 mm up to 10 mm and 0.5 mm for larger daily amounts. All tipping bucket rain gauges are checked frequently and cleaned if necessary to prevent clogging.

3.2.2. Data processing and qualification

By default, all daily rainfall amounts recorded by the operator are qualified with a 'RAWMB' source code and considered as reliable (F3~~'F'~~ quality code). A ~~checking~~control procedure consisting of visually comparing the amount of daily rainfall between all the other rain gauges enables anomalies, such as reading or data entry errors, to be identified manually. Data detected as anomalous is given an 'NF' quality code. The daily rainfall value for the periods when a ~~totalisatordirect-reading~~ rain gauge is not operational due to vandalism, for example, is indicated as NAa, with an 'IND' quality code. On the infrequent days when the operator has been unable to take the measurement, a value of 'NA' is indicated with an 'IND' quality code. The daily rainfall amount for the day following a period with 'NA' is indicated with a 'RAWMB' source code and a 'NF' quality code, and a comment indicating that the value corresponds to a cumulative value is added.

By default, all ~~high-frequency instantaneous~~ rainfall recordings are qualified with a 'RAWMB' source code and a 'F3' quality code. The measurements corresponding to the calibration tests are first removed from the time series. ~~They are easily identifiable because each calibration test is recorded in a field notebook.~~ A two-step ~~checking~~control procedure is then applied to identify periods of failure. The first step consists in comparing the daily accumulated values derived from the rain gauge tipping buckets with the daily rainfall amounts derived from all rain gauges. The second step consists in comparing the 5-minute rainfall intensities between the tipping bucket rain gauges to identify failures such as partial or complete clogging. For periods of complete failure, 2 consecutive ~~records~~lines with 'NA' as values and 'IND' as source and quality codes are entered in the measurement file to the start and end of the failure. For periods of malfunction, the raw recordings are kept and the NF quality code is assigned. Note that every malfunction identified by the operator during his recurring visits is also recorded in the field notebook, enabling particular attention to be paid to the quality of the data concerned.

3.2.3. Additional ~~homogenized synthetic~~ rainfall time series

~~An high-frequency homogenized instantaneous synthetic~~ time series and a daily ~~homogenized synthetic~~ time series of rainfall measurements over the entire 1994-2023 period are provided in addition to the previous individual daily or ~~instantaneous high-frequency~~ rainfall time series.

The ~~homogenized synthetic~~ daily rainfall time series (from 8 a.m. to 8 a.m. UTC the following day) is produced using the average of all reliable daily rainfall records provided from the eight ~~totalisator direct-reading~~ rain gauges and calculated from the three tipping-bucket rain gauges. On the rare days when the operator was unable to take the measurement, the cumulative daily rainfall recorded on the ~~totalisator direct-reading~~ rain gauge on the day following the NA period was first distributed over the days without recording using the daily rainfall distribution derived from tipping bucket rain gauges. The daily ~~homogenized synthetic~~ time series is qualified with a ~~CALC~~ source code 'CALC' and a ~~F3~~ quality code 'F', except for the period prior to 1/9/2004 for which an ~~IND~~ quality code 'IND' is assigned because there were not enough rain gauges to guarantee reliable daily rainfall value.

The ~~homogenized instantaneous synthetic~~ rainfall time series is compiled from the three rainfall tipping bucket rain gauges, retaining only reliable values, and applying the following order of priority from 2003 onwards: I1 > I2 > I3. This choice is based on the fact that the I1 rain gauge is slightly more centrally located in the catchment area than the two others. The ~~homogenized instantaneous synthetic~~ time series is qualified with a ~~RAW~~ source code 'MB' and a ~~F3~~ quality code 'F', except for the period prior to 1/9/2004 for which an ~~IND~~ quality code 'IND' is assigned because there was only one operational tipping bucket rain gauge in the catchment.

3.3. Water discharges at hydrosedimentary stations

3.3.1. Measurement

Each hydrosedimentary station has been designed to measure water levels at two points, one suitable for low flows (LQ) and the other for high flows (HQ), as illustrated in Fig. 2. For the PAR station, the gauging system is a Venturi

flume for HQ and a V-notch weir for LQ. For the MBV station, the gauging system is a rectangular flume for HQ and a V-notch weir for LQ. For the GBV station, the gauging system is a rectangular flume for HQ and a smaller rectangular flume for LQ. Water levels for each station are recorded using digital piezoresistive pressure transducers~~digital sensors~~ (CS451, Campbell Scientific, UK~~e.g. pressure probe~~) at these two measurement points. Measurements are taken with a time step of 1 minute and recorded when height variations exceed 5 mm or systematically every 30 minutes. Water level sensors are accurate to within a few millimetres. Each measuring point is equipped with a limnimetric scale, i.e., a metal ruler, so that an operator can manually read the water level on a daily basis, or even more frequently in the event of flooding.

3.3.2. Data processing and qualification

The time series of raw water levels are first compared with the scales readings in order to identify any biases. Biases are mainly induced by changes in the vertical position of the digital sensors during cleaning operations, for example. A piecewise bias-correction is then made to the raw water levels to bring them into line with the scale readings. When necessary, corrections are generally less than one or two centimetres.

Flow discharges are then derived from bias-corrected water levels using a rating curve specifically elaborated for each monitoring point. The rating curves were all based on information supplied by the manufacturer (e.g. for the Venturi flume) or theoretical laws (e.g. for the V-notch weir), then adjusted locally by episodic discharge measurements taken during floods~~flow control measurements~~. The latter were carried out on several occasions in order to cover the full range of possible flow rates. They were carried out by recording the time required to fill a container of known volume for low flow rates, and by measuring the velocity profile across cross-sections using a portable FLO-MATE electromagnetic current meter (Model 2000, Marsh-McBirney, USA) for high flow rates. The water discharge time series for each hydrosedimentary station was compiled from a combination of the LQ and HQ discharge time series, using the most accurate measurement source at each instant.

By default, the origin and quality of the water discharge time series for each hydrosedimentary station are set to LoCMFAC and F3. If there are gaps at the measurement point suitable for low discharges (LQ), it may be necessary to use the HQ discharge values, but in this case the quality code has been changed from F3 to F2 for the PAR station (because the Venturi flume provides an accurate discharge rate even for low values); and from F3 to F1 for the MBV or GBV stations. If there are gaps at the HQ measurement point, a gap period is inserted (NA value at the start and end) for the corresponding periods. In some cases, discharge values exist for the appropriate discharge range but they are derived from water levels of altered quality. This happens, for example, when there are heavy deposits of sediment at the point where the water level is measured. These periods of flow obstruction are detected through reports made by the operator during their regular site visits and through visual analysis of water level fluctuations. If this is the case for LQ discharges, either the code source was changed from F3 to F2 or from F3 to F1 depending on the estimated level of distortion, or the HQ discharge values were used and the quality code was modified according to the rule mentioned above. If this is the case for HQ discharges, either the quality code source was changed from F3 to F2 or from F3 to F1 depending on the estimated level of distortion. Where distortions were considered too great, a gap period has been introduced.

3.4. Runoff ~~depths~~rates at the LAKE station

3.4.1. Measurement

The water level in the outlet reservoir, i.e., at the LAKE station, is monitored using a digital piezoresistive pressure transducer (CS451, Campbell Scientific, UK)~~pressure probe~~. Raw measurements are made every 5 minutes and they are recorded when height variations exceed 10 mm or systematically every 60 minutes. The outlet reservoir is equipped with a limnimetric scale so that an operator can manually read the water level on a daily basis, or even more frequently in the event of flooding. The spillway has been designed so that the overflow discharge can be accurately estimated from the water level using a rating table. This table was made up of two theoretical curves: one for the V section, adjusted locally by flow control measurements, and one for the water level over the V section of the spillway. The periods during which the bottom gate is open are recorded manually, enabling the flow rate discharged to be estimated from the water level using a theoretical curve adjusted locally by flow control measurements. Lastly, the depth/volume and depth/surface curves of the reservoir are established on the basis of topo-bathymetric surveys carried out every 2 to 5 years.

3.4.2. Data processing and qualification

As with the hydrosedimentary stations, the time series of raw water levels are first compared with the scale readings and a piecewise bias correction is then applied to the raw water levels to bring them into line with the scale readings. Then daily runoff entering into the reservoir (Q_{LAKE}) could be derived using an hydrologic budget as described in Albergel et al. (1998). Basically, the flow into the lake is evaluated as the variation in the stock of water in the reservoir, to which is added the volume of water leaving through overflow, the bottom gate and evaporation, and from which is subtracted the volume of rainwater falling directly onto the water body. The hydrological balance was established on a daily time step, with the value for day D corresponding to the daily runoff entering the reservoir between day D at 8 a.m. UTC and day D+1 at 8 a.m. UTC, in order to be in line with the operator's field surveys.

By default, Q_{LAKE} is qualified with a CALC source code 'CALC' and a F3 quality code 'F3', except for the period with overflow or bottom discharge for which a F2 quality code 'F2' is assigned because the corresponding terms in the hydrological budget are estimated less accurately. When there are gaps in the time series of water levels (e.g. sensor failure) and overflow or bottom discharge occurs, the daily runoff entering the reservoir is set to NA, with an IND code source 'IND' and an IND quality code 'IND'. The daily time series of outflow from the reservoir via the spillway and/or bottom gate, labelled Q_{LAKE} Outflow, is also provided. By default, it has a CALC source code and a F2 quality code. In the LAKE_Vol time series, we also shared the evolution of the reservoir's water storage volume, established from the 14 bathymetric surveys conducted between 1994 and 2023. By default, it has a CALC source code and a F2 quality code.

3.4.3. Additional homogenizedsynthetic time series of daily runoff

A synthetic gap-filled time series of daily runoff depth is proposed for the lake station over the entire 1994-2023 period. Gap-filling was realized using the GR5J model and the procedure available in the baseflow R package (Coron et al., 2017, Pelletier and Andréassian, 2020). The daily gap-filledsynthetic time series is qualified with the same source code and quality code as the water discharge values for the day in question. The gap-filled values are qualified with a CALC source code 'CALC' and an IND quality code 'IND'. A specific comment is also added to indicate the values derived from the GR5J gap-filling procedure.

3.5. Suspended sediment concentration

3.5.1. Measurement

Manual and automatic water samples are used to evaluate suspended sediment concentrations (SSC) in runoff water at each hydrosedimentary station. Automatic samples are taken using a 24-vial sequential sampler (SIGMA 900P or AS950, Hach-Lange, USA), the sampling of which is controlled by the flow rate. The capacity of each vial is either 350 ml for glass vials or 500 ml for plastic vials. They are supplemented by manual sampling of approximately 500 ml when an operator is present at the site during flooding. Samples were transported after each flood to the laboratory for oven drying (48 h at 105 °C, without prior decanting or filtration) and weighing.

3.5.2. Data processing and qualification

SSC is calculated as the ratio of the dry weight to the sample volume. The measurement uncertainty associated with the SSC is estimated at 5 % maximum.

The SSC values are all qualified by default with a RAW source code 'MB' and a F3 quality code 'F'. The quality code was modified in NF for a few values deemed unreliable, in particular very high concentrations at the end of major floods when it is suspected that the sample taken is affected by the deposit of sediment at the strainer. An additional comment indicates for each SSC value whether the value comes from a manual or automatic sample.

4. Preliminary explorations of the database

In this section, we propose characterising the key elements of the hydro-sedimentary regime and investigating trends in rainfall, runoff and erosion time series using the database presented in this paper. In addition, we also combined the time series of discharge and suspended sediment concentration at the GBV station to evaluate the daily sediment yield (in t ha⁻¹) over an 18-year period (from 2005 to 2023) to be used for the time compression and trends analysis for

erosion. This required the development of a specific regression-based gap-filling procedure, the description of which is beyond the scope of this paper.

4.1. Runoff depthSpecific Streamflow discharge at the four nested stations

Figure 4 presents the matrix of pair plots with the runoff depth measured at the four hydrometric stations between 2005 and 2023. The upper part of the matrix corresponds to pair plots computed from daily data, while the lower part shows those obtained at the monthly scale. Overall, the runoff flows recorded at the four stations are strongly correlated, which suggests that the main driving factors of runoff generation are likely very similar from field to catchment outlets. Differences in soil type, land use or surface condition between catchment areas are among the factors that may explain the observed patterns of dispersion.

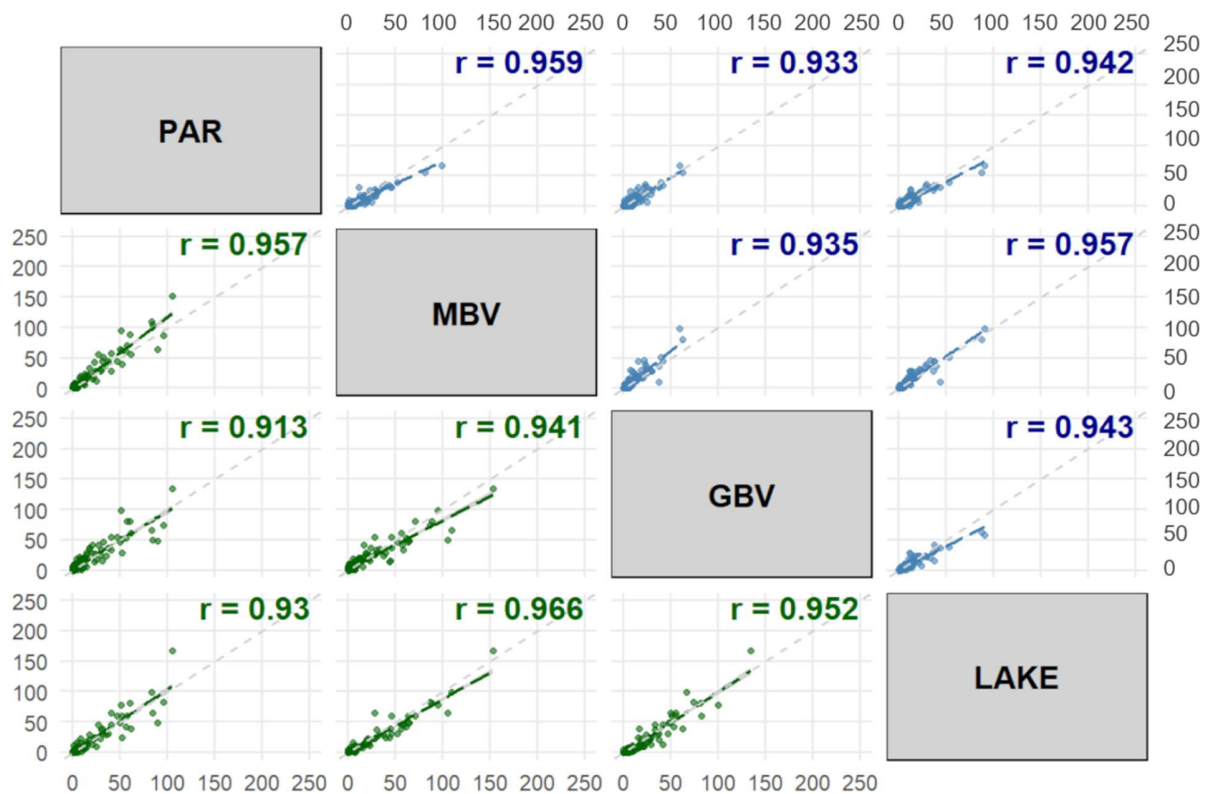


Figure 4. Correlation matrix of runoff depth-discharge (in mm) for the four stations over an 18-year period: upper triangle for monthly values ($n = 216$), lower triangle for daily values ($n = 6574$). The red dashed line indicates $y = x$.

4.2. Hydro-sedimentary regime

4.2.1. Interannual and intrannual variability

Figure 5a depicts the interannual variability of the rainfall regime in the Kamech catchment. Annual rainfall amounts range from a minimum of 395 mm yr⁻¹ to a maximum of 1036 mm yr⁻¹, resulting in a ~~range n-amplitude~~ of 642 mm. The standard deviation is approximately 150 mm around an interannual mean of 618 mm. ~~The annual runoff response is as variable as precipitation.~~ Annual runoff rates range from 2.2 mm to 275.5 mm, with a standard deviation of 84.5 mm around a mean close to 108 mm yr⁻¹ at the LAKE Station. The annual runoff coefficient, defined as the ratio of annual discharge to annual precipitation, exhibits considerable variability, with a standard deviation of 10.8 %, an interannual mean around 16 %, and a range from 0.5 % to 38 %.

Figure 5b shows the intra-annual variations of runoff discharge and suspended sediment concentration (SSC) at GBV hydrometric station. For runoff, maximum rates are observed from December to March, with intermediate values in November. For SSC, maximum values are observed in September and October, and then quickly decrease, with intermediate values in November. As a result, there is a significant seasonal lag between runoff rates and suspended sediment concentrations, which greatly affects sediment yield dynamics in the catchment area.

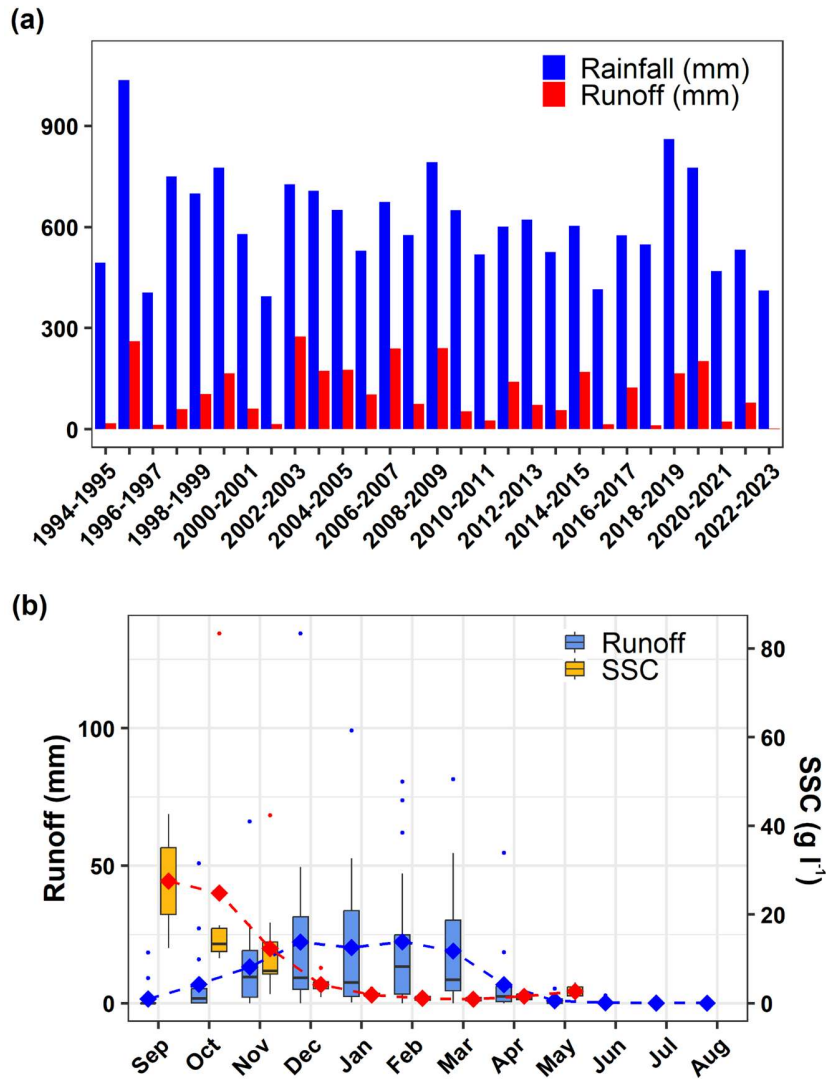


Figure 5. (a) Interannual variability of rainfall and runoff at the LAKE Station between 1994 and 2023; (b) Monthly variability of runoff and SSC at the GBV station between 2005 and 2023.

4.2.2. No flow occurrence

The analysis of the daily discharge time series at the catchment outlet (i.e., Q_{LAKE}) shows a mean of 258 days with zero-flow per year over the period 1994-2023 (Fig. 6). ~~Notably RemarkableIn other words~~, discharge from the catchment is highly intermittent, as it only occurs 30 % of the time. Figure 4 also indicates the number of dry periods, a dry period being defined as consecutive days without flow discharge at the catchment outlet. The number of dry periods per year ranged from 15 to over 50, highlighting the very frequent changes between periods of flow and no flow.

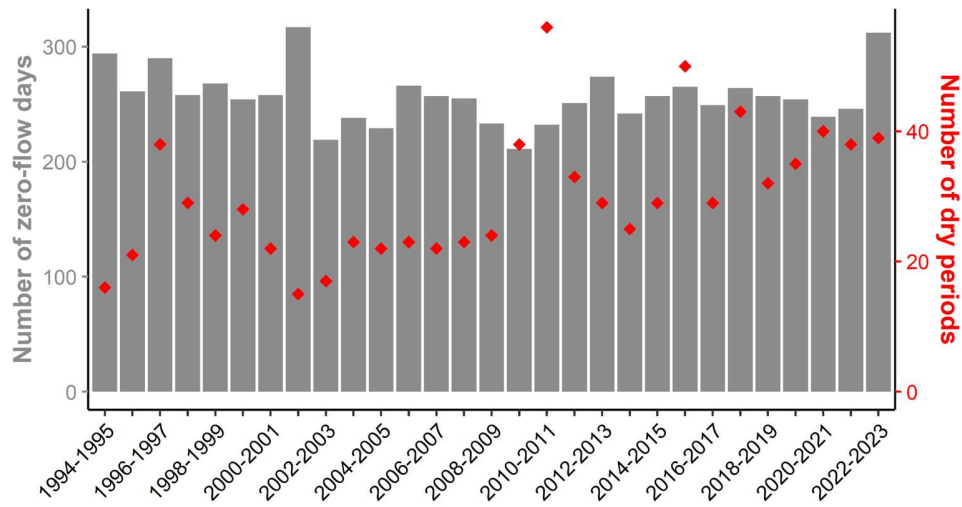


Figure 6. Number of periods with zero flow and dry periods per year (1994–2023)

Analysis of the cross-correlation between precipitation and discharge enables a rapid estimate of the lag time (t_{lag}), which is a measure of how quickly a stream responds to runoff-producing rainfall (Sultan et al., 2022). According to these authors, the lag time corresponds to about two-thirds of the time of concentration. Figure 7 shows the cross-correlogram drawn up for the 2005–2023 period using the precipitation and discharge time series at the GBV station at 5-minute time steps. It highlights narrow peaks with very low time lag ranging from 15 minutes in autumn to 50 minutes in spring. These results show that the Kamech catchment is highly reactive, with sub-hourly lag time. ~~This means that flash floods highly dominate in this catchment.~~

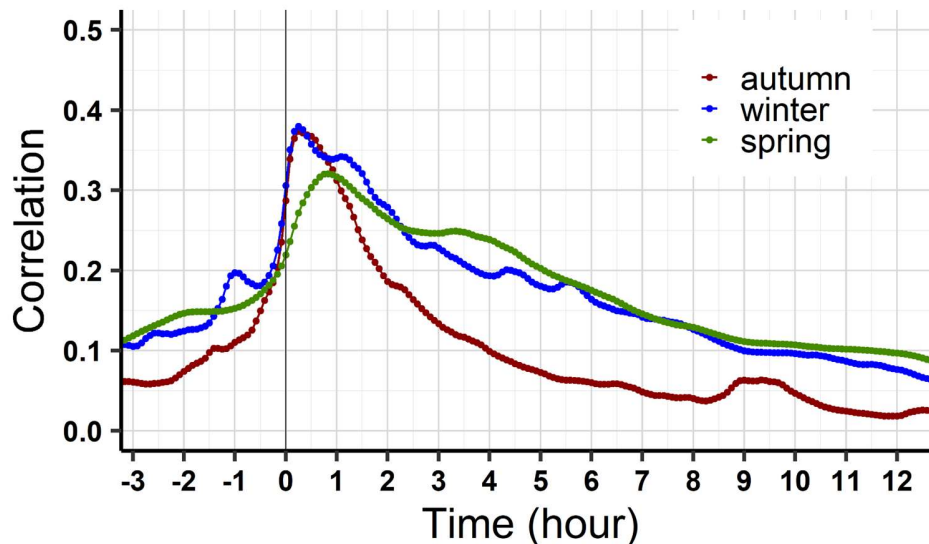


Figure 7. Seasonal cross-correlation between precipitation and discharge at the GBV station elaborated with time series at 5-minute time steps. Note that The summer season is excluded because there are few runoff events during this time.

4.2.3. Baseflow contribution

A series of base flow separation methods (Table 3) was applied to the daily discharge entering the outlet reservoir (Q-LAKE time series) to derive the baseflow index, which represents the percentage of slow or delayed components to the streamflow. Five hydrograph separation methods come from the R “grwat” package (Rets et al., 2022). They were applied with the default parameters proposed in the package. A sixth one comes from the baseflow package (Pelletier and Andréassian, 2020), and is considered more impartial as it integrates a way to estimate the parameters entering in the flow separation procedure. As shown in Table 3 below, the contribution of baseflow varies depending on the algorithm applied from 3 to 14 %, confirming the very high reactivity of the Kamech catchment, and therefore a presumed very low contribution of groundwater to the streamflow.

Table 3. Estimation of the slow or delayed flow contribution to streamflow at the Kamech outlet.

algorithm	Boughton (1993)	Jakeman and Hornberger (1979)	Lyne and Hollick (1979)	Chapman (1991)	Chapman and Maxwell (1996)	Pelletier and Andréassian (2020)
% of slow or delayed flow to streamflow	14	11	7	3	5	9

4.2.4. Duration curvesTime-compression

~~The concept of time compression in hydrology and erosion refers to the phenomenon whereby significant geomorphological changes occur within a short time frame, often as a result of extreme events. The level of time compression in a catchment may have direct implications for land management practices (Molina et al., 2020; Smetanová et al., 2018; Cheng et al., 2017).~~

In this paper we characterized the duration curves ~~time-compression~~ in the Kamech catchment during the 18-year period between 2005 and 2023 using ~~the homogenized synthetic daily precipitation time series and~~ the gap-filled daily ~~runoff depth~~discharge and ~~specific~~ sediment yield at the GBV station (Fig. 8). ~~The r~~Results show ~~that a runoff depth over 10 mm/day occurred less than 1% of the time, which equates to 42 days during the 18-year period or an average of 2.3 days per year.~~a very significant time compression, with 75 % of precipitation, flow, and sediment yield occurring during only 427 days, 302 days, and 28 days, respectively, representing 6.5 %, 4.6 %, and 0.4 % of the period considered. Figure 8a shows the number of days during which daily discharge exceeds various thresholds ranging from 10 to 100 mm. Less of 1 % of the time (i.e, 42 days) with a streamflow discharge over 10 mm/day were observed, i.e. an average of 2.3 days per year. The average number of annual days decreases to less than 1 when considering a threshold of 20 mm d⁻¹, whereas one day exceeded 60 mm during the considered period. ~~The contribution of extreme events to total fluxes is even more important for sediment yield than for runoff, as seen in Fig. 8b.~~ During the 18-year

period, only 44 days exceeded 0.5 t ha^{-1} , 30 days exceeded 1 t ha^{-1} , 12 days exceeded 2 t ha^{-1} and one day exceeded 160 t ha^{-1} . Results also show that 75 % of flow and sediment yield occurred during only 302 days, and 28 days, respectively, representing 4.6 %, and 0.4 % of the period considered.

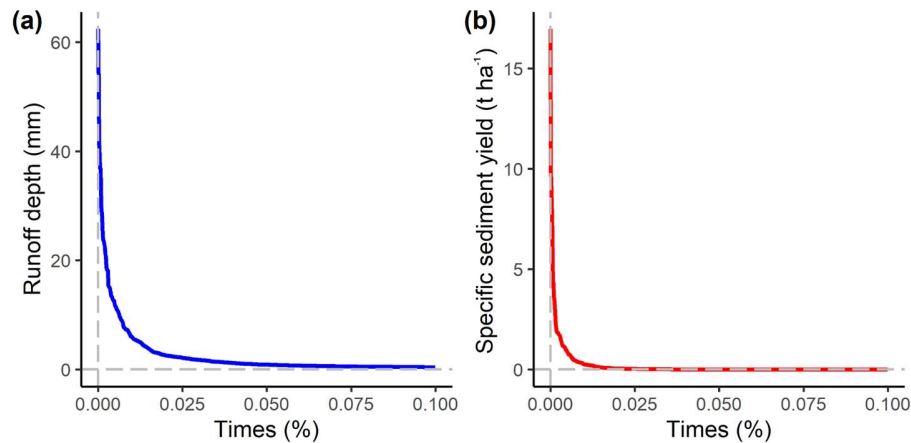


Figure 8. Percentage of timeNumber of days exceeding a daily runoff threshold (a) and a daily sediment yield threshold (b) at the GBV station during the 18-year period between 2005 and 2023.

4.2.5. Key points about the hydro-sedimentary regime

The hydro-erosive regime in Kamech catchment is clearly non-perennial, it can be classified as ephemeral according to the classification proposed by Busch et al. (2020). Indeed, our preliminary analysis shows that streamflow occurs during a very short percentage of time and almost exclusively in response to precipitation events. The very significant time-compression in time of the runoff and the sediment yield -observed in the catchment emphasised the importance of accurately and comprehensively documenting the response of extreme events, which are rare but account for most of the runoff and sediment fluxes in a Mediterranean context as already shown by Gonzalez-Hidalgo et al. (2007).

4.3. Trends in the rainfall, runoff and erosion time series

The dataset acquired within the framework of the OMERE observatory over a period of approximately 30 years provides an opportunity to explore if trends can be detected in the rainfall, runoff and erosion time series. The analysis was made for annual, seasonal and monthly values derived from the synthetic daily rainfall time series (1994-2023), the gap filled time series of daily runoff for the lake station (1994-2023), and the gap filled time series of daily sediment yield established at the GBV station (2005-2023). Trend analysis for rainfall maximum precipitation from 5-minutes to 12-hours was based on the synthetic maximum rainfall time series (1994-2023). The annual timestep corresponds to the hydrological year, running from September 1st to August 31st. Autumn covers the period from September 1st to November 30th; winter spans from December 1st to February 28th (or 29th in leap years); and spring extends from March 1st to May 31st.

The presence of trends was tested using the Sen's slope technique, and their statistical significance achieved using the Mann-Kindall test. Only trends with a significant p-value under 0.1 were shown in Table 3 and discussed below.

Table 4. Sen slope estimates for time series trend analysis of precipitation, maximum rainfall intensity, runoff and erosion rate at different time steps. The time series for precipitation and runoff cover 29 years, while those for erosion cover 18 years. Values underlined in bold refer to Sen's slope values with a Mann-Kindall test p-value of less than 0.05; other values refer to slope values with a Mann-Kindall test p-value between 0.05 and 0.1; and “-” indicates no trend considering a p-value threshold of 0.1.

		Annual	Season				Month												
			Aut	Win	Spr	Sum	9	10	11	12	1	2	3	4	5	6	7	8	
Rainfall(sum)		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Rainfall (max. intensity)	05min	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	15min	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	30min	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	01h	-	-	-	-	-	-	-	0.27	-	-	-	-	-	-	-	-	-	
	02h	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-0.02	-	-	
	03h	-	-	-0.09	-	-	-	-	-	-	-	-	-	-	-	-	0.004	-	-
	06h	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	12h	-	-	-	-	-	-	-	0.04	-	-	-	-	-	-	-	-0.01	-	-
	24h	-	-	-0.78	-	-	-	-	0.57	-0.40	-0.60	-	-	-	-	-	-	-	-
Runoff(sum)		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Number of days with zero-flow		-	-	-	-	-	-	-	-0.33	-	0.42	-	-	-	-0.08	-	-	-	
Erosion (sum)		-	-	-	-	-	-	-	0.05	-	-	-	-	-	-	-	-	-	

Annual and monthly precipitation in the Kameeh catchment has remained largely unchanged over the last thirty years. This result is in line with the study by Vicente-Serrano et al. (2025), who found that precipitation in the Mediterranean region is highly variable over time but does not show a consistent trend. However, certain seasonal or monthly trends have been detected in terms of maximum precipitation intensity, indicating certain changes in the intra-annual rainfall regime and, more specifically, in the timing and intensity of maximum rainfall events.

No significant trends were observed in the annual and monthly runoff, consistent with the lack of significant trends in the corresponding precipitation time series. Similarly, no trend was found in the annual number of days without runoff.

However, significant trends emerged for the number of days without runoff during specific months, likely reflecting shifts in the timing and intensity of maximum rainfall events.

Regarding erosion, the only significant trend identified is an increase in total sediment yield in November. A possible explanation could be the observed upward trend in maximum rainfall intensities over 1 hour, 12 hour, and 24 hour durations during November.

Finally, this analysis reveals no significant trends in annual rainfall, runoff, or erosion. However, it detects minor shifts in the timing of days without runoff and erosion events, likely attributable to subtle changes in the temporal distribution and intensity of peak rainfall throughout the year. These subtle changes have an obvious impact on the annual number of dry periods between 1994 and 2023 (see Fig. 4), with a significant upward trend (Sen slope = +0.7; p-value = 2×10^{-4}). Longer time series are required to determine whether these trends are persistent or if they are associated with multi-decadal variability.

5. Examples of previous studies and open questions

The dataset presented in this paper has multiple applications for addressing questions related to hydrological risks, including flood events and severe erosion, as well as risks to agricultural production associated with the frequency of drought episodes. As briefly described below, several studies already used them for these purposes.

For example, Ben Slimane et al. (2013) combined the dataset from the LAKE station with sediment archives extracted from the sediment trapped into the reservoir to identify the main erosive processes in the catchment. Using a fingerprinting method based on several tracers, including radionuclides, they showed that sediment trapped in the reservoir mainly originated from agricultural topsoils, indicating that interrill and rill erosion was more involved than gully erosion in the silting up of the reservoir since its construction in 1994. Combining the OMERE monitoring and morphometric analysis of gullies from photographic imagery, Ben Slimane et al. (2018) confirmed the predominance of interrill and rill erosion processes. They estimated that 70 to 80 % of the sediments reaching the reservoir came from surface soils (diffuse erosion), while only 20 to 30 % came from banks and ravines. Thus, this dataset, combined with other data, has enabled a better understanding of the sediment sources contributing to the reservoir siltation, which is highly valuable for more effectively targeting recommended soil and water conservation measures.

Inoubli et al. (2016) investigated the impact of shrinking-swell soils dynamics on the dynamics of water and sediment exports at the PAR station. They first observed that the cracks remained open for over six months of the year. This finding is consistent with the conclusion of Mekki et al. (2006) that a threshold of approximately 200 mm of cumulative precipitation since the beginning of the hydrological year is necessary to induce significant runoff in the Kamech catchment. Inoubli et al. (2016) concluded that crack dynamics are likely the main drivers explaining the time lag between runoff flows and suspended matter concentrations observed at the experimental plot outlet. Inoubli et al.

(2017) also showed that a seasonal time lag between runoff and erosive response existed at the MBV station, with shrink–swell processes as the most likely driver of this time lag. In this study, we showed that a similar shift is also observed at the GBV station (Fig. 5b), suggesting that crack dynamics can strongly influence runoff response across the entire catchment.

The proposed dataset has also been analyzed in the framework of environmental research catchment networks. For example, Smetanová et al. (2018) analyzed a comprehensive dataset comprising a total of 104 years of continuous sediment yield records from eight small catchments, including Kamech. The study reported a wide range of sediment yield variability ($0\text{--}271\text{ t ha}^{-1}\text{ yr}^{-1}$ and $0\text{--}116\text{ t ha}^{-1}\text{ month}^{-1}$). Considering the eight catchments, they identified that intense time compression was observed in catchments with low sediment yield during spring and summer, whereas low time compression was linked to very high soil loss, low runoff and sediment production thresholds, and high connectivity. These authors also demonstrated that identifying periods of high sediment production is essential for defining management strategies, and that these periods can be predicted by analysing intra-annual variability, seasonality and time compression. Another study conducted by Peña-Angulo et al. (2019) enabled a detailed examination of the spatial variability in hydro-sedimentary variables throughout the Mediterranean basin. This study involved data from 68 research sites (including Kamech) in nine Mediterranean countries, totaling 22,458 events. The study revealed that a small subset of weather types could be responsible for a large proportion of total precipitation, runoff, and sediment yield, suggesting that variations in the frequency of these weather types in the context of climate change could have a significant impact on hydrological responses and sediment transport in the Mediterranean basin.

However, the high temporal variability observed in the study catchment, which is strongly influenced by a few rare events, is likely to alter the previous conclusions. It is therefore important to continue collecting monitoring data and to pursue studies by analyzing longer time series. An ongoing study involves comparing sediment data from core sampling in the reservoir with sediment flows derived from in situ monitoring in order to assess the ability of sediment deposits to estimate the intensity of past floods. Future studies may lie on a variety of questions concerning critical zone processes and the interactions between chemical, physical and biotic components in headwater Mediterranean catchments. A major step forward would be to better understand and prioritize the factors that control water and sediment flows in the Kamech catchment area. Among the main challenges are the need to (i) distinguish the effects of climate variability or climate change from those related to land use and management, (ii) study the interactions between vegetation, carbon, and erosion or between flows and crack dynamics, (iii) better understanding the impact of intermittency on the response of watersheds in terms of water and sediments, etc. Future studies could also focus on exploring modelling strategies aimed at improving water and sediment export from the event scale to longer time scales, and helping to identify land management practices that preserve water and soil resources in changing and uncertain environmental conditions.

6. Data availability

All datasets referenced in this work are openly accessible via the repository: <https://doi.org/10.23708/PPPPDL> (Raclot and Hamdi, 2025). ~~All the monitoring data files are in text format, with a semicolon as the field separator and a “.” as the decimal separator. The geodata are in Esri shapefile format and use the EPSG 32632 projection system. For more details on format, units and conventions, please refer to the 'Read_me.txt' file included in this repository.~~ We also encourage users to visit <https://www.obs-omere.org/> (currently in French, but available in English in the future), which also provides access to ~~this dataset and additional metadata and supplementary useful information~~ information, ~~such as meteorological data and geodata~~. It will also host future data, as monitoring will continue as long as our institutions can fund it.

7. Conclusion

This paper presents a comprehensive database of rainfall measurements and hydro-erosive fluxes collected over nearly 30 years in an agricultural catchment under a Mediterranean climate and vertic soils. These data were acquired as part of the Mediterranean Observatory for Environmental Research (OMERE). In addition to providing a detailed description of the data acquisition protocols, we implemented rigorous quality ~~checking~~control and validation procedures to ensure the usability of the data.

The paper also included a characterization of the hydro-erosive regime in the Kamech catchment, indicating an ephemeral regime with high temporal variability and time compression. The data analysis shows a strong correlation between the runoff rates measured at the different stations. It also highlights the complexity of the hydrological and erosive response, with a significant time lag between runoff flows and suspended matter concentrations throughout the year. ~~The analysis of the rainfall records reveals an overall stationarity in annual precipitation and runoff throughout the study period, although a notable increase in the frequency of dry periods was observed. Regarding erosive fluxes, a slight but significant increase in specific erosion was detected in November, consistent with the observed rise in maximum rainfall intensities at both hourly and daily scales during that month.~~

Beyond the detailed description of the monitoring protocols and the initial analyses presented, this work highlights the irreplaceable value of maintaining long-term observations in small Mediterranean agricultural catchments subject to intense climatic variability. Only continuous datasets extending over several decades make it possible to disentangle short-term fluctuations from multi-decadal trends, to detect subtle changes in hydro-sedimentary regimes, and to attribute them to climate variability, climate change, or land management practices.

In regions such as the southern Mediterranean, where extreme events dominate water and sediment fluxes, such sustained monitoring is essential for understanding the frequency, magnitude, and timing of rare but high-impact events. The ~~exceptional~~ temporal depth, spatial resolution, and data quality of this dataset thus provide a unique empirical basis for scientific research, the calibration and validation of predictive models, and the design of effective

adaptation and conservation strategies. This long-term commitment also ensures that policy-makers and stakeholders can rely on robust evidence to guide decision-making in increasingly uncertain environmental conditions.

Author contribution

RH, DR, IM and JA conceptualized the paper. RH and DR criticized and validated the data. RH and DR analyzed the data. The original draft was prepared by RH and DR, while IM, MG and JA contributed to review and editing.

Competing interests

The authors declare that they have no conflict of interest.

Acknowledgments

We gratefully acknowledge the Ministry of Agriculture, Water Resources and Fisheries (MARHP) of Tunisia, and in particular its Directorate General for Agricultural Land Management and Conservation (DG ACTA), for its responsibility in the national programme on small dams and hillside lakes. We also thank the Regional Agricultural Development Office (CRDA of Nabeul) for its support in the management of agricultural affairs in the Lebna watershed, where the Kamech catchment is located.

The establishment of the OMERE observatory was made possible through the European research programmes Hydromed (FP4) and SOWAMED (Soil and water in the Mediterranean) (FP6), which provided the initial funding for research facilities on small dams, including the Kamech catchment. It is part of OZCAR research infrastructure, which is supported by the French Ministry of Research, French Research Institutions and Universities. We are also indebted to the research institutes that have continuously supported this observatory since its creation, namely INRGREF (Institut National de Recherche en Génie Rural et Eaux et Forêts) and INAT (Institut National Agronomique de Tunisie) in Tunisia, and IRD (Institut de Recherche pour le Développement) and INRAE (Institut National de Recherche pour l'Agriculture, l'Alimentation et l'Environnement) in France, as well as to the Tunisian and French laboratories that have hosted and managed OMERE activities in Tunisia, including the relevant departments at INRGREF and INAT, UMR LISAH (Unité Mixte de Recherche Laboratoire d'étude des Interactions entre Sol - Agrosystème et Hydrosystème), the joint international laboratory Naïla, and the international research network RHYMA-CES.

We warmly thank the farmers and residents of Kamech, without whose long-standing collaboration this observatory would not exist. We also extend our gratitude to the many researchers, engineers, and observers who contributed to the design, installation, and maintenance of the experimental equipment. It is impossible to name them all individually, but we wish to pay tribute to colleagues who passed away during their careers, including Mekki Ben Youssef (DG ACTA), Slah Nasri (INRGREF), Rawdha Mougou (INRGREF), as well as to those who accompanied the observatory until retirement, such as Ali Dababria (DG ACTA), Henri Camus (IRD), Jean Collinet (IRD) and Noel Guiguen (IRD).

We would like to express our sincere gratitude to the successive coordinators of the OMERE long-term monitoring programme—Jean Albergel, Netij Ben Mechlia, Mohamed Boufaroua, Jérôme Molénat, Damien Raclot, Marc Voltz, and Rim Zitouna—who have ensured and continue to ensure its development. We would also like to thank Denis Feurer, Olivier Grunberger, Claude Hammecker and Guillaume Coulouma for their involvement in managing the OMERE catchments.

We thank all those who participated in the installation of the hydrometric stations and the collection of data, including OMERE staff, with special thanks to Mohamed Ben Younes Louati, who managed all fieldwork for two decades; the many students and international civilian volunteers of IRD, and in particular Kilani Ben Hzez, who has carried out daily site measurements with remarkable dedication.

Finally, we would like to thank the University of Bizerte, who took an interest in the work of this observatory and welcomed Hamdi Radhouane as a PhD student.

References

- Albergel, J., Nasri, S., Boufaroua, M.: Small dams water balance: experimental conditions, data processing and modeling in arid and semiarid areas. In: Berndtsson, R. (Ed.), *Proceedings of the International Seminar Rain Water Harvesting and Management of Small Reservoirs in Arid and Semiarid Areas, An Expert Meeting within the EU-INCO Collaboration HYDROMED*. Department of Water Resources Engineering, Lund Institute of Technology, Lund, pp. 45–48, 1998.
- de Araújo, J. C., Batalla, R. J., and Bronstert, A.: Special issue: analysis and modelling of sediment transfer in Mediterranean river basins, *J Soils Sediments*, 14, 1905–1908, <https://doi.org/10.1007/s11368-014-1000-7>, 2014.
- Ben Slimane, A., Raclot, D., Evrard, O., Sanaa, M., Lefèvre, I., Ahmadi, M., Tounsi, M., Rumpel, C., Ben Mammou, A., and Le Bissonnais, Y.: Fingerprinting sediment sources in the outlet reservoir of a hilly cultivated catchment in Tunisia, *J Soils Sediments*, 13, 801–815, <https://doi.org/10.1007/s11368-012-0642-6>, 2013.
- BOUGHTON, W. C.: *A Hydrograph-based model for estimating the water yield of ungauged catchments*, Hydrology and Water Resources Symposium, Newcastle, IEAust, 1993.
- Busch, M. H., Costigan, K. H., Fritz, K. M., Datry, T., Krabbenhoft, C. A., Hammond, J. C., Zimmer, M., Olden, J. D., Burrows, R. M., Dodds, W. K., Boersma, K. S., Shanafield, M., Kampf, S. K., Mims, M. C., Bogan, M. T., Ward, A. S., Perez Rocha, M., Godsey, S., Allen, G. H., Blaszcak, J. R., Jones, C. N., and Allen, D. C.: What’s in a Name? Patterns, Trends, and Suggestions for Defining Non-Perennial Rivers and Streams, *Water*, 12, 1980, <https://doi.org/10.3390/w12071980>, 2020.
- Cerdan, O., Govers, G., Le Bissonnais, Y., Van Oost, K., Poesen, J., Saby, N., Gobin, A., Vacca, A., Quinton, J., Auerswald, K., Klik, A., Kwaad, F. J. P. M., Raclot, D., Ionita, I., Rejman, J., Rousseva, S., Muxart, T., Roxo, M. J., and Dostal, T.: Rates and spatial variations of soil erosion in Europe: A study based on erosion plot data, *Geomorphology*, 122, 167–177, <https://doi.org/10.1016/j.geomorph.2010.06.011>, 2010.
- Chapman, T. G.: Comment on “Evaluation of automated techniques for base flow and recession analyses” by R. J. Nathan and T. A. McMahon, *Water Resources Research*, 27, 1783–1784, <https://doi.org/10.1029/91wr01007>, 1991.

- Chapman, T. G. and Maxwell, A. I.: Baseflow separation-comparison of numerical methods with tracer experiments, in: Hydrology and water resources symposium 1996: Water and the environment; preprints of papers, 539–545, 1996.
- ~~Cheng, Y., Cui, G., and Zhu, J.: Using time compression approximation to determine actual infiltration rate from variable rainfall events, *Hydrology Research*, 50, 155–165, <https://doi.org/10.2166/nh.2017.062>, 2017.~~
- Cid, N., Bonada, N., Carlson, S., Grantham, T., Gasith, A., and Resh, V.: High Variability Is a Defining Component of Mediterranean-Climate Rivers and Their Biota, *Water*, 9, 52, <https://doi.org/10.3390/w9010052>, 2017.
- Coron, L., Thirel, G., Delaigue, O., Perrin, C., and Andréassian, V.: The suite of lumped GR hydrological models in an R package, *Environmental Modelling & Software*, 94, 166–171, <https://doi.org/10.1016/j.envsoft.2017.05.002>, 2017.
- Diodato, N. and Bellocchi, G.: Landscape Scales of Erosive Storm Hazard Across the Mediterranean Region, in: Storminess and Environmental Change: Climate Forcing and Responses in the Mediterranean Region, edited by: Diodato, N. and Bellocchi, G., Springer Netherlands, Dordrecht, 101–116, https://doi.org/10.1007/978-94-007-7948-8_7, 2014.
- Folton, N., Martin, É., Arnaud, P., and Tolsa, M.: Fifty years of hydrological processes observed in small Mediterranean catchments: towards a scarcity of water resources. *La Houille Blanche*, 106, 17–27, <https://doi.org/10.1051/lhb/2020048>, 2020.
- ~~Francke, T., Foerster, S., Brosinsky, A., Sommerer, E., Lopez-Tarazon, J. A., Güntner, A., Batalla, R. J., and Bronstert, A.: Water and sediment fluxes in Mediterranean mountainous regions: comprehensive dataset for hydro-sedimentological analyses and modelling in a mesoscale catchment (River Isábena, NE Spain), *Earth Syst. Sci. Data*, 10, 1063–1075, <https://doi.org/10.5194/essd-10-1063-2018>, 2018.~~
- Gaillardet, J., Braud, I., Hankard, F., Anquetin, S., Bour, O., Dorfliger, N., de Dreuz, J. r., Galle, S., Galy, C., Gogo, S., Gourcy, L., Habets, F., Laggoun, F., Longuevergne, L., Le Borgne, T., Naaim-Bouvet, F., Nord, G., Simonneaux, V., Six, D., Tallec, T., Valentin, C., Abril, G., Allemand, P., Arènes, A., Arfib, B., Arnaud, L., Arnaud, N., Arnaud, P., Audry, S., Comte, V. B., Batiot, C., Battais, A., Bellot, H., Bernard, E., Bertrand, C., Bessière, H., Binet, S., Bodin, J., Bodin, X., Boithias, L., Bouchez, J., Boudevillain, B., Moussa, I. B., Branger, F., Braun, J. J., Brunet, P., Caceres, B., Calmels, D., Cappelaere, B., Celle-Jeanton, H., Chabaux, F., Chalikakis, K., Champollion, C., Copard, Y., Cotel, C., Davy, P., Deline, P., Delrieu, G., Demarty, J., Dessert, C., Dumont, M., Emblanch, C., Ezzahar, J., Estèves, M., Favier, V., Faucheux, M., Filizola, N., Flammarion, P., Floury, P., Fovet, O., Fournier, M., Francez, A. J., Gandois, L., Gascuel, C., Gayer, E., Genthon, C., Gérard, M. F., Gilbert, D., Gouttevin, I., Grippa, M., Gruau, G., Jardani, A., Jeanneau, L., Join, J. L., Jourde, H., Karbou, F., Labat, D., Lagadeuc, Y., Lajeunesse, E., Lastennet, R., Lavado, W., Lawin, E., Lebel, T., Le Bouteiller, C., Legout, C., Lejeune, Y., Le Meur, E., Le Moigne, N., Lions, J., et al.: OZCAR: The French Network of Critical Zone Observatories, *Vadose Zone Journal*, 17, 180067, <https://doi.org/10.2136/vzj2018.04.0067>, 2018.
- García-Ruiz, J. M., Nadal-Romero, E., Lana-Renault, N., and Beguería, S.: Erosion in Mediterranean landscapes: Changes and future challenges, *Geomorphology*, 198, 20–36, <https://doi.org/10.1016/j.geomorph.2013.05.023>, 2013.

- Gonzalez-Hidalgo, J.C., Pena-Monne, J.L., de Luis, M.: A review of daily soil erosion in Western Mediterranean areas, *Catena*, 71 (2), 193–199, <https://doi.org/10.1016/j.catena.2007.03.005>, 2007.
- Inoubli, N., Raclot, D., Moussa, R., Habaieb, H., and Le Bissonnais, Y.: Soil cracking effects on hydrological and erosive processes: a study case in Mediterranean cultivated vertisols, *Hydrological Processes*, 30, 4154–4167, <https://doi.org/10.1002/hyp.10928>, 2016.
- Inoubli, N., Raclot, D., Mekki, I., Moussa, R., and Le Bissonnais, Y.: A Spatiotemporal Multiscale Analysis of Runoff and Erosion in a Mediterranean Marly Catchment, *Vadose Zone Journal*, 16, vzj2017.06.0124, <https://doi.org/10.2136/vzj2017.06.0124>, 2017.
- IUSS Working Group WRB, 2022. World Reference Base for Soil Resources. International soil classification system for naming soils and creating legends for soil maps. 4th edition. International Union of Soil Sciences (IUSS), Vienna, Austria. https://www.isric.org/sites/default/files/WRB_fourth_edition_2022-12-18.pdf (accessible on 9 april 2025).
- Jakeman, A. J. and Hornberger, G. M.: How much complexity is warranted in a rainfall-runoff model, *Water Resources Research*, 29, 2637–2649, <https://doi.org/10.1029/93wr00877>, 1993.
- Khairallah, W., Raclot, D., Annabi, M., Coulouma, G., Guenet, B., Rumpel, C., and Bahri, H.: Evidence of high carbon biodegradability in the subsoil of Mediterranean croplands, *Geoderma*, 455, 117212, <https://doi.org/10.1016/j.geoderma.2025.117212>, 2025.
- Klotz, S., Le Bouteiller, C., Mathys, N., Fontaine, F., Ravanat, X., Olivier, J.-E., Liébault, F., Jantzi, H., Coulmeau, P., Richard, D., Cambon, J.-P., and Meunier, M.: A high-frequency, long-term data set of hydrology and sediment yield: the alpine badland catchments of Draix-Bléone Observatory, *Earth Syst. Sci. Data*, 15, 4371–4388, <https://doi.org/10.5194/essd-15-4371-2023>, 2023.
- Lyne, V., and Hollick, M.: “Stochastic Time-Variable Rainfall-Runoff Modeling.” In Australian National Conference Publication, 79:89–92, 1979..
- Mekki, I., Albergel, J., Ben Mechlia, N., and Voltz, M.: Assessment of overland flow variation and blue water production in a farmed semi-arid water harvesting catchment, *Physics and Chemistry of the Earth, Parts A/B/C*, 31, 1048–1061, <https://doi.org/10.1016/j.pce.2006.07.003>, 2006.
- Matthews, F., Verstraeten, G., Borrelli, P. et al.: EUSEDcollab: a network of data from European catchments to monitor net soil erosion by water, *Sci Data* 10, 515, <https://doi.org/10.1038/s41597-023-02393-8>, 2023.
- Molénat, J., Raclot, D., Zitouna, R., Andrieux, P., Coulouma, G., Feurer, D., Grunberger, O., Lamachère, J. m., Bailly, J. s., Belotti, J. l., Ben Azzez, K., Ben Mechlia, N., Ben Younès Louati, M., Biarnès, A., Blanca, Y., Carrière, D., Chaabane, H., Dagès, C., Debabria, A., Dubreuil, A., Fabre, J. c., Fages, D., Floure, C., Garnier, F., Geniez, C., Gomez, C., Hamdi, R., Huttel, O., Jacob, F., Jenhaoui, Z., Lagacherie, P., Le Bissonnais, Y., Louati, R., Louchart, X., Mekki, I., Moussa, R., Negro, S., Pépin, Y., Prévot, L., Samouelian, A., Seidel, J. l., Trotoux, G., Troiano, S., Vinatier, F., Zante, P., Zrelli, J., Albergel, J., and Voltz, M.: OMERE: A Long-Term Observatory of Soil and Water Resources, in *Interaction with Agricultural and Land Management in Mediterranean Hilly Catchments*, *Vadose Zone Journal*, 17, 180086, <https://doi.org/10.2136/vzj2018.04.0086>, 2018.

- Molina, J. L., Zazo, S., Martín-Casado, A. M., and Patino-Alonso, M. C.: Rivers' Temporal Sustainability through the Evaluation of Predictive Runoff Methods, *Sustainability*, 12, 1720, <https://doi.org/10.3390/su12051720>, 2020.
- Müller, G., Middelburg, J. J., and Sluijs, A.: Introducing GloRiSe – a global database on river sediment composition, *Earth Syst. Sci. Data*, 13, 3565–3575, <https://doi.org/10.5194/essd-13-3565-2021>, 2021.
- Nord, G., Boudevillain, B., Berne, A., Branger, F., Braud, I., Dramais, G., Gérard, S., Le Coz, J., Legoût, C., Molinié, G., Van Baelen, J., Vandervaere, J.-P., Andrieu, J., Aubert, C., Calianno, M., Delrieu, G., Grazioli, J., Hachani, S., Horner, I., Huza, J., Le Boursicaud, R., Raupach, T. H., Teuling, A. J., Uber, M., Vincendon, B., and Wijbrans, A.: A high space-time resolution dataset linking meteorological forcing and hydro-sedimentary response in a mesoscale Mediterranean catchment (Auzon) of the Ardèche region, France, *Earth Syst. Sci. Data*, 9, 221–249, <https://doi.org/10.5194/essd-9-221-2017>, 2017.
- Palmieri, A., Shah, F., and Dinar, A.: Economics of reservoir sedimentation and sustainable management of dams, *Journal of Environmental Management*, 61, 149–163, <https://doi.org/10.1006/jema.2000.0392>, 2001.
- Patault, E.: Analyse multi-échelle des processus d'érosion hydrique et de transferts sédimentaires en territoire agricole : exemple du bassin versant de la Canche (France), Thèse de doctorat, Ecole nationale supérieure Mines-Télécom Lille Douai, 2018.
- Pelletier, A. and Andréassian, V.: Hydrograph separation: an impartial parametrisation for an imperfect method, *Hydrology and Earth System Sciences*, 24, 1171–1187, <https://doi.org/10.5194/hess-24-1171-2020>, 2020.
- Pena-Angulo, D., Nadal-Romero, E., Gonzalez-Hidalgo, J. C., Albaladejo, J., Andreu, V., Bagarello, V., Barhi, H., Batalla, R. J., Bernal, S., Bienes, R., Campo, J., Campo-Bescos, M. A., Canatario-Duarte, A., Canton, Y., Casali, J., Castillo, V., Cerda, A., Cheggour, A., Cid, P., Cortesi, N., Desir, G., Diaz-Pereira, E., Espigares, T., Estrany, J., Fernandez-Raga, M., Ferreira, C. S. S., Ferro, V., Gallarty, F., Gimenez, R., Gimeno, E., Gomez, J. A., Gomez-Gutierrez, A., Gomez-Macpherson, H., Gonzalez-Pelayo, O., Hueso-Gonzalez, P., Kairis, O., Karatzas, G. P., Klotz, S., Kosmas, C., Lana-Renault, N., Lasanta, T., Latron, J., Lazaro, R., Le Bissonnais, Y., Le Bouteiller, C., Licciardello, F., Lopez-Tarazon, J. A., Lucia, A., Marin, C., Marques, M. J., Martinez-Fernandez, J., Martinez-Mena, M., Martinez-Murillo, J. F., Mateos, L., Mathys, N., Merino-Martin, L., Moreno-de las Heras, M., Moustakas, N., Nicolau, J. M., Novara, A., Pampalone, V., Raclot, D., Rodriguez-Blanco, M. L., Rodrigo-Comino, J., Romero-Diaz, A., Roose, E., Rubio, J. L., Ruiz-Sinoga, J. D., Schnabel, S., Senciales-Gonzalez, J. M., Simonneaux, V., Sole-Benet, A., Taguas, E., V., Taboada-Castro, M. M., Taboada-Castro, M. T., Todisco, F., Ubeda, X., Varouchakis, E. A., Vericat, D., Wittenberg, L., Zabaleta, A., and Zorn, M.: Spatial variability of the relationships of runoff and sediment yield with weather types throughout the Mediterranean basin, *JOURNAL OF HYDROLOGY*, 571, 390–405, <https://doi.org/10.1016/j.jhydrol.2019.01.059>, 2019.
- Raclot, D., Hamdi, R.: OMERE Observatory - A long-term dataset on hydrology and suspended sediments in the Kamech catchment (1994-2023), <https://doi.org/10.23708/PPPPDL>, DataSuds, ~~V4~~, 2025.
- Raclot, D., Le Bissonnais, Y., Annabi, M., Sabir, M., and Smetanova, A.: Main Issues for Preserving Mediterranean Soil Resources From Water Erosion Under Global Change, *Land Degradation & Development*, 29, 789–799, <https://doi.org/10.1002/ldr.2774>, 2018.

- Rets, E., Kireeva, M., Samsonov, T., Ezerova, N., Gorbarenko, A., and Frolova, N.: Algorithm grwat for Automated Hydrograph Separation by B.I. Kudelin's Method: Problems and Perspectives, *Water Resources*, 49, 23–37, <https://doi.org/10.1134/S0097807822010146>, 2022.
- Smetanová, A., Le Bissonnais, Y., Raclot, D., Pedro Nunes, J., Licciardello, F., Le Bouteiller, C., Latron, J., Rodríguez Caballero, E., Mathys, N., Klotz, S., Mekki, I., Gallart, F., Solé Benet, A., Pérez Gallego, N., Andrieux, P., Moussa, R., Planchon, O., Santos, J. M., Alshihabi, O., Chikhaoui, M., and Follain, S.: Temporal variability and time compression of sediment yield in small Mediterranean catchments: impacts for land and water management, *Soil Use and Management*, 34, 388–403, <https://doi.org/10.1111/sum.12437>, 2018.
- Sultan, D., Tsunekawa, A., Tsubo, M., Haregeweyn, N., Adgo, E., Meshesha, D. T., Fenta, A. A., Ebabu, K., Berihun, M. L., and Setargie, T. A.: Evaluation of lag time and time of concentration estimation methods in small tropical watersheds in Ethiopia, *Journal of Hydrology: Regional Studies*, 40, 101025, <https://doi.org/10.1016/j.ejrh.2022.101025>, 2022.
- Vallebona, C., Pellegrino, E., Frumento, P., and Bonari, E.: Temporal trends in extreme rainfall intensity and erosivity in the Mediterranean region: a case study in southern Tuscany, Italy, *Climatic Change*, 128, 139–151, <https://doi.org/10.1007/s10584-014-1287-9>, 2015.
- Vanmaercke, M., Poesen, J., Verstraeten, G., de Vente, J., and Ocaloglu, F.: Sediment yield in Europe: Spatial patterns and scale dependency, *Geomorphology*, 130, 142–161, <https://doi.org/10.1016/j.geomorph.2011.03.010>, 2011.
- Vicente-Serrano, S. M., Tramblay, Y., Reig, F., González-Hidalgo, J. C., Beguería, S., Brunetti, M., Kalin, K. C., Patalen, L., Kržič, A., Lionello, P., Lima, M. M., Trigo, R. M., El-Kenawy, A. M., Eddenjal, A., Türkeş, M., Koutroulis, A., Manara, V., Maugeri, M., Badi, W., Mathbout, S., Bertalanič, R., Bocheva, L., Dabanli, I., Dumitrescu, A., Dubuisson, B., Sahabi-Abed, S., Abdulla, F., Fayad, A., Hodzic, S., Ivanov, M., Radevski, I., Peña-Angulo, D., Lorenzo-Lacruz, J., Domínguez-Castro, F., Gimeno-Sotelo, L., García-Herrera, R., Franquesa, M., Halifa-Marín, A., Adell-Michavila, M., Noguera, I., Barriopedro, D., Garrido-Perez, J. M., Azorin-Molina, C., Andres-Martin, M., Gimeno, L., Nieto, R., Llasat, M. C., Markonis, Y., Selmi, R., Ben Rached, S., Radovanović, S., Soubeyroux, J.-M., Ribes, A., Saidi, M. E., Bataineh, S., El Khalki, E. M., Robaa, S., Boucetta, A., Alsafadi, K., Mamassis, N., Mohammed, S., Fernández-Duque, B., Cheval, S., Moutia, S., Stevkov, A., Stevkova, S., Luna, M. Y., and Potopová, V.: High temporal variability not trend dominates Mediterranean precipitation, *Nature*, 639, 658–666, <https://doi.org/10.1038/s41586-024-08576-6>, 2025.
- Woodward, J.C.: Patterns of erosion and suspended sediment yield in Mediterranean river basins, in: Foster IDL, Gurnell AM, Webb BW (Eds.), *Sediment and Water Quality in River Catchments*. Wiley, Chichester, 365–389, 1995.