

Earthquake Catalog and Continuous Waveforms from a Two-Week Distributed Acoustic Sensing experiment on Kefalonia Island, Greece.

5 Gian Maria Bocchini¹, Emanuele Bozzi², Marco P. Roth¹, Sonja Gaviano³, Giulio Pascucci², Francesco Grigoli², Ettore Biondi⁴, Efthimios Sokos⁵, Rebecca M. Harrington¹

¹Institute of Geosciences, Ruhr University Bochum, Bochum, Germany.

²Department of Earth Sciences, University of Pisa, Pisa, Italy.

³Seismix srl, Palermo, Italy.

10 ⁴Stanford University, Geophysics Department, 397 Panama Mall, Stanford, CA 94305, USA.

⁵Department of Geology, Seismological Laboratory, University of Patras, Patras, Greece.

Correspondence to: Gian Maria Bocchini (gian.bocchini@rub.de)

Abstract. In this work, we present a new, high-resolution earthquake catalog for the Kefalonia region, Greece, together with the distributed acoustic sensing (DAS) waveform dataset used for its construction (Bocchini et al., 2025). We build the catalog from DAS data recorded between 1 August 2024, 23:00 and 15 August 2024, 23:00, combined with open-access seismic-station recordings from the Hellenic Unified Seismic Network (HUSN). The DAS dataset consists of continuous strain measurements acquired along a 15 km-long telecommunications fiber-optic cable connecting northern Kefalonia and Ithaki. This work presents a high-resolution earthquake catalog for the Kefalonia region, Greece, built from the analysis of Distributed Acoustic Sensing (DAS) data recorded on a telecommunications cable between 1 August 2024, 23:00 and 15 August 2024, 23:00, together with open-access seismic station recordings. The DAS data consist of continuous strain recordings on a 15 km long telecommunication optical fiber connecting northern Kefalonia and Ithaki. We use a semblance-based detector on the DAS waveforms to identify 5,734 earthquakes within ~50 km of the fiber origin. We jointly locate ~~284~~ 356 high-SNR (SNR > 12 dB) events with DAS and seismic stations and calculate their local magnitudes from seismic records. We then apply waveform cross-correlation to match unlocated detections with the most similar template events and estimate relative magnitudes from amplitude ratios to enhance the constructed catalog. Enhancement adds ~~2,496-515~~ 2,780-871 earthquakes, resulting in ~~2,780-871~~ 2,780-871 events with assigned locations and magnitudes ~~and, represents a ~32-fold increase in the number of earthquakes with respect to the official National Observatory of Athens (NOA) catalog.~~ Most events (~~2,74890~~ 2,74890) cluster within a ~5 km radius offshore northwest of Kefalonia, where seismicity rates reach >100 events per hour. We achieve a ~38-fold increase in the number of earthquakes with respect to the official catalog from NOA in the region

[encompassing the earthquake cluster northwest of Kefalonia](#). Our dataset provides a detailed spatio-temporal view of seismicity in a region with limited station coverage and demonstrates the value of integrating DAS with conventional seismic networks to monitor intense earthquake sequences. The combination of high seismicity and open-access data from the ~~Hellenic Unified Seismic Network~~HUSN makes this DAS dataset particularly valuable for the seismological community.

35 We provide a 2-week-long catalog, the full detection list (local and distant events and false detections), and two weeks of continuous DAS recordings. ~~Possible applications of the datasets include testing and benchmarking DAS processing algorithms for tectonic earthquakes, as well as studies of physical processes associated with complex seismic sequences. The aim is to provide a resource for researchers to test, develop, and benchmark DAS processing algorithms on tectonic earthquakes and to investigate the physical processes that drive complex seismic sequences.~~

40

1 Introduction

1.1. Why a new open-access dataset of DAS records?

Distributed ~~Aeoustic~~acoustic Sensing~~sensing~~ (DAS) has become an increasingly innovative approach in seismology to enable effective continuous spatiotemporal sampling of the recorded seismic wavefield through strain or strain-rate measurements on fiber optic cables (Zhan, 2020). The dense sampling has proven particularly well suited for applications that include seismic and microseismic monitoring (Glubokovskikh et al., 2023; Lellouch et al., 2021; Lindsey et al., 2017; Lior et al., 2021a; Porras et al., 2024), seismic imaging (Biondi et al., 2023a; Zeng et al., 2017), earthquake source-parameter estimation (Li et al., 2023; Lior et al., 2021b), and monitoring of volcanic activity (Currenti et al., 2023; Jousset et al., 2022; 50 Li et al., 2025), among others. Nevertheless, despite its rapid adoption, several factors still limit the broader exploitation of DAS data. The high sampling rates and density of measurement points generate large data volumes ~~of data that introduce challenges to~~ effective data storage and sharing (Seguí et al., 2025). Moreover, because DAS technology is still relatively new in seismology, many aspects of data processing and interpretation remain under active development, including seismic event detection and location, signal enhancement, strain-to-ground-motion calibration, and earthquake source parameter 55 analysis. A further limitation is that most large publicly available DAS datasets are mainly related to microseismic monitoring of industrial operations (e.g., hydraulic stimulations) rather than natural seismicity, as technology evolved from industry. While several open-access datasets dedicated to the monitoring of natural earthquakes are present, they often lack elevated seismic rates and/or data from permanent seismic networks to augment the DAS experiment. The capability of using publicly available DAS datasets for the analysis of highly productive seismic sequences remains limited, slowing the 60 validation and generalization of emerging data analysis methods across different tectonic contexts. Among the DAS datasets

now publicly available (as of September 2025), PubDAS provides a repository with data from a variety of experiments, including natural and induced seismicity (Spica et al., 2023). The collection spans urban noise monitoring, volcanic environments, underground mines, and teleseismic events (Spica et al., 2023). FORGE (Frontier Observatory for Research in Geothermal Energy) (Pankow, 2022) and PoroTomo (Feigl et al., 2016) offer DAS data closely tied to geothermal research, including microseismicity monitoring related to hydraulic stimulation operations and subsurface characterization. Greenland Calving-Front Dataset offers a demonstration of the DAS and DTS potential in cryospheric research (Gräff et al., 2025). The Global DAS Month of February 2023 dataset (Wuestefeld et al., 2024) comprises globally coordinated DAS recordings acquired to advance efforts toward a Global Fiber Sensing Network and promote standardized, collaborative seismic monitoring.

70 Here we present a new dataset of DAS recordings that captured a period of high seismic activity near the Kefalonia Transform Fault (KTF) in Greece (Fig. 1). The main seismic sequence occurred northwest of Kefalonia at an epicentral distance of ~15 km from the interrogated fiber-optic cable, while additional earthquakes in the region were also recorded. In addition, we complement the data from seven open-access permanent seismic stations of the Hellenic Unified Seismic Network (HUSN) that are located within ~30 km of the cable's starting point to enhance the analysis. The integration of
75 DAS and seismic station data enables the construction of an enhanced seismicity catalog in a natural tectonic setting, where such joint analysis remains relatively unexplored.

This study releases two main products: (i) a high-resolution earthquake catalog covering a two-week period of elevated seismicity within ~50 km of the start of the interrogated fiber-optic cable, and (ii) the continuous DAS waveform dataset from which we derived the catalog. In the following, we describe the methodological workflow we use to integrate DAS and
80 seismic station data for catalog construction. We also provide additional supporting products, including a comprehensive detection list and cable geometry metadata.

The datasets presented here may support further research in DAS-based earthquake detection and processing, integration of DAS and seismic-station data, as well as studies in earthquake physics and statistical seismology, with potential benefits from the analysis of DAS data.

85 ~~Here we present a new dataset of DAS recordings that captured a natural seismic sequence along the Kefalonia transform fault system, in Greece. The seismic sequence occurred approximately at 15 km epicentral distance from the interrogated cable, along with other natural earthquakes in the region. In addition to DAS data, a set of permanent seismic stations in close proximity provides an augmented data set to enable integration of DAS and seismic station data, which, to date, remains relatively unexplored. In the following, we present a new earthquake catalog that covers a two week period~~
90 ~~coinciding with elevated seismicity, as well as the continuous DAS waveforms used to build the catalog. We also document the publicly available station data that we use to augment the DAS data to gain a significantly detailed seismicity catalog in a natural tectonic setting. As detailed in the following section, the activity clustered offshore northwest of Kefalonia, at about~~

~~10 km from the fiber's starting point (Fig. 1), and includes additional earthquakes at distances of up to 50 km. The seven open-access permanent seismic stations from the Hellenic Unified Seismic Network (HUSN) are located within 30 km of the fiber's starting point. The dataset released with this paper is useful not only to researchers developing DAS data analysis methods, but also to those studying earthquake physics and statistical seismology. Our analysis highlights the benefits of combining DAS and seismic station data to examine seismicity features in greater detail in a natural tectonic setting.~~


1.2. The Kefalonia Transform Fault and the 2024 seismic sequence

The ~~Kefalonia Transform Fault (KTF)~~ is a major tectonic structure in the Eastern Mediterranean that marks the transition from oceanic subduction to the south to continental collision to the north (Bocchini et al., 2018; Louvari et al., 1999; Royden and Papanikolaou, 2011; Scordilis et al., 1985). The KTF accommodates 2–2.5 cm/yr of differential convergence between the oceanic subduction and continental collision zones (Pérouse et al., 2012), making it one of the most seismically active faults in Europe, as evidenced by frequent M_6-7+ earthquakes (Papadimitriou, 2002). A period of increased seismic activity started offshore northwest of Kefalonia at the end of February 2024 and lasted until the end of the year. The largest magnitude earthquakes (local magnitude, M_L , 3.6-3.8) occurred in the first weeks of March 2024, and earthquakes with $M_L > 3.0$ were also recorded in April, August, and October 2024 ~~as visible from the~~ and are listed in the revised catalog of the National Observatory of Athens (NOA) (<https://bbnet.gein.noa.gr/HL/databases/database>, last accessed Sept. 2025). Anagnostou et al. (2025) analyzed the seismic activity from February to April 2024, interpreting it as a complex, swarm-like sequence and they suggest that fluid dynamics played a primary role in its triggering. ~~present an analysis of the activity during the period of February-April 2024 and interpret the sequence as being complex with swarm-like behavior, highlighting the important role of fluids in its triggering.~~ Notably, the authors report that the primary structure(s) that were activated include WNW-ESE left-lateral strike-slip fault(s), rather than the main branch of the KTF.

1.3. Description of the DAS experiment in Kefalonia ~~and goal of this study.~~

We used ~~Distributed Acoustic Sensing (DAS)~~ to measure strain along a dark telecommunications optical fiber connecting the islands of Kefalonia and Ithaki, in the Ionian Sea (Greece) (Fig. 1). The fiber starts in the village of Antipata (Kefalonia), runs inland for slightly more than half of its ~15.5 km length, crosses the Strait of Ithaki over steep bathymetry, and terminates in the village of Stavros (Ithaki) (Fig. 1). The DAS measurement period ranges from early July to late September 2024, where we recorded continuous data using an OptaSense QuantX interrogator. This study focuses on the analysis of a two-week period that captures the highest activity within the earthquake cluster northwest of Kefalonia and the broader Kefalonia region (Fig. 1). Using the revised seismicity catalog from NOA as a basis for selection, we identify the study period as we focus on a seismically active period identified from the revised catalog of the National Observatory of Athens (<https://bbnet.gein.noa.gr/HL/databases/database>), spanning 2–15 August 2024 (1 August 23:00 – 15 August

23:00) [as well-suited](#) to construct an enhanced earthquake catalog. We combine DAS strain recordings with continuous recordings of ground velocity from seven seismic stations of the HUSN to mitigate the azimuthal gap caused by the relatively short cable length, which is comparable to the epicentral distance between the cable and the recorded seismicity, and obtain higher quality earthquake locations than would be possible with DAS or seismic data alone. The complementary seismic data also enables more accurate magnitude estimations, which are hindered by the lack of a calibrated instrument response for converting strain to displacement (Lior et al., 2021b). In other words, complementing ~~the~~-DAS with seismic station data enables building a high-quality, ~~manually revised~~ earthquake catalog during the two-week study period. ~~One main objective of this work is to publicly release the dataset to provide the community with an opportunity to test, benchmark, and develop methods for detecting and locating earthquakes with both DAS data and hybrid DAS seismic station networks using a productive, tectonic seismic sequence. Moreover, the dataset offers the opportunity to investigate the statistical features and underlying physical mechanisms driving complex seismic sequences.~~

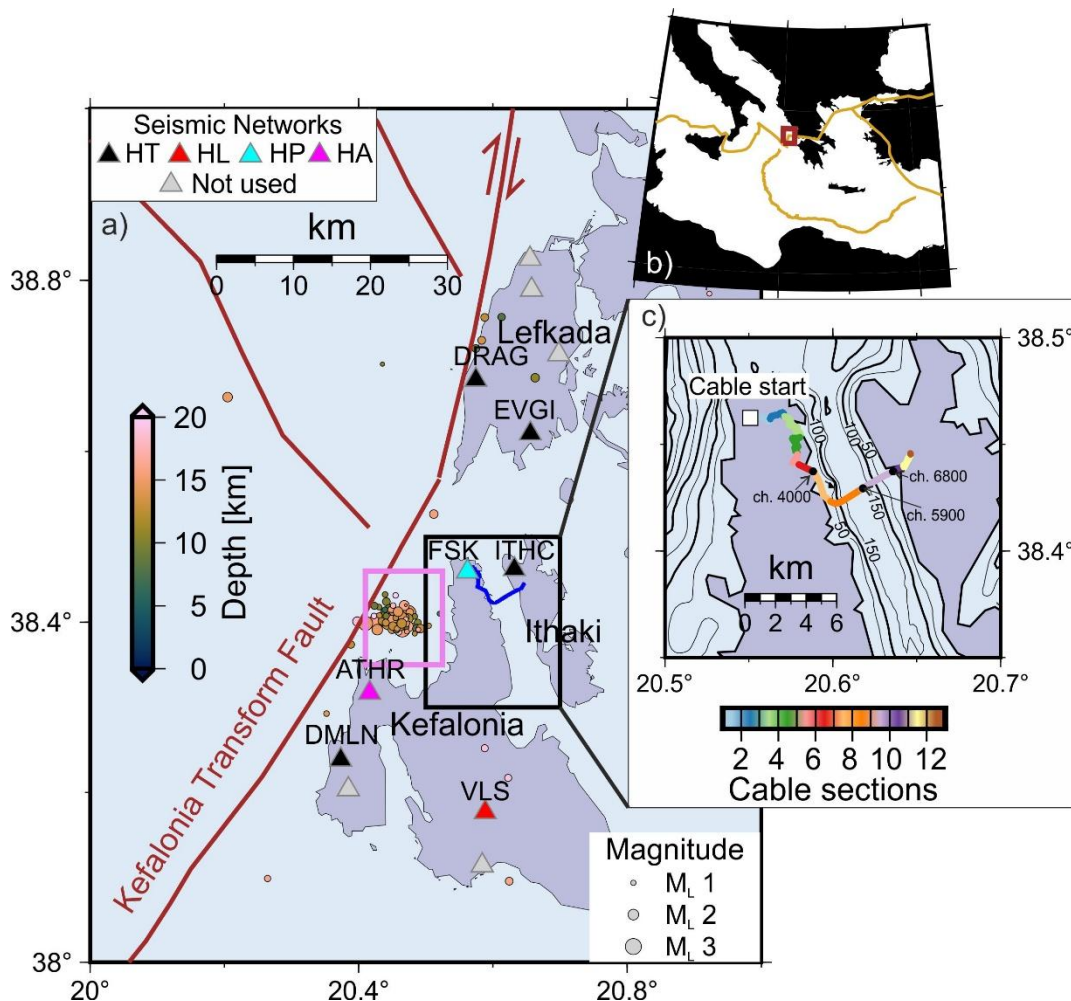

135 Figure 1. (a) Map view of the study region, including the location of the optical fiber, seismic events (colored circles) reported by
 140 ~~the NNOAational Observatory of Athens (<https://bbnet.gein.noa.gr/HL/databases/database>, last accessed September 2025)~~, and
 the publicly available seismic stations from the ~~Hellenic Unified Seismic Network (HUSN)~~ used (colored triangles) to locate seismic
 events. Grey triangles indicate public seismic stations from the HUSN not used in this study because they are too distant from the
most seismically active region (pink box) or provide azimuthal coverage similar to that of closer seismic stations. Thick brown
 lines indicate major active faults (Basili et al., 2024). (b) Inset showing the location of the study region within the Central-Eastern
 Mediterranean Sea. (c) Zoom on the optical fiber. The optical fiber is divided into 12 segments (see methods) that are used for
 earthquake location. Continuous black lines indicate isobaths. Black circles along the cable indicated the position of channels (ch.)
 mentioned in the text.

145 2. Data

We recorded DAS data with a temporal sampling rate (i.e., ping rate) of 5,000 Hz, which we decimated by a factor of 20
 before storing them, yielding a sampling rate of 250 Hz. The system configuration has a gauge length of 10 m and a channel

spacing of 2.04 m, resulting in a total of 7,750 channels. Data is saved in 30-second segments (~80 MB per file), resulting in a total size of 3.1 TB for the two-week experiment, with a short gap in data archiving occurring between 09:14 and 09:48 on the 6th of August 2024. The file name is UTC time + 1h (default naming from the system).

We performed tap tests on both Kefalonia and Ithaki islands to precisely identify the channel locations onshore. The cable onshore was visible along the entire length ~~because, where~~ it had been covered by asphalt along streets. Offshore, the cable path and channel positions are less certain. To reconstruct the offshore cable geometry and channel locations, we rely on the

expected number of offshore channels (after subtracting those onshore) and refine the cable path by aligning the trend of the picked DAS P-wave arrival times with the earthquake-to-channel epicentral distances (using earthquake locations from NOA) ~~We rely on the expected number of channels (after subtracting those onshore) and compare the moveout of earthquake~~

~~P-wave arrivals (from earthquakes reported in the revised NOA catalog) with earthquake to channel epicentral distances (Fig. S1) to refine the cable location offshore.~~ Automatic picking of P-wave arrivals along the fiber resulted from applying PhaseNet-DAS (Zhu et al., 2023). We employ EMODnet bathymetry (<https://emodnet.ec.europa.eu/en/>) to assign an

elevation to the channels offshore, while for the onshore channels, we rely on the elevation from our GPS device. We also check for loops (typical of telecom infrastructures) in the onshore cable sections by analyzing the normalized energy recorded on each channel (Biondi et al., 2023b), and then cross-validating it with vehicle signals generated while driving along the fiber (Fig. S2). We show the locations of identified loops in Fig. 2 (gray areas between dashed vertical lines).

~~Automatic picking of P-wave arrivals along the fiber resulted from applying PhaseNet-DAS (Zhu et al., 2023)=~~

We perform an initial assessment of data quality by manually inspecting recordings of earthquakes within a ~50 km radius of the fiber starting point using the revised NOA catalog (M_L 0.5–3.4). The catalog lists 91 earthquakes (last accessed September 2025) within the two-week study period, all of which are clearly visible along the fiber (Fig. 2, Fig. S3). ~~We observe that we can successfully record signals from teleseismic earthquakes, mostly on the offshore portion of the cable (Fig. S4).~~ Earthquake recordings show strong amplification (a factor >20) in the offshore segment, while onshore and

offshore maximum noise amplitudes are similar, with slightly higher noise amplitudes offshore (Fig. 2). We observe amplitude scaling with earthquake magnitude that is consistent with theoretical expectations. For example, we obtain an amplitude ratio of ~148 between an M_L 0.6 and M_L 3.0 event separated by ~1.7 km (epicentral locations from the NOA catalog), as shown in Fig. 2c.

We compute the amplitude for each event as a trimmed mean after excluding the upper and lower 10% of values to reduce the influence of outliers. We band-pass filter the waveforms between 3–20 Hz and use channels 4000–5900. Assuming a theoretical scaling of $10^{\Delta M}$, where ΔM is the magnitude difference between the two events,

the observed amplitude ratio corresponds to an implied $\Delta M \approx 2.17$. This value is slightly lower than the idealized expectation for perfectly co-located events and may reflect the minor differences in source location and measurement uncertainties. We note that the M_L 0.6 event in the NOA catalog is based on two station observations. ~~Expected amplitude scaling with earthquake magnitude is also evident: for example, an amplitude ratio of ~230–240 between events of M_L 0.6~~

180 ~~and M_L 3.0 located 1.7 km apart (epicentral locations from NOAA catalog) is consistent with the theoretical value of 250~~
~~that is expected if the events were co-located (Fig. 2e).~~ We also ~~note~~ observe consistently elevated amplitudes ~~signals~~ at both
the onshore–offshore transition zones of the cable (Fig. 2). In addition, we successfully record signals from teleseismic
earthquakes, predominantly on the offshore portion of the cable (Fig. S4).

185 -The seven seismic stations of the ~~Hellenic Unified Seismic Network (HUSN)~~ that complement the DAS data include: FSK
(HP, 2000), ATHR (HA, 2008), VLS (HL, 1975), EVGI, DLMN, ITHC, DRAG (HT, 1981) (Fig. 1, Fig. S3).


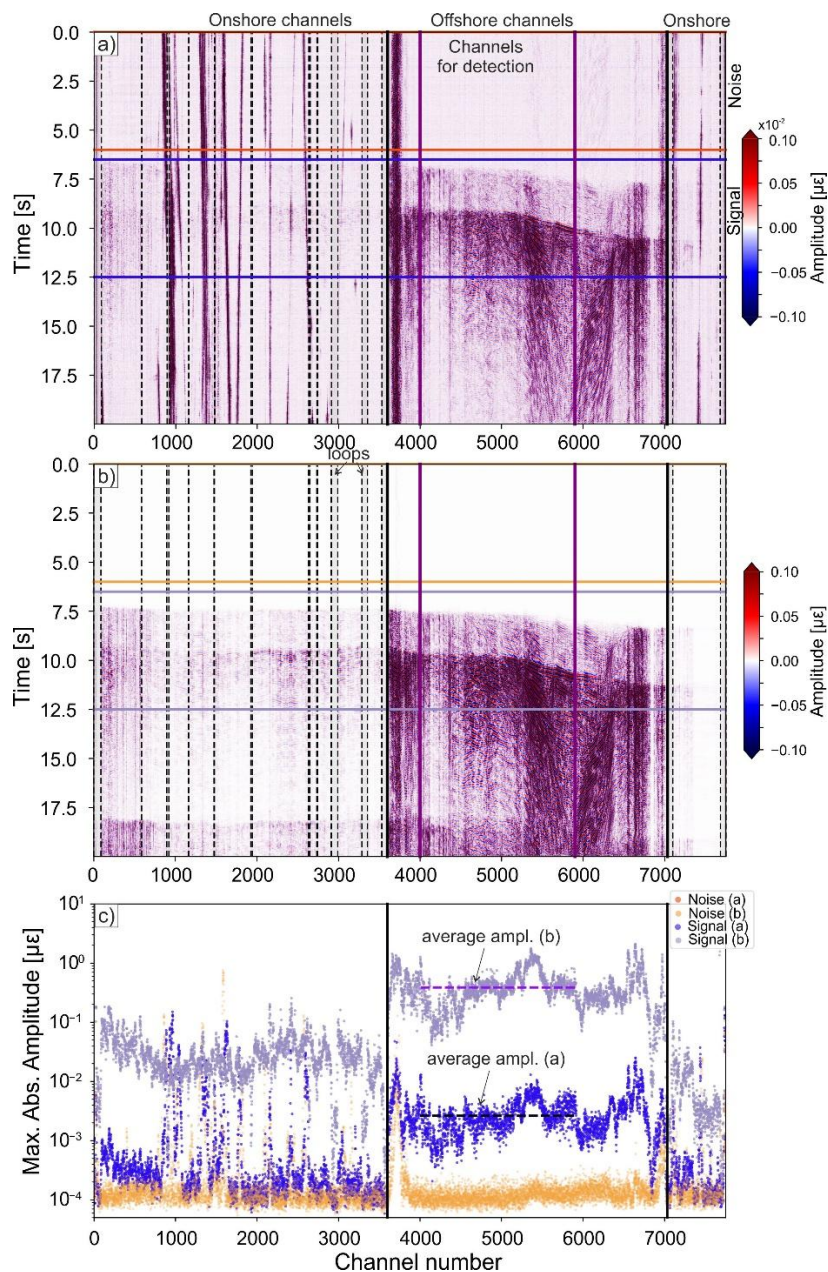


Figure 2. (a) Example of earthquakes recorded along the cable. (a) M_L 0.6 on 08 August 2024 at 10:35 UTC (NOA event-id: noa2024pmvwc). (b) M_L 3.0 Earthquake on 08 August 2024 at 19:18 UTC (NOA event-id: noa2024pnndk). (c) Maximum absolute amplitudes of signal and noise shown in panels (a-b). (c) Horizontal dashed black and purple lines indicate average amplitudes for events displayed in panel a and b, respectively. The length of the horizontal lines shows the range of channels used for calculating the average amplitudes (4000-5900). Panels (a-b) detail the location of onshore and offshore channels, the location of the channels used for the detection, and the location of the identified loops. Traces are band-pass filtered 53-30-20 Hz. The light and dark orange, and violet and blue lines in panels (a-b) highlight the noise and signal windows shown in panel (c). -

3. Earthquake detection using DAS data.


195 We use a semblance-based earthquake detector, HECTOR, to detect earthquakes recorded along the optical fiber (Porrás et al., 2024). The detector evaluates the coherence of the waveforms along pre-computed hyperbolic trajectories with varying curvature and vertex along the fiber and time axes (x - t) using a modified semblance function (Fig. 3). The run of the detector requires a set of pre-processing steps that include: (1) removing the mean and linear trend of each trace; (2) normalizing trace amplitudes to reduce the effect of geometrical spreading, fiber coupling, and nonlinear effects; (3) applying a band-pass filter of 5-30 Hz as well as a (4) common mode noise removal ~~through-via a frequency-wavenumber (f/k) filter (i.e., removal of $k=0$)~~ by removing the zero-wavenumber ($k=0$) component, which corresponds to coherent signals that arrive simultaneously across all DAS channels without exhibiting any phase delay.

Owing to the strong signal amplification offshore and the clearer hyperbolic seismic phase arrival moveouts, we perform the detection using an offshore segment of the fiber (Fig. 2). Testing different configurations led us to use channels 4000-5900 for detection (Fig. 1c, Fig. 2), corresponding to a total length of ~ 3900 m. Since the target seismicity cluster northwest of Kefalonia lies beyond the fiber's extent, we fix the hyperbola vertex at channel 4000 (bottom Fig 3c). We let the curvature of the hyperbola vary between 130 - 200° with steps of 5° and use temporal windows of 30 samples with steps of 10 samples to calculate the semblance and evaluate the coherence of the signals. We run the detection algorithm on 45-second data windows with a 15-second overlap (Fig. 3). The overlap ensures that potential earthquakes that might occur across two consecutive files are not missed. To eliminate duplicate entries, we de-cluster the initial detection list by removing signals that occur within 3 seconds of each other, retaining only the earliest detection. We choose this 3-second threshold specifically to account for the detector's inability to distinguish between P- and S-wave arrivals, which would otherwise register as separate events. Because the observed $T_S - T_P$ times along the offshore channels do not exceed ~ 2.5 seconds for earthquakes within cluster northwest of Kefalonia (Fig. 2a-b), a 3-second window safely merges these phases into a single event identification for most detections. ~~To avoid duplicate entries, we de-cluster the initial detection list by removing signals that occur within 3 seconds of each other and keep the earliest detection. We choose a 3-second threshold because the observed $T_S - T_P$ along the offshore channels (Fig. 2a-b) is ~ 2.5 seconds for earthquakes in the cluster northwest of Kefalonia. The detector is unable to distinguish between P- and S waves, without additional processing this can lead to P- and S waves from a given earthquake being classified as separate events.~~ The 15-second overlap between consecutive windows may also cause the same event to be detected twice, which we also mitigate with the de-clustering. We note that detection time (Fig. 3a) may be shifted with respect to the phase arrival observed in Fig. 3c because the vertex and the curvature of the hyperbola provide the highest signal coherence, which may not be perfectly corresponds with the earliest time of the phase arrival.

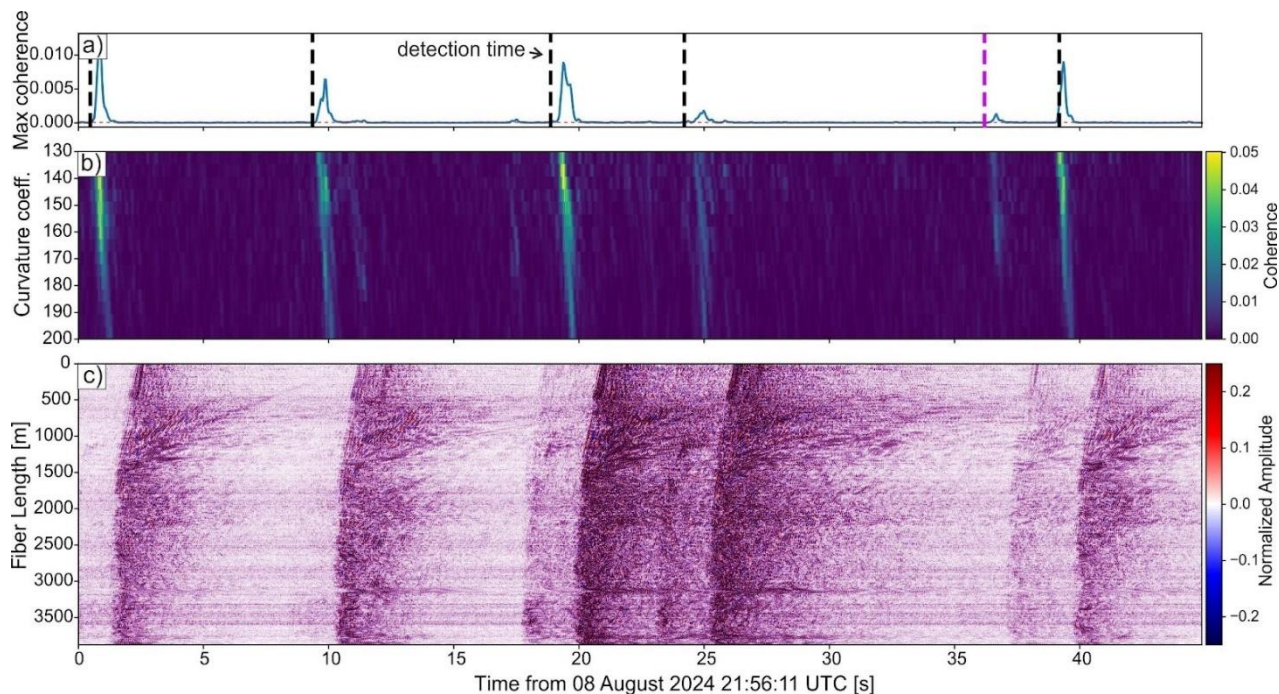

225 **Figure 3. (a) Coherence time series in a 45-s window showing six detections. Vertical dashed black lines mark detection times. Violet vertical dashed line (second from the right) indicates a detection identified in the subsequent window (30–75 s) and not in the time window shown here (see text). (b) Semblance matrix, where the coherence maxima highlight events detected by HECTOR (Porrás et al., 2024). (c) DAS recording with y-axis channels ranging from 4000 (bottom) to 5900 (top). See text for details of trace processing (Section 3). Note that detection times may mark the S-wave arrival, where P-waves are not always clearly visible.**


Running the HECTOR detection algorithm on the 2-weeks of data leads to a total of 6,817 detections (Fig. 4). The number of
 230 detections increases substantially relative to the revised NOA catalog, with the highest counts occurring after M_L 2.5+ earthquakes listed in that catalog. (Fig. 4). The number of detections within 1-hour bins following M_L 2.5+ events from the NOA catalog exceeds 100 and exhibits an Omori-like decay (Fig. 4). We note that all M_L 2.5+ NOA earthquakes reported in Fig. 4 occurred within the active cluster northwest of Kefalonia (pink box in Fig. 1). Importantly, although we calibrate the detector parameters to maximize sensitivity to the region of elevated seismicity offshore northwest of Kefalonia Island, we
 235 successfully detect all 91 earthquakes reported in the NOA catalog that occurred within ~ 50 km of the fiber’s starting point (Fig. 1). The sensitivity to various azimuthal directions, distances, and magnitudes suggests that the set of parameters, DAS channels, and waveform processing used in the detector (as applied in this study) offer sufficient flexibility.

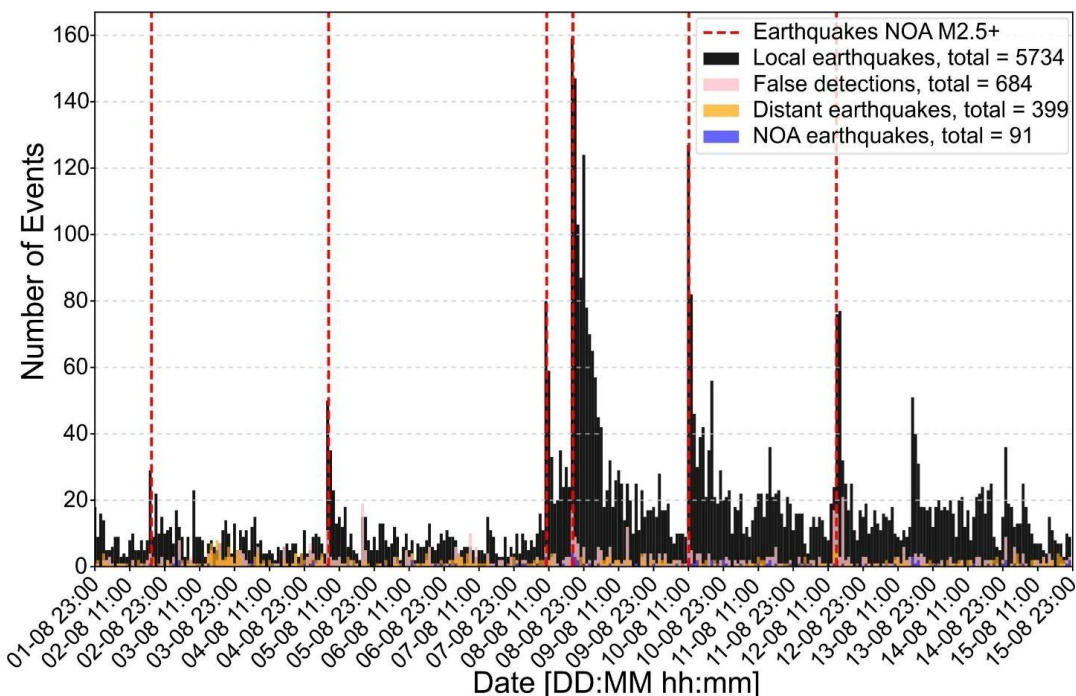

240 **Figure 4. Histogram of detections with 1-hour bins obtained with HECTOR from 1 August 2024 at 23:00 to 15 August 2024 at 23:00. Detections are classified after manual inspection of the signals. Distant earthquakes represent signals with $T_S-T_P > \sim 6$ s, where all 91 earthquakes from the revised ~~National Observatory of Athens (NOA)~~ catalog within ~ 50 km of the cable starting point (Fig. 1b) are included in the histogram. Vertical lines indicate $M_L 2.5+$ earthquakes from the revised NOA catalog.**

We manually inspect all detections and classify them into three groups based on their manually determined T_S-T_P values and
 245 arrival moveout: i) local earthquakes (Fig. 4, Fig. 5a–b), ii) distant earthquakes (with $T_S-T_P > \sim 6$ s) (Fig. 4, Fig. 5c), and iii) false detections (Fig. 4, Fig. 5d–e). Local earthquakes (5,734), include events within ~ 50 km of the start of the cable, are identified by coherent signals along the fiber that commonly have clearly visible P- and/or S-wave arrivals (Fig. 5a–b). Smaller-amplitude earthquakes are recognizable primarily from characteristic reverberations between channels 5000–5500 in the submarine section of the cable (Fig. 5b). We inspect some of the weaker amplitude earthquakes with a spectral over-
 250 subtraction denoiser (Pascucci et al., 2026) to confirm that the signals correspond to real seismic events (Fig. S4). False detections (684) include non-seismic signals (e.g., boat noise; Fig. 5d), triggers within the coda of larger events where P- and S-wave arrivals are absent or unclear (Fig. 5e), and duplicate entries. In the case of duplicate detections, we retain the earliest detection (typically the P-wave arrival) and classify the latter detection as false. For example, we retain the P-wave arrival in
 255 Fig. 5c as the detection of the distant event, while the S-wave arrival is rejected as a false detection. We obtain a false detection rate of approximately 6% (399 out of 6,817 detections), which we consider a conservative overestimate. This is because some cases classified as false detections correspond to S-wave arrivals for which the associated P-wave is also

detected, but the S-wave was not automatically removed during the 3-second de-clustering process. Manual inspection of signals also reveals some missed events, particularly during the most active periods (i.e., after the 8th of August, Fig. S6).

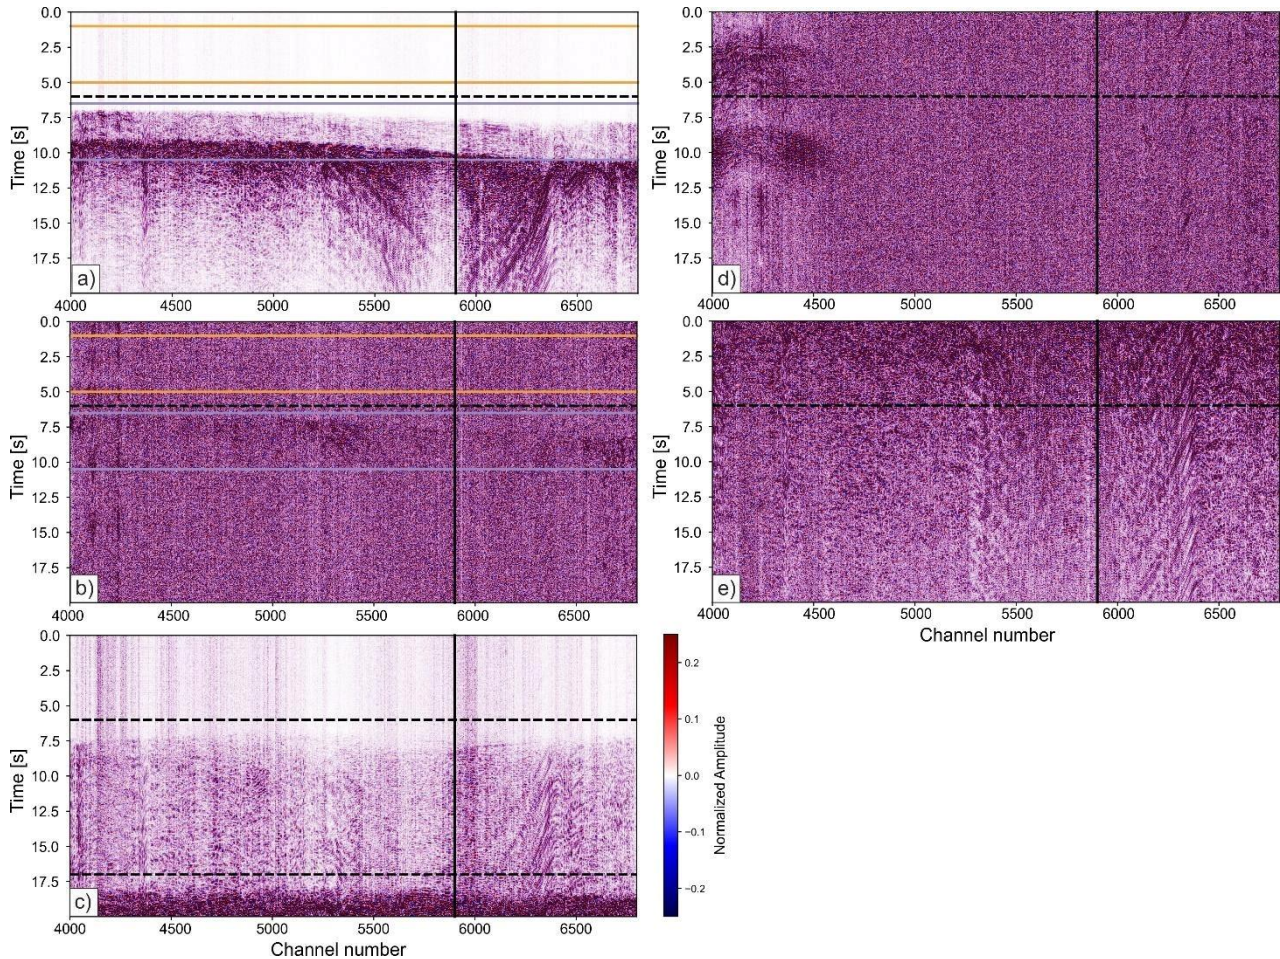

260 **Figure 5. Example types—Typical examples of event detectionsdetected signals.** (a) M_L 1.2 earthquake, (b) M_L 0.3 earthquake, (c) distant earthquake, (d) false detection, (e) false detection. Panel (d) likely shows a signal from a boat while e) represents a detection within the coda of an earthquake. We obtain two detections in panel (c), where the earlier detection (P-wave arrival) is retained. We declare the second detection from the S-wave arrival as false. Dashed horizontal lines indicate the detection time obtained from HECTOR while the orange and purple lines in panels a-b indicate noise and signal windows (4 seconds), respectively, that are used to calculate the signal-to-noise (SNR) ratios (SNR). The detections ~~result are obtained~~ from channels 4000-5900, while SNR ~~ratios result are calculated~~ from all offshore channels 4000-6800 (~~signals-channels~~ with the highest SNR, Fig. 2). Fig. S5a-b shows the event in panel (b) before and after the application of a spectral over-subtraction denoiser.

265

4. Earthquake location and local magnitude estimates.

270 We initially locate and calculate local magnitudes for high-SNR detected local earthquakes by combining DAS and seismic station data. We calculate SNR on offshore fiber channels (4000-6800) considering a noise window from 1-5 seconds before the detection time and a signal window from 0.5-4.5 seconds after the detection time (Fig. 5). We compute the average Root-Mean-Square (RMS) values for noise and signal on traces band-pass filtered between 5–20 Hz, using a trimmed mean that removes the highest and lowest 10% of values (trim fraction 0.1).

We then calculate SNR as follows:

275

$$\text{SNR} = 20\log_{10}(\text{RMS}_{\text{signal}}/\text{RMS}_{\text{noise}}).$$

280 We consider local earthquakes (following the criteria ~~reported~~ outlined above) with a SNR > 15–12 dB for hypocentral location and magnitude estimation, resulting in a subset of ~~297–456~~ events ~~from-out of~~ the 5,734 detected local earthquakes. We manually include a M_L 3.4 earthquake on 08 August 2024 at 19:18 (event id: kef2196) despite its low SNR of 5.3 dB, as it represents the largest earthquake recorded northwest of Kefalonia during our study period. The low SNR results from the origin time being ~12 seconds after a nearby M_L 3.0 (event id: kef2195) whose coda wave contaminates the window containing the primary phase arrival of the M_L 3.4 earthquake. Thus, our initial dataset consists of 457 earthquakes for location. The restrictive SNR threshold reflects the goal of building a high-quality reference catalog of locations and magnitudes. We perform automatic P- and S-wave arrival picking on DAS data using PhaseNet-DAS (Zhu et al., 2023) for each of the ~~297–457~~ earthquakes. We define 20-second windows for PhaseNet-DAS that start 6 seconds before the detection time and end 14 seconds after it (same as in Fig. 5). We follow the preprocessing used in the PhaseNet-DAS implementation (https://ai4eps.github.io/EQNet/phasetnet_das/), including conversion of strain to strain rate via temporal differentiation. We apply an additional band-pass filter between 5–40 Hz as part of our preprocessing. We manually inspect all picking results and observe good quality P- and S-phase picks. ~~We note that we convert strain to strain rates as one of the required preprocessing steps for PhaseNet-DAS and bandpass filter the records between 5–40 Hz. We observe P and S arrivals of good quality despite PhaseNet-DAS being trained on raw strain rate data sampled at 100 Hz (Fig. S7).~~

285

290


295

To reduce the number of DAS channels for earthquake location and achieve a number comparable to the seismic stations, we subdivide the cable into 12 segments (Fig. 1c) using a custom geometric clustering algorithm. The algorithm uses Density-Based Spatial Clustering of Applications with Noise (DBSCAN, Ester et al., 1996) to group channels exclusively by their spatial coordinates. It automatically instantiates a new segment boundary whenever the azimuthal angle variation exceeds a specified threshold. We allow a maximum azimuthal variation of 60°, applied an azimuth smoothing window of 50 channels, and enforce a minimum constraint of 100 channels per segment. To reduce the number of DAS channels for earthquake locations and make it comparable to the number of seismic stations, we split the optical fiber into 12 segments based on

300 ~~azimuthal coverage and number of channels (Fig. 1c). We choose segments based on a clustering algorithm that allows a~~
~~maximum azimuthal variation of 60°, use an azimuth smoothing window of 50 channels, and a minimum number of 100~~
~~channels per fiber segment.~~ We assign median P- and S-wave arrival times that we estimate in a prior step with PhaseNet-
DAS applied to the entire fiber to the median channel for each of the 12 segments. Finally, we download waveforms from
the seven stations closest to the fiber (Fig. 1, Fig. S3) and manually pick P- and S-wave arrival for each of the 297
305 earthquakes in Snuffler (Heimann et al., 2017) when data quality permits.

4.1. Earthquake location

We consider events with a P- or an S-wave arrival identified by Phasenet-DAS on at least 10 of the 12 fiber segments and
with a clear P- or S-wave arrival at a minimum of ~~3~~three seismic stations for earthquake location. The minimum required
number of segments and stations assures adequate azimuthal coverage for the events in the cluster offshore northwest of
310 Kefalonia. We compute earthquake locations with NLLoc (Lomax et al., 2000) using arrival times from both DAS and
seismic station data and a local 1-D velocity model (Haslinger et al., 1999). We revised the original velocity model by
removing the second layer at 0.5 km depth ($V_p = 5.47$ km/s), maintaining lower velocities from 0 to 2 km depth (Table S1)
to reflect the presence of unconsolidated sediments beneath the offshore cable segment. ~~The removal of the second layer~~
~~from the original velocity model reduces the number of very shallow earthquakes (0-1 km) and improves depth resolution~~
315 slightly. We calculate static phase arrival time residuals at the seismic stations and DAS channels used for location and
include them in the final NLLoc run. Incorporating these residuals partially accounts for velocity model heterogeneities and
mitigates the limitations of a 1D model. We note, however, that static station corrections are influenced by the spatial
distribution of seismicity and are most appropriate for the region with the highest event density for this data set. We
successfully locate ~~284-356~~ of the ~~297-457~~ local earthquakes (Fig. 6). Hypocenter solutions for the remaining events were
320 either recorded at only two seismic stations or lacked a median phase arrival time on at least 10 cable segments, which
inhibited robust solutions. We obtain average semi-major and semi-minor axis error ellipse values of 1.5 ± 0.5 and 0.8 ± 0.5 4
km, respectively, and vertical errors of 1.9 ± 0.7 6 km (Fig. S8). ~~A total of 280 of the 284 earthquakes have semi-major error~~
~~ellipse axis values and vertical errors < 5 km (Fig. S8).~~

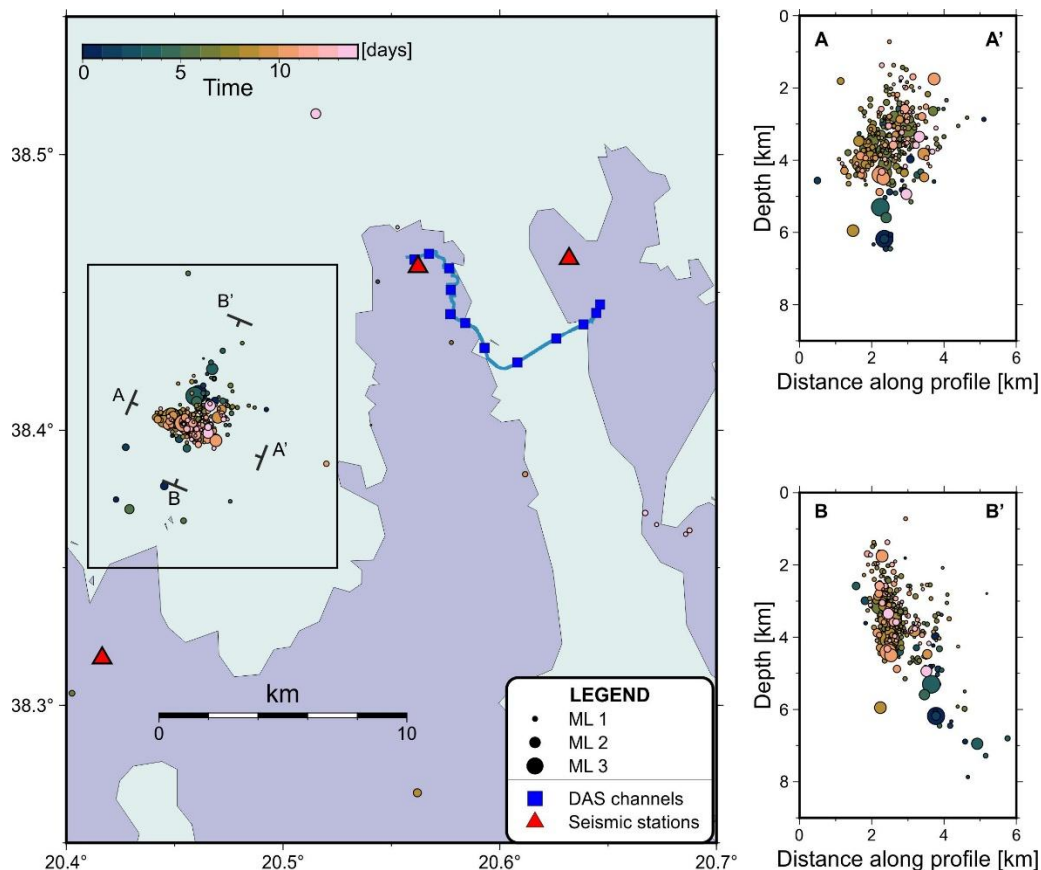

325 Figure 6. Earthquake locations derived from events with average SNR > 1512, estimated along the offshore portion of the optical
 fiber (channels 4000–6800) by combining P- and S-wave arrival times from DAS and seven nearby seismic station data. Local
 magnitudes are computed using data from the four seismic stations on Kefalonia and one on Ithaki (shown in Fig. 1). Blue squares
 indicate the median channel positions for each fiber segment, associated with the corresponding median P- and S-wave arrival
 times (see Fig. 1 and Section 4). The black box denotes the area shown by the pink box in Fig. 1 and outlines the most seismically
 330 active region during the two-week study period. Seismicity cross-sections include events located within 2 km of either side of each
 profile trace.

4.2. Earthquake magnitude estimate

We estimate local magnitude (M_L) of located earthquakes using seismic station data following the empirical equation-relation
 of Hutton and Boore (1987) because the relation is also employed by NOA for M_L calculations. (Melis and Konstantinou,
 335 2006). We remove instrument response and convert waveforms to Wood-Anderson equivalent amplitudes. We then apply a 1
Hz, high-pass filter before calculating amplitudes at seismic stations. apply a bandpass filter to the waveforms in the band 2–
30 Hz and calculate the maximum amplitude on the two horizontal components at each of the four seismic stations on
Kefalonia and the one on Ithaki (Fig. 1). The 1 Hz high-pass filter helps remove longer period microseismic noise and
improves magnitude estimates for smaller earthquakes ($M_L < 0.6-0.8$). We restrict the magnitude analysis to the four stations

340 with the largest number of picks (FSK, DMLN, ITHC, VLS), ~~as well as~~ and a fifth station, ATHR, because of its proximity
 to the cluster of seismicity northwest of Kefalonia (Fig. 1). ~~At For~~ each station we ~~consider~~ use the maximum amplitude
 between the two horizontal components ~~for magnitude~~ to estimate magnitude. Because some events have low amplitudes and
 are not always clearly visible at five stations, or because some signal windows may contain overlapping earthquakes, we
 calculate M_L using only the individual station magnitudes that differ by less than $\Delta M = 0.5$ from the average event
 345 magnitude estimate. We require at least three station magnitudes with $\Delta M < 0.5$ to assign a final M_L , which is then computed
 as the average of the retained values. M_L estimates are possible for all ~~284-356~~ earthquakes based on the above quality
 control requirements, and values range from ~~0.3-2~~ to ~~3.34~~. ~~We note that a M_L 3.4 earthquake is not included in the 284~~
~~earthquakes. While the earthquake is successfully detected, it fails to meet the quality control criteria because it has a SNR =~~
~~5.3. The low SNR results from the fact that its origin time is 12 seconds after a nearby M_L 3.0 whose coda contaminates the~~
 350 ~~window containing the primary phase arrival of the M_L 3.4. Nevertheless, the final catalog includes the event because it is~~
~~added during enhancement by cross-correlation and its magnitude is correctly retrieved from the amplitude ratio (details~~
~~follow in Section 5).~~ A comparison of earthquake magnitudes estimated here and common events in the revised NOA
 catalog shows a correlation coefficient of $R = 0.96-95$ and a near one-to-one relationship, ~~with most of the absolute residuals~~
~~< 0.1-0.2~~, suggesting a strong correlation (Fig. S9). ~~The observed deviations between M_L estimates from this study and those~~
 355 ~~reported by NOA can be attributed to differences in the seismic stations used and in hypocentral locations.~~

5. Catalog enhancement using waveform cross-correlation of DAS data

~~For clarity in our catalog enhancement workflow, we define template events as earthquakes with absolute hypocentral~~
~~locations and magnitude estimates derived from the seismic network, and target events denote local earthquakes whose~~
 360 ~~locations and magnitudes are initially unknown.~~ We begin catalog enhancement by using ~~280-352~~ of the ~~284-356~~ located
 earthquakes as templates ~~events~~. We omit four events from the group of templates that have either a semi-major horizontal
 error ellipse axis and/or a depth error > 5 km, ~~or a depth above the sea level. This error threshold is necessary because large~~
~~location uncertainties propagate into significant errors in.~~ ~~The reason for using the error cutoff is that large location~~
~~uncertainties may lead to large errors in M_L , which in turn, affect their critical since~~ relative magnitudes ~~that~~ are calculated
 365 ~~during enhancement using the amplitude ratios between templates and target events, and we calculate relative magnitudes~~
~~during enhancement using the amplitude ratio between templates and target events. Prior to calculating these cross-~~
~~correlations, the continuous waveform records are downsampled to 50 Hz, and the analysis is restricted to the same offshore~~
~~fiber-cable section (channels 4,000-5,900) utilized used for event detection (Fig. 7). ~~All~~We band-pass filter all traces ~~are~~~~
~~band-pass filtered~~ between 5-20 Hz before computing a channel-based cross-correlation coefficient (CCC) using 4-second

370 ~~time windows that begin 0.5 seconds after the detection time (Figs. 7 and 8). We begin by cross-correlating~~ each of the
5,454-378 ~~detected local earthquakes without a location and a magnitude estimate (target events)~~ with the 280-352 template
events. ~~Each target event is subsequently assigned the location of its most highly correlated template event. We retain the~~
~~initial absolute locations and magnitude estimates in the final catalog f~~For the four events previously excluded from the
template database due to large hypocentral errors (> 5 km) or because located above the sea level, ~~we retain their initial~~
375 ~~absolute locations, and magnitude estimates in the final catalog. We keep the initial location, and magnitude estimates for the~~
~~four events previously excluded based on their larger (> 5 km) hypocentral error. Each target event is then assigned the~~
~~location of the corresponding template event with highest similarity. We downsample the continuous waveform data to 50~~
~~Hz for the cross-correlation calculation and use the same offshore channels (4000–5900) that are used for detection (Fig. 7).~~
~~All traces are bandpass filtered between 5–20 Hz before computing channel-based Cross-Correlation Coefficients (CCC) for~~
380 ~~4-second time windows that begin 0.5 seconds after the detection time (Fig. 7–8).~~

We observe that CCC varies across channels (Fig. 7a, Fig. S10a) and that higher CCC values are associated with channels
with higher SNR (Fig. 7c–d, Fig. S8c-d). To account for varying CCC with SNR, we apply an SNR criterion before
averaging the CCC values of individual channels. We then compute the average CCC between event pairs using the Fisher
mean (Fisher, 1921; Silver and Dunlap, 1987), after excluding 67% of the channels (i.e., 1,273 channels) with the lowest
385 SNR (Fig. 7e, Fig. S10e). The SNR estimation uses the 4-second signal and noise windows noted above (Fig. 5), and the
cutoff threshold is determined based on the lowest-amplitude earthquake in each event pair (Fig. 7b).

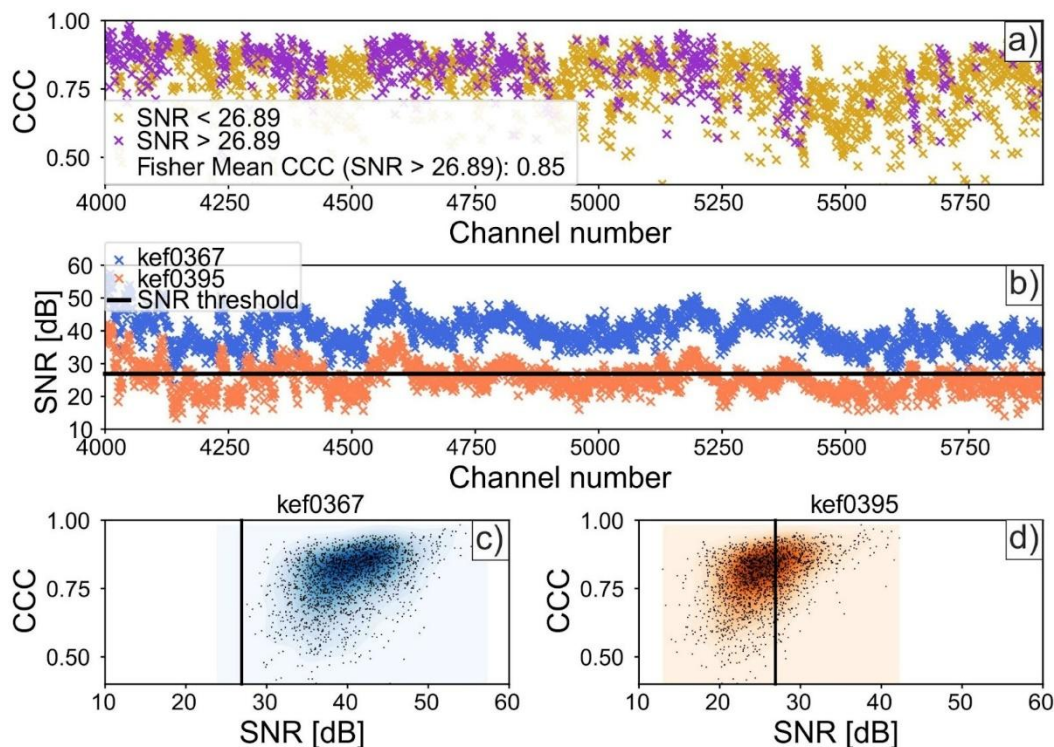


Figure 7. Waveform ~~Crosscross-Correlation-correlation~~ ~~Coefficient-coefficient~~ (CCC) analysis for event pair kef0367 (M_L 1.76) and kef0395 (M_L 10.09). (a) CCC of individual DAS traces from channels 4000-5900. (a) Purple and gold symbols are CCC values above and below a SNR threshold calculated from the smaller amplitude event in the pair (see text and description in panel b of this figure). (b) Signal-to-noise ratio (SNR) of each event in the pair. SNR (in dB) is calculated as the ratio between the root-mean-square of the signal in 4-second windows starting 0.5 s after the detection time and noise windows of the same length starting 5 s before the detection time (refer to Fig. 3a for SNR windows). The thick horizontal black line marks the minimum SNR threshold required for the CCC calculation, which is defined by the lower-amplitude event. The threshold corresponds to the cutoff of the top 33% of channels with the highest SNR. (c–d) CCC versus SNR for events kef0367 and kef0395. The vertical black line indicates the minimum SNR threshold. Average CCC ~~cross-correlation-coefficient~~ of the event pair is 0.85, estimated as the Fisher mean of the individual CCC values. Traces are ~~band-pass-filtered~~ 5-20 Hz. The correlation between SNR and CCC at individual traces is even clearer when showing CCC values over the entire cable (Fig. S10).

Before selecting the minimum CCC value for associating a target event with a template and proceeding with relative magnitude calculations, we first examine the expected decay of CCC with inter-event distance (Menke et al., 1990). We do so by cross correlating all independent template event pairs ~~by cross correlating all template events with one another~~ (excluding the four events noted above with larger hypocentral uncertainties) following the procedure outlined ~~in the previous paragraph~~ ~~earlier in this section~~. We restrict the analysis to template earthquakes since we know their locations. Because our analysis relies solely on absolute event locations, the calculated inter-event distances for a given CCC value are likely to overestimate the true physical separation of the event pairs. Because only absolute locations are available, our inter-event distance estimates for given CCC values should be considered conservative.

As expected, we observe a systematic inverse correlation between CCC and inter-event distance. As expected, inter-event distance increases systematically with decreasing CCC (Fig. S11). For instance, we obtain a median inter-event distance of < 2 km and a 95th percentile of ~5 km for a pair with a CCC of 0.52 (Fig. S11). At 15 km distance, this corresponds to a magnitude error of 0.06 for a 2 km inter-event separation and 0.15 for a 5 km inter-event separation. At 10 km distance, the corresponding errors are 0.05 and 0.2, respectively. In this study, we present results using a conservative CCC threshold of 0.52 that is empirically determined from the observed CCC–distance relationship. Specifically, Fig. S11 indicates a notable increase in inter-event distance for CCC values below ~0.52–0.53. While median inter-event distances remain below ~3 km for CCC values between 0.40 and 0.52, the 95th percentile increases substantially, indicating a higher risk of large spatial mismatches. We therefore exclude lower CCC values to ensure robustness of the event associations. By using a CCC threshold of that allows us to 0.52, we associate 2,515 2,496 target events to template events. We test slightly different CCC thresholds, namely 0.50 and 0.54, in addition to the preferred value of 0.52 used to construct the final enhanced catalog. We find that differences in the number of detected events occur primarily for magnitudes < -0.5 (Fig. S12). We provide all event-pair CCC values to enable reproducibility and allow assessment of the sensitivity of event associations to different CCC thresholds (see Data and code availability). We make all event pair CCC values available so that catalog users can test the effects of using different CCC thresholds to associate target and template events. In Figure 8, we show examples of target-template pairs exceeding the CCC threshold. We observe that nearly all target events (>97–98%) are associated with template events from the cluster northwest of Kefalonia (Fig. S12S13).

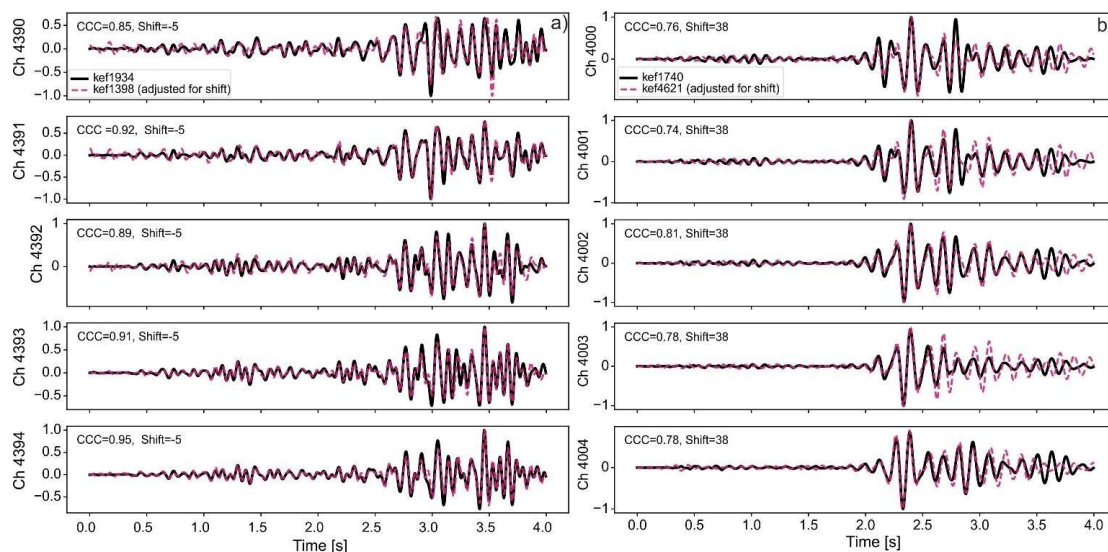


Figure 8. Event pair (template-target) cross-correlation. Black traces are template events with location, and a M_L estimates, while in magenta it is the target event with no (initial) location or magnitude estimate. (a) Event pair kef1934 (M_L 1.23) and kef1398 (M_L 0.23) with average CCC of 0.93. (b) Event pair kef1740 (M_L 0.64) and kef4621 (M_L 0.0–0.2) with an average CCC of 0.58. Traces

430 are band-pass filtered at 5-20 Hz and normalized to make waveforms comparable. CCC is calculated in 4-second windows starting 0.5 seconds after the detection time. CCC at a given channel and time shift (in samples) are indicated for each subpanel.

Before calculating amplitude ratios for the determination of relative magnitudes, we first inspect whether we can correctly retrieve the magnitudes of template events using amplitude ratios, where template M_L estimates originate from seismic stations (Fig. 9). We associate each template event with its most similar template and recalculate the magnitude from the amplitude ratio of band-passed traces (5-20 Hz) on channels 4000-5900. The lower corner frequency of 3 Hz suppresses long-period noise present in the offshore DAS segment. The upper corner frequency of 20 Hz is sufficiently high to capture the peak amplitudes of smaller earthquakes ($M_L \approx 0$) with expected peak spectral amplitudes below the source corner frequency (e.g., Baltay and Abercrombie, 2025), and is sufficiently low to minimize high-frequency effects related to source complexity (e.g., Trugman et al., 2021). We consider the average of the maximum amplitudes of all traces between 4000-440 5900 after removing the highest and lowest 10% values (i.e., trimmed mean) for event pairs with CCC values > 0.52. We calculate relative magnitudes as follows:

$$M_{\text{target}} = M_{\text{template}} + \log_{10}(A_{\text{target}}/A_{\text{template}})$$

445 where M is the magnitude and A is the average of the maximum amplitude.

We ~~find observe strong good~~ agreement between initial M_L and relative M_L estimates ~~across over~~ the full magnitude range, ~~as~~ indicated by a coefficient of determination $R^2 = 0.92$, ~~mean absolute deviations of 0.1 ± 0.1 ,~~ and a best-fitting line ~~with an approximately unit slope slope of nearly 1:1.~~ (Fig. 9). ~~Remaining deviations between seismic-station M_L and DAS-derived relative M_L estimates may be attributed to imperfectly collocated event pairs and/or uncertainties in the initial magnitudes estimated from the seismic stations. Accordingly, we compute relative magnitudes~~ Thus, we proceed with the calculations of ~~relative magnitudes~~ for all target events with a minimum CCC > 0.52 (2,496-515 events) with respect to their template events.

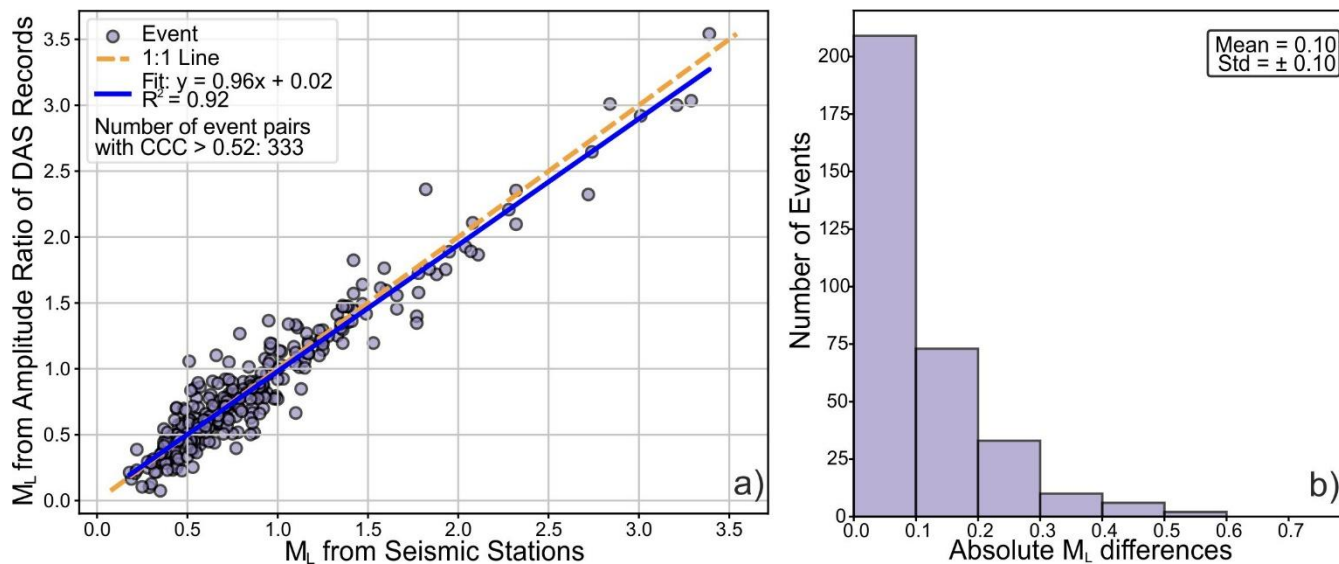


Figure 9. **a)** M_L from seismic stations versus relative M_L derived from DAS data. **b)** Histogram of differences between M_L from seismic stations and relative M_L derived from DAS data. The analysis includes all located earthquakes (i.e. templates) with semi-major horizontal error ellipse axes and vertical error < 5 km (352280 events). Relative M_L for each template event is obtained from the mean amplitude ratio with respect to the most similar event using band-pass filtered waveforms (5-20 Hz). Average amplitude ratios are calculated using event pairs with a Cross-Correlation-Coefficient (CCC) > 0.52 (268-333 of the 280-352 template events) on channels 4000–5900 using a trimmed mean that exclude the highest and lowest 10% of values.


455

460 Adding relative magnitude estimates to the 284-356 events with M_L calculated from seismic stations leads to 2,78710 magnitude estimates (48.50% of the local earthquakes). We observe that 2,718-790 earthquakes with a magnitude estimate (97.77%) are located offshore northwest of Kefalonia and are mostly clustered in space (Fig. 1, Fig. 5, Fig. S12S13). The remaining events are scattered within the study region (Fig. S12S13), with a few clusters located along the Strait of Ithaki. Figure S11-S13 shows the distribution of all events detected and located in this study with a magnitude estimate. There are

465 41-10 events in common with the revised NOA catalog (the NOA catalog reports 91 earthquakes within a radius of 50 km from the start of the cable) that are not included in our catalog of 284-356 events, despite being successfully detected. Nine Eight of the eleven-ten events common to the NOA catalog are omitted because of their average SNR at offshore DAS channels being <15-12 dB(nine events), and they were therefore not considered for initial location (Section 4.1). The last two of the eleven-ten events are omitted because we observe $T_S - T_P > 6$ seconds at offshore DAS channels. The fact that we detect

470 but do not locate a few earthquakes included in the revised NOA catalog reflects our focus on detecting and locating seismicity in the highly active region offshore northwest of Kefalonia. By considering events within the active region northwest of Kefalonia (Fig. 1, Fig. 5, Fig. S12S13), we observe a ~3738-fold increase in the number of events with a magnitude estimate relative to the revised NOA catalog (Fig. 10). All events in our catalog down to M_L 2.4 are common to the NOA catalog (Fig. 10a), while the number of events from this study significantly increases at lower magnitudes (Fig.

475 10). Specifically, we estimate a magnitude of completeness of $M_c = -0.54$ using both a maximum curvature and Goodness-of-Fit Test (Wiemer and Wyss, 2000) and a b-value = $0.850.95 \pm 0.02-03$ based on the maximum likelihood estimate (Aki, 1965) (Fig. 10a). The enhanced earthquake catalog shows inter-event times as short as 3-three seconds (the minimum allowed inter-event time from de-clustering) and average inter-event times for 100-event windows down to 30 seconds.

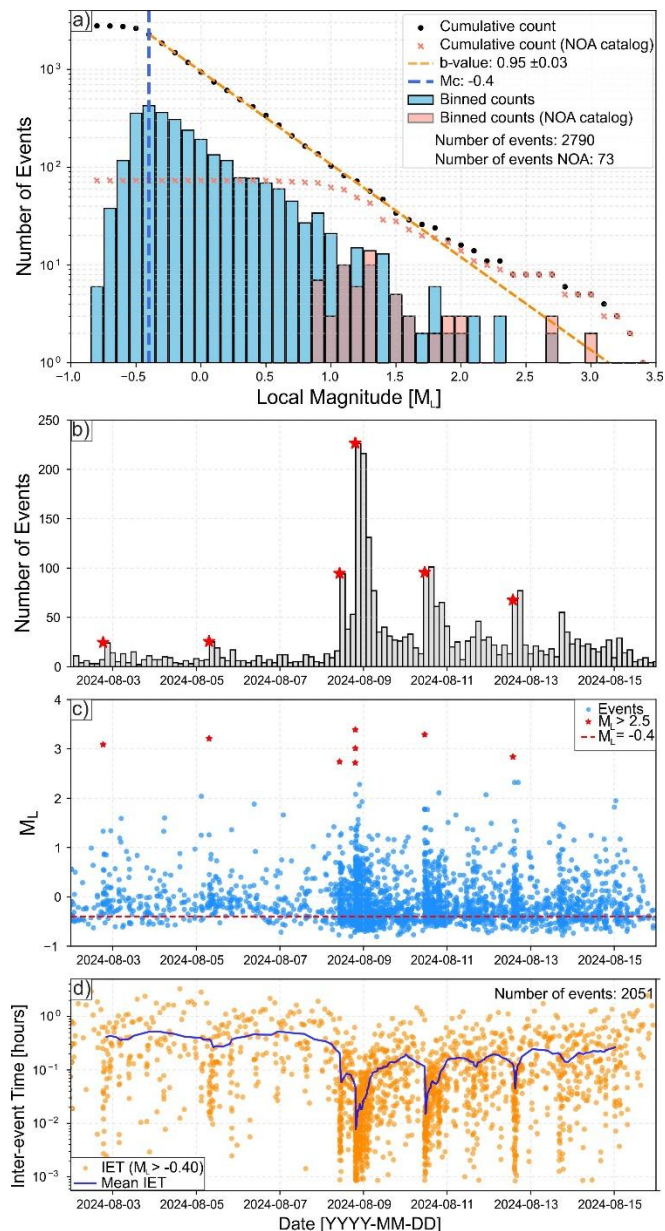

480 **Figure 10. Time–space–magnitude distribution of seismicity in the region 38.35–38.46°N, 20.41–20.525°E (black box in Fig. 1 and**
Fig. 6). (a) Frequency–magnitude distribution of events from this study compared with events from ~~NOA the National Observatory~~
~~of Athens~~ for the same period and region. The b-value is estimated using Maximum Likelihood (Aki, 1965), and the magnitude of
completeness (M_c) using the Goodness-of-Fit Test and Maximum Curvature method (Weimer and Wyss, 2000). (b) Number of
 485 **events over time (3-hour bins). Red stars indicate $M_L > 2.5$ earthquakes. (c) Event magnitudes versus time for individual events.**
(d) Inter-event times (100-event sliding windows with 90% overlap) between successive events with $M_L > M_c$ plotted against time.

6. Discussion

~~This study releases two-week DAS waveforms and a high-resolution earthquake catalog derived from the integration of DAS recordings and publicly available data from conventional seismic stations. The dataset captures a period of exceptionally high seismicity within 10–15 km of the fiber-optic cable at rates exceeding 100 events per hour. The main goal of this work is to integrate data from DAS and conventional seismic networks to construct a high-resolution earthquake catalog. One notable feature of this dataset is the exceptionally high seismicity rate within 10–15 km of the optical fiber, which at times exceeds 100 events per hour~~ (Fig. 1, Fig. 6). Although other open-access DAS datasets also contain high event rates, most of them were acquired in boreholes and target induced seismicity (the FORGE dataset, Porras et al., 2024), rather than natural earthquake sequences.

495 ~~Concerning our dataset,~~ **†**The highest seismicity rates occur offshore in a cluster northwest of Kefalonia with a ~5 km radius where azimuthal coverage from land stations is limited (Fig. 1, Fig. 6). The intense seismic activity combined with sparse station geometry are challenging for the monitoring of active seismic sequences (Grigoli et al., 2021; Karastathis et al., 2015). This work shows that combining DAS and seismic station data can make it possible to overcome some of the challenges associated with observing offshore earthquakes: using DAS channels for dense wavefield sampling and
 500 earthquake detection, combining DAS and seismic station data for determining hypocenter locations, and using seismic stations for amplitude calibration and magnitude estimation.

The enhanced catalog presented here exhibits high temporal resolution, with inter-event times as short as three seconds and a completeness magnitude of $M_c = -0.54$. It captures evolving statistical features of the seismic sequence, including a transition from more Poisson-like inter-event time distribution to densely clustered activity associated with mainshock–aftershock activity (Figure 10c). The catalog also reveals notable changes in aftershock productivity. For instance, two $M > 3$ earthquakes before 8 August 2024 were not followed by clear aftershock activity, whereas similar-sized and smaller events after that date produced pronounced aftershock sequences (Figure 10b-c). After 8 August, we observe a systematic relation between mainshock magnitude and aftershock inter-event times, with larger mainshocks followed by shorter aftershock inter-event times (Figure 10d). The distribution of the seismicity highlights a nearly vertical WNW-ESE striking fault (Fig.
 510 6), which is consistent with the geometry observed by Anagnostou et al. (2025), who used 3-month data between the end of February and the end of April 2025. These observations underscore the high spatial and temporal resolution of the catalog that we will discuss in a detailed analysis of the space–time–magnitude patterns that will be addressed in a separate study.

515 The amphibious nature of the telecommunication cable introduces additional features of shallow crustal structure that ~~are~~ warrant further investigation, ~~such as including~~ the strong signal amplification observed along the marine segment and its potential influence on magnitude determination when using ~~only~~ DAS data alone. This offshore amplification may reflect not only variations in shallow crustal structure, but also differences in DAS sensitivity to body and surface waves, mechanical coupling, cable construction, and installation conditions across the onshore-offshore transition.

6.1. Distorted waveforms

520 The close proximity of the cable and the large magnitudes of the sequence also led to distorted waveforms on many channels after the S-wave arrival for earthquakes with $M_L > \sim 2$. The distortion is mostly limited to offshore channels but can also appear on onshore channels for events with $M_L > \sim 2.8$. This distortion is likely related to cycle-skipping issues in DAS caused by dynamic range limitations (Katakami et al., 2024). In fact, for a sample of earthquakes exhibiting distorted waveforms, we observe a phase shift corresponding to an integer multiple of 2π that is consistent with cycle-skipping.

525 However, determining the exact cause is challenging because the data were decimated by a factor of 20 before storage (from 5000 Hz to 250 Hz), eliminating higher-frequency energy above 125 Hz. With our settings, the maximum change measurable between consecutive samples is $\sim 0.033 \mu\epsilon (\pm\pi)$. While the QuantX instrument can measure larger signal amplitudes, it cannot track phase changes exceeding $\pm\pi$ between consecutive samples. Nevertheless, the observed distortion of the signals, likely due to cycle-skipping, did not affect our analysis: maximum earthquake amplitudes are correctly measured (Fig. 9), and waveform shapes remain undistorted after band-passing earthquakes in our frequency range of
530 interest (Fig. 11).

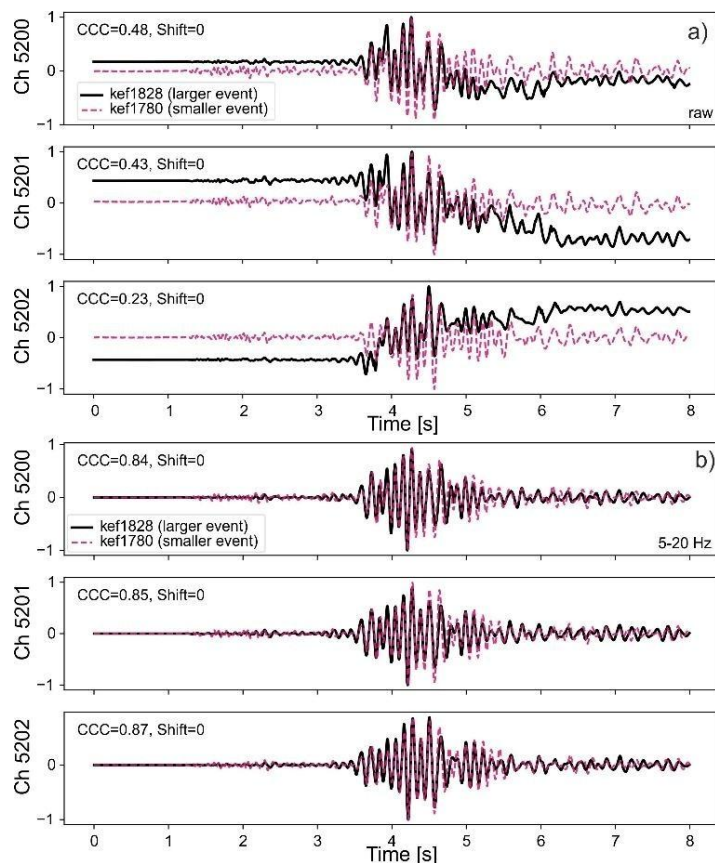


Figure 11. Waveforms of similar events (average CCC = 0.7 from DAS), one of which is affected by cycle skipping. The M_L 2.8–7 event kef1828 (black) shows waveform distortion at the S-wave arrival, while the M_L 1.4 event kef1780 (violet) does not. (a) Raw waveforms. (b) Band-pass filtered waveforms (5–20 Hz). Hypocentral locations: kef1780 – 38.4018°N, 20.4502°E, depth 3.41 km; kef1828 – 38.4018°N, 20.4547°E, depth 3.76 km. Note the high waveform similarity after filtering the traces. The events show an average CCC of 0.7 at seismic stations (Fig. S13S14)

7. Potential Applications—applications of the datasets

The datasets released in this work ~~offers a wide~~ may offer a range of potential applications. The exceptionally high seismicity rate, with inter-event times as short as three seconds, ~~creates~~ provides an ideal testbed for developing and evaluating advanced detection and location methods tailored to DAS data. To support such efforts, we provide a ~~detailed~~, manually verified event catalog that ~~can serve~~ as a reliable reference dataset. In addition, the inclusion of very small-amplitude signals, some with magnitude estimates and others without, ~~offers a valuable opportunity~~ may be useful to design and test denoising methods for developing and testing denoising approaches (e.g., Fig. S5).

545 ~~The integration of the DAS array within an open-access seismic network offers an opportunity to evaluate DAS-enhanced event location methods and explore hybrid location strategies. The integration of the DAS array within an open-access seismic network makes this dataset a controlled environment for evaluating DAS-enhanced seismic event location performance and for the development of new hybrid location techniques. This setting also allows testing of various strategies to mitigate biases that could arise from the large difference in the number of sensors between the DAS cable and the traditional network, such as automatic DAS channel selection. Furthermore, DAS recordings acquired on seafloor cables~~
 550 ~~may exhibit higher amplitudes compared to onshore cables, as observed in this study. Such differences could reflect a combination of site, coupling, and propagation effects that may in turn introduce biases in magnitude estimation. Furthermore, DAS recordings acquired on the ocean floor may exhibit a higher signal to noise ratio compared to more distant land based seismometers. This setting also allows testing of various strategies to mitigate biases arising from the large difference in the number of sensors between the DAS cable and the traditional network, such as automatic DAS channel selection. Finally, the~~
 555 dataset ~~provides~~ may offer valuable opportunities for machine learning applications. With nearly 6,000 recorded events, it can be used to train new models or to investigate transfer learning of existing ones.

8. Data & ~~code~~ Code Availability

Continuous DAS data waveforms are available from (Bocchini et al., 2025) <https://www.geophysik.ruhr-uni-bochum.de/~marco/ReSeed/>
 560

Codes to read and plot the events (or detections) recorded along the optical fiber, earthquake catalogs, event pairs cross-correlation coefficients, cable geometry, and PhaseNet-DAS picks are available from: <https://gitlab.ruhr-uni-bochum.de/bocchgxw/das-kefalonias/-/tree/7a1933f67475119fb281f4efb43f0370686e00b8/>

We use PhaseNet-DAS (Zhu et al., 2023) for phase picking on DAS data, which is available from
 565 https://ai4eps.github.io/EQNet/phasetnet_das/

We use HECTOR (Porrás et al., 2024) for event detection on DAS data, which is available from <https://github.com/juanucr/HECTOR/tree/main>

We use Snuffler, available through Pyrocko, for manual picking of seismic waveforms (Heimann et al., 2017)

We use Obspy for processing of seismic station waveforms (Beyreuther et al., 2010)

570 We create figures using Matplotlib (Hunter, 2007) and GMT (Wessel et al., 2019).

9. Metadata

9.1. DAS Metadata

- Interrogator: OptaSense QuantX
- File Format: HDF5
- 575 • Number of Channels: 7,750
- File Length: 30 seconds
- Ping Rate: 5,000 Hz
- Sampling Rate: 250 Hz
- Gauge Length: 10.3 m
- 580 • Channel Spacing: 2.04 m
- Data Unit: Optical phase shift*

**Note: The raw data can be converted to strain using the script provided in the accompanying repository (see [Data and Code Availability](#) section), which also demonstrates the HDF5 file structure and includes functions for data reading and visualization.*

9.2. Cable Geometry

The cable geometry is provided as a CSV file that defines the spatial coordinates of the DAS array after the removal of looped or otherwise non-usable fiber sections. Consequently, the number of unique channels in this geometry file is lower than in the raw HDF5 waveform files; only channels explicitly listed in this file are considered valid for analysis. The CSV file contains the following columns:

- 590 • channel_number_recorded: The channel number directly matching the channel numbers in the HDF5 files.
- latitude / longitude: Geographic coordinates in decimal degrees.
- elevation_m: Elevation in meters (negative values indicate channels below sea level).
- comment: Label indicating whether the channel is located on Kefalonia, offshore, or on Ithaki.
- final_section_id: Identifier for the specific cable sections used for earthquake locations.

9.3. Seismic Station Waveforms

- 595 • Seismic Stations: HP.FSK, HA.ATHR, HL.VLS, HT.EVGI, HT.DLMN, HT.ITHC, HT.DRAG
- Sampling Rate: 100 Hz

- Data Source: Continuous seismic waveforms are publicly accessible via the NOA EIDA node (<https://eida.gein.noa.gr/>).

600 9.4. Earthquake Catalogs

9.4.1. Catalog with Absolute Earthquake Locations

The catalog contains 356 earthquakes and is provided as a CSV file with the following columns: event_id (unique event identifier), origin_time (UTC origin time), longitude (decimal degrees), latitude (decimal degrees), depth (km), Nobs (number of observations), and gap (azimuthal gap). Uncertainties are reported in kilometers as H_err and h_err (the semi-major and semi-minor axes of the horizontal error ellipse, respectively) and z_err (depth uncertainty). The catalog also includes the local magnitude (ML) and its standard deviation (ML_std).

9.4.2. Enhanced Earthquake Catalog

This catalog expands upon the absolute locations dataset by incorporating additional events identified via waveform cross-correlation, bringing the total to 2,871 events. The data is provided as a CSV file containing the following columns: event_id (unique event identifier), amplitude (event amplitude in micrometers), ML (local magnitude), reference (the template event ID associated with the target event), CCC (cross-correlation coefficient), detection_time (UTC detection time returned by the detector), longitude (decimal degrees), latitude (decimal degrees), and depth (km).

Note: For the original 356 template earthquakes containing absolute locations, the CCC and reference columns are left blank.

615 ~~Seismic station waveforms can be downloaded through the NOA EIDA node (<https://eida.gein.noa.gr/>), networks HL, HP, HA, HT.~~

-109. Conclusions

In this study, we combine DAS recordings with permanent seismic stations from the HUSN to investigate seismicity on Kefalonia Island between 2–15 August 2024. ~~In this study, we use DAS recordings together with permanent seismic stations from the HUSN to construct a high resolution earthquake catalog for Kefalonia Island between 2–15 August 2024.~~ Applying a semblance-based detector enables identification of more than 5,700 earthquakes within a ~50 km radius of the starting point of the optical fiber. Combining DAS and seismic data analysis and waveform cross-correlation enables location and magnitude estimates of ~~2,780–871~~ events, of which ~~2,718–790~~ concentrate in an active cluster offshore northwest of Kefalonia. The catalog shows very high seismicity rates with peaks in earthquake rates that exceed 100 events per hour. Individual inter-event times are as short as 3 seconds, ~~while, and~~ average inter-event times calculated over moving 100-event

~~windows decrease to ~30 seconds as short as 30 seconds derived from 100 event windows.~~ The short inter-event times and a ~~magnitude of completeness (M_c) of -0.5-4~~ enable a detailed spatiotemporal analysis of the seismicity.

630 A comparison of the catalog produced here and the revised earthquake catalog of NOA for the active cluster northwest of Kefalonia shows the same number of events down to M_L 2.4, and a factor of ~~~37-38~~ increase in smaller events for the DAS-seismic-data catalog. The detailed catalog underscores the benefit of using DAS to strengthen seismic monitoring in regions where station coverage is limited and seismicity is intense.

This work makes the following data products publicly available: the DAS-seismic station earthquake catalog, continuous DAS recordings, detection lists, and supporting metadata. The dataset provides a resource for future studies of DAS data processing, integration with seismic stations for earthquake monitoring, and analyses of seismicity, in large part because it
635 targets a highly productive natural seismic sequence. Finally, the main objective of this work is to provide the community with a data set that includes an earthquake catalog, a comprehensive detection list, and two weeks of continuous DAS recordings that can be used to benchmark methodological developments. Such developments may include testing new DAS processing techniques, integrating DAS with standard seismic networks for enhanced monitoring of seismic sequences, and detailed studies of earthquake clustering and processes driving complex seismicity, among many others that we anticipate
640 will be conceived by the community.

Author contribution

G.M.B. Conceptualization, Writing - original draft, Writing - review and editing, Methodology, Visualization, Formal analysis, Data curation, Investigation. E.B. Conceptualization, Writing - review and editing, Methodology, Formal Analysis.
645 M.P.R. Formal analysis, Data curation, Investigation. S.G. Conceptualization, Formal Analysis. G.P. Conceptualization, Formal Analysis. F.G. Conceptualization, Methodology, Writing - review and editing. E. B. Writing - review and editing. E. S. Writing - review and editing. R.M.H. Funding acquisition, Conceptualization, Writing - review and editing, Investigation.

Competing interests

The authors declare that they have no competing interests.

650 Disclaimer:

The authors decline responsibility for any possible errors in the dataset that could lead to erroneous evaluations.

Acknowledgements

The authors would like to thank the student assistants D. Drier and M. Roßbach for helping with the location of the DAS channels and with manual picking of events at seismic stations. The authors also thank M. Bagagli for helping with manual
655 inspection of the initial list of detections. The authors would like to thank Dionisis Alisandratos for his patience and help during the set-up of the DAS experiment, and OTE Greece for providing access to the optical fiber. G.M.B., M.P.R., and R.M.H., would like to thank Roger Crickmore (Luna Innovations) for the helpful discussion on cycle skipping in DAS.

Financial support

G.M.B and R.M.H. acknowledge the financial support of the Volkswagen Stiftung.

660 References

- Aki, K.: Maximum likelihood estimate of b in the formula $\log N = a - bM$ and its confidence limits, *Bull. Earthq. Res. Inst., Tokyo Univ.*, 43, 237–239, 1965.
- Anagnostou, V., Papadimitriou, E., Karakostas, V., and Bäck, T.: Investigating the 2024 Swarm–Like Activity Offshore Kefalonia Island, Aided by Machine Learning Algorithms, *Pure Appl. Geophys.*, 1–31, <https://doi.org/10.1007/S00024-025-03766-3/FIGURES/8>, 2025.
665
- Baltay, A. and Abercrombie, R. E.: Seismic Moment and Local Magnitude Scales in Ridgecrest, California, from the SCEC/USGS Community Stress Drop Validation Study, *Bulletin of the Seismological Society of America*, 115, 1279–1293, <https://doi.org/10.1785/0120240162>, 2025.
- Basili, R., Danciu, L., Beauval, C., Sesetyan, K., Vilanova, S. P., Adamia, S., Arroucau, P., Atanackov, J., Baize, S., Canora,
670 C., Caputo, R., Carafa, M. M. C., Cushing, E. M., Custódio, S., Demircioglu Tumsa, M. B., Duarte, J. C., Ganas, A., García-Mayordomo, J., Gómez De La Peña, L., Gràcia, E., Jamšek Rupnik, P., Jomard, H., Kastelic, V., Maesano, F. E., Martín-Banda, R., Martínez-Loriente, S., Neres, M., Perea, H., Šket Motnikar, B., Tiberti, M. M., Tsereteli, N., Tsironi, V., Vallone, R., Vanneste, K., Zupančič, P., and Giardini, D.: The European Fault-Source Model 2020 (EFSM20): geologic input data for the European Seismic Hazard Model 2020, *Natural Hazards and Earth System Sciences*, 24, 3945–3976,
675 <https://doi.org/10.5194/NHESS-24-3945-2024>, 2024.
- Beyreuther, M., Barsch, R., Krischer, L., Megies, T., Behr, Y., and Wassermann, J.: ObsPy: A Python Toolbox for Seismology, *Seismological Research Letters*, 81, 530–533, <https://doi.org/10.1785/GSSRL.81.3.530>, 2010.
- Biondi, E., Zhu, W., Li, J., Williams, E. F., and Zhan, Z.: An upper-crust lid over the Long Valley magma chamber, *Sci. Adv.*, 9, <https://doi.org/10.1126/SCIADV.ADI9878>, 2023a.

- 680 Biondi, E., Wang, X., Williams, E. F., and Zhan, Z.: Geolocalization of Large-Scale DAS Channels Using a GPS-Tracked Moving Vehicle, *Seismological Research Letters*, 94, 318–330, <https://doi.org/10.1785/0220220169>, 2023b.
- Bocchini, G. M., Brüstle, A., Becker, D., Meier, T., van Keken, P. E., Ruscic, M., Papadopoulos, G. A., Rische, M., and Friederich, W.: Tearing, segmentation, and backstepping of subduction in the Aegean: New insights from seismicity, *Tectonophysics*, 734–735, 96–118, <https://doi.org/10.1016/j.tecto.2018.04.002>, 2018.
- 685 Bocchini, G.-M., Roth, M. P., and Harrington, R. M.: Earthquake Catalog and Continuous Waveforms From a Two-week Distributed Acoustic Sensing Experiment on Kefalonia Island, Greece, <https://doi.org/10.60517/cv43p1601>, 2025.
- Currenti, G., Allegra, M., Cannavò, F., Jousset, P., Prestifilippo, M., Napoli, R., Sciotto, M., Di Grazia, G., Privitera, E., Palazzo, S., and Krawczyk, C.: Distributed dynamic strain sensing of very long period and long period events on telecom fiber-optic cables at Vulcano, Italy, *Sci. Rep.*, 13, 1–17, <https://doi.org/10.1038/S41598-023-31779-2>, 2023.
- 690 Ester, M., Kriegel, H.-P., Sander, J., and Xu, X.: A Density-Based Algorithm for Discovering Clusters in Large Spatial Databases with Noise, In *KDD*, 96, 226–231, 1996.
- Feigl, K., Reinisch, E., Patterson, J., Jreij, S., Parker, L., Nayak, A., Zeng, X., Cardiff, M., Lord, N., Fratta, D., Thurber, C., Wang, H., Robertson, M., Coleman, T., Miller, D., Spielman, P., Akerley, J., Kreemer, C., Morency, C., Matzel, E., Trainor-Guitton, W., and Davatzes, N.: PoroTomo Natural Laboratory Horizontal and Vertical Distributed Acoustic Sensing Data. [Data set], <https://doi.org/10.15121/1778858>, 2016.
- 695 Fisher, R. A.: On the “Probable Error” of a Coefficient of Correlation Deduced from a Small Sample., *Metron*, 1, 3–32, 1921.
- Glubokovskikh, S., Shashkin, P., Shapiro, S., Gurevich, B., and Pevzner, R.: Multiwell Fiber Optic Sensing Reveals Effects of CO₂ Flow on Triggered Seismicity, *Seismological Research Letters*, 94, 2215–2230, <https://doi.org/10.1785/0220230025>,
700 2023.
- Gräff, D., Lipovsky, B. P., Vieli, A., Dachauer, A., Jackson, R., Farinotti, D., Schmale, J., Ampuero, J. P., Berg, E., Dannowski, A., Kneib-Walter, A., Köpfl, M., Kopp, H., van der Loo, E., Mata Flores, D., Mercerat, D., Moser, R., Sladen, A., Walter, F., Wasser, D., Welty, E., Wetter, S., and Williams, E. F.: Calving-driven fjord dynamics resolved by seafloor fibre sensing, *Nature*, 644, 404–412, <https://doi.org/10.1038/S41586-025-09347-7>, 2025.
- 705 Grigoli, F., Ellsworth, W. L., Zhang, M., Mousavi, M., Cesca, S., Satriano, C., Beroza, G. C., and Wiemer, S.: Relative earthquake location procedure for clustered seismicity with a single station, *Geophys. J. Int.*, 225, 608–626, <https://doi.org/10.1093/GJI/GGAA607>, 2021.
- HA: University of Athens, Seismological Laboratory [Data set], <https://doi.org/10.7914/SN/HA>, 2008.
- Haslinger, F., Kissling, E., Ansorge, J., Hatzfeld, D., Papadimitriou, E., Karakostas, V., Makropoulos, K., Kahle, H. G., and
710 Peter, Y.: 3D crustal structure from local earthquake tomography around the Gulf of Arta (Ionian region, NW Greece), *Tectonophysics*, 304, 201–218, [https://doi.org/10.1016/S0040-1951\(98\)00298-4](https://doi.org/10.1016/S0040-1951(98)00298-4), 1999.

- Heimann, S., Kriegerowski, M., Isken, M., Cesca, S., Daout, S., Grigoli, F., Juretzek, C., Megies, T., Nooshiri, N., Steinberg, A., Sudhaus, H., Vasyura-Bathke, H., Willey, T., and Dahm, T.: Pyrocko - An open-source seismology toolbox and library, <https://doi.org/10.5880/GFZ.2.1.2017.001>, 2017.
- 715 HL: National Observatory of Athens Seismic Network [Data set], <https://doi.org/10.7914/SN/HL>, 1975.
 HP: University of Patras, Seismological Laboratory [Data set], <https://doi.org/10.7914/SN/HP>, 2000.
 HT: Aristotle University of Thessaloniki Seismological Network [Data set], <https://doi.org/10.7914/SN/HT>, 1981.
 Hunter, J. D.: Matplotlib: A 2D graphics environment, *Comput. Sci. Eng.*, 9, 90–95, <https://doi.org/10.1109/MCSE.2007.55>, 2007.
- 720 Hutton, L. K. and Boore, D. M.: The ML scale in Southern California, *Bulletin of the Seismological Society of America*, 77, 2074–2094, <https://doi.org/10.1785/BSSA0770062074>, 1987.
 Jousset, P., Currenti, G., Schwarz, B., Chalari, A., Tilmann, F., Reinsch, T., Zuccarello, L., Privitera, E., and Krawczyk, C. M.: Fibre optic distributed acoustic sensing of volcanic events, *Nat. Commun.*, 13, 1–16, <https://doi.org/10.1038/S41467-022-29184-w>, 2022.
- 725 Karastathis, V. K., Mouzakiotis, E., Ganas, A., and Papadopoulos, G. A.: High-precision relocation of seismic sequences above a dipping Moho: the case of the January-February 2014 seismic sequence on Cephalonia island (Greece), *Solid Earth*, 6, 173, 2015.
 Katakami, S., Noda, S., Korenaga, M., Araki, E., Takahashi, N., and Iwata, N.: Potential of Earthquake Strong Motion Observation Utilizing a Linear Estimation Method for Phase Cycle Skipping in Distributed Acoustic Sensing, *J. Geophys. Res. Solid Earth*, 129, e2023JB027327, <https://doi.org/10.1029/2023JB027327>, 2024.
- 730 Lellouch, A., Schultz, R., Lindsey, N. J., Biondi, B. L., and Ellsworth, W. L.: Low-Magnitude Seismicity With a Downhole Distributed Acoustic Sensing Array—Examples From the FORGE Geothermal Experiment, *J. Geophys. Res. Solid Earth*, 126, e2020JB020462, <https://doi.org/10.1029/2020JB020462>, 2021.
 Li, J., Zhu, W., Biondi, E., and Zhan, Z.: Earthquake focal mechanisms with distributed acoustic sensing, *Nat. Commun.*, 14, 1–9, <https://doi.org/10.1038/S41467-023-39639-3>, 2023.
- 735 Li, J., Biondi, E., Heimisson, E. R., Puel, S., Zhai, Q., Zhang, S., Hjörleifsdóttir, V., Wei, X., Bird, E., Klesh, A., Kamalov, V., Gunnarsson, T., Geirsson, H., and Zhan, Z.: Minute-scale dynamics of recurrent dike intrusions in Iceland with fiber-optic geodesy, *Science (1979)*, 388, 1189–1193, <https://doi.org/DOI:10.1126/science.adu0225>, 2025.
- Lindsey, N. J., Martin, E. R., Dreger, D. S., Freifeld, B., Cole, S., James, S. R., Biondi, B. L., and Ajo-Franklin, J. B.: Fiber-
 740 Optic Network Observations of Earthquake Wavefields, *Geophys. Res. Lett.*, 44, 11,792-11,799, <https://doi.org/10.1002/2017GL075722>, 2017.

- Lior, I., Sladen, A., Rivet, D., Ampuero, J. P., Hello, Y., Becerril, C., Martins, H. F., Lamare, P., Jestin, C., Tsagkli, S., and Markou, C.: On the Detection Capabilities of Underwater Distributed Acoustic Sensing, *J. Geophys. Res. Solid Earth*, 126, e2020JB020925, <https://doi.org/10.1029/2020JB020925>, 2021a.
- 745 Lior, I., Sladen, A., Mercerat, D., Ampuero, J. P., Rivet, D., and Sambolian, S.: Strain to ground motion conversion of distributed acoustic sensing data for earthquake magnitude and stress drop determination, *Solid Earth*, 12, 1421–1442, <https://doi.org/10.5194/SE-12-1421-2021>, 2021b.
- Lomax, A., Virieux, J., Volant, P., and Berge-Thierry, C.: Probabilistic earthquake location in 3D and layered models, in: *Advances in seismic event location*, edited by: Thurber, C.H. and Rabinowitz, N., Springer, Dordrecht, Kluwer, Amsterdam, 101–134, https://doi.org/https://doi.org/10.1007/978-94-015-9536-0_5, 2000.
- 750 Louvari, E., Kiratzi, A. A., and Papazachos, B. C.: The Cephalonia Transform Fault and its extension to western Lefkada Island (Greece), *Tectonophysics*, 308, 223–236, [https://doi.org/10.1016/S0040-1951\(99\)00078-5](https://doi.org/10.1016/S0040-1951(99)00078-5), 1999.
- Melis, N. S. and Konstantinou, K. I.: Real-time Seismic Monitoring in the Greek Region: An Example from the 17 October 2005 East Aegean Sea Earthquake Sequence, *Seismological Research Letters*, 77, 364–370, 755 <https://doi.org/10.1785/GSSRL.77.3.364>, 2006.
- Menke, W., Lerner-Lam, A. L., Dubendorff, B., and Pacheco, J.: Polarization and coherence of 5 to 30 Hz seismic wave fields at a hard-rock site and their relevance to velocity heterogeneities in the crust, *Bulletin of the Seismological Society of America*, 80, 430–449, <https://doi.org/10.1785/BSSA0800020430>, 1990.
- Pankow, K.: Utah FORGE: Distributed Acoustic Sensing Data 2022. [Data set], 2022.
- 760 Papadimitriou, E. E.: Mode of Strong Earthquake Recurrence in the Central Ionian Islands (Greece): Possible Triggering due to Coulomb Stress Changes Generated by the Occurrence of Previous Strong Shocks, *Bulletin of the Seismological Society of America*, 92, 3293–3308, <https://doi.org/10.1785/0120000290>, 2002.
- Pascucci, G., Gaviano, S., Pozzoli, A., and Grigoli, F.: Signal Enhancement of Distributed Acoustic Sensing Data Using a Spectral Subtraction–Based Approach, *Seismological Research Letters*, 97, 1905–1918, <https://doi.org/10.1785/0220250105>, 765 2026.
- Pérouse, E., Chamot-Rooke, N., Rabaute, A., Briole, P., Jouanne, F., Georgiev, I., and Dimitrov, D.: Bridging onshore and offshore present-day kinematics of central and eastern Mediterranean: Implications for crustal dynamics and mantle flow, *Geochemistry, Geophysics, Geosystems*, <https://doi.org/10.1029/2012GC004289>, 2012.
- Porras, J., Pecci, D., Bocchini, G. M., Gaviano, S., De Solda, M., Tuinstra, K., Lanza, F., Tognarelli, A., Stucchi, E., and 770 Grigoli, F.: A semblance-based microseismic event detector for DAS data, *Geophys. J. Int.*, 236, 1716–1727, <https://doi.org/10.1093/GJI/GGAE016>, 2024.
- Royden, L. H. and Papanikolaou, D. J.: Slab segmentation and late Cenozoic disruption of the Hellenic arc, *Geochemistry, Geophysics, Geosystems*, 12, 1–24, <https://doi.org/10.1029/2010GC003280>, 2011.

- Scordilis, E. M., Karakaisis, G. F., Karacostas, B. G., Panagiotopoulos, D. G., Comninakis, P. E., and Papazachos, B. C.:
 775 Evidence for transform faulting in the Ionian sea: The Cephalonia island earthquake sequence of 1983, *Pure Appl. Geophys.*,
<https://doi.org/10.1007/BF00880738>, 1985.
- Seguí, A., Ugalde, A., Fichtner, A., Ventosa, S., Morros, J. R., Seguí, A., Ugalde, A., Fichtner, A., Ventosa, S., and Morros,
 R.: DASPack: Controlled Data Compression for Distributed Acoustic Sensing, *Geophys. J. Int.*,
<https://doi.org/10.1093/GJI/GGAF397>, 2025.
- 780 Silver, N. C. and Dunlap, W. P.: Averaging Correlation Coefficients: Should Fisher's z Transformation Be Used?, *Journal of*
Applied Psychology, 72, 146–148, <https://doi.org/10.1037/0021-9010.72.1.146>, 1987.
- Spica, Z. J., Ajo-Franklin, J., Beroza, G. C., Biondi, B., Cheng, F., Gaithe, B., Luo, B., Martin, E., Shen, J., Thurber, C.,
 Viens, L., Wang, H., Wuestefeld, A., Xiao, H., and Zhu, T.: PubDAS: A PUBLIC Distributed Acoustic Sensing Datasets
 Repository for Geosciences, *Seismological Research Letters*, 94, 983–998, <https://doi.org/10.1785/0220220279>, 2023.
- 785 Trugman, D. T., Chu, S. X., and Tsai, V. C.: Earthquake Source Complexity Controls the Frequency Dependence of Near-
 Source Radiation Patterns, *Geophys. Res. Lett.*, 48, e2021GL095022, <https://doi.org/10.1029/2021GL095022>, 2021.
- Wessel, P., Luis, J. F., Uieda, L., Scharroo, R., Wobbe, F., Smith, W. H. F., and Tian, D.: The Generic Mapping Tools
 Version 6, *Geochemistry, Geophysics, Geosystems*, 20, 5556–5564, <https://doi.org/10.1029/2019GC008515>, 2019.
- Wiemer, S. and Wyss, M.: Minimum magnitude of completeness in earthquake catalogs: Examples from Alaska, the
 790 Western United States, and Japan, *Bulletin of the Seismological Society of America*, 90, 859–869,
<https://doi.org/10.1785/0119990114>, 2000.
- Wuestefeld, A., Spica, Z. J., Aderhold, K., Huang, H. H., Ma, K. F., Lai, V. H., Miller, M., Urmantseva, L., Zapf, D.,
 Bowden, D. C., Edme, P., Kiers, T., Rinaldi, A. P., Tuinstra, K., Jestin, C., Diaz-Meza, S., Jousset, P., Wollin, C., Ugalde,
 A., Barajas, S. R., Gaithe, B., Currenti, G., Prestifilippo, M., Araki, E., Tonegawa, T., de Ridder, S., Nowacki, A., Lindner, F.,
 795 Schoenball, M., Wetter, C., Zhu, H. H., Baird, A. F., Rørstadbotnen, R. A., Ajo-Franklin, J., Ma, Y., Abbott, R. E.,
 Hodgkinson, K. M., Porritt, R. W., Stanciu, C., Podrasky, A., Hill, D., Biondi, B., Yuan, S., Luo, B., Nikitin, S., Morten, J.
 P., Dumitru, V. A., Lienhart, W., Cunningham, E., and Wang, H.: The Global DAS Month of February 2023, *Seismological*
Research Letters, 95, 1569–1577, <https://doi.org/10.1785/0220230180>, 2024.
- Zeng, X., Lancelle, C., Thurber, C., Fratta, D., Wang, H., Lord, N., Chalari, A., and Clarke, A.: Properties of Noise Cross-
 800 Correlation Functions Obtained from a Distributed Acoustic Sensing Array at Garner Valley, California, *Bulletin of the*
Seismological Society of America, 107, 603–610, <https://doi.org/10.1785/0120160168>, 2017.
- Zhan, Z.: Distributed Acoustic Sensing Turns Fiber-Optic Cables into Sensitive Seismic Antennas, *Seismological Research*
Letters, 91, 1–15, <https://doi.org/10.1785/0220190112>, 2020.
- Zhu, W., Biondi, E., Li, J., Yin, J., Ross, Z. E., and Zhan, Z.: Seismic arrival-time picking on distributed acoustic sensing
 805 data using semi-supervised learning, *Nat. Commun.*, 14, 1–11, <https://doi.org/10.1038/S41467-023-43355-3>, 2023.

