

# A dataset of tracer concentrations and meteorological observations from the Bolzano Tracer EXperiment (BTEX) to characterize pollutant dispersion processes in an Alpine valley.

Marco Falocchi<sup>1,2</sup>, Werner Tirler<sup>3</sup>, Lorenzo Giovannini<sup>1</sup>, Elena Tomasi<sup>4</sup>, Gianluca Antonacci<sup>4</sup>, and Dino Zardi<sup>1,2</sup>

<sup>1</sup>Atmospheric Physics Group, Department of Civil Environmental and Mechanical Engineering, University of Trento, Trento (Italy)

<sup>2</sup>C3A – Center Agriculture Food Environment, University of Trento, Trento (Italy)

<sup>3</sup>Eco-Research srl, Via Negrelli 13, 39100 Bolzano (Italy)

<sup>4</sup>CISMA S.r.l., Via Ipazia 2 c/o NOI Techpark, 39100 Bolzano (Italy)

**Correspondence:** Marco Falocchi (marco.falocchi@unitn.it)

**Abstract.** The paper describes the dataset of concentrations and related meteorological measurements collected during the field campaign of the Bolzano Tracer Experiment (BTEX). The experiment was performed to characterize the dispersion of pollutants emitted from a waste incinerator in the basin of the city of Bolzano, in the Italian Alps. As part of the experiment two controlled releases of a passive gas tracer (sulfure hexafluoride, SF<sub>6</sub>) were performed through the stack of the incinerator on 14 February 2017 for two different time-lags, starting respectively at 07:00 LST and 12:45 LST. Samples of ambient air were collected at target sites with vacuum-filled glass bottles and polyvinyl fluoride bags, and later analyzed by means of a mass spectrometer (detectability limit 30 ppt<sub>v</sub>). Meteorological conditions were monitored by a network of 15 [ground-surface](#) weather stations, 1 microwave temperature profiler, 1 SODAR and 1 Doppler Wind-LIDAR.

The dataset represents one of the few examples available in the literature concerning dispersion processes in a typical mountain valley environment and provides a useful benchmark for testing atmospheric dispersion models in complex terrain. The dataset described in this paper is available at <https://doi.pangaea.de/10.1594/PANGAEA.898761> (Falocchi *et al.*, 2019).

*Copyright statement.* TEXT

## 1 Introduction

Pollutant transport modeling is an essential tool for our understanding of factors controlling air quality and consequently affecting the environment and the human health. Nowadays, the increasing computational capabilities allow to simulate with unprecedented detail many atmospheric processes even at local scale. However, models still need careful calibration and validation against field observations, especially over mountainous complex terrain, where the interaction between local atmospheric processes and the orography (*c.f.* Zardi and Whiteman, 2013; Serafin *et al.*, 2018) affects both mean flow and turbulence prop-

erties (*c.f.* Rotach and Zardi, 2007; Giovannini et al., 2019), and therefore makes the advection and dispersion of pollutants  
20 further complicated (*e.g.* De Wekker et al., 2018; Tomasi et al., 2018). Moreover, the frequent occurrence of persistent low-  
level inversions and cold pools in depressed areas and closed basins may inhibit the dispersion of pollutants, especially during  
wintertime (*e.g.* de Franceschi and Zardi, 2009).

Several research projects focusing on air pollution transport processes at different scales performed experiments including  
controlled releases of tracers, both at ground level (*e.g.* Cramer et al., 1958; Doran and Horst, 1985) and from elevated sources  
25 (*e.g.* Nieuwstadt and van Duuren, 1979), such as the stack of industrial plants (*e.g.* Emberlin, 1981; Zannetti et al., 1986;  
Hanna et al., 1986). For example, Min et al. (2002) investigated the dispersion processes above the atmospheric boundary  
layer by releasing puffs of sulfur hexafluoride (SF<sub>6</sub>), quantifying the dispersion by analysing images provided by multiple  
infrared cameras placed at the ground. The European ~~tracer experiment~~ Tracer EXperiment (ETEX, Van dop et al., 1998;  
Nodop et al., 1998), instead, focused on the assessment of the ability of various dispersion models in simulating emergency  
30 response situations across northern Europe. The critical events were emulated by performing two controlled releases of a  
passive gas tracer about 35 km west of Rennes (France). Model predictions were then validated against measurements of tracer  
concentration at 168 surface stations in 17 different countries. Field campaigns involving releases of passive tracers in cities,  
from both elevated (*e.g.* Camuffo et al., 1979; Gryning and Lyck, 1980; Allwine and Flaherty, 2006; Doran et al., 2007) and  
surface sources (*e.g.* Britter et al., 2002; Gryning and Lyck, 2002; Clawson et al., 2005; Gromke et al., 2008; Wood et al.,  
35 2009), were also carried out to identify how pollutants migrate within the urban environment, and to identify the areas of the  
cities where the population is mostly exposed to high concentrations.

The main purpose of the above experiments is to provide a reliable reference benchmark under controlled conditions for  
comparison with dispersion model outputs. However, only few projects were conducted over complex mountainous terrain  
(*e.g.* Whiteman, 1989; Ambrosetti et al., 1994; Kalthoff et al., 2000; Darby et al., 2006)(*e.g.* Fiedler, 1989; Whiteman, 1989; Ambrosetti et  
40 due to the intrinsic difficulties both in designing and in managing measurement campaigns in this specific environment, and in  
modeling local meteorological processes (*e.g.* Giovannini et al., 2014, 2017; Serafin et al., 2018; De Wekker et al., 2018)(*e.g.* Giovannini et

The present paper describes a dataset of tracer concentrations and related meteorological measurements collected to evaluate  
the pollutant dispersion from a waste incinerator close to Bolzano, a mid-sized city in the Italian Alps. Indeed, concerns about  
the environmental impacts of this plant stimulated the organization of a comprehensive project to assess the fate of the pollu-  
45 tants released and their ground deposition in the surrounding area (Ragazzi et al., 2013). The project, called BTEX (Bolzano  
Tracer EXperiment), was then designed and performed. The project included a measurement campaign with tracer releases  
from the incinerator stack, with the final aim of validating the emission-impact scenarios simulated by a modeling chain com-  
posed of meteorological and dispersion models (Tomasi et al., 2019). The controlled releases of the tracer were performed on  
14 February 2017, with the plant working at operating speed, at two different times of the day, in order to investigate the dis-  
50 persion processes under different conditions of atmospheric stability and blowing winds. During the measurement campaign,  
the meteorological variables in the basin were monitored by means of 15 surface weather stations, one microwave temperature  
profiler, one SODAR and one Doppler Wind-LIDAR.

The paper is organized as follows: Sec. 2 describes the outline of the BTEX project, Sec. 3 provides details of the meteorological monitoring network and of the tracer concentration measurement techniques. The collected dataset, instead, is described in Sec. 4 and discussed in Sec. 5. Finally, conclusions and outlooks are drawn in Sec. 6.

## 2 Outline of the BTEX project

### 2.1 Target area


The city of Bolzano (258 m ASL, northeastern Italian Alps), where about ~~107000~~108000 inhabitants live, is the most populated town of South Tyrol. As shown in Fig. 1, the city lies in a wide basin at the junction of the Adige Valley (S and NW) with the Sarentina Valley (N) and the Isarco Valley (E). The area is characterized by a highly complex mountainous topography, with very steep sidewalls and many surrounding crests exceeding 1200 m ASL. Such a morphology deeply affects the local meteorology. Indeed, the elevated ridges allow at lower levels the onset of wind regimes mainly dominated by thermally-driven local circulations, sometimes associated to the development of ground-based temperature inversions. Moreover, especially under fair weather conditions, the nocturnal wind regime inside the basin is mostly dominated by drainage winds from the Isarco Valley, accelerating at the outlet of the valley and spreading into the Bolzano basin like a valley-exit jet, with peaks of intensity exceeding  $12 \text{ m s}^{-1}$  (Tomasi et al., 2019). As it is well documented in the literature (*e.g.* Whiteman, 2000; Zardi and Whiteman, 2013), thermally-driven valley-exit jets develop when a narrow valley abruptly joins the adjacent plain. Indeed, the Isarco Valley displays these characteristics (see in Fig. 1 the stretch from Barbiano Colma (WS12) to the outlet).

The waste incinerator is 2 km southwest of Bolzano, in the Adige Valley (label 1 in Fig. 1) and became operative since July 2013. The plant has a maximum treatment capacity of  $130000 \text{ t y}^{-1}$  and was designed to treat the exhaust-smokes along a three stage system, before they get released in the atmosphere at 60 m AGL, with a temperature of 413 K and at a rate of  $10^5 \text{ Nm}^3 \text{ h}^{-1}$ .

### 2.2 Experimental set up

#### 2.2.1 Tracer selection

A passive tracer for monitoring the dispersion processes in the atmosphere needs to be: (i) colourless and odourless; (ii) non-toxic for the human health and the environment; (iii) chemically inert and stable at the temperature of the released smoke; (iv) absent in the ambient air (*i.e.* detectable only in trace concentration); and (v) easily measurable in the laboratory once environmental samples have been collected. As none of the substances normally released in the atmosphere by the plant fulfill the above requirements, sulfur hexafluoride ( $\text{SF}_6$ ,  $\text{MM} = 146 \text{ g mol}^{-1}$ ) was selected as the passive tracer for BTEX. Indeed, this gas is not naturally present in the ambient air (background around 10 ppt<sub>v</sub> at global level, *e.g.* Rigby et al., 2010; Manca, 2017) and has been widely used in many other studies concerning the dispersion of pollutants from the stack of industrial plants (*e.g.* Emberlin, 1981; Bowne et al., 1983; Zannetti et al., 1986; Sivertsen, 1988), as well as atmospheric dispersion processes in mountain valleys (*e.g.* Whiteman, 1989; Kalthoff et al., 2000; Darby et al., 2006) and in the urban environment (*e.g.* Camuffo

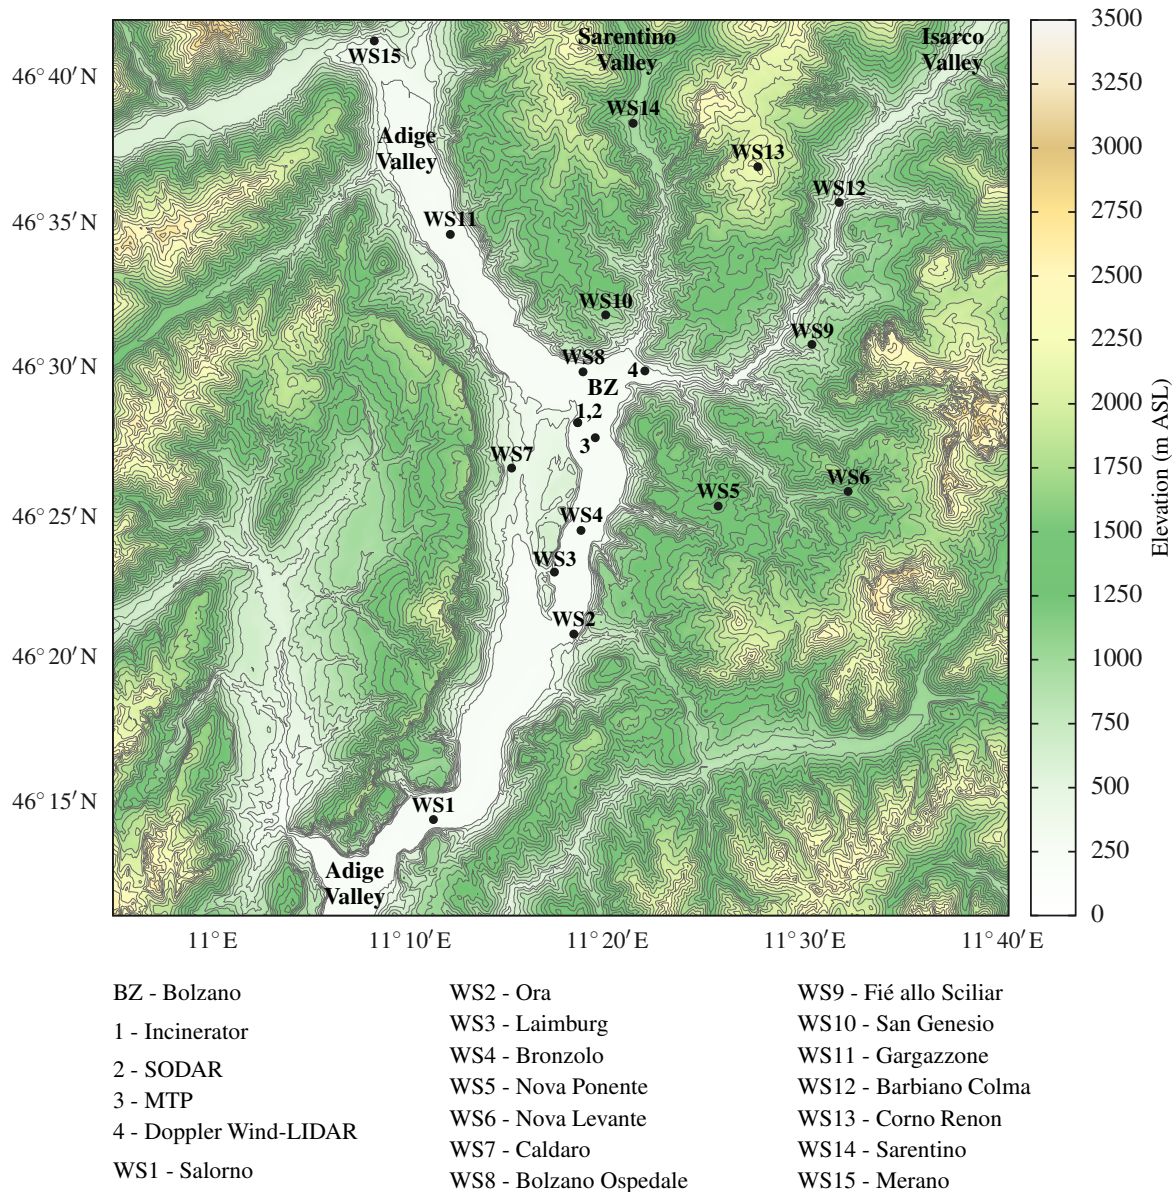

**Figure 1.** Overview of the study area. The map shows the orographic complexity of the region, the position of the city of Bolzano (BZ), of the incinerator (1) and of the meteorological monitoring used during BTEX, namely one SODAR (2), one microwave temperature profiler (MTP, 3), one Doppler Wind-LIDAR (4) and 15 ground-surface weather stations (WS).

et al., 1979; Gryning and Lyck, 1980; Britter et al., 2002; Allwine and Flaherty, 2006; Doran et al., 2007; Gromke et al., 2008; 85 Wood et al., 2009).

Nowadays, SF<sub>6</sub> is mostly adopted in industry as an electrical insulator. Leakages of SF<sub>6</sub> from plants represent the most important source likely to alter the background concentration. Accordingly, due to the many industrial activities in the surroundings of Bolzano, a preliminary campaign was performed to investigate the background concentration of SF<sub>6</sub> in the ambient air of the Bolzano basin prior to any tracer release. Concentrations were found to be lower than 30 ppt<sub>v</sub> (instrumental detection  
90 limit, see Sec. 3.2 for the laboratory detection method) and therefore comparable with the global background concentration.

### 2.2.2 Tracer injection strategy

Pollutant emissions from a plant into the atmosphere are strongly controlled by the operational working of the plant. The emissions from the incinerator of Bolzano, under usual operating conditions, are ejected at a constant flow rate under steady conditions. Therefore, the deposition areas of the pollutants and their ground concentrations mostly depend on local atmospheric processes, *e.g.* wind regime and stability. Accordingly, in order to obtain realistic deposition patterns of the tracer, an  
95 important requirement was to perform a steady release of SF<sub>6</sub> at constant concentration. In particular, SF<sub>6</sub> was injected at the bottom of the stack, upstream of the ventilation system, to guarantee an effective mixing of the tracer within the smoke, having the incinerator working at operational speed. The control on the mass released, instead, was performed by regulating the valves of the tank containing the tracer. To avoid tracer gas condensation (as a consequence of the expansion) and related  
100 consequences on the injection system, possibly resulting in a non-constant gas injection, a monitoring system was installed, based on an on-line mass spectrometer to measure the actual SF<sub>6</sub> concentration in the smoke before the outlet into the atmosphere. In particular, an on-line mass spectrometer with EI ionization, manufactured by V&F Instruments (Airsense Compact), was used. This ionization mode allows to achieve a relatively low sensitivity only, which is nonetheless enough to monitor continuously the high SF<sub>6</sub> concentrations in the smoke (several hundreds of ppm).

### 105 2.2.3 Strategy of the releases

Two releases of SF<sub>6</sub> were performed on 14 February 2017, in order to investigate the dispersion processes under the absence of significant synoptic forcing, but with different conditions of atmospheric stability and wind direction. Indeed, as detailed in Sec. 5, the first release was planned in the early morning, at 07:00 LST, when the atmosphere was stable and a weak down-valley wind was blowing in the Adige Valley. The second release, instead, was scheduled in the early afternoon, at 12:45 LST,  
110 with a weakly unstable atmosphere and an up-valley wind blowing.

### 2.2.4 Sampling strategy

~~After each release, samples of ambient air were collected by means of vacuum-filled glass bottles and polyvinyl fluoride (PVF) bags (hereafter PVF bags). Bottles with a capacity of 1 liter were filled by means of a valve, whose calibrated nozzle allowed a constant inflow, thus determining the time required to fill the bottle. In the framework of BTEX, nozzles were calibrated to fill  
115 a bottle in 20 or 60 minutes. The filling of the PVF bags, instead, was regulated by a suitable air pump controlling the inflow speed.~~



**Figure 2.** Vacuum-filled glass bottle (left) and PVF bag (right) used to collect samples of ambient air. These pictures were taken during the tracer releases of BTEX. On the right of the vacuum bottle, the incinerator of Bolzano can be recognised.

During each release of  $\text{SF}_6$ , 14 sampling teams were located into the field. A crucial issue in the design of the sampling strategy was represented by the definition of the sampling-point positions and their scheduling, *i.e.* starting time and duration. Given the complex orography of the study area and its related heterogeneous meteorological fields, the sampler distribution could be neither geometrically designed (as for example with concentric circles around the incinerator stack, *e.g.* Hanna et al., 1986) nor fixed on the basis of the mean wind flow. For these reasons, seven sampling teams were located in the main residential areas, where most of the receptors are concentrated, while the remaining ones were placed in the surroundings of the incinerator, in agreement with the ground concentrations ~~foreseen~~predicted by an operational modeling chain composed of both meteorological and air quality models, specifically set-up for the present field campaign. A detailed description of this modeling chain is beyond the purposes of the current paper and will be presented in future related works. Here, its structure and operational use during the experimental campaigns is briefly reported.

The meteorological field inside the Bolzano basin was simulated by means of the Weather and Research Forecasting (WRF) model (Skamarock and Klemp, 2008) through four nested domains, with an increasing horizontal resolution of 13.5 km (North Italy), 4.5 km (Northeastern Italian Alps), 1.5 km (Trentino Alto Adige) and 0.5 km (Bolzano basin). Moreover, in the innermost domain, observational nudging was adopted, by assimilating all the available data described in Sec. 3.1. Then, the CALMET model was used to increase the horizontal resolution of the meteorological field simulated by WRF up to 200 m,

whereas the CALPUFF model was adopted to simulate the dispersion processes and the ground concentrations within the study area.

The modeling chain was used:

- 135 1. 48h before the experiment, to pinpoint a “first-guess” distribution of the samplers on the basis of the predicted meteorological conditions and fall-out areas.
2. Right before each release, in nowcasting mode, to adjust (if needed) the distribution of the samplers with the updated model output (driven by the most recent assimilated meteorological measurements) and to define the starting time and duration of each sampling.

140 The resolution adopted for the numerical weather prediction simulations (i.e. 500 m) can fall, in principle, in the so-called gray zone or “terra incognita”, i.e. those scales where turbulence is neither sub-grid nor fully resolved, but rather is partially resolved. However, this rather high resolution was necessary to adequately capture the spatial variability of meteorological fields in the Bolzano basin. The CALMET model, instead, was used as a “physically-based interpolator” to further increase the horizontal resolution from 500 m to 200 m.

## 145 3 Materials and methods

### 3.1 Meteorological measurements

During BTEX, the meteorological field within the study area was monitored by means of 15 surface weather stations (WS in Fig. 1), one Microwave Temperature Profiler (MTP, label 3 in Fig. 1), one SODAR (label 2 in Fig. 1) and one Doppler Wind-LIDAR (label 4 in Fig. 1).

#### 150 3.1.1 Surface weather stations

The 15 surface weather stations are part of the network operated by the Meteorological Service of the Autonomous Province of Bolzano, and are partly located on the valley floors and partly on the sidewalls. These stations, listed in Tab. 1 and reported in Fig. 1, record every 10 min the following meteorological quantities: air temperature and humidity at 2 m AGL, average wind intensity and direction and wind gusts at 10 m AGL, rainfall, atmospheric pressure, global radiation and sunshine duration.

#### 155 3.1.2 Microwave temperature profiler

The atmospheric thermal structure inside the basin is constantly monitored by means of an MTP-5HE passive microwave radiometer (manufactured by Attex, Russia). The instrument determines the vertical temperature profile at 11 elevation angles (from 0° to 90°), by measuring the brightness temperature of the molecular oxygen at frequency of 60 GHz. The device retrieves the air temperature from the measured brightness temperature by solving a Fredholm equation of the first kind (Gaikovich et al.,  
160 1992; Troitskii et al., 1993) and interpolates the obtained profile along 21 vertical levels 50-m spaced. Further information

**Table 1.** Surface weather stations (WS) adopted to monitor the meteorological field during BTEX, along with their position (V: valley floor station; S: valley sidewall station), coordinates, altitude and available measurements: air temperature (T); relative humidity (RH); rain (R); atmospheric pressure (P); wind direction (dir); wind intensity (U); wind gust ( $U_g$ ); global radiation (GR); sunshine duration (SD). The first column indicates the label of the station shown in Fig. 1.

	Station			Coordinates		Altitude	Meteorological quantities								
	Site	ID	Position	lat. [N]	lon. [E]	[m ASL]	T	RH	R	P	dir	U	$U_g$	GR	SD
WS1	SALORNO	88820MS	V	46.24	11.19	212	x	x	x	x	x	x	x	x	x
WS2	ORA	86900MS	V	46.35	11.30	250	x	x	x	x				x	x
WS3	LAIMBURG	86600MS	V	46.38	11.29	224	x	x	x	x	x	x	x	x	x
WS4	BRNZOLO	85700MS	V	46.41	11.31	226	x	x	x	x	x	x	x	x	x
WS5	NOVA PONENTE	85120MS	S	46.42	11.43	1470	x	x	x	x	x	x	x	x	x
WS6	NOVA LEVANTE	78305MS	S	46.43	11.54	1128	x	x	x	x				x	x
WS7	CALDARO	89190MS	V	46.44	11.25	495	x	x	x	x	x	x	x	x	x
WS8	BOLZANO OSPEDALE	83200MS	V	46.50	11.31	254	x	x	x	x	x	x	x	x	x
WS9	FIÉ ALLO SCILIAR	75600MS	S	46.51	11.51	840	x	x	x	x	x	x	x	x	x
WS10	SAN GENESIO	82910MS	S	46.53	11.33	970	x	x	x	x	x	x	x	x	x
WS11	GARGAZZONE	27100MS	V	46.58	11.20	290	x	x	x	x	x	x	x	x	x
WS12	BARBIANO COLMA	74900MS	V	46.60	11.53	490	x	x	x	x	x	x	x	x	x
WS13	CORNO RENON	82500WS	S	46.62	11.46	2260	x	x	x						
WS14	SARENTINO	82200MS	S	46.64	11.36	970	x	x	x	x	x	x	x	x	x
WS15	MERANO	23200MS	V	46.69	11.14	330	x	x	x	x	x	x	x	x	x

on the functioning of this device can be found in Westwater et al. (1999), Scanzani (2010), Ezau et al. (2013) and Wolf et al. (2014).

The MTP-5HE used during BTEX (technical specifications in Tab. 2, label 3 in Fig. 1), is operated by the Physical Chemistry Laboratory of the Environmental Protection Agency of the Autonomous Province of Bolzano and is installed at the airfield of Bolzano (46.46 N, 11.32 E, 238 m ASL), on the roof of a 12-m-high building. This device provides every 10 min the vertical temperature profile from 250 m ASL to 1250 m ASL.

### 3.1.3 SODAR

Wind intensity and direction at the outlet of a stack represent a fundamental input to properly model the fate of pollutants. Accordingly, the wind field at the chimney of the incinerator was monitored by means of a MFAS mini-SODAR (manufactured by Scintec, Germany), installed on the roof of the plant at 40 m AGL (label 2 in Fig. 1). The SODAR, shown in Fig. 3, probed the wind field within a 400-m-thick atmospheric layer, from 315 m ASL to 685 m ASL and with a vertical resolution of 30 m. Raw data were processed by means of the software APRun, provided by Scintec, in order to obtain the vertical profiles of the wind speed components and of the backscatter over an averaging period of 30 min. In particular, the profiles were provided along 38 vertical levels, each spaced by 10 m.



**Table 2.** Technical characteristics of the [Microwave Temperature Profiler \(MTP-5HE\)](#) installed at the airfield of Bolzano.

Characteristic	Value
Site	Bolzano airport (238 m ASL)
Elevation	12 m AGL
Field of view azimuth angle	South
Range	1000 m
Effective resolution	50 m from 0 to 100 m 70 m from 100 to 400 m 80 m from 400 to 600 m 120 m from 600 to 1000 m
Displayed resolution	50 m
Accuracy under adiabatic conditions	0.3°C from 0 to 500 m 0.4°C from 500 to 1000 m
Accuracy under inversion conditions	0.8°C from 0 to 500 m 1.2°C from 500 to 1000 m
Azimuth direction of the scan	South
Number of scans and zenith range	11, from 0° to 90°
Opening angle	6°
Duration of a measurement	120 s
Acquisition rate	1 profile every 10 min
Calibration and diagnostic	Automatic

175 SODAR measurements played a key role in the BTEX project. Indeed, during preliminary analyses preceding the experiment, these measurements allowed to capture an intense nocturnal wind (wind intensity greater than  $10 \text{ m s}^{-1}$ ) blowing from north-east. These observations, supported by high-resolution numerical simulations run with the WRF model, allowed to identify this wind as the drainage flow of the Isarco Valley that, especially under fair weather conditions, spreads into the Bolzano basin behaving like a thermally-driven valley-exit jet (Whiteman, 2000).

### 180 3.1.4 Doppler Wind-LIDAR

The interaction between the valley-exit jet of the Isarco Valley and the smokes of the incinerator can strongly affect the pollutant dispersion scenarios within the Bolzano basin. Therefore, a dedicated measurement campaign was performed to monitor this flow and a Doppler Wind-LIDAR (label 4 in Fig. 1) was installed, from 9 January to 5 April 2017, on the roof of a public building at 18 m AGL, at the outlet of the Isarco Valley (Fig. 4).

185 The Doppler Wind-LIDAR was a WINDCUBE 100S manufactured by Leosphere (France). This device probes the atmosphere with coherent beams of pulsed, eye-safe electromagnetic waves in the near-infrared domain (wavelength  $1.54 \mu\text{m}$ )



**Figure 3.** A view on the roof of the incinerator of Bolzano during the experimental campaign with the MFAS mini-SODAR (left) and the detail of the antenna (right).



**Figure 4.** The WINDCUBE 100S Doppler Wind-LIDAR from Leosphere (France) installed on a roof at 18 m AGL. In the background the outlet of the Isarco Valley.

and returns measurements of the wind speed component along each line of sight with physical resolutions of 25, 50, 75 or 100 m, up to 319 gates. In the framework of BTEX, the vertical profile of the wind was measured every 5 s by means of the Doppler Beam Swinging (DBS) technique along 110 vertical levels, 10 m-spaced (from 335 m ASL to 1385 m ASL) and with a vertical resolution of 25 m. These profiles were hourly averaged and assimilated by the modeling system to nowcast both the meteorological variables and the tracer dispersion scenarios.

190

### 3.2 Tracer concentration measurements


195 After each release, samples of ambient air were collected by means of two different technologies: vacuum-filled glass bottles and polyvinyl fluoride bags (hereafter PVF bags). Bottles with a capacity of 1 liter were filled by means of a valve, whose calibrated nozzle allowed a constant inflow, thus determining the time required to fill the bottle. In the framework of BTEX, nozzles were calibrated to fill a bottle in 20 or 60 minutes. The filling of the PVF bags, instead, was regulated by a suitable air pump controlling the inflow speed.

Differently from the on-line monitoring of SF<sub>6</sub> at the incinerator stack, a much higher sensitivity was required for the detection of the tracer concentrations in the samples of ambient air collected in the surroundings of the plant. Accordingly, a triple 200 quadrupole Gas-Chromatography Mass Spectrometer (TSQ 8000 EVO from Thermo Scientific) with chemical ionization with methane as reagent gas was used in the laboratory analyses. The obtained sensitivity allowed to measure down to background levels. Nevertheless, to avoid the influence of the background (see Sec. 2.2.1), SF<sub>6</sub> concentrations in the collected samples were quantified at levels above 30 ppt<sub>v</sub>.

## 4 Dataset

205 The dataset presented in this paper consists of:

- 79 samples of SF<sub>6</sub> concentrations measured at ground level. According to the descriptions provided in Sections 2.2.2, 2.2.4, 2.2.3 and 3.2, the volumes of ambient air were collected in 14 different points surrounding the incinerator for the two releases performed during BTEX.
- Time series of meteorological quantities collected by the monitoring network described in Sec. 3.1. The 15 surface 210 weather stations contributing to the meteorological data set are listed in Table 1, along with their identification label, coordinates, altitude and available observations (x). These data are provided with a time resolution of 10 min and can also be freely downloaded from the open data web-service of the Autonomous Province of Bolzano.
- Temperature profiles ~~collected~~ measured by means of the Microwave Temperature Profiler (MTP-5HE) every 10 min ~~and~~ 215 . These data are provided by the Physical Chemistry Laboratory of the Environmental Agency of the Autonomous Province of Bolzano.
- SODAR measurements, *i.e.* vertical profiles of mean wind quantities, standard deviations and backscatter, provided every 30 min.
- Doppler Wind-LIDAR vertical profiles of the wind speed components and of the Carrier-to-Noise Ratio, provided every 5 s.
- 220 – Information and working conditions of the incinerator observed during the day of the release, *i.e.* coordinates and height of the stack, discharge and temperature of the smokes every 30 min. These data can also be freely downloaded from the web page of the company operating the plant, Eco-Center S.p.A.

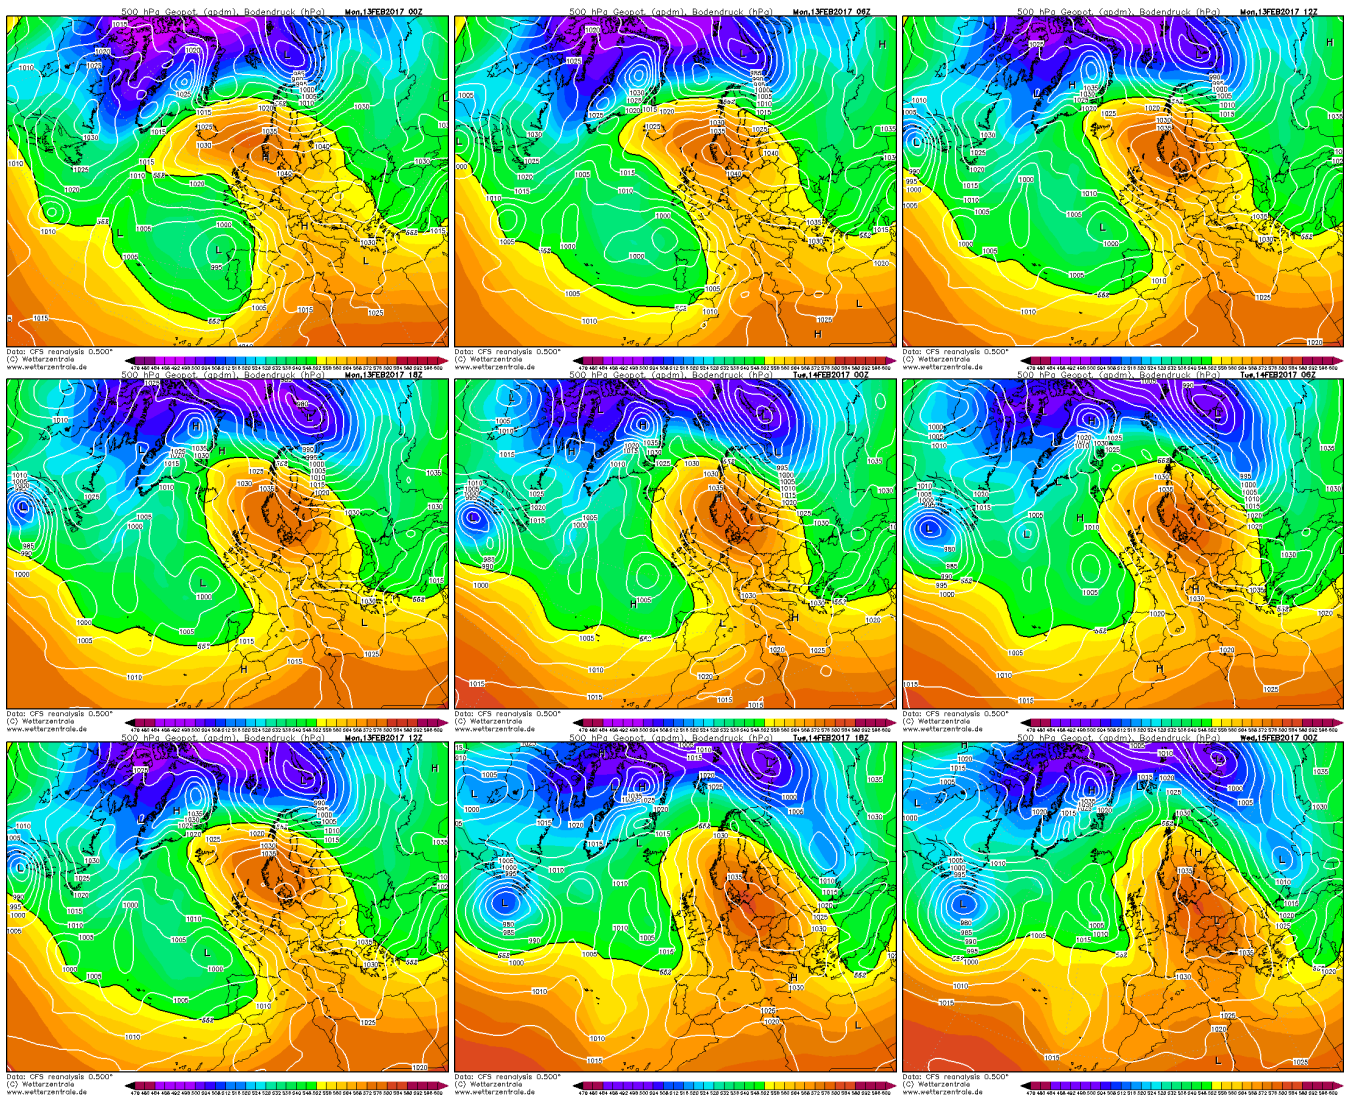

**Figure 5.** CFS reanalyses of geopotential height at 500 hPa from 20170213 00 UTC to 20170215 00 UTC ([www.wetterzentrale.de](http://www.wetterzentrale.de)).

## 5 Results and discussions

### 5.1 Weather conditions

225 Releases of SF<sub>6</sub> were performed on 14 February 2017, when over North Italy a high–pressure system was present with very weak synoptic winds(see- [The evolution of the synoptic conditions from 13th February 00:00 UTC to 15th February 00:00 UTC is reported in Fig. 5, in terms of maps of geopotential height at 500 hPa as simulated by the reanalyses of the Climate Forecast System \(CFS\) model \(source: \[www.wetterzentrale.de\]\(http://www.wetterzentrale.de\)\)](#)). On 13 February, instead, the weakening

of a low-pressure system above the Iberian Peninsula induced southwestern synoptic winds blowing over the study area, which  
230 channelled into the valleys. Especially during the afternoon and the evening of 13 February, these synoptic winds interacted  
with the local circulations by strengthening the up-valley winds, as observed by the surface weather stations (Fig. 6a) and by  
both the SODAR and the Doppler Wind-LIDAR (Fig. 7b-e). As a further effect, the synoptic winds transported moist air into  
the valleys. Indeed, the distributions of absolute humidity shown in Fig. 6c display an increase of the moisture content in the  
afternoon of 13 February at all the weather stations used in BTEX (Tab. 1).

235 During the night between 13 and 14 February, the moist air produced low-level clouds that covered the sky above the study  
area and inhibited the radiative cooling of the ground. Indeed, as confirmed by the microwave temperature profiler (Fig. 7a),  
this night was warmer than the previous one, and no significant ground-based temperature inversions developed. The absence  
of synoptic forcing, instead, allowed the development of thermally-driven circulations. However, the wind regimes captured  
by the surface weather stations on the floor of the Adige Valley at Bronzolo (WS4 in Fig. 1) and at Gargazzone (WS11, Fig.  
240 1) appear different from the one observed in the Isarco Valley at Barbiano Colma (WS12 in Fig. 1). Indeed, as shown in Fig.  
6a and b, the winds observed at Bronzolo (WS4) and Gargazzone (WS11) were weak and with intensities less than  $1\text{ m s}^{-1}$ ,  
while at Barbiano Colma (WS12) the down-valley wind was much stronger, with intensities around  $3\text{ m s}^{-1}$ . In particular, the  
topographic constraints of the Isarco Valley and of its outlet into the Bolzano basin determined the acceleration of the winds  
blowing from this valley, thus allowing the development of a thermally-driven valley-exit jet, whose evolution was observed by  
245 the Doppler Wind-LIDAR. The time-height plots of the wind intensity (Fig. 7d) and of the wind direction (Fig. 7e) measured  
by the Doppler Wind-LIDAR reveal the valley-exit jet blowing from East after 21:00 LST (UTC+1) with intensities around  
 $5\text{ m s}^{-1}$  in a layer about 400-m deep. During the night, the wind became stronger on an increasingly deep layer until the early  
morning (14 February 09:00 LST), when it reached its maximum intensity, exceeding  $13\text{ m s}^{-1}$ . Then, as it is typical of these  
phenomena (Banta et al., 1995; Chrust et al., 2013), the jet abruptly ceased around 11:00 LST. The valley-exit jet was also  
250 observed at ground level by the weather stations at Bolzano Ospedale (WS8 in Fig. 1) and Caldaro (WS7 in Fig. 1). Indeed,  
in the morning of 14 February, the weather station at Bolzano Ospedale (WS8, Fig. 6a, b) recorded a strong easterly wind  
exceeding  $5\text{ m s}^{-1}$ . The weather station at Caldaro (WS7, Fig. 6a, b), instead, measured a northerly wind around  $3\text{ m s}^{-1}$  that  
intensified from 06:00 LST to 09:00 LST (wind speed above  $4\text{ m s}^{-1}$ ), in agreement with the behaviour of the valley-exit jet.  
The footprint of the valley-exit jet can also be observed in the time series of absolute humidity (Fig. 6c) measured by the  
255 previously mentioned surface weather stations, *i.e.* Barbiano Colma (WS12), Bolzano Ospedale (WS8) and Caldaro (WS7).  
Indeed, in these series, a significant reduction of absolute humidity is observed during the valley-exit jet event. Therefore, it  
seems reasonable to assume that the valley-exit jet advected drier air from the upper valleys into the basin. After the noon of  
14 February, both the SODAR and the Doppler Wind-LIDAR observed a weak up-valley wind (around  $2\text{ m s}^{-1}$ ) rising from  
South in the Adige Valley. Also at ground level, the surface weather stations (Fig. 6a and b) recorded very weak winds, with  
260 intensities around  $1\text{ m s}^{-1}$ .

**Table 3.** Summary of the two releases performed during BTEX (VB: vacuum-filled glass bottles, TB: PVF bags)

N.	Release		Tracer mass	Plant smokes		Samples		
	Start [LST]	Duration		Temperature	Exit speed	Points	VB	TB
1 <sup>st</sup>	07:00	60 min	150 kg	140°C	7.9 ms <sup>-1</sup>	14	25	3
2 <sup>nd</sup>	12:45	90 min	450 kg	140°C	7.8 ms <sup>-1</sup>	14	30	21

**Table 4.** Geographical coordinates of the sampling points (SP) along with number of samples of ambient air collected during the first release of BTEX (VB: vacuum-filled glass bottle; TB: PVF bags). The numbers close to VB and TB indicate the duration in minutes of the sampling.

1 <sup>st</sup> release										
ID	Latitude	Longitude	Altitude	Samples						
	[N]	[E]	[m ASL]	VB60	VB20	TB25	TB15	TB10	TB5	Total
SP01	46.49	11.33	248	1	-	-	-	-	-	1
SP02	46.48	11.32	250	2	-	-	-	-	-	2
SP03	46.46	11.31	238	2	-	-	-	-	-	2
SP04	46.48	11.33	249	2	-	-	-	-	-	2
SP05	46.45	11.33	232	1	-	-	-	-	-	1
SP06	46.43	11.34	320	1	-	-	-	-	-	1
SP07	46.41	11.32	228	1	-	-	-	-	-	1
SP08	46.46	11.32	236	2	-	-	-	-	-	2
SP09	46.47	11.31	358	2	1	-	-	-	-	3
SP10	46.46	11.30	413	1	1	-	-	-	-	2
SP11	46.47	11.32	240	-	3	-	-	-	-	3
SP12	46.50	11.30	242	-	1	-	-	-	-	1
SP13	46.50	11.35	275	-	1	1	2	-	-	4
SP14	46.47	11.33	263	-	3	-	-	-	-	3
Total				15	10	1	2	-	-	28

## 5.2 Dispersion patterns

The two releases of SF<sub>6</sub> were carried out to investigate the fall-out areas of the tracer under different conditions of atmospheric stability and blowing winds, according to the release strategy (Sec. 2.2.2) and the sampling strategy (Sec. 2.2.4) described above. These data can be used to evaluate the spatial patterns of the tracer in the target area and its evolution in 14 different points. Table 3 summarizes the main characteristics of these releases. In particular, Table 3 reports the timetables and the masses of the tracer released, the metadata concerning the incinerator smoke, the number of sampling teams and the number of

**Table 5.** Geographical coordinates of the sampling points (SP) along with number of samples of ambient air collected during the second release of BTEX (VB: vacuum-filled glass bottle; TB: PVF bags). The numbers close to VB and TB indicate the duration in minutes of the sampling.

2 <sup>st</sup> release										
ID	Latitude	Longitude	Altitude	Samples						
	[N]	[E]	[m ASL]	VB60	VB20	TB25	TB15	TB10	TB5	Total
SP01	46.49	11.33	246	2	-	-	-	-	-	2
SP02	46.48	11.32	250	2	-	-	-	-	-	2
SP03	46.46	11.31	238	1	-	-	-	-	-	1
SP04	46.49	11.31	247	2	-	-	-	-	-	2
SP05	46.45	11.33	232	-	1	-	-	-	-	1
SP06	46.43	11.34	320	-	1	-	-	-	-	1
SP07	46.49	11.29	242	1	-	-	-	-	-	1
SP08	46.48	11.31	358	2	1	-	-	-	-	3
SP09	46.48	11.32	245	2	-	-	-	-	-	2
SP10	46.50	11.36	286	-	5	-	-	-	-	5
SP11	46.50	11.30	242	2	-	-	-	3	5	10
SP12	46.50	11.35	275	-	3	-	2	5	-	10
SP13	46.49	11.34	254	2	-	-	-	-	6	8
SP14	46.47	11.33	263	3	-	-	-	-	-	3
Total				19	11	-	2	8	11	51

collected samples. Further, information regarding the coordinates of the sampling points and the collected samples (sampling devices and time resolution) are reported in Tab. 4 and Tab. 5 for the first and the second release, respectively. During both the releases, instantaneous samples of ambient air were also collected outside the laboratory, located in the Bolzano city center, and immediately analyzed as described in Sec. 3.2. These measurements allowed monitoring in quasi-real-time the presence of the tracer in the atmosphere and therefore controlling the effectiveness of the releases.

**Figure 8** provides a graphical overview of the dataset, by representing the time evolution of the concentrations measured by the sampling teams during each release (gray areas). In particular, in view of describing the spatial patterns of the tracer along the axis of the Adige Valley, *i.e.* in agreement with the observed wind regime, the sampling points are ordered according to their latitude, *i.e.* from South (below) to North (above), while the horizontal black line marks the latitude of the incinerator. Each box corresponds to one sample: the length of the box fits the timing and the duration of the sampling, whereas the color corresponds to the measured concentration. In particular, blue boxes correspond to samples in which the tracer

concentration was lower than the detectability limit of the laboratory analyzes, i.e. 30ppt<sub>v</sub>. White areas, instead, correspond to periods without samplings.

280 The first release of BTEX was carried out in the early morning, in order to evaluate the dispersion of pollutants in a stable nocturnal atmosphere with a light down-valley wind (*i.e.* blowing from North to South, see for example the weather station at Bronzolo (WS4) in Fig. 6a and b). In this case, the valley-exit jet from the Isarco Valley, being confined north of the incinerator within the Bolzano basin, did not interact with the released smokes. These atmospheric conditions suggested to envisage a weak dispersion of the tracer and a fall-out area south of the incinerator, in the Adige Valley. The tracer release started at 07:00 LST  
285 and ended 1 h later, whereas the sampling activity started at 08:30 LST and continued until 10:45 LST. During this release, the 14 sampling teams collected a total of 28 samples of ambient air in the points represented in the maps in Fig. 9. In particular, **Figure Fig. 9** shows the position of the sampling teams and the tracer concentrations at four different times (arrows in Fig. 8). At the beginning of the sampling period (45 min after the end of the release, Fig. 9a), only one team north-east of the incinerator observed a concentration of SF<sub>6</sub> significantly different from the background (0.03–0.1 ppb), whereas at 09:15 LST  
290 the tracer was observed south of the incinerator in the Adige Valley, with concentrations ranging between 0.1 and 0.5 ppb (Fig. 9b). These findings confirm that the transport of the tracer due to the advection by the mean wind dominated over turbulent dispersion, and therefore the fall-out of the tracer at surface level was slower. After 09:30 LST, thanks to the heating of the ground and the onset of a weak up-valley wind (WS3 and WS4 in Fig. 6a and b), tracer concentrations increased also in the area surrounding the incinerator (Fig. 9c and d), where a maximum concentration of 1.19 ppb was observed (Fig. 9d). However,  
295 coherently with the observed wind speed and direction, the tracer never reached the town of Bolzano.

The second release of BTEX, instead, started at 12:45 LST and ended at 14:15 LST, in order to investigate the dispersion processes under a weakly unstable atmosphere and an up-valley wind rising the Adige Valley (see WS3, WS4, WS8, WS11 in Fig. 6a and b). Under these atmospheric conditions, the mixing is usually more efficient, and a faster fall-out of the tracer, north of the incinerator, was expected. Therefore, samples of ambient air were collected starting from 13:10 LST (still during  
300 the release), until 16:30 LST. Indeed, a concentration of 11.96 ppb was observed north of the incinerator at 13:15 LST (Fig. 10a), *i.e.* 30 min after the beginning of the release. At the end of the release (14:15 LST, **Figure Fig. 10b**), the up-valley winds moved the smokes of the plant northward and significant concentrations of SF<sub>6</sub> were measured west of Bolzano, inside the basin, while trace concentrations were observed south of the incinerator. After 30 min (**Figure Fig. 10c**), the tracer spread into the basin, even if high concentrations were still observed west of Bolzano. Background concentrations of SF<sub>6</sub> ranging  
305 between 0.2 and 0.5 ppb, as shown in Fig. 10a, were also found, as a consequence of the persistence of the tracer released in the morning.

At the end of this second release a total of 51 samples were collected by means of both vacuum-filled glass bottles and PVF bags.



## 6 Conclusions and outlook

310 The Bolzano Tracer EXperiment (BTEX) represents one of the few experiments available in the literature performed over com-  
plex mountainous terrain to evaluate dispersion processes by means of controlled tracer releases and under well documented  
meteorological conditions. The dataset presented in this paper is the result of a 3-year project during which a great effort was  
made to properly design, organize and manage all the activities connected to the measurement campaigns. Indeed, preliminary  
investigations were performed to identify the most suitable monitoring network (Sec. 3.1) able to properly capture the local  
315 circulation patterns characterizing the meteorology of the Bolzano basin, also by performing *ad hoc* measurement campaigns.  
At the same time, the release of the tracer through the stack of the incinerator was designed. This task included: (i) the selection  
of the tracer (Sec. 2.2.1) and of a representative day for the study area (Sec. 2.2.3); (ii) the definition of the injection of the  
tracer, to ensure and monitor the steadiness of the release (Sec. 2.2.2); (iii) the definition of the devices used to collect samples  
of ambient air at ground level (Sec. 2.2.4) and of the required laboratory analysis to measure the tracer concentrations (Sec.  
320 3.2).

On 14 February 2017 two tracer releases were performed. The collected dataset contains 79 samples of tracer ground con-  
centrations. ~~These concentrations were~~ collected during each release in 14 different locations of the study area and at different  
times, ~~thus allowing to evaluate~~. The complex orography of the study area and its related heterogeneous meteorological fields  
did not allow a regular distribution of the sampling points around the incinerator, e.g. in concentric circles. Therefore, seven  
325 sampling points were dislocated in the main residential areas, in the neighboring of the incinerator, while the other seven  
sampling points were placed in agreement with the fall-out areas of the tracer, as predicted by a modeling chain, specifically  
setup for the purposes of the study and composed of both meteorological and dispersion models. In particular, for a proper  
interpretation of the output of the modeling chain, a key role was played by the expertise gained by the modeling team on the  
typical meteorological processes characterizing the study area. The adopted strategy allowed to capture the space-time vari-  
330 ability of the ~~dispersion processes~~ tracer at ground level. More details on the numerical experiments carried out to simulate  
the tracer dispersion can be found in Tomasi *et al.* (2019).

The dataset is completed with a detailed description of the meteorological field, provided by 15 ground-surface weather  
stations, one microwave temperature profiler, one SODAR and one Doppler Wind-LIDAR. In particular, the meteorological  
data cover a period of ~~48 h~~ 48 h starting from 13 February 2017 00:00 LST, in order to provide a more complete description of  
335 the meteorological processes within the study area.

The uniqueness of BTEX makes the collected dataset a useful benchmark for testing dispersion models in complex terrain.

## 7 Data availability

All data presented in this paper are publicly available at World Data Center PANGAEA (<https://doi.pangaea.de/10.1594/PANGAEA.898761>  
Falocchi et al., 2019).

340 *Author contributions.* MF led the writing of the manuscript, and prepared all figures and tables. WT wrote the section on chemical measurements. DZ revised preliminary versions of the manuscript. All authors contributed to suggest ideas and reviewing the manuscript.

All Authors contributed to the design and planning of the experiment and participated in the field campaigns. WT provided the required tools for air samples collection, instructed the team of observers and performed all the laboratory analyses. MF, LG, ET and GA managed the SODAR and the Doppler Wind–LIDAR operations. GA, ET and LG contributed to set-up the modeling chain and operated it during the  
345 field campaigns. MF collected all the data, both from the field experiment and from permanent observational facilities in the target area and surroundings, organized the dataset, and created its publication on World Data Center PANGAEA. DZ, as Principal Investigator, managed the overall execution of the project, including partners’ involvement and commitment, from the initial concept to the conclusion, and suggested the preparation of the present paper.

*Competing interests.* The authors declare that they have no conflict of interest.

350 *Acknowledgements.* The authors acknowledge Marco Palmitano (Eco–Center s.p.a.) and Bruno Eisenstecken (Eco–Center s.p.a.) who encouraged and strongly supported this study, also by renting the Doppler Wind–LIDAR. The authors are also grateful to all the personnel of Eco–Center s.p.a., Eco–Research s.r.l., of the Environmental Agency of the Autonomous Province of Bolzano and of the “Mario Negri Institute” for participating to the measurements activities during the releases. The Meteorological Office of the Autonomous Province of Bolzano is acknowledged for kindly providing data from their weather stations. The Environmental Agency of the Autonomous Province of  
355 Bolzano, Massimo Guariento and Luca Verdi are kindly acknowledged for data from the microwave temperature profiler.


## References

- Allwine, K. J. and Flaherty, J. E.: Joint Urban 2003: Study overview and instrument locations, Tech. rep., Pacific Northwest National Laboratory (PNNL), Richland, WA (US), 2006.
- Ambrosetti, P., Anfossi, D., Cieslik, S., Graziani, G., Grippa, G., Marzorati, R. L. A., Stingle, A., and Zimmermann, H.: The TRANSALP-  
360 90 Campaign. The second tracer release experiment in a sub-alpine valley., Tech. Rep. Technical Report EUR 15952 EN., Commission of the European Communities, 1994.
- Banta, R. M., Olivier, L. D., Neff, W. D., Levinson, D. H., and Ruffieux, D.: Influence of canyon-induced flows on flow and dispersion over adjacent plains, *Theoretical and Applied Climatology*, 52, 27–42, <https://doi.org/10.1007/BF00865505>, 1995.
- Bowne, N. E., Londergan, R. J., Murray, D. R., and Borenstein, H. S.: Overview, results, and conclusions for the EPRI Plume Model  
365 Validation and Development Project: Plains site, Electric Power Research Institute Rep. EA-3074, Project, pp. 1616–1, 1983.
- Britter, R. E., Di Sabatino, S., Caton, F., Cooke, K. M., Simmonds, P. G., and Nickless, G.: Results from three field tracer experiments on the neighbourhood scale in the city of Birmingham UK, *Water, Air and Soil Pollution: Focus*, 2, 79–90, 2002.
- Camuffo, D., De Bortoli, M., and Gaglione, P.: Tests on atmospheric diffusion with tracers in an urban area, Tech. Rep. 108, NATO CC MS, 1979.
- 370 Chrust, M. F., Whiteman, C. D., and Hoch, S. W.: Observations of Thermally Driven Wind Jets at the Exit of Weber Canyon, Utah, *Journal of Applied Meteorology and Climatology*, 52, 1187–1200, <https://doi.org/10.1175/JAMC-D-12-0221.1>, 2013.
- Clawson, K. L., Carter, R. G., Lacroix, D. J., Biltoft, C. A., Hukari, N. F., Johnson, R. C., Rich, J. D., Beard, S. A., and Strong, T. W.: Joint Urban 2003 (JU03) SF6 atmospheric tracer field tests, Tech. rep., NOAA Technical Memorandum OAR ARL-254, Air Resources Laboratory, Idaho Falls, Idaho, 237 pp., 2005.
- 375 Cramer, H. E., Record, F. A., and Vaughan, H. C.: The study of the diffusion of gases or aerosols in the lower atmosphere, Tech. rep., MIT Department of Meteorology, Boston, 1958.
- Darby, L. S., Allwine, K. J., and Banta, R. M.: Nocturnal low-level jet in a mountain basin complex. Part II: Transport and diffusion of tracer under stable conditions, *Journal of Applied Meteorology and Climatology*, 45, 740–753, 2006.
- de Franceschi, M. and Zardi, D.: Study of wintertime high pollution episodes during the Brenner–South ALPNAP measurement campaign,  
380 *Meteorology and Atmospheric Physics*, 103, 237–250, <https://doi.org/10.1007/s00703-008-0327-2>, 2009.
- De Wekker, S. F. J., Kossmann, M., Knierel, J. C., Giovannini, L., Gutmann, E. D., and Zardi, D.: Meteorological Applications Benefiting from an Improved Understanding of Atmospheric Exchange Processes over Mountains, *Atmosphere*, 9, <https://doi.org/10.3390/atmos9100371>, 2018.
- Doran, J. C. and Horst, T. W.: An evaluation of Gaussian plume–depletion models with dual–tracer field measurements, *Atmospheric Environment* (1967), 19, 939–951, [https://doi.org/10.1016/0004-6981\(85\)90239-2](https://doi.org/10.1016/0004-6981(85)90239-2), 1985.
- 385 Doran, J. C., Allwine, K. J., Flaherty, J. E., Clawson, K. L., and Carter, R. G.: Characteristics of puff dispersion in an urban environment, *Atmospheric Environment*, 41, 3440–3452, 2007.
- Emberlin, J. C.: A sulphur hexafluoride tracer experiment from a tall stack over complex topography in a coastal area of Southern England, *Atmospheric Environment* (1967), 15, 1523–1530, 1981.
- 390 Ezau, I. N., Wolf, T., Miller, E. A., Repina, I. A., Troitskaya, Y. I., and Zilitinkevich, S. S.: The analysis of results of remote sensing monitoring of the temperature profile in lower atmosphere in Bergen (Norway), *Russian Meteorology and Hydrology*, 38, 715–722, <https://doi.org/10.3103/S1068373913100099>, 2013.


- Falocchi, M., Tirlor, W., Giovannini, L., Tomasi, E., Antonacci, G., and Zardi, D.: Tracer concentrations and meteorological observations from the Bolzano Tracer Experiment (BTEX), <https://doi.pangaea.de/10.1594/PANGAEA.898761>, 2019.
- 395 Fiedler, F.: Proposal of a Subproject: “Transport of Air Pollutants over Complex Terrain (TRACT)”, EUREKA Environmental Project, Karlsruhe, 1989.
- Fiedler, F. and Borrell, P.: TRACT: Transport of Air Pollutants over Complex Terrain, pp. 239–283, Springer Berlin Heidelberg, Berlin, Heidelberg, [https://doi.org/10.1007/978-3-642-59718-3\\_11](https://doi.org/10.1007/978-3-642-59718-3_11), 2000.
- Gaikovich, K. P., Kadygrov, E. N., Kosov, A. S., and Troitskii, A. V.: Thermal sounding of the atmospheric boundary layer at the center of  
400 the oxygen absorption line, *Radiofizika*, 35, 130–136, 1992.
- Giovannini, L., Antonacci, G., Zardi, D., Laiti, L., and Panziera, L.: Sensitivity of Simulated Wind Speed to Spatial Resolution over Complex Terrain, *Energy Procedia*, 59, 323–329, european Geosciences Union General Assembly 2014, EGU Division Energy, Resources & the Environment (ERE), 2014.
- Giovannini, L., Laiti, L., Serafin, S., and Zardi, D.: The thermally driven diurnal wind system of the Adige Valley in the Italian Alps, *Q. J. R. Meteorol. Soc.*, 143, 2389–2402, 2017.
- 405 R. Meteorol. Soc., 143, 2389–2402, 2017.
- Giovannini, L., Ferrero, E., Karl, T., Rotach, M. W., Staquet, C., Trini Castelli, S., and Zardi, D.: Atmospheric pollutant transport over complex terrain: challenges and needs for improving air quality measurements and modelling, *Atmosphere*, In preparation, 2019.
- Gromke, C., Buccolieri, R., Di Sabatino, S., and Ruck, B.: Dispersion study in a street canyon with tree planting by means of wind tunnel and numerical investigations—evaluation of CFD data with experimental data, *Atmospheric Environment*, 42, 8640–8650, 2008.
- 410 Gryning, S. E. and Lyck, E.: Elevated source SF<sub>6</sub>-tracer dispersion experiments in the Copenhagen area. Preliminary results II, in: Proceedings of the seminar on radioactive releases and their dispersion in the atmosphere following a hypothetical reactor accident, Risø, 22-25 April 1980, 1980.
- Gryning, S. E. and Lyck, E.: The Copenhagen tracer experiments: Reporting of measurements, Tech. rep., Risø-R-1054(rev.1)(EN), Risø National Laboratory, Roskilde, Denmark, 75 pages., 2002.
- 415 Hanna, S. R., Weil, J., and Paine, R.: Plume model development and evaluation., Tech. Rep. Report Number D034-500., Electric Power Research Institute, Palo Alto, CA, 1986.
- Kalthoff, N., Horlacher, V., Corsmeier, U., Volz Thomas, A., Kolahgar, B., Geiß, H., Möllmann-Coers, M., and Knaps, A.: Influence of valley winds on transport and dispersion of airborne pollutants in the Freiburg-Schauinsland area, *Journal of Geophysical Research: Atmospheres*, 105, 1585–1597, 2000.
- 420 Manca, G.: GreenHouse Gases concentration-2017., Tech. rep., European Commission, Joint Research Centre (JRC) [Dataset] PID: <http://data.europa.eu/89h/jrc-abcis-ghg-2017>, 2017.
- Min, I. A., Abernathy, R. N., and Lundblad, H. L.: Measurement and analysis of puff dispersion above the atmospheric boundary layer using quantitative imagery, *Journal of Applied Meteorology*, 41, 1027–1041, 2002.
- Nieuwstadt, F. T. M. and van Duuren, H.: Dispersion experiments with SF<sub>6</sub> from the 213 m high meteorological mast at Cabauw in the  
425 Netherlands., in: Proceedings of the 4th Symposium on Turbulence, Diffusion and Air Pollution, Reno, Nevada, 15-18 January, pp. 34–40, American Meteorological Society, Boston, MA., 1979.
- Nodop, K., Connolly, R., and Girardi, F.: The field campaigns of the European Tracer Experiment (ETEX): overview and results, *Atmospheric Environment*, 32, 4095–4108, [https://doi.org/10.1016/S1352-2310\(98\)00190-3](https://doi.org/10.1016/S1352-2310(98)00190-3), 1998.
- Ragazzi, M., Tirlor, W., Angelucci, G., Zardi, D., and Rada, E. C.: Management of atmospheric pollutants from waste incineration processes:  
430 the case of Bozen, *Waste Management & Research*, 31, 235–240, <https://doi.org/10.1177/0734242X12472707>, 2013.

- Rigby, M., Mühle, J., Miller, B. R., Prinn, R. G., Krummel, P. B., Steele, L. P., Fraser, P. J., Salameh, P. K., Harth, C. M., Weiss, R. F., Greally, B. R., O'Doherty, S., Simmonds, P. G., Vollmer, M. K., Reimann, S., Kim, J., Kim, K. R., Wang, H. J., Olivier, J. G. J., Dlugokencky, E. J., Dutton, G. S., Hall, B. D., and Elkins, J. W.: History of atmospheric SF<sub>6</sub> from 1973 to 2008, *Atmospheric Chemistry and Physics*, 10, 10 305–10 320, <https://doi.org/10.5194/acp-10-10305-2010>, 2010.
- 435 Rotach, M. W. and Zardi, D.: On the boundary–layer structure over highly complex terrain: Key findings from MAP, *Quarterly Journal of the Royal Meteorological Society*, 133, 937–948, <https://doi.org/10.1002/qj.71>, 2007.
- Scanzani, F.: Ground based passive microwave radiometry and temperature profiles, in: *Remote Sensing for Wind Energy*, edited by Pena, A. and Hasager, C. B., pp. 260–275, Technical Univ. of Denmark, DTU Wind Energy, DTU Risoe Campus, Roskilde, Denmark, 2010.
- Serafin, S., Adler, B., Cuxart, J., De Wekker, S. F. J., Gohm, A., Grisogono, B., Kalthoff, N., Kirshbaum, D. J., Rotach, M. W., Schmidli, J., 440 Stiperski, I., Večenaj, Ž., and Zardi, D.: Exchange Processes in the Atmospheric Boundary Layer Over Mountainous Terrain, *Atmosphere*, 9, 2018.
- Sivertsen, B.: Tracer Experiments to Estimate Diffusive Leakages and to Verify Dispersion Models, pp. 255–268, Springer Netherlands, Dordrecht, [https://doi.org/10.1007/978-94-009-2939-5\\_20](https://doi.org/10.1007/978-94-009-2939-5_20), 1988.
- Skamarock, W. C. and Klemp, J. B.: A time-split nonhydrostatic atmospheric model for weather research and forecasting applications, 445 *Journal of Computational Physics*, 227, 3465 – 3485, <https://doi.org/10.1016/j.jcp.2007.01.037>, predicting weather, climate and extreme events, 2008.
- Tomasi, E., Giovannini, L., Zardi, D., and de Franceschi, M.: Optimization of Noah and Noah\_MP WRF Land Surface Schemes in Snow-Melting Conditions over Complex Terrain, *Monthly Weather Review*, 145, 4727–4745, <https://doi.org/10.1175/MWR-D-16-0408.1>, <https://doi.org/10.1175/MWR-D-16-0408.1>, 2017.
- 450 Tomasi, E., Giovannini, L., Falocchi, M., Zardi, D., Antonacci, G., Ferrero, E., Bisignano, A., Alessandrini, S., and Mortarini, L.: Dispersion Modeling Over Complex Terrain in the Bolzano Basin (IT): Preliminary Results from a WRF–CALPUFF Modeling System, in: *Air Pollution Modeling and its Application XXV*, edited by Mensink, C. and Kallos, G., pp. 157–161, Springer International Publishing, Cham, 2018.
- Tomasi, E., Giovannini, L., Falocchi, M., Antonacci, G., Jimenez, P. A., Kosovic, B., Alessandrini, S., Zardi, D., Delle Monache, L., and 455 Ferrero, E.: Turbulence parameterizations for dispersion in sub–kilometer horizontally non-homogeneous flows, *Atmospheric Research*, <https://doi.org/10.1016/j.atmosres.2019.05.018>, 2019.
- Troitskii, A. V., Gaikovich, K. P., Gromov, V. D., Kadygrov, E. N., and Kosov, A. S.: Thermal sounding of the atmospheric boundary layer in the oxygen absorption band center at 60 GHz, *IEEE Transactions on Geoscience and Remote Sensing*, 31, 116–120, <https://doi.org/10.1109/36.210451>, 1993.
- 460 Van dop, H., Addis, R., Fraser, G., Girardi, F., Graziani, G., Inoue, Y., Kelly, N., Klug, W., Kulmala, A., Nodop, K., and Pretel, J.: ETEX: a European tracer experiment; observations, dispersion modelling and emergency response, *Atmospheric Environment*, 32, 4089–4094, 1998.
- Westwater, E. R., Han, Y., Irisov, V. G., Leuskiy, V., Kadygrov, E. N., and Viazankin, S. A.: Remote Sensing of Boundary Layer Temperature Profiles by a Scanning 5–mm Microwave Radiometer and RASS: Comparison Experiments, *Journal of Atmospheric and Oceanic 465 Technology*, 16, 805–818, [https://doi.org/10.1175/1520-0426\(1999\)016<0805:RSOBLT>2.0.CO;2](https://doi.org/10.1175/1520-0426(1999)016<0805:RSOBLT>2.0.CO;2), 1999.
- Whiteman, C. D.: Morning transition tracer experiments in a deep narrow valley, *Journal of applied Meteorology*, 28, 626–635, 1989.
- Whiteman, C. D.: *Mountain Meteorology: Fundamentals and Applications*, Oxford University Press, New York, 2000.

- Wolf, T., Esau, I., and Reuder, J.: Analysis of the vertical temperature structure in the Bergen valley, Norway, and its connection to pollution episodes, *Journal of Geophysical Research: Atmospheres*, 119, 10,645–10,662, <https://doi.org/10.1002/2014JD022085>, 2014.
- 470 Wood, C. R., Arnold, S. J., Balogun, A. A., Barlow, J. F., Belcher, S. E., Britter, R. E., Cheng, H., Dobre, A., Lingard, J. J. N., Martin, D., et al.: Dispersion experiments in central London: the 2007 DAPPLE project, *Bulletin of the American Meteorological Society*, 90, 955–970, 2009.
- Zannetti, P., Carboni, G., and Ceriani, A.: *Avacta II Model Simulations of Worst-Case Air Pollution Scenarios in Northern Italy*, pp. 113–121, Springer US, Boston, MA, [https://doi.org/10.1007/978-1-4757-9125-9\\_8](https://doi.org/10.1007/978-1-4757-9125-9_8), 1986.
- 475 Zardi, D. and Whiteman, C. D.: Diurnal Mountain Wind Systems, in: *Mountain Weather Research and Forecasting: Recent Progress and Current Challenges*, edited by Chow, F. K., De Wekker, S. F. J., and Snyder, B. J., pp. 35–119, Springer Netherlands, Dordrecht, 2013.
- Zimmermann, H.: Field phase report of the TRACT field measurement campaign, Tech. rep., Garmisch-Partenkirchen : EUROTRAC Int. Sci. Secr., 1995.

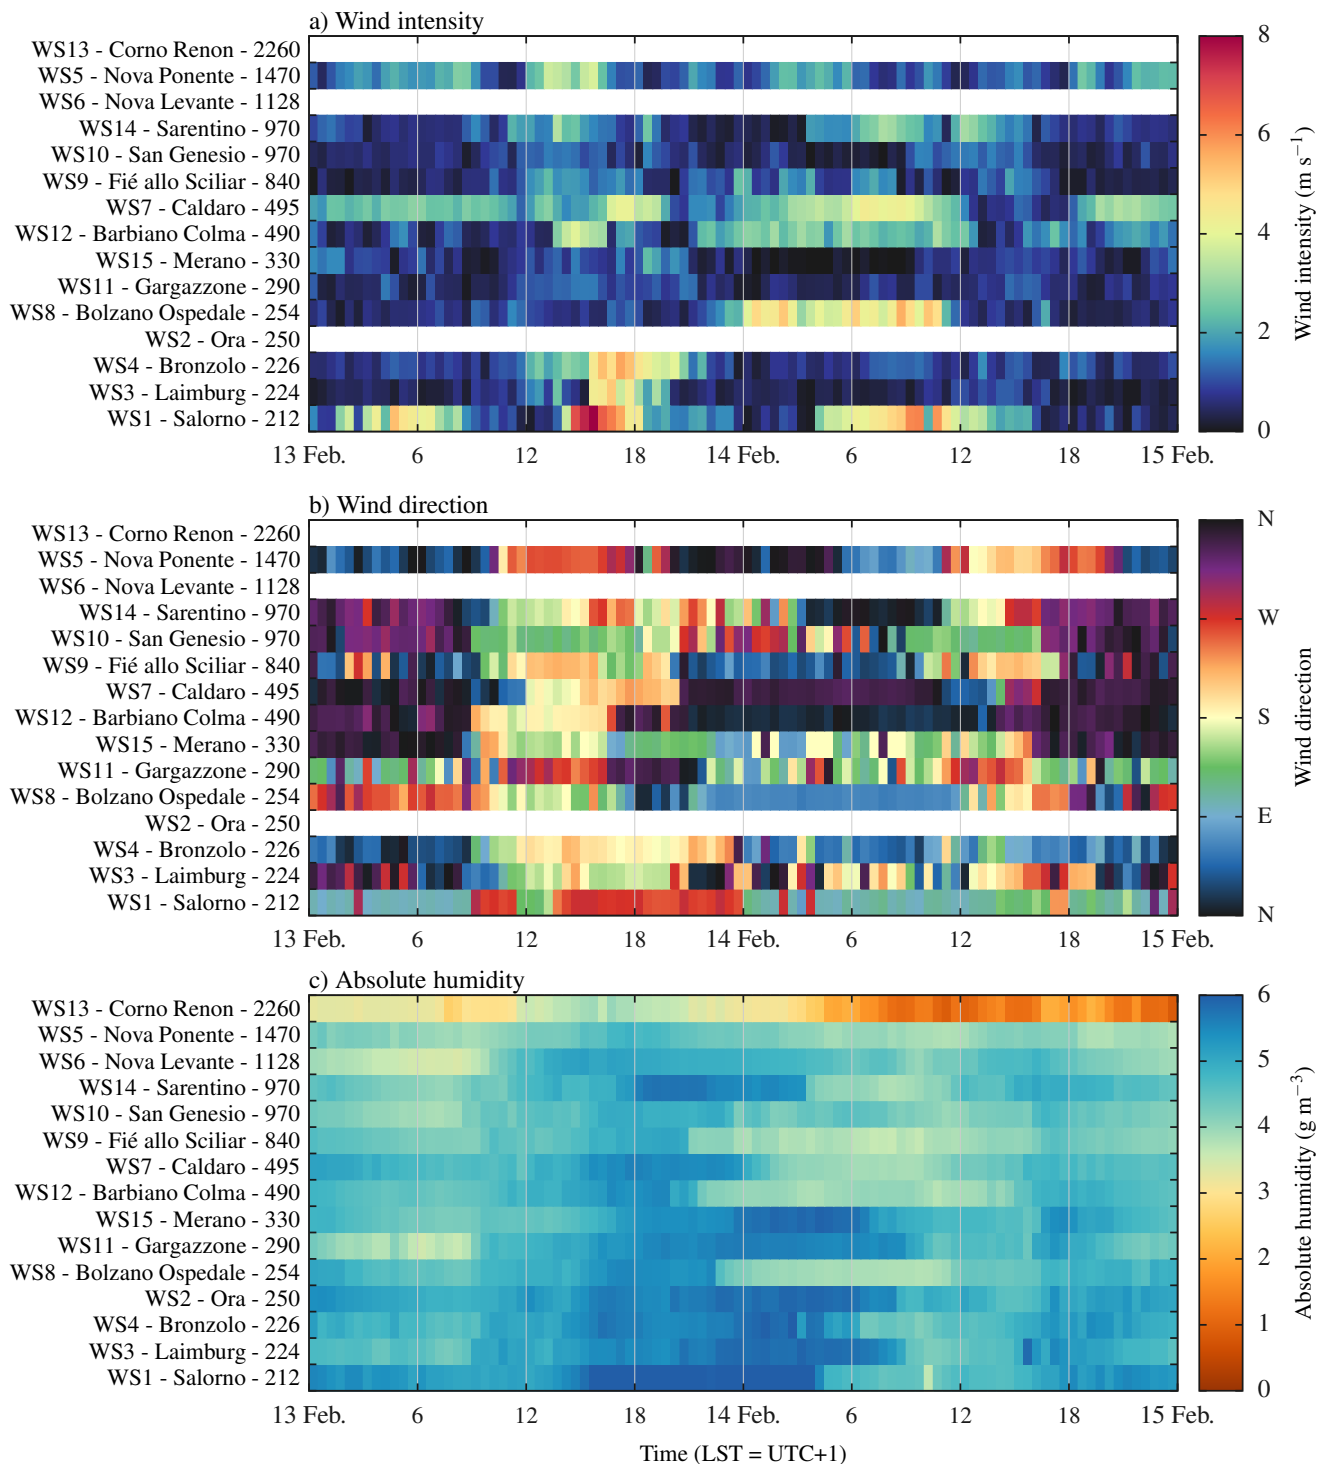


**Figure 6.** Time evolution of the wind intensity (a), of the wind direction (b) and the absolute humidity (c) measured by the 15 [ground surface](#) weather stations used during BTEX (see Tab. 1). The absolute humidity was computed from data of relative humidity, air temperature and atmospheric pressure. Weather stations are ordered according to their elevation, aiming at displaying a pseudo-vertical distribution of the observed quantities.

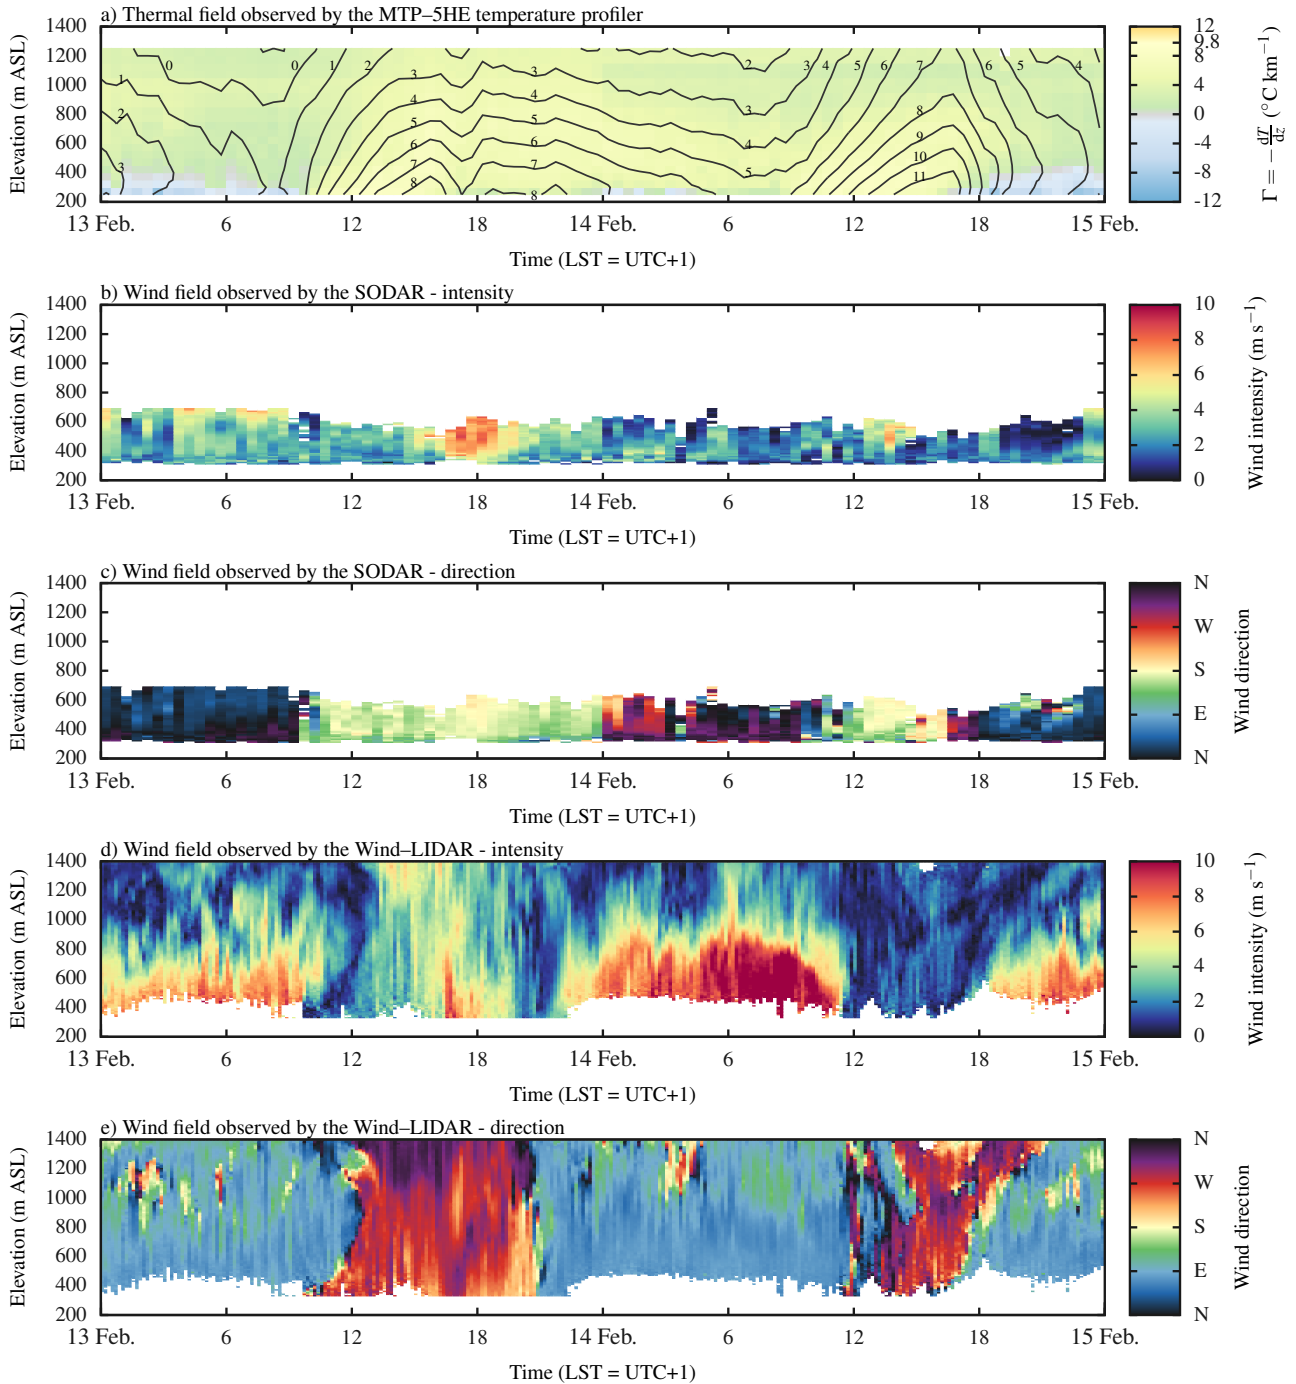


**Figure 7.** Time–height distribution of the thermal field (a) and of the wind fields measured by the SODAR (b–c) and by the Doppler Wind–LIDAR (d–e) inside the Bolzano basin.




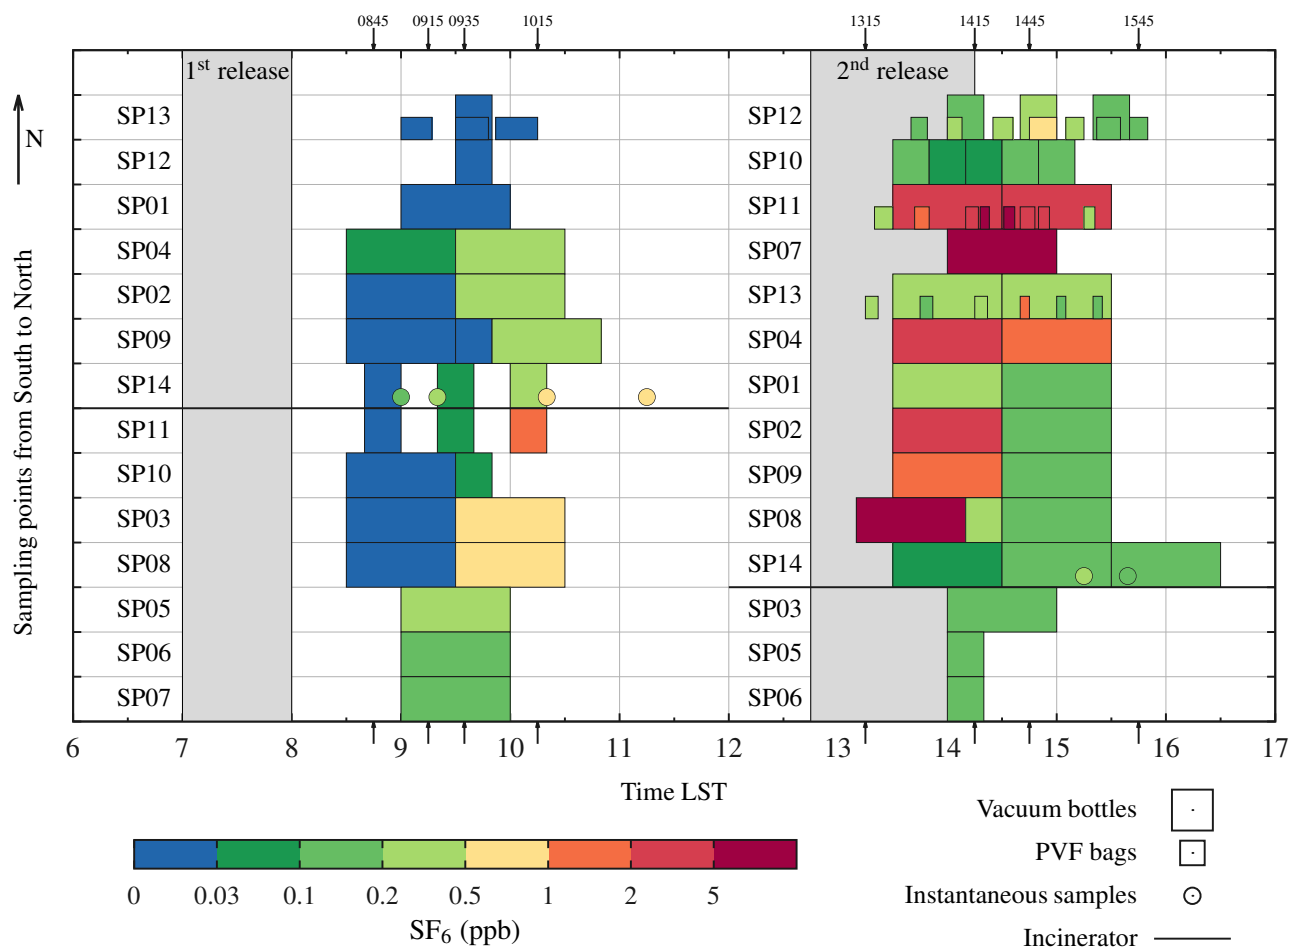

**Figure 8.** Tracer concentrations measured on 14 February 2017 after each release. Air samples were collected by means of vacuum-filled glass bottles (large rectangles), PVF bags (small rectangles). In addition, instantaneous samples of air (circles) were analyzed. The sampling points are listed from North to South, whereas the two horizontal black lines indicate the latitude of the incinerator. The arrows at the top and bottom of the graph indicate reference time stamps [LST] for Fig. 9 and Fig. 10.

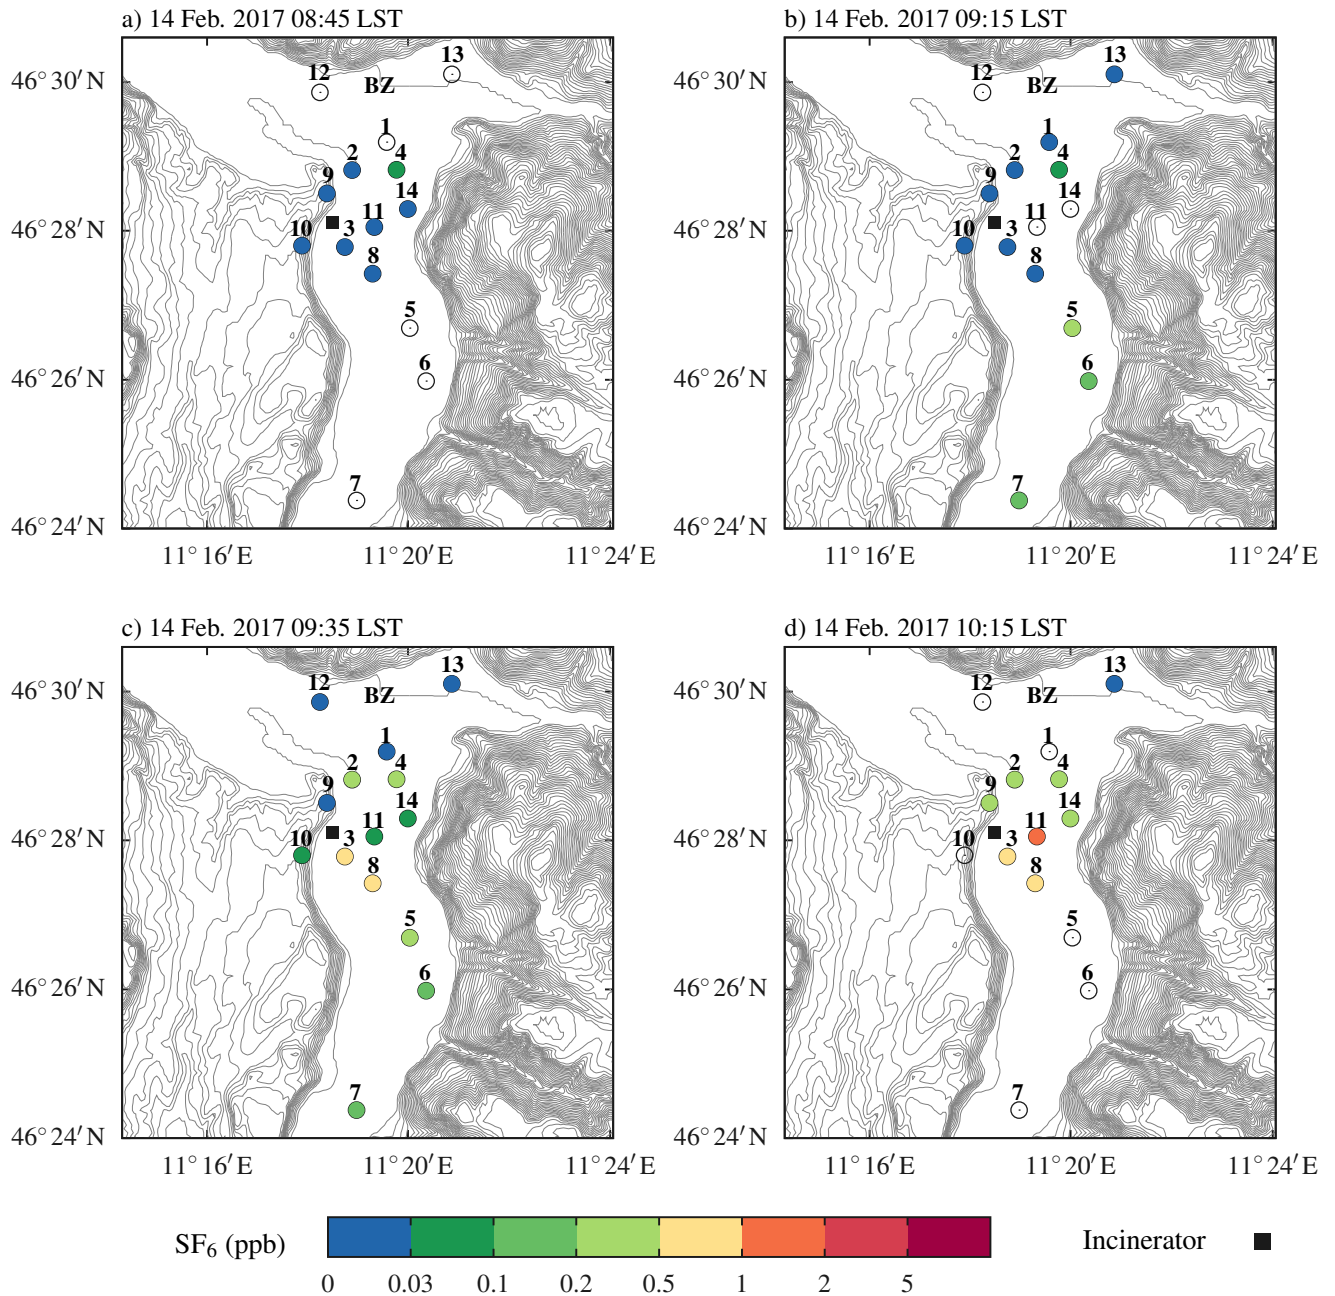

**Figure 9.** Spatial distribution of the tracer concentrations measured during the release performed in the morning of 14 February 2017. [The position of the city of Bolzano is indicated in the map with the label BZ.](#)

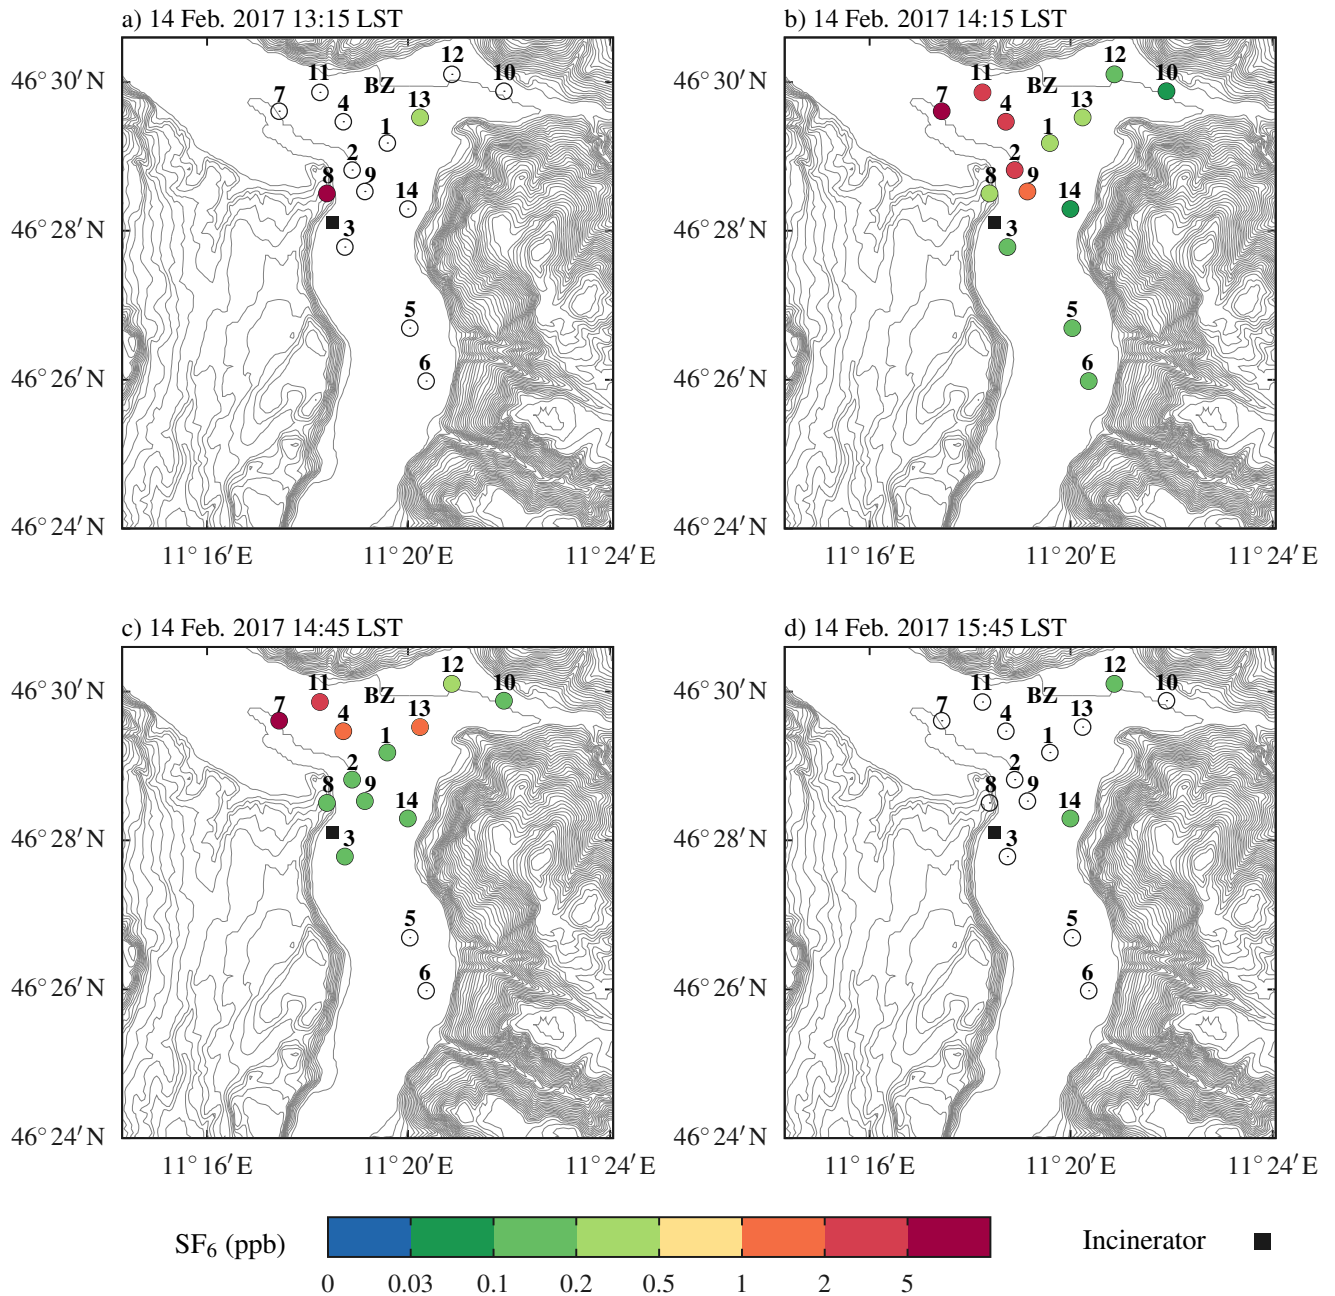

**Figure 10.** Spatial distribution of the tracer concentrations measured during the release performed in the afternoon of 14 February 2017. [The position of the city of Bolzano is indicated in the map with the label BZ.](#)