

# The NIEER AVHRR snow cover extent product over China – A long-term daily snow record for regional climate research

5 Xiaohua Hao<sup>1,2</sup>, Guanghui Huang<sup>3</sup>, Tao Che<sup>1,2</sup>, Wenzheng Ji<sup>1</sup>, Xingliang Sun<sup>1,4</sup>, Qin Zhao<sup>1</sup>, Hongyu Zhao<sup>1</sup>, Jian Wang<sup>1,2</sup>, Hongyi Li<sup>1,2</sup>, Qian Yang<sup>5</sup>.

<sup>1</sup>Heihe Remote Sensing Experimental Research Station, Northwest Institute of Eco-Environment and Resources, Chinese Academy of Sciences, Lanzhou 730000, China

<sup>2</sup>Key Laboratory of Remote Sensing of Gansu Province, Northwest Institute of Eco-Environment and Resources, Chinese Academy of Sciences, Lanzhou 730000, China

10 <sup>3</sup>College of Earth and Environmental Sciences, Lanzhou University, Lanzhou 730000, China

<sup>4</sup>Engineering Laboratory for National Geographic State Monitoring, Lanzhou Jiaotong University, Lanzhou 730070, China

<sup>5</sup>School of Geomatics and Prospecting Engineering, Jilin Jianzhu University, Changchun 130118, China

*Correspondence to:* Xiaohua Hao (haoxh@lzb.ac.cn)

15 **Abstract.** ~~Using the Google Earth Engine (GEE) platform, a~~ long-term AVHRR snow cover extent (SCE) product from 1981 until 2019 over China has been generated by the snow research team in the Northwest Institute of Eco-Environment and Resources (NIEER), Chinese Academy of Sciences. The ~~new~~NIEER AVHRR SCE product has ~~the~~a spatial resolution of 5-km and ~~the~~a daily temporal resolution, ~~and is~~. It is a completely gap-free product, which is produced through a series of processes such as the quality control, cloud detection, snow discrimination and gap-filling- (GF). A comprehensive validation ~~with reference to~~based on ground snow-depth measurements during snow seasons in China ~~revealed~~ showed an the overall accuracy ~~is of~~ 87.4%, ~~the~~a producer's accuracy ~~was of~~ 81.0%, ~~the~~a user's accuracy ~~was of~~ 81.3%, and ~~the~~a Cohen's kappa value ~~was of~~ 0.717. Another validation ~~with reference to~~regarding higher-resolution snow maps derived from Landsat-5 Thematic Mapper (TM) images ~~demonstrated~~s an overall accuracy of ~~89.4~~87.3%, a producer's accuracy of ~~90.2~~86.7%, a user's accuracy of ~~96.1~~95.7%, and a Cohen's kappa value of ~~0.713~~0.695. These accuracies were significantly higher than those of currently existing AVHRR products. For example, compared with the well-known JASMES AVHRR product, the overall accuracy increased approximately 15 percent, the omission error dropped from ~~nearly 40~~60.8% to 19.7%, the commission error dropped from 31.9% to 21.3%, and the CK value increased by more than 114%-. percent. The new AVHRR product is now already available at <https://dx.doi.org/10.11888/Snow.tpd.271381> (Hao et al., 2021).

20

25

30

## 1 Introduction

Snow cover is closely bound up with our climate. On the one hand, owing to snow's unique optical properties (high albedo), it can affect the surface radiation budget severely, and thereby our climate systems significantly (Warren, 1982; Huang et al. 2019). On the other hand, changes in climate in turn affect global and regional snow covers. With the continuous warming of the global climate, snow cover on the Earth has been shrinking evidently over ~~these~~the past several decades (Barnett et al., 2005; Bormann et al., 2018). ~~Long~~Therefore, long-term snow cover data, ~~therefore, is~~ are not only ~~of particular~~ importance particularly important for climate research, but are also an indispensable indicator of climate change.

Remote sensing is a widely used tool for monitoring snow cover extent (SCE) globally and regionally at various spatial and temporal resolutions (Konig et al., 2001; Dozier and Painter, 2004; Frei et al., 2012; Wang et al., 2014) since the beginning of the satellite era in the 1960s. The Northern Hemisphere Weekly Snow Cover and Sea Ice Extent (NHSCE) product provide weekly SCE with spatial resolutions of about 190 km from 1966 to 1997 (Robinson et al., 1993). Although the time coverage is long, the NHSCE product has a low spatio-temporal resolution, hand-drawn snow line maps, and incomplete spatial coverage due to swath gaps or cloud obscuration, largely restricting its application in climate research. With the development of satellite sensors, SCE products with a high spatial resolution for ~~throughout~~ China have been issued in the last decades, such as the Interactive Multi-sensor Snow and Ice Mapping System (IMS), which provides daily SCE with spatial resolutions of 24 km, 4 km, and 1km from 1997 to the present (Helfrich et al., 2007; Ramsay, 1998). The Moderate Resolution Imaging Spectroradiometer (MODIS) provides daily SCE with a spatial resolution of 500 m from 2000 to the present (Hall et al., 2002; Riggs et al., 2017). The ~~polar-orbit meteorological satellite of the~~ Fengyun daily SCE products ~~has~~have a spatial resolution of 1 km from 2003 to the present (Min et al., 2021). These SCE datasets have good quality with a high spatio-temporal resolution, but their short period is insufficient to create a climatological baseline of snow cover.

The Japan Aerospace Exploration Agency (JAXA) recently issued the long-term ~~snow-cover extent (SCE)~~ product JASMES with a spatial resolution of 5 km throughout the Northern Hemisphere. This product consists of satellite-derived daily, weekly, and half-monthly averaged global snow covers derived from 5 km resampled radiance data of AVHRR Global Area Coverage (GAC) radiance data onboard NOAA

series satellites (1978-2001) and MODIS onboard Terra & Aqua satellites (2000–the present) (Hori et al., 2017). Although the JASMES product presented a long time series and significantly enhanced spatial and temporal resolution, several shortcomings have been found. (1) The JASMES product uses AVHRR before 2000 and MODIS data after 2000. Although calibrated by the authors, the bandwidths of the two sensors are not consistent, and using the same algorithms for both can cause discontinuities in the data. (2) Previous work showed that the JASMES snow product has an excessive cloud mask, which ~~c~~would cause a considerable number of snow pixels to be misidentification as cloud pixels (Wang et al., 2018). (3) JASMES snow algorithm tended to underestimate snow in China, especially on the Qinghai-Tibet Plateau (Wang et al., 2018). (4) Finally, JASMES SCE exhibits incomplete spatial coverage caused by clouds and data gaps. These shortcomings limit its application in snow monitoring and climate studies in China. Thus, China still lacks a high-quality, long-term SCE product with complete spatial coverage for climate research.

Therefore, a new daily 5-km gap-free AVHRR snow cover extent product for China was produced based on the Google Earth Engine platform from 1981 to 2019. The new product provides a long time series of SCE with high quality for China and makes six improvements. (1) The Climate Data Record (CDR) of AVHRR Surface Reflectance (SR) is used as a data source after 2000 rather than MODIS to ensure product continuity. (2) Considering sensor attenuation of Band 11 before and after 2000, the algorithm chooses different training samples and discriminant thresholds separately. (3) An improved cloud detection test and new thresholds are obtained by a volume of training data, which can solve the snow/cloud confusion. (4) A multi-level decision tree for the snow discrimination algorithm is applied, which significantly ~~improved~~improves snow discrimination accuracy. (5) Improved gap-filling (GF) strategies are adopted to obtain complete snow coverage. (6) Land surface temperature reanalysis is used to exclude the false snow identification. Due to these improvements, the new AVHRR SCE product may serve as a baseline record for climate and other related applications.

## **2 Datasets and ~~processing~~preprocessing**

### **2.1 AVHRR surface reflectance CDR**

The NOAA Climate Data Record (CDR) of AVHRR Surface Reflectance Version 4 (AVHRR SR V4) was used as basic input data. AVHRR SR V4 is generated using AVHRR Global Area Coverage (GAC)

90 Level 1b data through geolocation, calibration, and atmospheric correction, and has latitudinal and longitudinal dimensions of 3600×7200, covering the globe at 0.05° spatial resolution (Vermote et al., 2014). The dataset contains surface reflectance, brightness, temperatures, and quality control flags for the period between June 24, 1981, and May 16, 2019. ~~All AVHRR SR V4 images were processed with the GEE platform.~~ Google established the Google Earth Engine (GEE) cloud computing platform in 95 2012. GEE enables academics to quickly the quick access of massive amounts of remote sensing data without downloading it, which could support scientific analysis and visualization of geospatial datasets with petabyte-scale (Gorelick, 2012). In this study, all AVHRR SR V4 images were processed by the GEE cloud platform. The reflectance, brightness, and temperature data were described in Table 1. The quality control flags are summarized in Table 3.

## 100 **2.2 Landsat-5 TM snow map**

This study used two groups of Landsat-5 Thematic Mapper (TM) maps across China from 1985-2013. The first group was used as “true” values to acquire the training data of AVHRR surface reflectance. TM snow maps were produced by the improved “SNOMAP” algorithm developed by Chen et al. (2020) for the snow season (beginning on November 1 through March 31 of the following year). Each map 105 contained three classes, namely snow, non-snow, and cloud. Considering sensor attenuation before and after 2000, the algorithm chose different TM images separately. Table 2 shows the number of Landsat-5 TM scenes used for training before and after 2000. The second group of maps was used as ~~true~~ground “true” ~~truth~~-values to evaluate the AVHRR SCE product. A total of ~~89~~ Landsat-5 TM snow maps were used as the validation dataset (Fig.1). ~~The~~To ensure reliability and representativeness, the training and 110 validating samples were evenly distributed ~~across China's main~~in three major seasonally snow-covered ~~areas to ensure reliability and representativeness~~regions across China, including North Xinjiang, Northeast China, and the Qinghai-Tibet Plateau.

## **2.3 AVHRR Training Samples**

Snow and non-snow training samples from the AVHRR were generated from spatially and temporally 115 (same day) collocated AVHRR surface reflectance along with the Landsat-5 snow maps. Cloud training samples came from AVHRR surface reflectance with Landsat-5 cloud flags during summer (June 1 to August 31). The training samples before 2000 included 71.7 thousand snow samples, 80.4 thousand non-

snow samples, and 8.3 thousand cloud samples. Samples after 2000 included 7.3 million snow samples, 8.4 million non-snow samples, and 4.4 thousand cloud samples.

## 120 **2.4 Ground snow-depth measurements**

Ground snow-depth measurements provided by the China Meteorological Administration (CMA) were used to validate the AVHRR SCE products. Daily snow depth was measured near the stations using a professional meter ruler. All measurements were conducted at 08:00 Beijing time when the fractional snow cover in the field of view was more than 50% (C.M.A, 2003). Validation CMA stations were carefully selected because too many non-snow samples can affect the accuracy of [the](#) assessment. To ensure the validation reliability, the selected CMA stations had  $\geq 20$  days with true snow ( $>1\text{cm}$ ) at the CMA site per snow season (Metsämäki, 2016). Finally, a total of 191 meteorological stations at 38-year periods (from 1981 to 2019; Fig.1) were used to validate the AVHRR SCE products. The available CMA stations were evenly distributed across the three major seasonally snow-covered regions in China, including North Xinjiang, Northeast China, and the Qinghai-Tibet Plateau.

## 130 **2.5 Ancillary data**

[Che et al. \(2008\) and Dai et al. \(2015\)](#) generated snow-depth data by using an inter-sensor calibration of multiple satellites' passive-microwave observations, which provides daily, 0.25-degree snow-depth data for China from 1979 to 2020. ~~And~~ This data set of long-term daily snow depth in China is available at <http://data.tpdc.ac.cn>. ~~It provides daily, 0.25-degree snow depth data for China from 1979 to 2020. It was generated by Che et al. (2008) and Dai et al. (2015) using an inter-sensor calibration of multiple satellites' passive-microwave observations.~~ This data set was used as a supplement to the gap-filling strategies. We used the land surface temperature (LST) daily product to alleviate the cloud/snow confusion ~~generated~~ by averaging the hourly ERA 5 land climate reanalysis dataset on the GEE platform (Muñoz Sabater, 2019). Digital Elevation Model (DEM) data were used as auxiliary data in the cloud and snow discrimination algorithm, mask, and validation. The SRTM DEM product has an original resolution of 90 m and is also available on the GEE. To match with AVHRR products, these products were resampled or aggregated into 5 km.

### 3 Methodology

145 Figure 2 shows the different steps in the generation of the NIEER AVHRR SCE product. Starting with AVHRR surface reflectance version 4 (AVHRR SR V4) data on the GEE platform, valid observations were selected first by the quality control flags of AVHRR SR V4. Then, an improved cloud detection algorithm was developed to distinguish ~~between cloudy pixels, water pixels,~~ and clear pixels. Third, clear pixels were determined as snow-covered or not by a multi-level decision tree, generating a set of AVHRR preliminary SCE records. ~~Forth~~Fourth, the gaps caused by clouds or invalid observations in the preliminary SCE record were filled with a set of gap-filling techniques, including HRMF-based interpolation and snow-depth interpolation. Finally, postprocessing based on land surface temperature and DEM was conducted to exclude false snow identifications.

#### 155 3.1 Quality control of AVHRR

Only observations valid in all AVHRR channels were employed to ~~directly~~ generate SCE records directly by using the quality control bit flags of AVHRR SR V4 (Table 3). In shows all the process, quality control information from AVHRR SR V4 and the status of its usage in this study. After quality control processing, the valid pixels were used as input for retrieval, and the invalid pixels were regarded as gap pixels.-

#### 3.2 Cloud detection algorithm

In this study, we could not directly adopt the cloudy flags of AVHRR SR V4 due to the obvious cloud overestimation (Chen et al., 2018).

As ~~stated by~~in previous studies (Hori et al., 2007; Hori et al., 2017; Stamnes et al., 2007; Yamanouchi et al., 1987), the following eight variables were used in the cloud detection test: SR1, SR2, SR3, BT11, the reflectance differences between SR1 and SR2 (SR1-SR2), the brightness temperature (BT) differences between BT37 and BT11 (BT37-BT11), the BT differences between BT11 and BT12 (BT11-BT12), and the normalized difference vegetation index (NDVI). The calculation of the NDVI is based on formula (1). For cloud detection, “BT37-BT11” was used as the primary test.

$$170 \quad NDVI = \frac{SR2 - SR1}{SR1 + SR2}, \quad (1)$$

We adopted the cloud test scheme by Hori et al. (2017), but the critical threshold value of BT37-BT11 was adjusted. As earlier thresholds of BT37-BT11 used a stronger cloud discrimination algorithm and ignored the cloud/snow confusion problem, further optimization was needed to minimize misclassification and the omission of clouds. Therefore, we focused on optimizing the cloud algorithm thresholds. Using the Landsat-5 TM maps for the true values, we ~~obtained~~trained the frequency distribution characteristics of BT37-BT11 for cloud and snow samples from AVHRR SR. Table 4 shows the cloud discrimination schemes, with ten cloud detection schemes and four non-cloud schemes. With A1 type as an example, Fig. 3 shows the optimal BT37-BT11 determination scheme. Fig. 3 (a) presents the BT37-BT11 frequency distribution of cloud and snow training samples from AVHRR before 2000, and Fig. 3 (b) presents the variation of the overall accuracy at different BT37-BT11 thresholds. Optimum accuracy (84.76%) occurred at the cross-point of snow and cloud frequency distributions, with a BT37-BT11 threshold of 14.5 K. This cross-point also represents a compromise for cloud omission (10.49%) and commission error (19.92%). Thus, the final threshold value was 14.5 K according to the optimal OA, which means that a pixel is classified as a cloud when  $BT37-BT11 > 14.5K$ . Following the same procedure, the optimal BT37-BT11 thresholds were obtained from AVHRR data before and after 2000, as listed in Table 4.

### 3.3 Snow discrimination algorithm

According to [the](#) previous snow classifications with AVHRR data (Hori et al., 2007; Hori et al., 2017; Stamnes et al., 2007; Yamanouchi et al., 1987), snow discrimination test variables included SR1, BT11, the reflectance ratio between SR3 and SR2 ( $SR3/SR2$ ), reflectance differences between SR3 and SR2 ( $SR3-SR2$ ), NDVI, the normalized difference snow index (NDSI), and BT differences between BT11 and BT12 ( $BT11-BT12$ ). For snow discrimination, the NDSI was one of the primary tests. The NDSI is usually calculated using the Green (around a wavelength of  $0.50\mu m$ ) and shortwave infrared (around a wavelength of  $1.60\mu m$ ) bands. As there were no shortwave infrared observations around  $1.60\mu m$  in AVHRR SR V4, we used the reflectance at  $3.7\mu m$  for an NDSI-like calculation, following Hori et al. (2017). The calculation of NDSI is shown in formula (2).

$$NDSI = \frac{SR1 - SR3}{SR1 + SR3} \quad (2)$$

To improve the snow discrimination under clear-skies, all decision rules were re-adjusted according to

the training samples from high-resolution snow maps. We developed a ~~multi~~three-level decision tree algorithm, which obtained the optimal threshold values from the training data. Using Landsat-5 TM data as true values, we obtained the frequency distribution characteristics of each band from AVHRR data in the snow and non-snow areas at SR1, BT11, SR3/SR2, SR3-SR2, NDVI, and NDSI. ~~The snow~~ Figure 4 shows the flowchart of the three-level decision tree ~~includes three levels~~ snow discrimination algorithm.

### 1) First-level decision tree

SR1, BT11, ~~and SR3/SR2,~~ combined with DEM, and SR3/SR2, were chosen as first-level discriminators. The main purpose of the first-level discriminators decision tree is to exclude ~~specific~~ pixels that are definitely non-snow pixels. Snow has high reflectance in the SR1 band and low ~~BT~~brightness temperature in the thermal infrared BT11 band. Since the ability of SR3/SR2 to distinguish snow of SR3/SR2 is lower than that of SR3-SR2 by in our training test, ~~the~~ SR3/SR2 was chosen as a first-level discriminator. Based on the frequency distributions of snow and non-snow pixels for the first-level discriminators for Landsat-5 TM maps, a confidence level of 95% of snow samples was set to obtain the threshold value of ~~possible snow and~~ certain non-snow pixels. As shown in Table 5, for the samples before 2000, SR1 was  $>0.14$  and BT11  $<274$  K when DEM  $<1300$  m, BT11 was  $<281$  K when DEM  $\geq 1300$  m, and SR3/SR2  $<0.50$  were the possible snow images, while the remaining pixels were non-snow pixels. The potential snow pixels were used as input for the second-level decision tree.

### 2) Second-level decision tree

NDVI and SR3-SR2 were chosen as second-level discriminators. The second-level decision tree was mainly used to obtain ~~the~~ certain snow ~~information in~~ pixels from the possible snow pixels. ~~The second-level discriminators were NDVI and SR3-SR2.~~ Based on the frequency distributions of ~~possible~~ snow and non-snow pixels ~~derived~~ from potential snow pixels processed by the first-level decision tree, a confidence level of 99% of non-snow samples was set to obtain the threshold value of certain snow ~~and possible snow~~ pixels. For the samples before 2000, a pixel was classified as certain snow when NDVI was  $< -0.16$  ~~and~~ or SR3-SR2  $< -0.81$  (Table 5). Other pixels were considered the ~~possible~~ potential snow pixels, ~~which~~ and were used as input for the third-level decision tree.



225 **3) Third-level decision tree**

NDSI was used as the third-level ~~decision tree indicator~~discriminator due to its excellent discrimination ability of snow cover and other land covers. Based on the frequency distributions of ~~possible~~potential snow pixels derived from the second-level decision tree, the optimal NDSI threshold value was calculated by a method similar to that of the cloud test. Figure 4 shows the optimal NDSI scheme. Fig. 45 (a) presents the NDSI frequency distribution histogram of snow and non-snow pixels. The cross-point of snow and non-snow that has the highest overall accuracy (85.87%) was chosen as the optimal NDSI threshold (0.73), as shown in Fig 45(b). The cross-point also represents a compromise for the snow omission (15.83%) and commission error (13.03%). Thus, pixels with  $NDSI > 0.73$  were identified as snow for the samples before 2000.

235 Following the same strategy, optimal snow discrimination threshold values were obtained from AVHRR data before and after 2000 (Table 5). Using the above-mentioned algorithm ~~above~~, we ~~first~~ produced the AVHRR preliminary SCE record for China based on the AVHRR SR V4.

**3.4 Gap-filling strategies**

For daily AVHRR preliminary SCE records, gaps due to frequent cloud obscuration or swath gaps remained serious. Two gap-filling strategies described below were used to generate a spatially complete daily AVHRR SCE record.

**3.4.1 HMRF-based spatio-temporal modeling**

Here, we present a spatio-temporal modeling technique for filling up gap pixels in daily snow cover estimates based on the time series of AVHRR preliminary SCE records. The spatio-temporal modeling technique integrated AVHRR preliminary SCE record spatial and temporal contextual information within a Hidden Markov Random Field (HMRF) model (Melgani and Serpico, 2003). Initially, Huang et al. (2018) utilized HMRF based spectral information, spatio-temporal ~~modeling for deriving~~information, and ~~improving daily~~environmental information to reclassify snow and non-snow classes by in MODIS snow products. In our study, we only used~~the~~ spatio-temporal information for filling up gap pixels. The core of this method is computing the ~~total spatiotemporal~~spatio-temporal cubic energy function for every gap from the neighborhood pixels and further classifying the gap pixels as snow pixels, non-snow pixels, or still gap pixels using

$$U_T(\beta_n) = U_{st}(\beta_n | N_{sp}, N_{tp}) \quad , \quad (3)$$

where  $U_T$  is the total energy function of belonging to the class of  $\beta_n$  ( $n=2$ ,  $\beta_1$  denotes snow and  $\beta_2$  denotes non-snow),  $\lambda_{st}$  is the weight parameters, and  $U_{st}$  is the spatio-temporal neighborhood cubic energy function.  $N_{sp}$  and  $N_{tp}$  denote the spatial neighborhood and temporal neighborhood centered with the gap pixel, respectively.

Figure 56 illustrates our gap-filling process based on the HMRF technique. For a given gap at the center, we first calculated  $U(\beta_1)$  and  $U(\beta_2)$  based on a spatio-temporal, surrounding cube with 3 rows  $\times$  3 columns  $\times$  3 days. If  $U(\beta_1)$  was  $> U(\beta_2)$ , gap pixels were classified as snow pixels. Otherwise, they were classified as non-snow pixels. If  $U(\beta_1) = U(\beta_2)$  or there were not sufficient valid pixels for calculating  $U(\beta_n)$ , we extended the spatio-temporal neighborhood to 3 rows  $\times$  3 columns  $\times$  5 days. If there were still insufficient valid pixels, the spatio-temporal neighborhood was expanded to 5 rows  $\times$  5 columns  $\times$  5 days. If the strategy above failed, gap pixels were maintained.

The HMRF-based modeling provided a rigorous interpolation framework for optimally integrating spatial-temporal contexts. To test the effect of HMRF-based interpolation for gap pixels, we used the monthly average gap ratio of the AVHRR preliminary SCE record from 1981 to 2019 before and after HMRF-based interpolation (table 6). The gap ratio of the AVHRR preliminary SCE record before HMRF-based interpolation was within 40% –60% (average: 47.8%), and the gap ratio after HMRF-based interpolation ranged between 0.2% and 6.4% (average: 2.7%). Almost 90% of gap pixels could be reduced. The HMRF-based spatio-temporal model significantly improved the practicability of the AVHRR SCE product.

### 3.4.2 Interpolation based on passive microwave snow-depth data

Although most gap pixels were filled after interpolating the HMRF-based spatio-temporal model, there were still ~6% gaps left in the daily SCE data. Therefore, a fusion method combining the passive microwave daily snow-depth data and the AVHRR snow cover data was performed for these residual gap pixels. The passive microwave daily snow-depth data (25 km) were resampled to the same cell size as the AVHRR data (5 km) by the nearest neighbor interpolation method. If collocated snow depth was

280  $\geq 2$ -cm, the gap was considered a snow pixel. Otherwise, it was considered a non-snow pixel (Hao et al., 2019).

### 3.5 Postprocessing based on surface temperature and DEM

Because of their similar optical properties, ice-cloud pixels are sometimes mistaken for snow pixels, which ~~will results~~ in artifact snow covers in Southern China even during summers, where and when snow is impossible. Referencing the MODIS algorithm, the postprocessing adopts LST products of ERA5 reanalysis and DEM to eliminate these snow pixels. The corresponding thresholds are given as below: 285 the pixel is reclassified as snow-free when LST is  $\geq 275$  K, and DEM is  $\leq 1300$  m, or LST is  $\geq 281$  K, and DEM is  $\geq 1300$  m.

## 4 Accuracies of the NIEER AVHRR SCE product

### 4.1 ~~Methodology~~Metrics of accuracy evaluation

290 A confusion matrix similar to that given in Table 7 is used to assess all associated AVHRR SCE data in ~~the paper~~this study. Four kinds of accuracy metrics were used in this study, ~~followed on the~~ing previous studies (Dong et al., 2014; Zhang et al., 2019), including the OA, the producer's accuracy (PA), the user's accuracy (UA), and Cohen's kappa (CK) value. The OA is the fraction of the correctly detected cases and all cases. The PA measures the probability of correctly detected snow cases by AVHRR in the actual 295 snow cases. The UA measures the proportion of true snow cases in all the detected snow cases by AVHRR. The sum of PA and omission error equals one, and the sum of UA and commission error equals one. (Arsenault et al., 2014). CK value is an overall measurement of the agreement and is considered a more robust metric than OA (Cohen, 1960; Powers and Ailab, 2011).

### 4.2 Validation with ground snow-depth measurements

300 As mentioned ~~above~~before, we ~~will use~~used 38-year CMA ground snow-depth measurements at 191 stations to validate the new NIEER AVHRR SCE product. Table 8 presents an overview of ~~the~~ validation results. The OA ~~is was~~ up to 87.4%. The ~~value of~~PA ~~value~~ (81.0%) was close to the UA ~~value~~ (81.3%), which indicated that the algorithm sensibly performed a trade-off between the omission error (19.0%) and commission error (18.7%). In addition, the CK value was 0.717. According to the guidelines 305 presented by Landis and Koch (1977), this would place the level of agreement as "substantial". All reveal

on a whole the new NIEER AVHRR product is accurate and has a good agreement with measurements of CMA stations.

To validate the stability and reliability of the NIEER AVHRR SCE product, Fig. 67 presents the four accuracy metrics' annual fluctuation over the past 38 years. The OA ranged within 80%–90%, the PA and UA ranged within 70%–90%, and the CK value ranged from 0.61 to 0.8. Several considerable annual fluctuations mainly occurred in 1993, 1994, and 2017, which were mainly caused by the poor quality of raw satellite data rather than the algorithm. In summary, the product maintained a higher precision with small annual fluctuations, which indicated the effectiveness and stability of the training framework with different thresholds before and after 2000.

Figure 78 further detailed details accuracy metrics at each CMA station. From According to this figure, the OAs had higher values, within 80%–90%, at in most stations across China, but the PA, UA, and CK had low values with a clear spatial inconsistency. We found that the product performed well in North Xinjiang and the north of Northeast China where the stable snow was widely distributed. In contrast, the accuracy was relatively lower on the Qinghai-Tibet Plateau, the Loess Plateau, in the Northeast of Inner Mongolia, and in the South of Northeast China, where snowpacks may be instability-unstable due to patchy snow-cover features, rugged terrains, or rapid melt even in winter.

#### 4.3 Validation with Landsat-5 TM SCE maps

The measurements from CMA stations can provide time-continuous validation. However, the “point to area” evaluation method ignores the spatial heterogeneity of satellite images within one pixel (Huang et al., 2011). The snow condition of an individual CMA station may not represent the larger area viewed by AVHRR. The “area to area” method using higher-resolution images has pointed out a good way to assess snow spatial distribution of the AVHRR SCE product.

In the this study, 89 Landsat-5 snow maps were used to further evaluate the NIEER AVHRR product. Table 9 gives the validation results of our maps versus the Landsat-5 TM SCE maps. The OA was as high as 89.4%, the PA (90.2%) and UA (96.1%) were both greater than 90%, the omission error (9.8%) and commission error (3.9%) were both below 10%. 87.3%. The high UA and low PA revealed that the product has had a slight tendency to underestimate the snow cover extent. The CK value (0.713695) of the ‘area to area’ method also demonstrated ‘substantial’ agreement, which was close to that of the ground measurements validation (0.717). Therefore, no matter from either the point of view (ground

335 measurements) or area of view (Landsat-5 SCE maps), the NIEER AVHRR product ~~is~~ was accurate. In general, the ~~new~~ NIEER AVHRR SCE product is promising to better serve the climatic and other related studies in China.

Figure ~~8~~ 9 further displays three intuitional examples demonstrating the detailed differences s between ~~the~~ NIEER AVHRR SCE maps and ~~the~~ Landsat-5 SCE reference maps. The three images (serial number 340 “C1, ~~C3~~ C5, and ~~C6~~ C8”) were located in Northeast China, the Qinghai-Tibet Plateau, and North Xinjiang, respectively. It was clear that the NIEER AVHRR SCE maps agree much better with higher-resolution snow maps in a wide range of snow-covered areas. However, in the ~~edges~~ boundaries of snow-covered areas, the NIEER AVHRR SCE maps failed to identify most snow pixels in the Landsat-5 SCE maps, which could be explained by the low ability of our product to detect low fractional snow-covered pixels.

## 345 **5 Discussion**

### **5.1 Uncertainties of the NIEER AVHRR SCE product**

The validation based on both CMA stations and Landsat TM images indicated that the NIEER AVHRR SCE product performs well for large and deep snow-covered areas ~~areas~~. To explore the uncertainties of our product in the thin snow-covered areas, we set different snow depth (SD) thresholds based on CMA 350 measurements to further evaluate the NIEER AVHRR SCE product. Figure ~~9~~ 10 shows the accuracy metrics of the product under different SD thresholds ( $SD \geq 1$  cm,  $SD \geq 2$  cm,  $SD \geq 3$  cm,  $SD \geq 4$  cm, and  $SD \geq 5$  cm).

The results showed that the OA, UA, and CK values of the product decreased with increasing SD thresholds. ~~While~~ The PA values of the product increased with the increase ~~of~~ ing SD threshold. As SD 355 increased, the UA presented a sharply decreasing trend and PA presented a slightly increasing trend. On a whole, OA and CK values showed a significant decreasing trend. ~~We can see o~~ Our algorithm performed well at lower SD thresholds, which indicated the product has a better recognition ability for shallow snow.

According to the snow cover temporal distribution feature in China, three seasonal snow periods were 360 defined, i.e., the snow accumulation period, stable snow period, and snow melting period. The snow accumulation period is November. The stable snow period ranges from the beginning of December of the year to the end of February, and the snow melting period is March. Figure ~~10~~ 11 presents the accuracy

results of the NIEER AVHRR SCE product in different snow periods. The OAs of the accumulation period (87.7%), stable period (86.7%) and melting period (89.0%) showed a similar response. However, 365 the PAs, UAs and CK values of the accumulation and melting periods were markedly lower than those of the stable snow period. The product had the highest omission errors (29.5%) during the accumulation period because of the mixed pixels in the early snowfall seasons ~~-, while the product but~~ had the highest commission error (30.3%) during the melting period due to the influence of wet snow.

## 5.2 Comparison of NIEER AVHRR and JASMES SCE product

370 To more objectively assess our product, we compared the NIEER AVHRR SCE product with [the JASMES SCE products](#). Since the JASMES SCE product was only generated by AVHRR data from 1981 to 1999, comparisons were made against the same ground snow-depth reference measurements in 19 snow seasons (1981-1999). Table 10 lists the comparison of the accuracy metrics. Our products performed well, with OA, PA, UA, and CK values of 86.1%, 80.3%, 78.7%, and 0.690, respectively. The 375 JASMES SCE products performed ~~poorly~~ [much worse](#), with total OA, PA, UA, and CK values amounting to 71.8%, 39.2%, 68.1%, and 0.321, respectively. ~~It means that~~ [Thus](#), our product clearly ~~outperforms~~ [outperformed](#) the JASMES product. Relative to the JASMES SCE product, the NIEER AVHRR OA increased approximately 15 percent, the omission error dropped from ~~nearly 60.8%~~ to 19.7%, the commission error dropped from 31.9% to 21.3%, and the CK value increased by more than 114%. The 380 JASMES product markedly underestimated the snow in China. In addition, there were about 50 thousand validation samples in our product and only about 36 thousand SD measurements in that of the JASMES product. Thus, our product should fill more gap pixels than JASMES. On the whole, the snow and cloud detection algorithm and the ~~gaps-filled~~ [filling](#) strategy of our product performed better than those of JASMES.

385 To better figure out the spatial distribution difference between the two sets of products, comparison maps were constructed for November 15, 1985. Figure ~~11~~ [12](#) presents the two SCE maps and their difference. There were significant differences in mapped snow extent between the two maps in the three major seasonal snow regions in China, i.e., North Xinjiang, Northeast China, and the Qinghai-Tibet Plateau. Our product mapped more snow in North Xinjiang, the Qinghai-Tibet Plateau, and the non-forest area in 390 the Northeast of China than JASMES. The most considerable discrepancy occurred on the Qinghai-Tibet Plateau, where our product identified more snow-covered areas than JASMES. JASMES maps had more

snow in the forested area of Northeast China than our product. Three improvements contributed to this phenomenon. Firstly, the proposed snow algorithm ~~proposed~~ improved snow discrimination accuracy and reduced omission errors largely. Secondly, the cloud detection algorithm effectively improved the cloud-snow confusion, which identified the snow pixels that were misidentified as clouds pixels in the JASMES. Thirdly, the ~~gaps-filled~~ filling strategy provided complete spatial coverage of snow cover.

## 6 Data availability

The NIEER AVHRR SCE product was named in a manner of NIEER\_GF AVHRR SCE\_yyyymmdd\_DAILY\_5km\_V01 (V01 denotes the first version). It has a spatial resolution of 5 km and a daily temporal resolution. It spans latitude 16-56°N and longitude 72-142°E, and now is freely accessible at <https://dx.doi.org/10.11888/Snow.tpd.271381> (Hao et al., 2021). Detailed information on the product is listed in Table 11. The values in the product are classified as non-snow (0), ~~water (4), filling value (255)~~, snow from AVHRR (1), snow from HMRF (2), ~~and~~ snow from SD (3), ~~water (4), and filling value (255)~~.

405

## 7 Conclusions

~~This study developed~~ This study generated a daily AVHRR SCE product with a spatial resolution of 5 km across China from 1981 to 2019 ~~has been generated by the snow research team in the NIEER, Chinese Academy of Sciences. The NIEER AVHRR SCE product used~~ a multi-level decision tree algorithm for cloud and snow discrimination ~~based on AVHRR SR V4 data in China. We used~~ and an improved ~~gap filling~~ GF technique ~~to fill in the missing values of the product and generate a daily NIEER AVHRR SCE product with a spatial resolution of 5 km across China from 1981 to 2019. The AVHRR SCE. The~~ product was validated using snow depth measurements provided by the China Meteorological Administration and higher spatial resolution SCE maps derived from Landsat-5 TM.

The OA of the NIEER AVHRR product was 87.4%, a high accuracy, while the PA and UA were 81.0% and 81.3%, respectively. The PA and UA were similar, showing that the algorithm of the NIEER AVHRR product performed a trade-off between commission and omission errors. The CK value was

0.717, which indicated that the product had an agreement level of “Substantial”. Considering the  
420 limitations of point-to-area validation, the overall OA, PA, UA, and CK values were ~~89.4%, 90.2%,  
96.1, 87.3%, 86.7%, 95.7%~~, and ~~0.713, 0.695~~, respectively, using Landsat-5 TM area-to-area, which showed  
the same trend of accuracy as the point validation. Therefore, no matter ~~from either~~ the point of view or  
area of view, our AVHRR SCE product ~~has~~ had high accuracy.

The performance of the NIEER AVHRR product in China was compared with the existing JASMES  
425 AVHRR SCE product. The OA, PA, UA, and CK values of the NIEER product were 86.1%, 80.3%,  
78.7%, and 0.690, and those of JASMES were 71.8%, 39.2%, 68.1%, and 0.321. Compared with the  
JASMES product, the NIEER product's OA increased approximately 15 percent, the omission error  
dropped from nearly 60% to 19.7%, the commission error dropped from 31.9% to 21.3%, and the CK  
value increased by more than 114%. Accordingly, the NIEER AVHRR product had a higher accuracy  
430 than the JASMES product. Furthermore, the NIEER product provides a completely gap-free product for  
China, permitting its wide applications.

Finally, we assessed the behavior of the NIEER AVHRR product during the snow accumulation, stable  
snow, and melting periods. The SCE performed best during the stable period, and the product was more  
accurate in the snow accumulation than the melting period. In general, the algorithm had a relatively high  
435 ability to identify shallower snow, but some uncertainties existed in patchy snow areas, regarding thinner  
snow, and in rugged terrain areas. As a long-term record, the dataset will provide a valuable data source  
for analyzing the influence of climate changes on the cryosphere on multiple time scales.

#### **Author contribution.**

XH and GH designed the study and developed the methodology; XH wrote the manuscript; TC, JW, QZ,  
440 HL, QY revised the manuscript. WJ, XS and HZ developed the python code.

#### **Competing interests.**

The authors declare that they have no conflict of interest.



## ACKNOWLEDGEMENTS

The authors would like to thank the China Meteorological Administration for ground snow-depth  
445 measurements, the National Oceanic and Atmospheric Administration (NOAA) and the Japan Aerospace  
Exploration Agency (JAXA) for satellite data. We also acknowledge that the Google Earth Engine  
dramatically facilitated the work on image re-processing.

### Financial support.

This research was supported by the Strategic Priority Research Program of the Chinese Academy of  
450 Sciences (Grant No. XDA19070101), the National Natural Science Foundation of China (Grant No.  
41971325, 41971399, 41801283), the Science & Technology Basic Resources Investigation Program of  
China (Grant No. 2017FY100502), the National Key Research and Development Program of China  
(Grant No. 2019YFC1510503).

### Reference

- 455 Arsenault, K. R., Houser, P. R., and De Lannoy, G. J. M.: Evaluation of the MODIS snow cover fraction  
product, *Hydrological Processes*, 28, 980-998, 10.1002/hyp.9636, 2014.
- Barnett, T. P., Adam, J. C., and Lettenmaier, D. P.: Potential impacts of a warming climate on water  
availability in snow-dominated regions, *Nature*, 438, 303-309, 10.1038/nature04141, 2005.
- Bormann, K. J., Brown, R. D., Derksen, C., Painter, T. H.: Estimating snow-cover trends from space,  
460 *Nature Climate Change*, 8, 10.1038/s41558-018-0318-3, 924-928, 2018.
- C.M.A: Specifications for Surface Meteorological Observations, China Meteorological Press,  
Beijing.2003.
- Che, T., Li, X., Jin, R., Armstrong, R., and Zhang, T.: Snow depth derived from passive microwave  
remote-sensing data in China, *Annals of Glaciology*, 49, 145-154, 10.3189/172756408787814690, 2008.
- 465 Chen, S., Wang, X., Guo, H., Xie, P., Wang, J., and Hao, X.: A Conditional Probability Interpolation  
Method Based on a Space-Time Cube for MODIS Snow Cover Products Gap Filling, *Remote Sensing*,  
12, 10.3390/rs12213577, 2020.

Chen, S., Wang, X., Guo, H., Xie, P., Wang, J., and Hao, X.: A Conditional Probability Interpolation Method Based on a Space-Time Cube for MODIS Snow Cover Products Gap Filling, *Remote Sensing*, 12, 3577, 10.3390/rs12213577, 2020.

Chen, X., Long, D., Liang, S., He, L., Zeng, C., Hao, X., and Hong, Y.: Developing a composite daily snow cover extent record over the Tibetan Plateau from 1981 to 2016 using multisource data, *Remote Sensing of Environment*, 215, 284-299, 10.1016/j.rse.2018.06.021, 2018.

Cohen, J.: A coefficient of agreement for nominal scales, *Educational and Psychological Measurement*, 20, 37-46, 10.1177/001316446002000104, 1960.

Dai, L., Che, T., and Ding, Y.: Inter-Calibrating SMMR, SSM/I and SSMI/S Data to Improve the Consistency of Snow-Depth Products in China, *Remote Sensing*, 7, 7212-7230, 10.3390/rs70607212, 2015.

Dong, J., Ek, M., Hall, D., Peters-Lidard, C., Cosgrove, B., Miller, J., Riggs, G., and Xia, Y.: Using Air Temperature to Quantitatively Predict the MODIS Fractional Snow Cover Retrieval Errors over the Continental United States, *Journal of Hydrometeorology*, 15, 551-562, 10.1175/jhm-d-13-060.1, 2014.

Dozier, J. and Painter, T. H.: Multispectral and hyperspectral remote sensing of alpine snow properties, *Annual Review of Earth and Planetary Sciences*, 32, 465-494, 10.1146/annurev.earth.32.101802.120404, 2004.

Frei, A., Tedesco, M., Lee, S., Foster, J., Hall, D.K., Kelly, R., Robinson, R.A.: A review of global satellite-derived snow products. *Advances in Space Research*, 50, 1007-1029, 10.1016/j.src.2011.12.021, 2012.

[Gorelick, N.: Google Earth Engine. Gebruiker Woody Bousson/kladblok, 2012.](#)

Hall, D. K., Riggs, G. A., Salomonson, V. V., DiGirolamo, N. E., and Bayr, K. J.: MODIS snow-cover products, *Remote Sensing of Environment*, 83, 181-194, 10.1016/s0034-4257(02)00095-0, 2002.

Hao, X. H., Luo, S. Q., Che, T., Wang, J., Li, H. Y., Dai, L. Y., Huang, X. D., and Feng, Q. S.: Accuracy assessment of four cloud-free snow cover products over the Qinghai-Tibetan Plateau, *International Journal of Digital Earth*, 12, 375-393, 10.1080/17538947.2017.1421721, 2019.

Hao, X., Ji, W., Zhao, Q., Sun, X., Wang, J., Li, H., Zhao, H.: Daily 5-km Gap-free AVHRR snow cover extent product over China (1981-2019). National Tibetan Plateau Data Center, <https://dx.doi.org/10.11888/Snow.tpd.c.271381>, 2021.

- Helfrich, S. R., McNamara, D., Ramsay, B. H., Baldwin, T., and Kasheta, T.: Enhancements to, and forthcoming developments in the Interactive Multisensor Snow and Ice Mapping System (IMS), *Hydrological Processes*, 21, 1576-1586, 10.1002/hyp.6720, 2007.
- 500 Hori, M., Aoki, T., Stamnes, K., and Li, W.: ADEOS-II/GLI snow/ice products - Part III: Retrieved results, *Remote Sensing of Environment*, 111, 291-336, 10.1016/j.rse, 2007.
- Hori, M., Sugiura, K., Kobayashi, K., Aoki, T., Tanikawa, T., Kuchiki, K., Niwano, M., and Enomoto, H.: A 38-year (1978-2015) Northern Hemisphere daily snow cover extent product derived using consistent objective criteria from satellite-borne optical sensors, *Remote Sensing of Environment*, 191, 505 402-418, 10.1016/j.rse.2017.01.023, 2017.
- Huang, G., Li, Z., Li, X., Liang, S., Yang, K., Wang, D., Zhang, Y.: Estimating surface solar irradiance from satellites: Past, present, and future perspectives. *Remote Sensing of Environment*, 233, 111371, 10.1016/j.rse.2019.111371, 2019.
- Huang, X., Liang, T., Zhang, X., and Guo, Z.: Validation of MODIS snow cover products using Landsat 510 and ground measurements during the 2001-2005 snow seasons over northern Xinjiang, China, *International Journal of Remote Sensing*, 32, 133-152, 10.1080/01431160903439924, 2011.
- Huang, Y., Liu, H., Yu, B., We, J., Kang, E. L., Xu, M., Wang, S., Klein, A., and Chen, Y.: Improving MODIS snow products with a HMRP-based spatio-temporal modeling technique in the Upper Rio Grande Basin, *Remote Sensing of Environment*, 204, 568-582, 10.1016/j.rse.2017.10.001, 2018.
- 515 König, M., Winther, J. G., and Isaksson, E.: Measuring snow and glacier ice properties from satellite, *Reviews of Geophysics*, 39, 1-27, 10.1029/1999rg000076, 2001.
- Landis, J. R. and Koch, G. G.: The Measurement Of Observer Agreement For Categorical Data, *Biometrics*, 33, 159-174, 10.2307/2529310, 1977.
- Melgani, F. and Serpico, S. B.: A Markov random field approach to spatio-temporal contextual image 520 classification, *IEEE Transactions on Geoscience and Remote Sensing*, 41, 2478-2487, 10.1109/tgrs.2003.817269, 2003.
- Metsämäki, S.: Report on Validation of VIIRS-FSC Products against In-Situ Observations, Finnish Environment Institute, 2016.
- Min, W. B., Peng, J., and Li, S. Y.: The evaluation of FY—3C snow products in the Tibetan Plateau, 525 *Remote Sensing for Land and Resources.*, 33, 145-151, 10.6046 /gtzyyg.2020102, 2021.

- Muñoz Sabater, J.: ERA5-Land hourly data from 1981 to present, Copernicus Climate Change Service (C3S) Climate Data Store (CDS), Copernicus Climate Change Service (C3S) Climate Data Store (CDS), 10.24381/cds.e2161bac, 2019.
- 530 Powers, D. and Ailab: Evaluation: From precision, recall and F-measure to ROC, informedness, markedness & correlation, *International Journal of Machine Learning Technology*, 2, 2229-3981, 10.9735/2229-3981, 2011.
- Ramsay, B. H.: The interactive multisensor snow and ice mapping system, *Hydrological Processes*, 12, 1537-1546, 10.1002/(sici)1099-1085(199808/09)12:10/11<1537::Aid-hyp679>3.0.Co;2-a, 1998.
- 535 Riggs, G. A., Hall, D. K., and Roman, M. O.: Overview of NASA's MODIS and Visible Infrared Imaging Radiometer Suite (VIIRS) snow-cover Earth System Data Records, *Earth System Science Data*, 9, 765-777, 10.5194/essd-9-765-2017, 2017.
- Robinson, D. A., Dewey, K. F., and Heim, R. R.: Global Snow Cover Monitoring: An Update, *Bulletin of the American Meteorological Society*, 74, 1689-1696, 10.1175/1520-0477(1993)074<1689:Gscmau>2.0.Co;2, 1993.
- 540 Stamnes, K., Li, W., Eide, H., Aoki, T., Hori, M., and Storvold, R.: ADEOS-II/GLI snow/ice products - Part I: Scientific basis, *Remote Sensing of Environment*, 111, 258-273, 10.1016/j.rse.2007.03.023, 2007.
- Vermote, E., Justice, C., Csiszar, I., Eidenshink, J., Myneni, R., Baret, F., Masuoka, E., Wolfe, R., and Claverie, M.: NOAA CDR Program (2014): NOAA Climate Data Record (CDR) of AVHRR Surface Reflectance, Version 4., NOAA National Climatic Data Center., 10.7289/V53776Z4, 2014.
- 545 Wang, J., Li, H., Hao, X., Huang, X., Hou, J., Che, T., Dai, L., Liang, T., Huang, C., Li, H., Tang, Z., and Wang, Z.: Remote sensing for snow hydrology in China: challenges and perspectives, *Journal of Applied Remote Sensing*, 8, 10.1117/1.Jrs.8.084687, 2014.
- Wang, X., Hao, X., Wang, J., Che, T., Li, H., and Shao, D.: Accuracy Evaluation of Long Time Series AVHRR Snow Cover Area Products in China, *Remote Sensing Technology and Application*, 33, 994-550 1003, 10.11873/j.issn.1004-0323.2018.6.0994, 2018.
- Warren, S. G.: Optical Properties of Snow, *Reviews of Geophysics*, 20, 67-89, 10.1029/RG020i001p00067, 1982.

Yamanouchi, T., Suzuki, K., and Kawaguchi, S.: Detection of clouds Antarctica from infrared multispectral data of AVHRR, *Journal of the Meteorological Society of Japan*, 65, 949-962, 555 10.2151/jmsj1965.65.6\_949, 1987.

Zhang, H., Zhang, F., Zhang, G., Che, T., Yan, W., Ye, M., and Ma, N.: Ground-based evaluation of MODIS snow cover product V6 across China: Implications for the selection of NDSI threshold, *Science of the Total Environment*, 651, 2712-2726, 10.1016/j.scitotenv.2018.10.128, 2019.

560


**Table 1: The details of spectral bands from CDR of AVHRR Surface Reflectance (Version 4) from GEE platform.**

GEE Band	Abbreviation	Wavelength ( $\mu\text{m}$ )	Description
SREFL_CH1	SR1	0.58-0.68	Surface Reflectance at 0.64 $\mu\text{m}$
SREFL_CH2	SR2	0.725-1.00	Surface Reflectance at 0.86 $\mu\text{m}$
SREFL_CH3	SR3	3.55-3.93	Surface Reflectance at 3.75 $\mu\text{m}$
BT_CH3	BT37	3.55-3.93	Brightness temperature at 3.75 $\mu\text{m}$
BT_CH4	BT11	10.30-11.30	Brightness temperature at 11.0 $\mu\text{m}$
BT_CH6	BT12	11.50-12.50	Brightness temperature at 12.0 $\mu\text{m}$

565


**Table 2: The number of training scenes using Landsat-5 TM**

Type of sample	Number of Landsat-5 TM scenes	<del>Year</del> Time period
Snow samples	1293	Before 2000
	6695	After 2000
Non-snow samples	1670	Before 2000
	5774	After 2000
Cloud samples	79	Before 2000
	125	After 2000

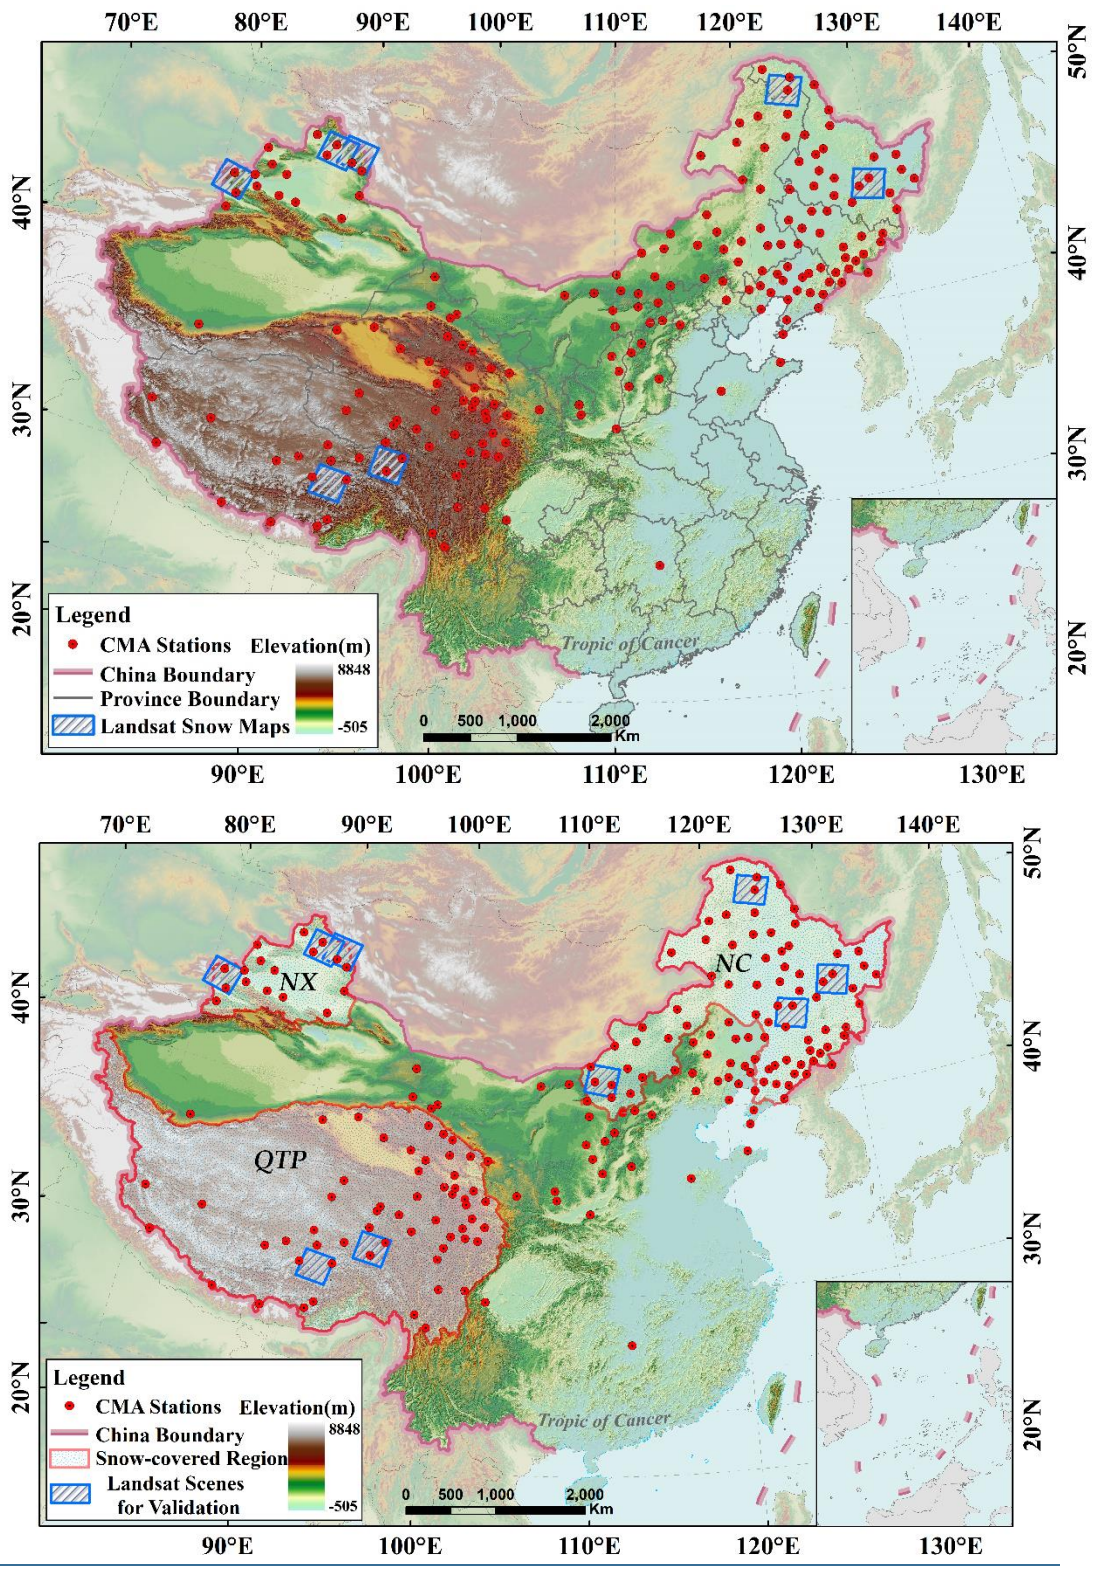

570 Figure 1: The geographic location of study area and the spatial distribution of [major snow-covered regions](#), climate stations and Landsat-5 validation dataset. The elevation data were derived from Shuttle Radar Topography Mission (SRTM).-



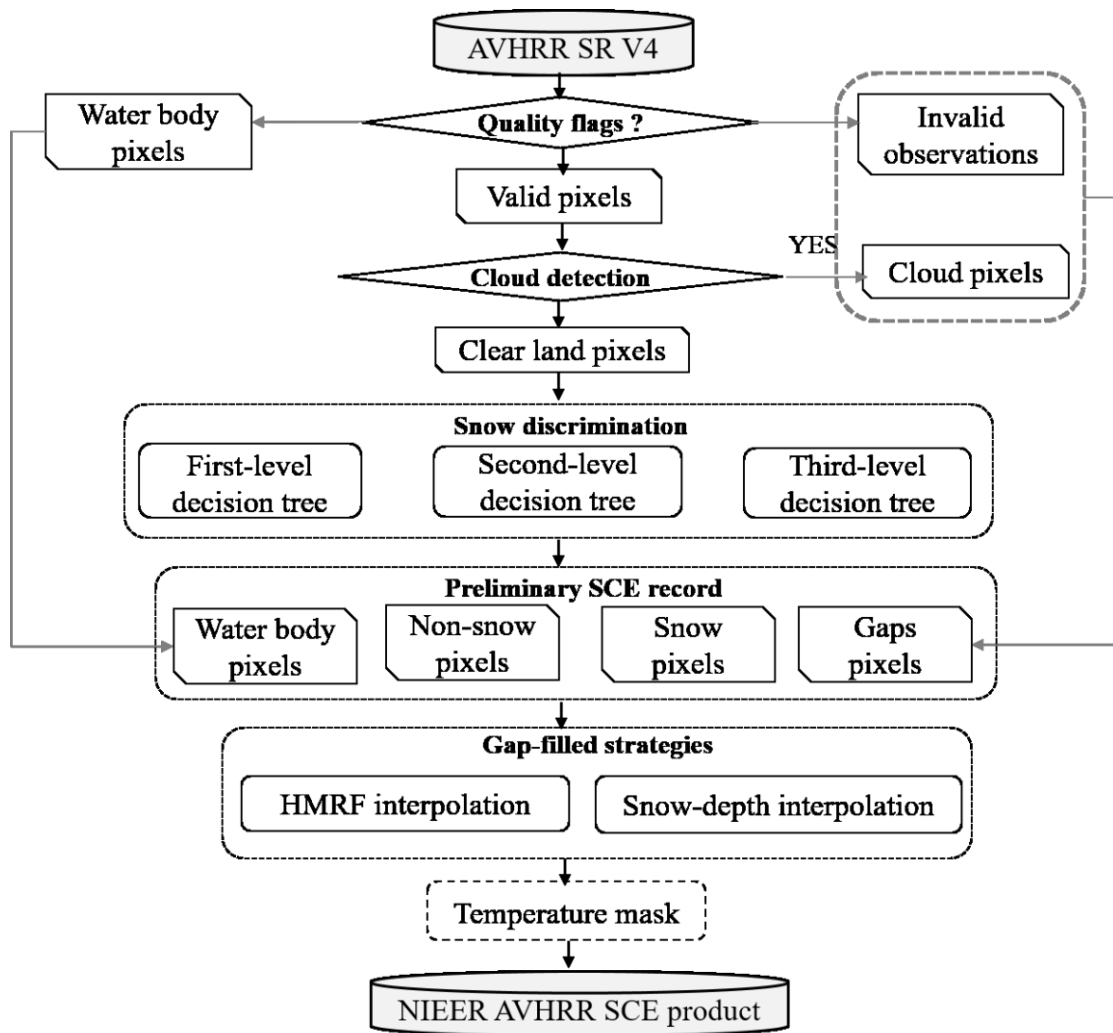


575

Figure 2: Generation flowchart of NIEER AVHRR snow cover extent product (NIEER AVHRR SCE)

**Table 3: The descriptions of quality control of AVHRR SR V4**

Bitmask	Description	<del>Value = 0</del> Use or <u>no use</u>
15	Polar flag (latitude over 60 degrees (land) or 50 degrees (ocean))	No <u>use</u>
14	BRDF-correction issues	No <u>use</u>
13	RHO3 value is invalid	No <u>use</u>
12	Channel 5 value is invalid	<del>No</del> Use
11	Channel 4 value is invalid	<del>No</del> Use
10	Channel 3 value is invalid	<del>No</del> Use
9	Channel 2 value is invalid	<del>No</del> Use
8	Channel 1 value is invalid	<del>No</del> Use
7	Channel 1-5 are valid	<del>No</del> Use
6	Pixel is at night (height solar zenith)	<del>No</del> Use
5	Pixel is over dense dark vegetation	No <u>use</u>
4	Pixel is over sunglint	No <u>use</u>
3	Pixel is over water	<del>No</del> Use
2	Pixel contains cloud shadow	No <u>use</u>
1	Pixel is cloudy	No <u>use</u>
0	Unused	No <u>use</u>

580

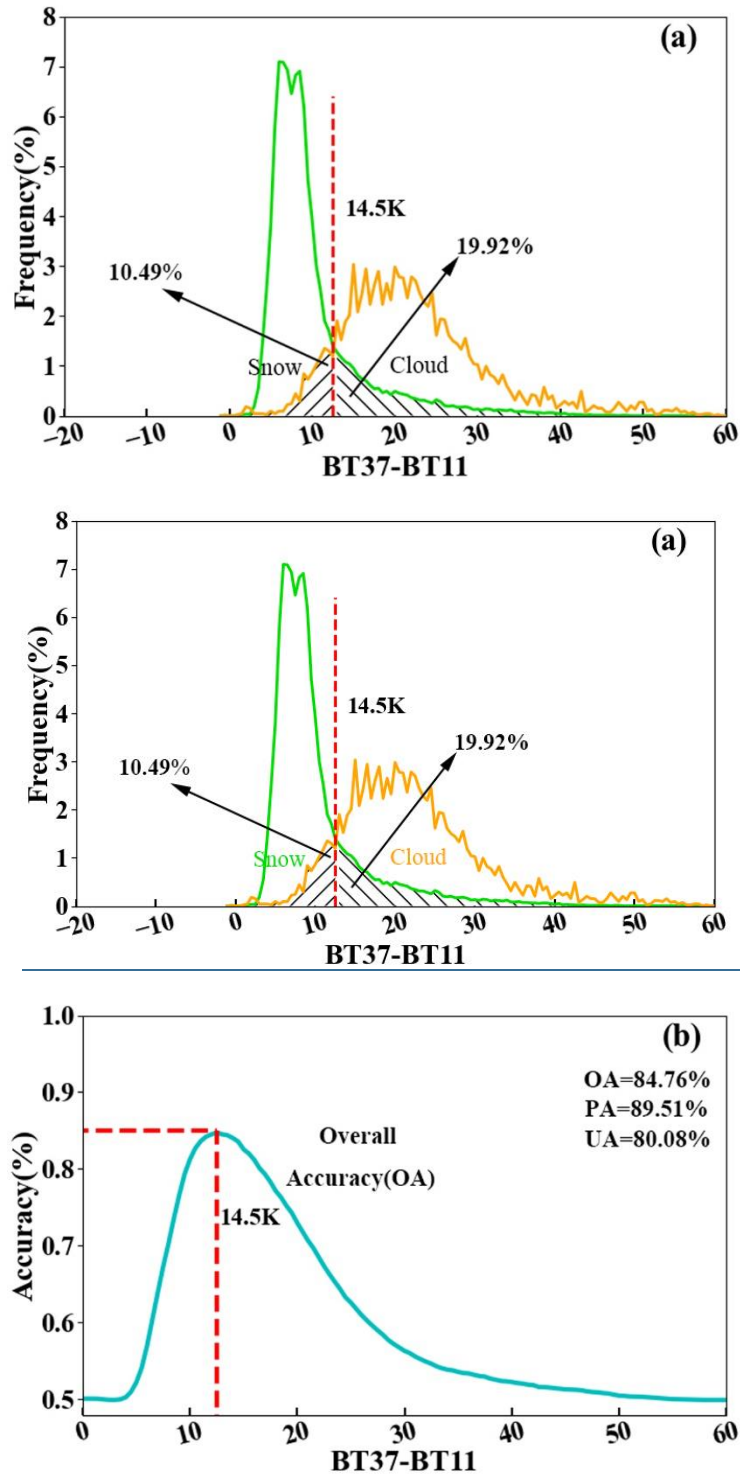

585 Figure 3: The frequency distribution of BT37-BT11 and optimal threshold acquisition of snow and cloud from A1 before 2000. Figure 3(a) shows the frequency distribution of snow and cloud on AVHRR, and Figure 3(b) shows the determination of optimal threshold for cloud detection.

590

**Table 4-:** Cloud detection tests and the corresponding thresholds. Target A indicates high and cold land (elevation > 300m and BT11 < 260 K), which have four types: A1~A4; Target B indicates the remaining land, which includes ten types: B11~B10. The cloud detection test was conducted from the top of the list to the bottom for each target. If the switch of the cloudy flag was “on”, the pixel was set to cloudy when the threshold tests met the conditions listed on the right-hand side. If the switch was “off”, the pixel identified as cloudy in the previous tests was reset to clear.

Target	Target serial number	Switch	Elevation (m)	SR1	SR2	SR3	SR1-SR2	NDVI	BT11(K)	Before 2000 BT37-BT11(K)	After 2000 BT37-BT11(K)	BT11-BT12(K)
A: High or cold land DEM>300 and BT11<260K)	A1	On	<3000						≥240	>14.5	>19.5	
	A2	On	≥3000						≥240	>15.5	>20	
	A3	On							<240	>21.0	>31	
	A4	On				>0.1	>0.02			>25.5	>33.5	
B : Other land DEM<300 or BT11>=260K	B1	On							<260	>14	>16	
	B2	On					>-0.02		<310	>10.5	>16.5	
	B3	On		>0.3			>-0.02		<293	>11.5	>17.5	
	B4	On			>0.4		>-0.03		<293	>11.5	>18.0	>-1
	B5	On			>0.4				<278	>11.5	>19.5	>-1
	B6	On		>0.3		>0.02				>11.5	>18	
	B7	Off						>0.5	>288			
	B8	Off							>310			
	B9	Off	>1000	<0.4			<-0.04		>275			
	B10	Off					<-0.04		>300			

595


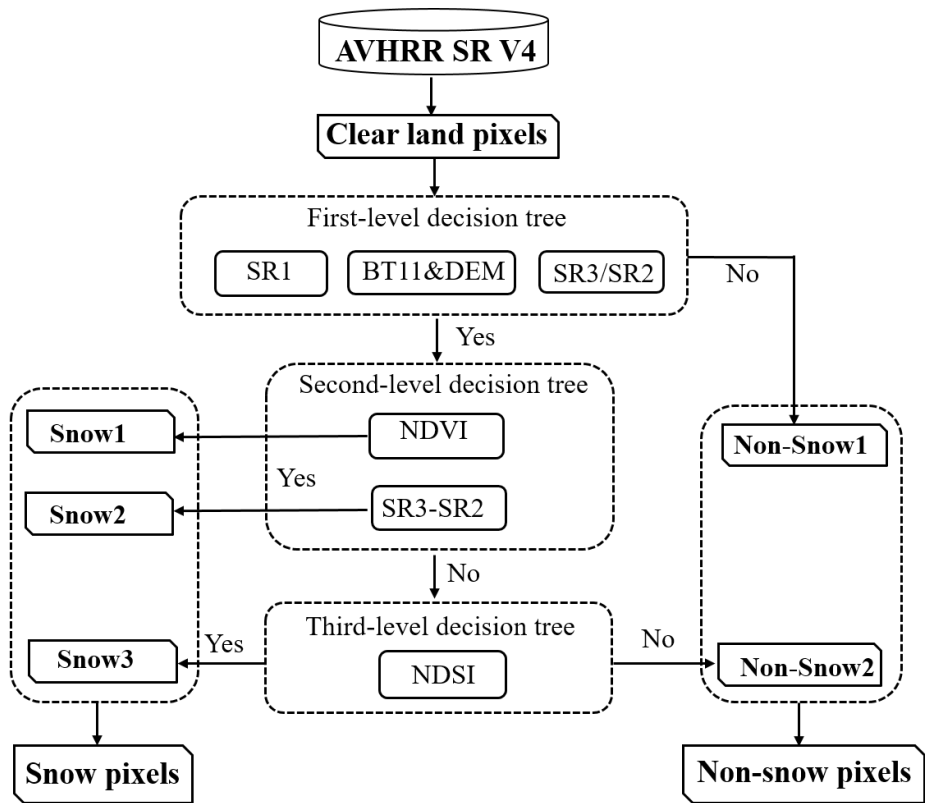


Figure 3: The flowchart of a three-level decision tree snow discrimination algorithm for NIEER AVHRR SCE product.

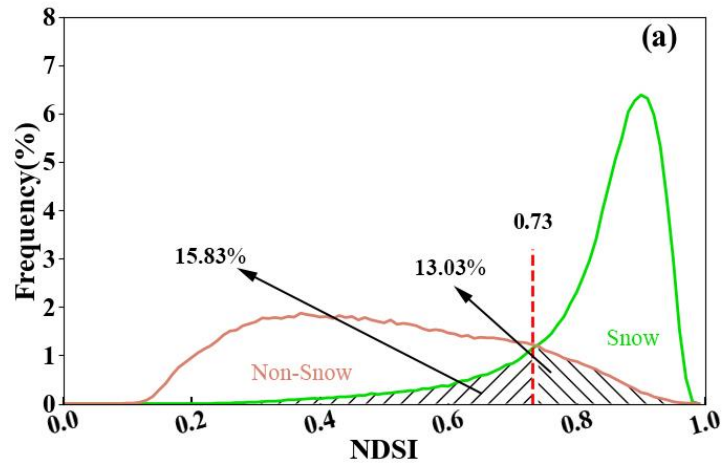

600

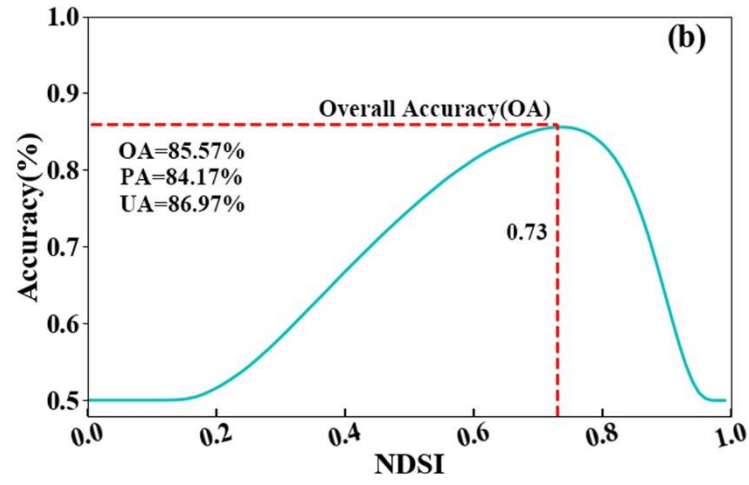


Figure 5: NDSI frequency distribution histogram and optimal threshold acquisition of snow and non-snow before 2000. (a) is the frequency distribution of snow and non-snow on AVHRR, and (b) is the optimal NDSI threshold value.

605

**Table 5:** Snow discrimination algorithm and its threshold values.

Target	Snow	SR1	BT11(K)	Elevation (m)	SR3/SR2	SR3-SR2	NDVI	NDSI
A: Before 2000	Snow1	>0.14	<274	<1300	<0.5	<-0.81		
		>0.14	<281	$\geq$ 1300	<0.5	<-0.81		
	Snow2	>0.14	<274	<1300	<0.5		<-0.16	
		>0.14	<281	$\geq$ 1300	<0.5		<-0.16	
	Snow3	>0.14	<274	<1300	<0.5	$\geq$ -0.81	$\geq$ -0.16	>0.73
		>0.14	<281	$\geq$ 1300	<0.5	$\geq$ -0.81	$\geq$ -0.16	>0.73
B: After 2000	Snow1	>0.14	<275	<1300	<0.56	<-0.77		
		>0.14	<281	$\geq$ 1300	<0.56	<-0.77		
	Snow2	>0.14	<275	<1300	<0.56		<-0.05	
		>0.14	<281	$\geq$ 1300	<0.56		<-0.05	
	Snow3	>0.14	<275	<1300	<0.56	$\geq$ -0.77	$\geq$ -0.05	>0.65
		>0.14	<281	$\geq$ 1300	<0.56	$\geq$ -0.77	$\geq$ -0.05	>0.65

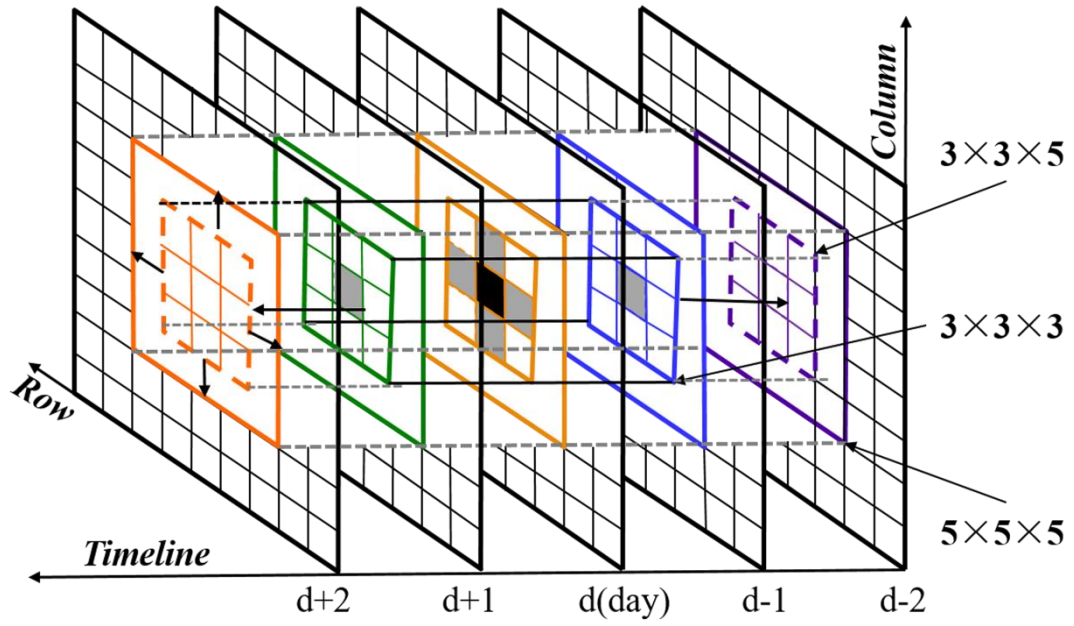


Figure 56: Diagram of the HMRF-based gap-filling process used in the study.

610



**Table 6:** The monthly average gap ratio of AVHRR preliminary SCE record in China before and after HMRF-based spatio-temporal interpolation from 1981 to 2019.

Month	Gap ratio before interpolation (%)	Gap ratio after interpolation of HMRF (%)
1	51.4	2.0
2	55.2	2.7
3	57.0	2.5
4	52.1	0.9
5	50.3	1.0
6	48.1	0.8
7	46.0	1.3
8	40.1	0.2
9	39.5	2.4
10	39.8	5.6
11	44.0	6.0
12	49.6	6.4
Average	47.8	2.7

615

**Table 7:** Description of a confusion matrix of snow classification between NIEER AVHRR SCE product and truth value that reference ground snow-depth measurements or Landsat-5 TM SCE maps.


		NIEER AVHRR SCE product	
		Snow	Non-snow
Ground depth	snow- Snow	SS	SN
	Non-snow	NS	NN
Overall Accuracy (OA)		$OA = \frac{SS + NN}{T}$	
Producer's Accuracy (PA)		$PA = \frac{SS}{SS + SN}$	
User's Accuracy (UA)		$UA = \frac{SS}{SS + NS}$	
Cohen's Kappa coefficient (CK).		$CK = \frac{OA - P}{1 - P}$	
Where, $T = SS + SN + NS + NN$			
$P = \left( \frac{SS + NS}{T} \times \frac{SS + SN}{T} \right) + \left( \frac{SN + NN}{T} \times \frac{SN + NS}{T} \right)$			

Note: SS, SN, NS and NN are all numbers. SS reps the number of cases that AVHRR predicts Snow and the ground snow-depth measures Snow. SN reps the number of cases that AVHRR predicts Non-snow and the ground snow-depth measures Non-snow. SN reps the number of cases that AVHRR predicts Non-snow while the ground snow-depth measures snow. NS reps the number of cases that AVHRR predicts Snow while the ground snow-depth measures Non-snow.

620


**Table 8: A confusion matrix for NIEER AVHRR SCE maps versus ground snow-depth measurements**

		NIEER AVHRR SCE	
		Snow	Non-snow
Ground snow-depth measurements	Snow	282239	66167
	Non-snow	64759	622381
	OA		87.4%
	PA		81.0%
	UA		81.3%
	CK		0.717

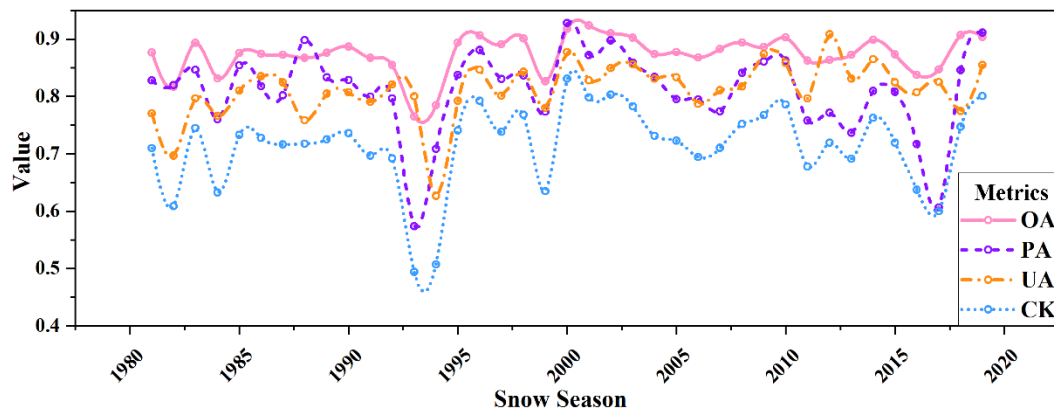

625

Figure 67: Accuracy fluctuations of NIEER AVHRR product base on ground snow-depth measurements in the past 38 years.

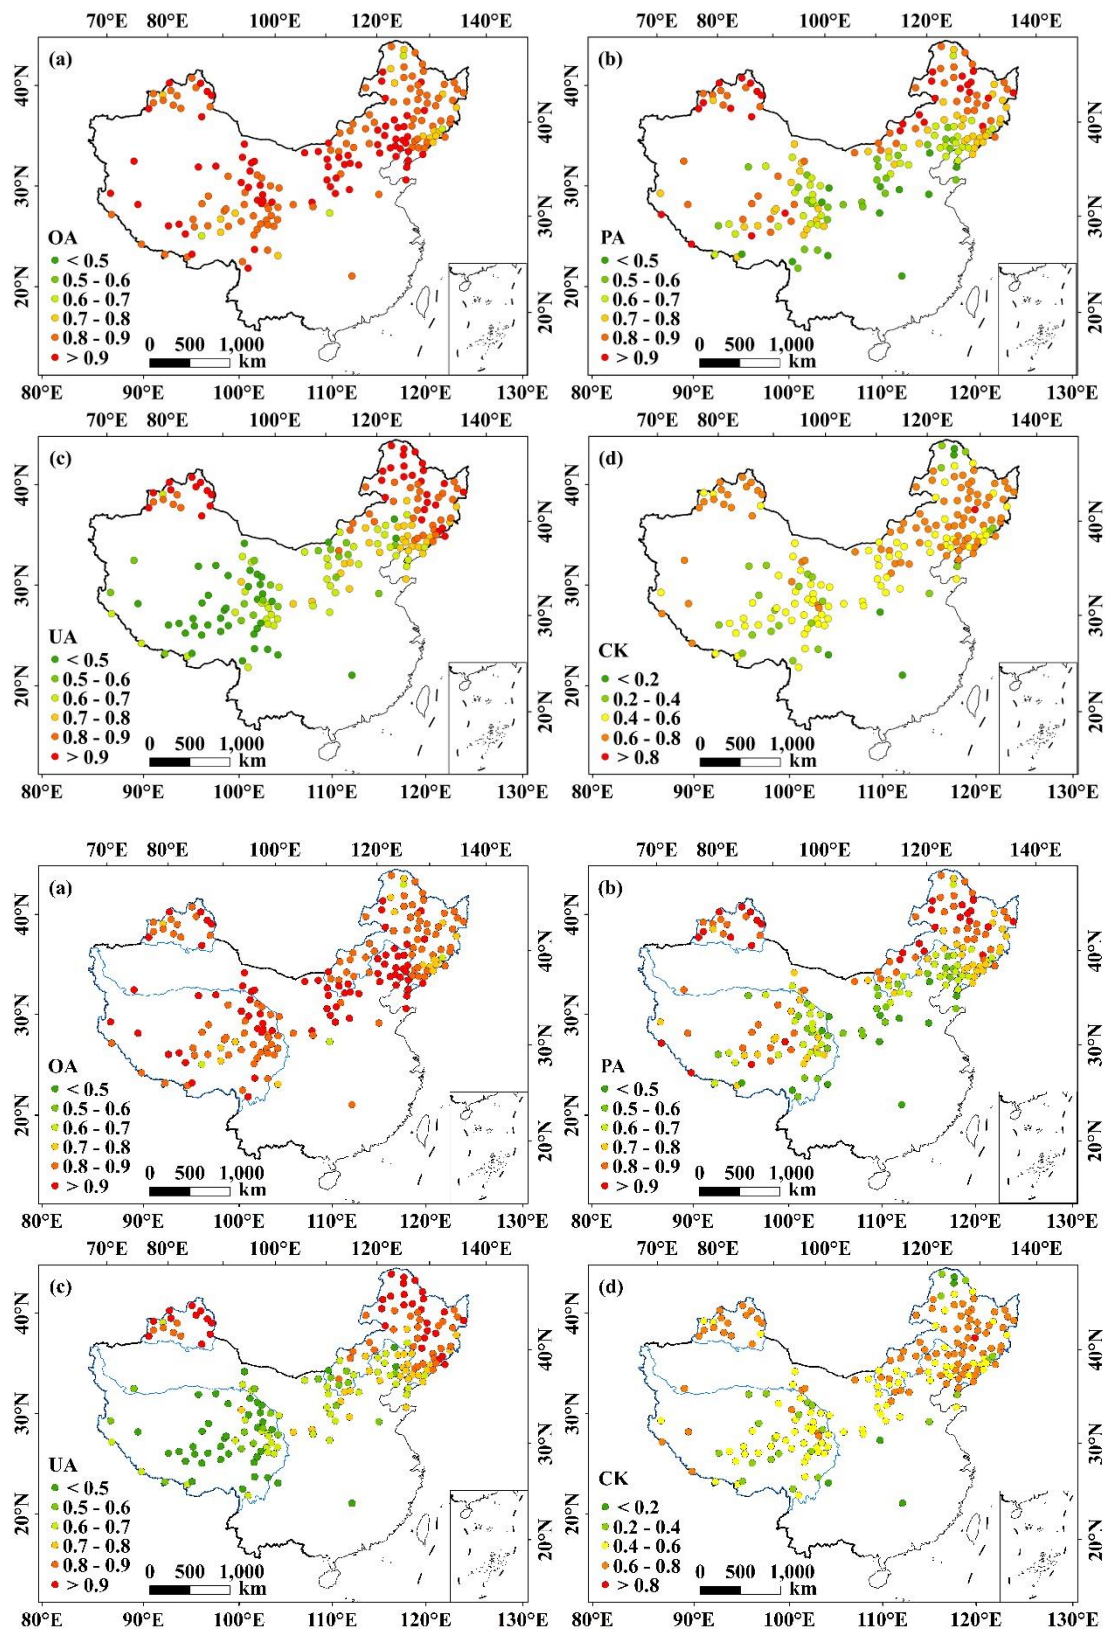


630

Figure 78: Point-based accuracy results of NIEER AVHRR product: (a) OA; (b) PA; (c) UA; (d) CK. The snow depth of 191 climate stations used is provided by the China Meteorological Administration (CMA). OA,

635 PA, UA and CK represent overall accuracy, producer's accuracy, user's accuracy, and Cohen's Kappa coefficient.

**Table 9:** The accuracy of NIEER AVHRR SCE maps versus Landsat-5 TM SCE maps. C1~C8 denotes the different Landsat-5 TM SCE.

Path/row	Serial number	Date	Cloud percentage	Snow percentage	OA	PA	UA	CK
116028	C1	19970312	2.0%	77.2%	87.9%	88.3%	95.9%	0.678
121024	C2	20160319	1.8%	96.4%	98.1%	100.0%	98.1%	1
135038	C3	19961109	1.0%	66.5%	79.5%	81.0%	87.9%	0.552
137039	C4	19961123	2.0%	50.7%	78.2%	65.7%	88.5%	0.566
142027	C5	19870323	0.0%	96.1%	97.2%	100.0%	97.2%	0.036
143027	C6	20051110	2.0%	48.6%	93.1%	86.7%	99.8%	0.863
147029	C7	20160222	1.1%	89.0%	90.6%	91.4%	98.0%	0.587
147029	C8	19970217	2.0%	88.3%	89.8%	90.9%	97.7%	0.560
		Total			89.4%	90.2%	96.1%	0.713

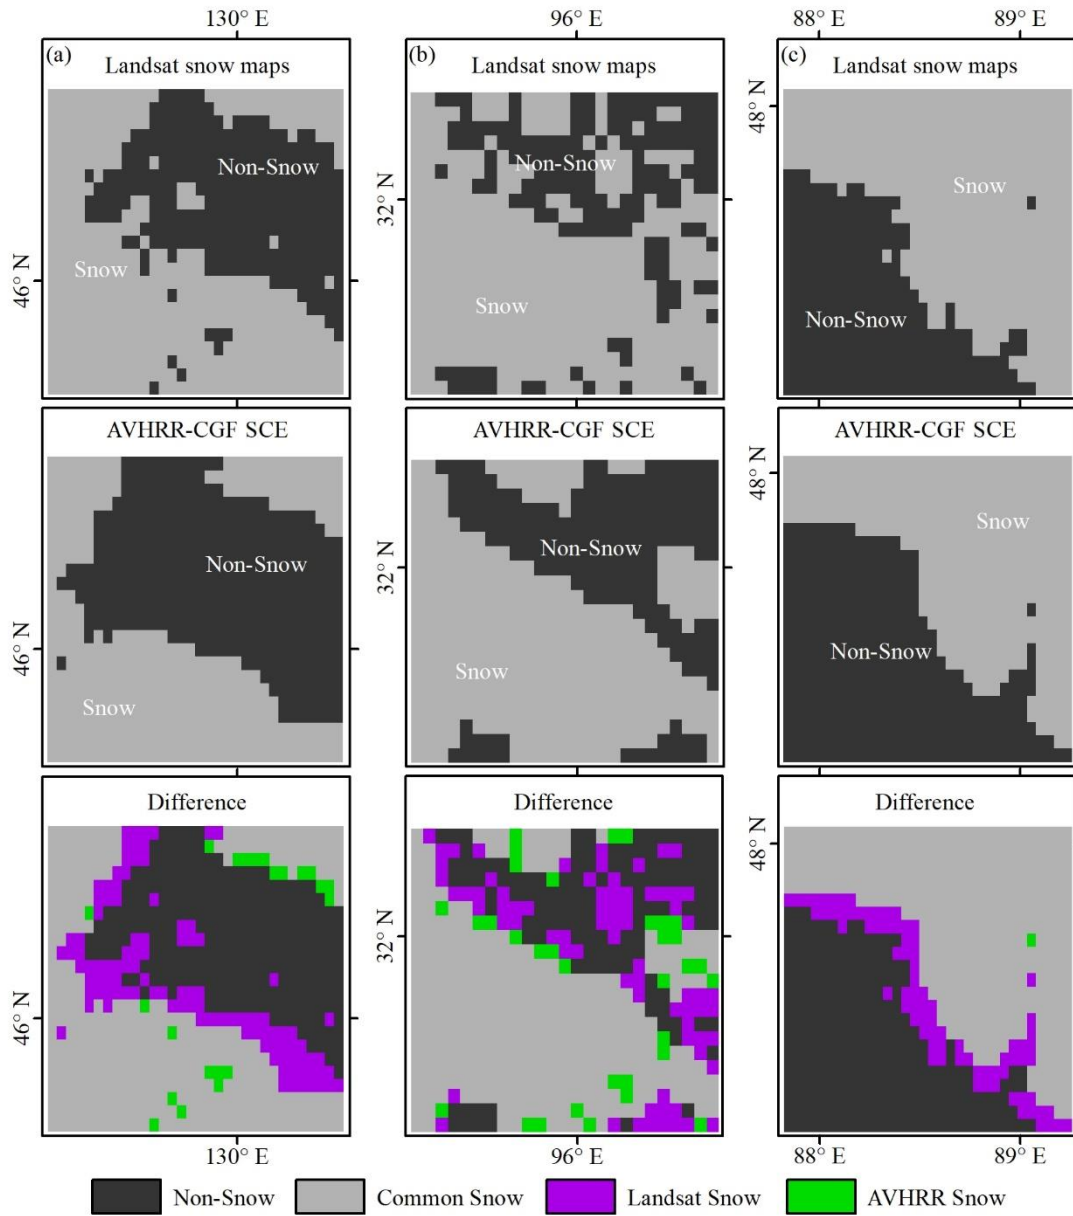

640

**Figure 89:** Comparison of Landsat reference image with NIEER AVHRR SCE images. (a) is located in Northeast China on Mar. 12<sup>st</sup>, 1997; (b) is located in Qinghai-Tibet Plateau on Nov. 9<sup>st</sup>, 1996; (c) is located in North Xinjiang on Nov. 10<sup>st</sup>, 2005.




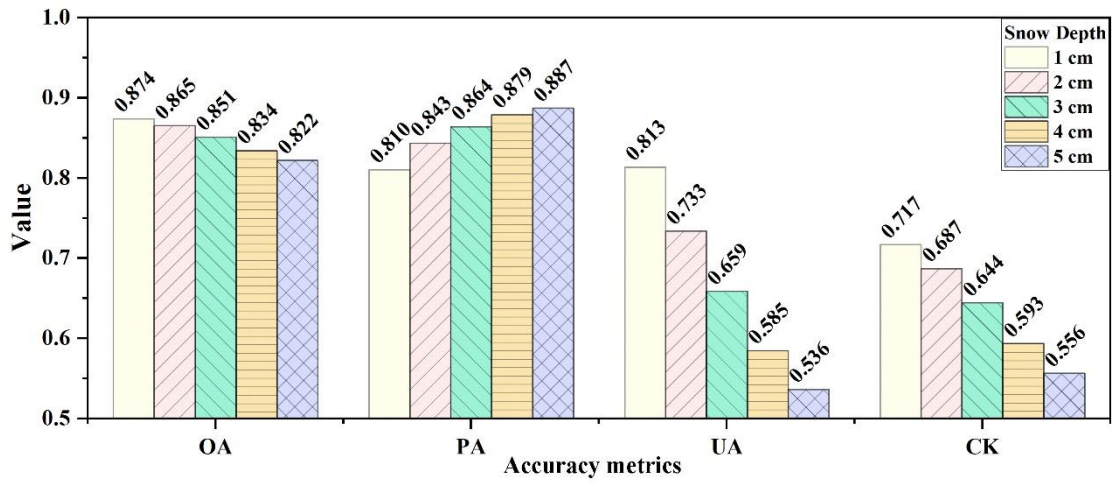


Figure 9-10: Histogram of accuracy results of NIEER AVHRR SCE product under different snow depth thresholds.

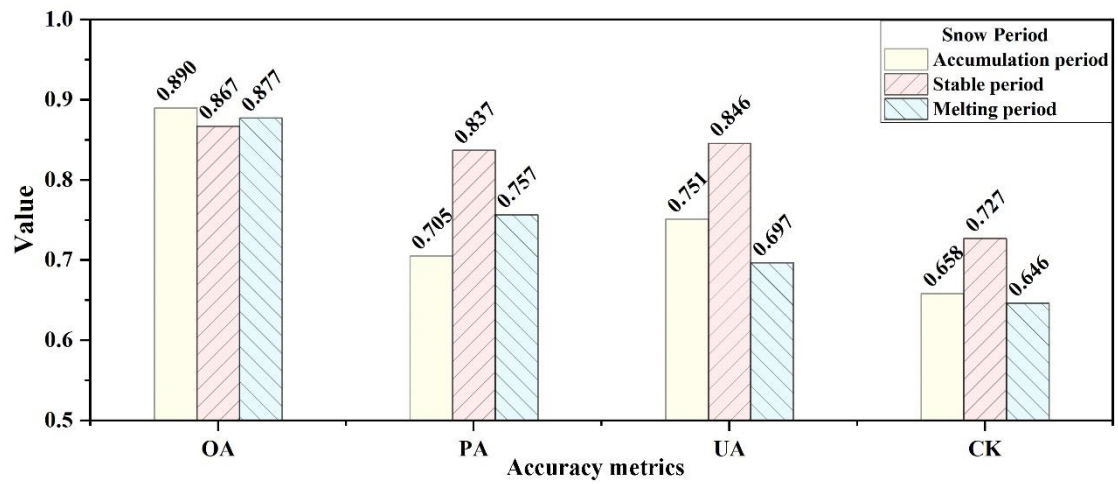


650

**Figure 1011:** Histogram of accuracy results of NIEER AVHRR SCE product in different snow periods, including accumulation period, stable period, melting period

655 **Table 10:** The confusion matrix and accuracy results of NIEER AVHRR and JASMES SCE product based on snow depth measurements from CMA, OA, PA, UA and CK.

	Class	NIEER AVHRR SCE		JASMES SCE	
		Snow	Non-snow	Snow	Non-snow
Ground snow-depth measurements	Snow	134260	32946	50335	78148
	Non-snow	36367	295890	23594	209149
OA		86.1%		71.8%	
PA		80.3%		39.2%	
UA		78.7%		68.1%	
CK		0.690		0.321	

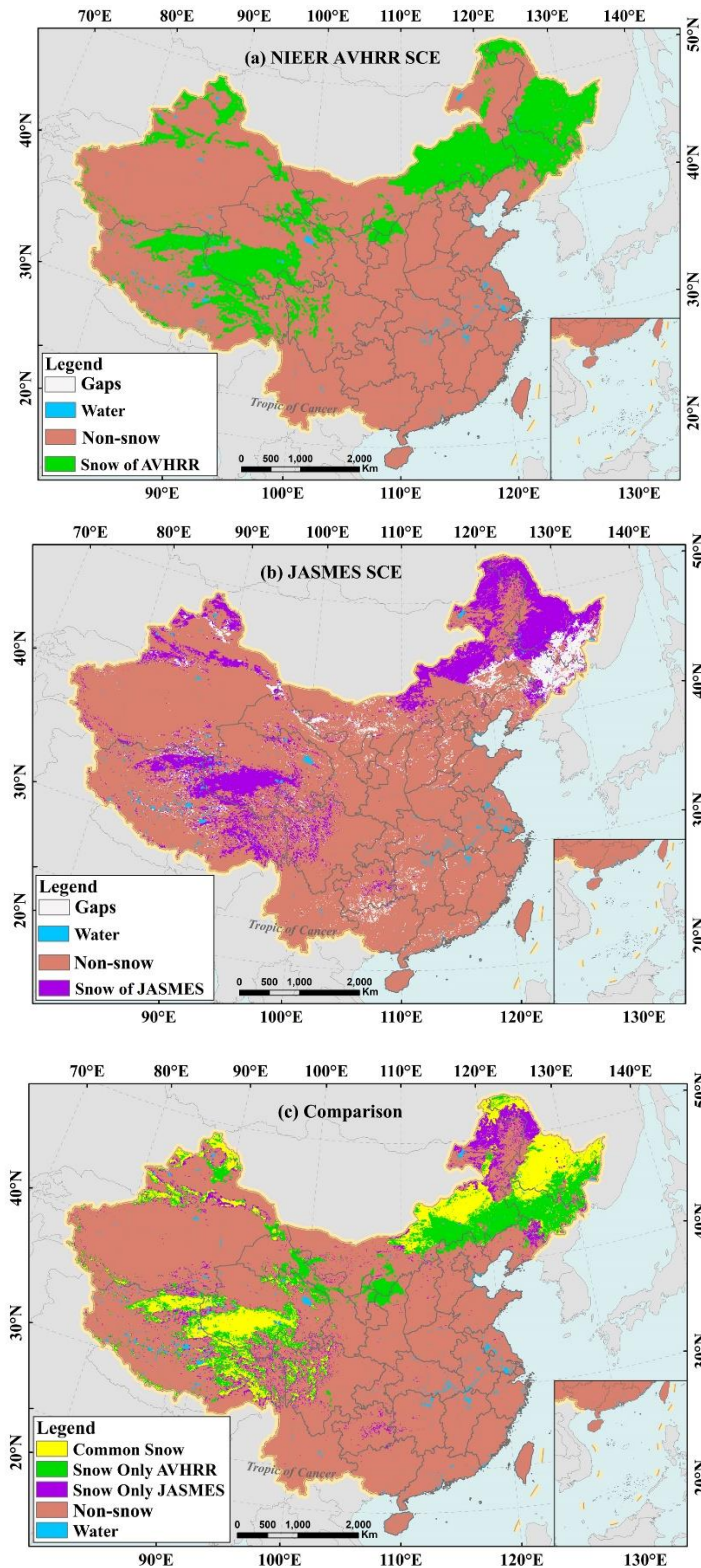

660

Figure 14.12: Comparison of snow cover maps between the NIEER AVHRR and JASMES SCE map on November 15, 1985. (a) is NIEER AVHRR SCE map; (b) is JASMES SCE map; (c) comparison between the two snow maps.

665 **Table 11:** The description of NIEER AVHRR SCE product

Classification	values	Description
Snow	1	Snow from AVHRR
	2	Snow from HMRP
	3	Snow from SD
Non-snow	0	Non-Snow form AVHRR
Water	4	
Filling value	255	Filling value