



Lagoon hydrodynamics of pearl farming atolls: the case of Raroia, Takapoto, Apataki and Takaroa (French Polynesia)

Oriane Bruyère¹, Romain Le Gendre², Mathilde Chauveau¹, Bertrand Bourgeois³, David Varillon³, John Butscher⁴, Thomas Trophime⁵, Yann Follin⁵, Jérôme Aucan¹, Vetea Liao⁵, Serge Andréfouët^{1,6}

5

¹IRD, UMR 9220 ENTROPIE (IRD, Univ. La Réunion, IFREMER, Univ. Nouvelle-Calédonie, CNRS), BPA5, 98948 Nouméa, New Caledonia

²Ifremer, UMR 9220 ENTROPIE (IRD, Univ. Réunion, IFREMER, Univ. Nouvelle-Calédonie, CNRS), BP 32078, 98897 Nouméa CEDEX, New Caledonia

10

³IRD, US 191 IMAGO (IRD. Nouvelle-Calédonie), BPA5, 98948 Nouméa, New Caledonia

⁴IRD, UMR 182 LOCEAN (IRD. Nouvelle-Calédonie), BPA5, 98948 Nouméa, New Caledonia

15

⁵Direction des Ressources Marines, BP 20, 98713 Papeete, French Polynesia

⁶IRD, UMR-9220 ENTROPIE (Institut de Recherche pour le Développement, Université de la Réunion, IFREMER, CNRS, Université de la Nouvelle-Calédonie), BP 49, 98725 Vairao, Tahiti, French Polynesia

20

Correspondence to: Serge Andréfouët (serge.andrefouet@ird.fr)

Abstract.

Between 2018 and 2022, four pearl farming Tuamotu atolls of French Polynesia were monitored with autonomous oceanographic instruments to measure the hydrodynamics of atoll lagoons and the ocean-lagoon water exchanges. These surveys were conducted in the frame of ANR MANA (*Management of Atolls*) project and its extensions to additional sites. The overarching goal was to improve knowledge on the processes influencing the spat collection of the pearl oyster *Pinctada margaritifera*, the oyster species used to produce black pearls. These data sets are also critical for the calibration and validation of 3D high spatial resolution hydrodynamic models used to study the oyster larval dispersal within lagoons. The observational strategies focused on the characterization of ocean/lagoon exchanges through passes and *hoa* (i.e., shallow reef flats), lagoon circulation, incident waves breaking on the forereef, water elevation inside lagoon as well as spatial temperature variability. Chronologically, the investigated atolls were first Raroia Atoll with 9 months measurements between May 2018 and March 2019 during which the MALIS1 and MALIS2 cruises on-board the R/V ALIS took place. It was followed by a 4-month deployment in Takapoto Atoll (November 2021 to March 2022). In late April 2022, Apataki Atoll was instrumented until end of July, followed by Takaroa measurements between

25

30

35




40 July to October. Apataki (Leg2) and Takaroa Atoll were conjointly instrumented during the MALIS 3 oceanographic cruise. Altogether, those multi-atoll data bring a worldwide unique oceanographic atoll data set, useful to address local pearl farming questions but potentially beneficial for other fundamental and applied investigations. Each data set was post processed, quality controlled and converted in NetCDF format. Files are available in open source into dedicated repositories in the SEANOE marine data platform with permanent DOIs.

1 Introduction

45 This report focuses on hydrodynamic data collected between 2018 and 2022 on four pearl farming atolls of the Tuamotu Archipelago, in French Polynesia. French Polynesia (FP) is a French overseas collectivity located in the Central Pacific Ocean (134° to 155°W and 7° to 27°S). It consists of five archipelagos (Figure 1) and 118 atolls and high islands spread on a vast 4.8 million km² Exclusive Economic Zone (EEZ) (Andréfouët and Adjeroud, 2019). The Tuamotu and Gambier Archipelagos
50 include a total of 77 atolls and several high islands found in the lagoon of Gambier. Five of the atolls are actually with dry or uplifted lagoons. The other 72 atolls all have an intertidal/partly emerged rim which surrounds a lagoon. Among the atolls with a deep (>20m) lagoon, about 30 have been black pearl farming atolls since the beginning of this activity in the late 1980s, although only about 20 are currently active as in 2023.

55 Black pearl farming is the second source of French Polynesia income after tourism. In 2021, it represented a 40million € value in exports. This activity emerged as a major activity after nearly 60 years of trials and pioneer work. Since the 1980s and especially the 1990s, the number of exploitations boomed, thanks to the presence of abundant oyster *Pinctada margaritifera* natural stocks. This stock has allowed to efficiently collect spats in several lagoons and a sustained supply of oysters for pearl
60 productions. The activity thus includes oyster production (through spat collection) and pearl production. In 2021, 8136 ha of lagoon concessions were devoted to these activities (DRM, 2021). Four islands and atolls (Gambier, Marutea Sud, Ahe, and Arutua) represent half of the concessions but many atolls contribute to the activity (such as Apataki, Takapoto, Takaroa, Katiu, Kauehi, Raroia, etc.), although there are ups and downs. For instance, Takaroa atoll lagoon suffered a major dystrophy event in 2014
65 (Rodier et al., 2019), resulting in a mass mortality of oysters and spats. Since then, the activity is moribund in this lagoon, and has not yet revived as in 2023. Overall in French Polynesia, the numbers of farmers have decreased the past years and now stabilized at around 600 farmers, with 340 of them producing pearls.

70 Since the first mortality events in Takapoto atoll in the 1980s, pearl farming lagoons have been the objects of numerous scientific investigations related to the biology and ecophysiology of *P. margaritifera*, the estimation of natural stocks, or the characterization of the planktonic trophic web and food sources for oysters, among many other topics (Le Pennec, 2010; Andréfouët et al., 2012a, 2022; Gueguen et al., 2016). In the wake of the comparative TYPATOLL program (Dufour and Harmelin-Vivien, 1997), lagoon hydrodynamics became a focus during the *Programme General Recherche sur la*
75 *Nacre 2* (PGRN2) in the late 1990s, using a comparative approach between atoll lagoons but with limited field measurements (Pagès et al., 2001; Andréfouët et al., 2001a).

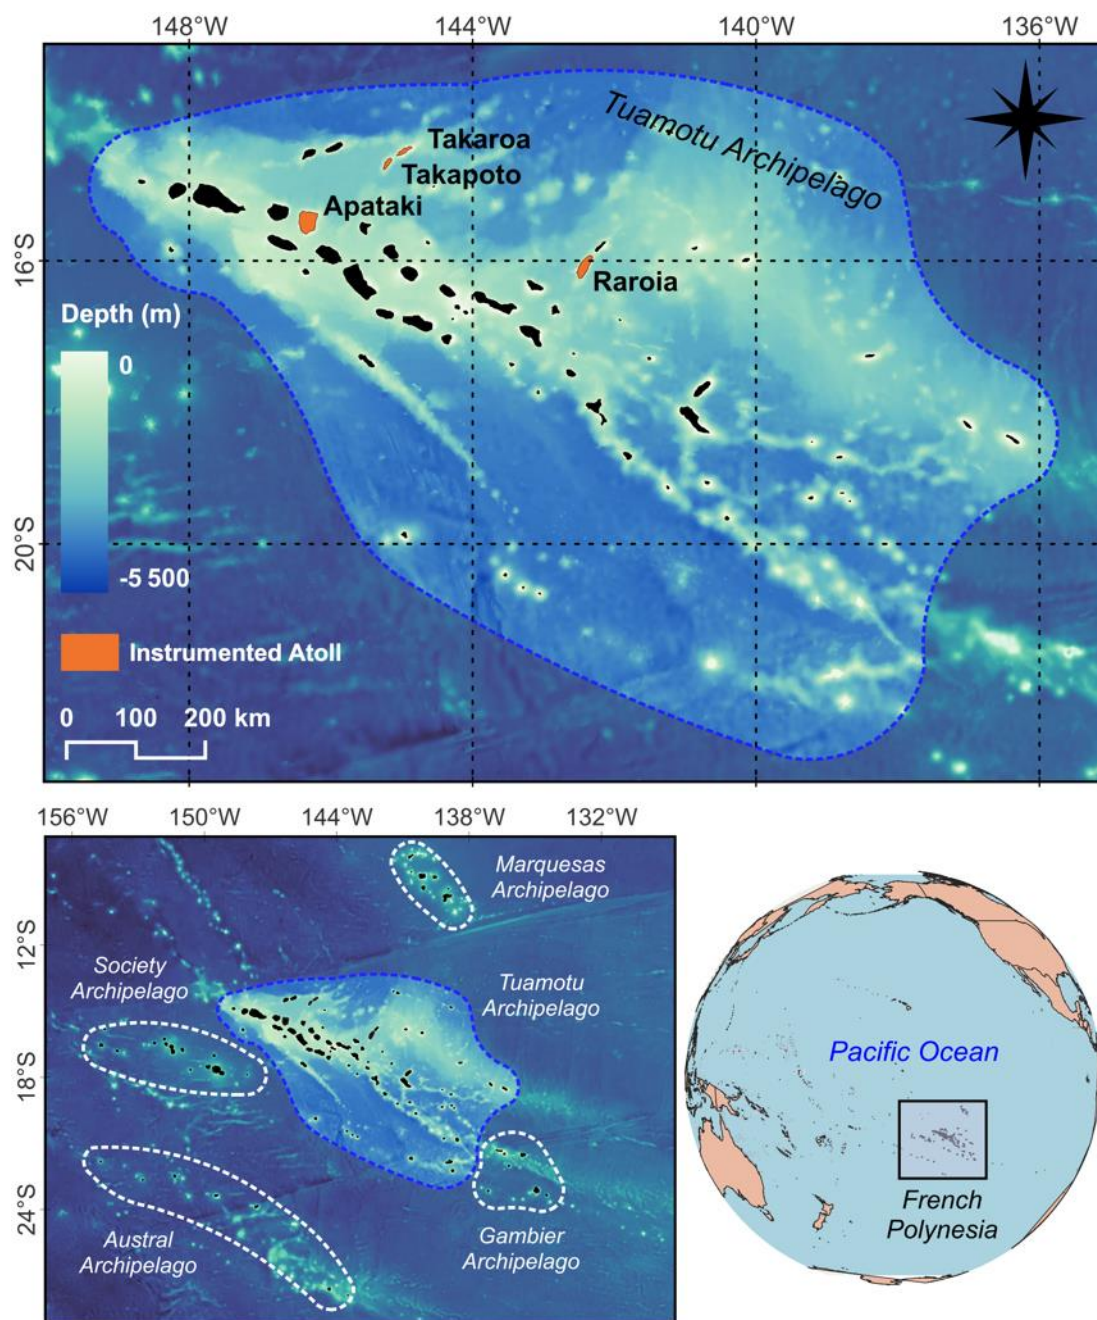

80 **Figure 1: Map of French Polynesia Archipelagos and GEBCO bathymetry. The instrumented atolls of Tuamotu Archipelago that are the focus of this study are colored in orange (Raroia, Takapoto, Apataki, Takaroa).**

Following the first Tuamotu-Gambier atoll lagoon hydrodynamic modelling work by Tartinville et al. (1997) that investigated Moruroa Atoll in the context of nuclear weapon tests consequences, a workshop in 2004 in Tahiti identified the main steps required to achieve 3D high spatial resolution numerical



85 models to address pearl farming questions (Andréfouët et al., 2006). A high priority topic was to better understand spat collection variability, for which it was necessary to better characterize *P. margaritifera* larval dispersal phase in spat collection lagoons exposed to different oceanographic and atmospheric forcings.

Ahe became the first atoll investigated for 3D hydrodynamical modelling, with for the first time a large array of in situ measurements (Dumas et al., 2012). Ahe had a one-year dedicated field program in 90 2008-2009 (see Le Gendre, 2020a for sampling strategy), followed by a dedicated oceanographic POLYPERL cruise in 2013 (<https://doi.org/10.17600/13100050>). Ahe was followed by Takaroa but only with a short field expedition in 2009 (see Le Gendre, 2020b for sampling strategy). Results from Ahe model prove to be very useful to characterize larval dispersal variability (Thomas et al., 2012; 2014; 2016).

95 To build on these first results, the ANR-funded MANA (*Management of Atolls*) project was launched in 2017 (Andréfouët et al., 2022a). The project ended in September 2022. The project overarching goals were to provide new spatially explicit products useful for the management of geomorphologically diverse pearl farming atolls (namely Ahe, Takaroa, Raroia in French Polynesia and Manihiki in the 100 Cook Islands). Focus was still on understanding spat collection on different sites, but also provide guidelines for stock management and restocking (André et al., 2022, Violette et al., 2023). Funds and instruments provided by the local *Direction des Ressources Marines* (DRM) in charge of the management of pearl farming lagoons expended the ANR-MANA project to two new sites (Gambier Islands and Takapoto Atoll). Finally, the *Commission Nationale de la Flotte Côtière* also supported the 105 project with ship time (R/V ALIS) for 2 cruises in Raroia Atoll in 2018 and one cruise targeting in particular the Apataki and Takaroa Atolls in 2022 (respectively, <https://doi.org/10.17600/18000582> and <https://doi.org/10.17600/18001644>).

110 This paper reports on the *in situ* data collected in the frame of the ANR-MANA project and its derivatives on Raroia Takapoto, Takaroa and Apataki atolls between 2018 and 2022 (Figure 2). It is organized as follow: Section 2 briefly presents the French Polynesia climate to draw the regional context, and the general sampling strategy applied to atolls during MANA project considering the typical geomorphology of atolls and their lagoons and the hydrodynamic processes at stake. Then, the sampling strategy specific to the different study sites are developed in Section 3. Oceanographic 115 instruments used during all surveys are detailed in Section 4 and data processing specificities are provided in Section 5. Examples of results are provided in section 6. Section 7 finally informs on data availability followed by Section 8 which concludes this paper.

2 The French Polynesia atolls context: climate, geomorphology and hydrodynamic processes

2.1 French Polynesia climate

120 Due to the large latitudinal and longitudinal variations, there are local weather differences between French Polynesia archipelagoes, but overall, the French Polynesia climate has two seasons (Laurent and Maamaatuaiahutapu, 2019). The wet and warm season ranges from November to April (Austral



125 summer) with weak trade winds (northeast to southeast) and moderate waves including distant swells
born in the northern hemisphere. Then, a cooler and dryer season occur from May to October (Austral
winter), with stronger trade winds and high energy distant swells from southern hemisphere. The
weather is influenced by the proximity of the South Pacific Convergence Zone (SPCZ) leading to higher
rainfalls during December to March, albeit with significant spatial and interannual variations between
archipelagoes (Laurent and Maamaatuaiahutapu, 2019).


130 The interannual El Niño-Southern Oscillation (ENSO) affects the French Polynesian climate and
particularly precipitations and trade wind regimes. ENSO influence the position of the SPCZ which lead
to increased precipitations, higher occurrences of tropical cyclones and changes in wind regimes during
the El Niño phase (Laurent and Varney, 2014). Conversely, the La Niña phase exacerbates the main
features of the neutral years, with lower precipitation and drought especially in the north (Marquesas
135 Archipelago), and lower east to southeast trade winds overall.

The wind and wave regimes of French Polynesia with a focus on pearl farming sites was recently
revisited at different temporal scales (Dutheil et al., 2020; 2021). The wave regime is much more
spatially variable and atoll-dependent than the wind regime considering the shadowing effects on the
140 propagation of wave trains created by the position of atolls relative to each other (Andréfouët et al.,
2012b, 2022a).

2.2 Atoll geomorphology and hydrodynamic process: the clues for the MANA project field data collection strategy

145 During the MANA project and its extensions, a total of four atolls (Raroia, Takapoto, Apataki and
Takaroa, Figure 2, Table 1) have been instrumented with physical instruments to better understand the
processes influencing *Pinctada margaritifera* spat collection variability, by helping the calibration and
validation of 3D high spatial resolution hydrodynamical models and eventually improve the realism of
existing models. The deployments took place between 2018 and 2022, with an interruption due to the
150 COVID pandemic (Figure 3). We describe in this section the general features encountered on all atolls
and the principles used for the sampling strategy to capture the main hydrodynamic processes. The
Section 3 provides the sampling specifics per atoll.


High resolution bathymetry data were collected by private sub-contractors using a mono-beam
155 (Takaroa) or multibeam (Takapoto, Raroia) sounders (Andréfouët et al., 2020). Soundings were
resampled and interpolated to achieve a 10m resolution bathymetric grid for Raroia and Takapoto and a
60m resolution grid for Takaroa Atoll, prior to the development of hydrodynamic models. Conversely,
the Apataki lagoon has not been entirely mapped yet as in 2023.

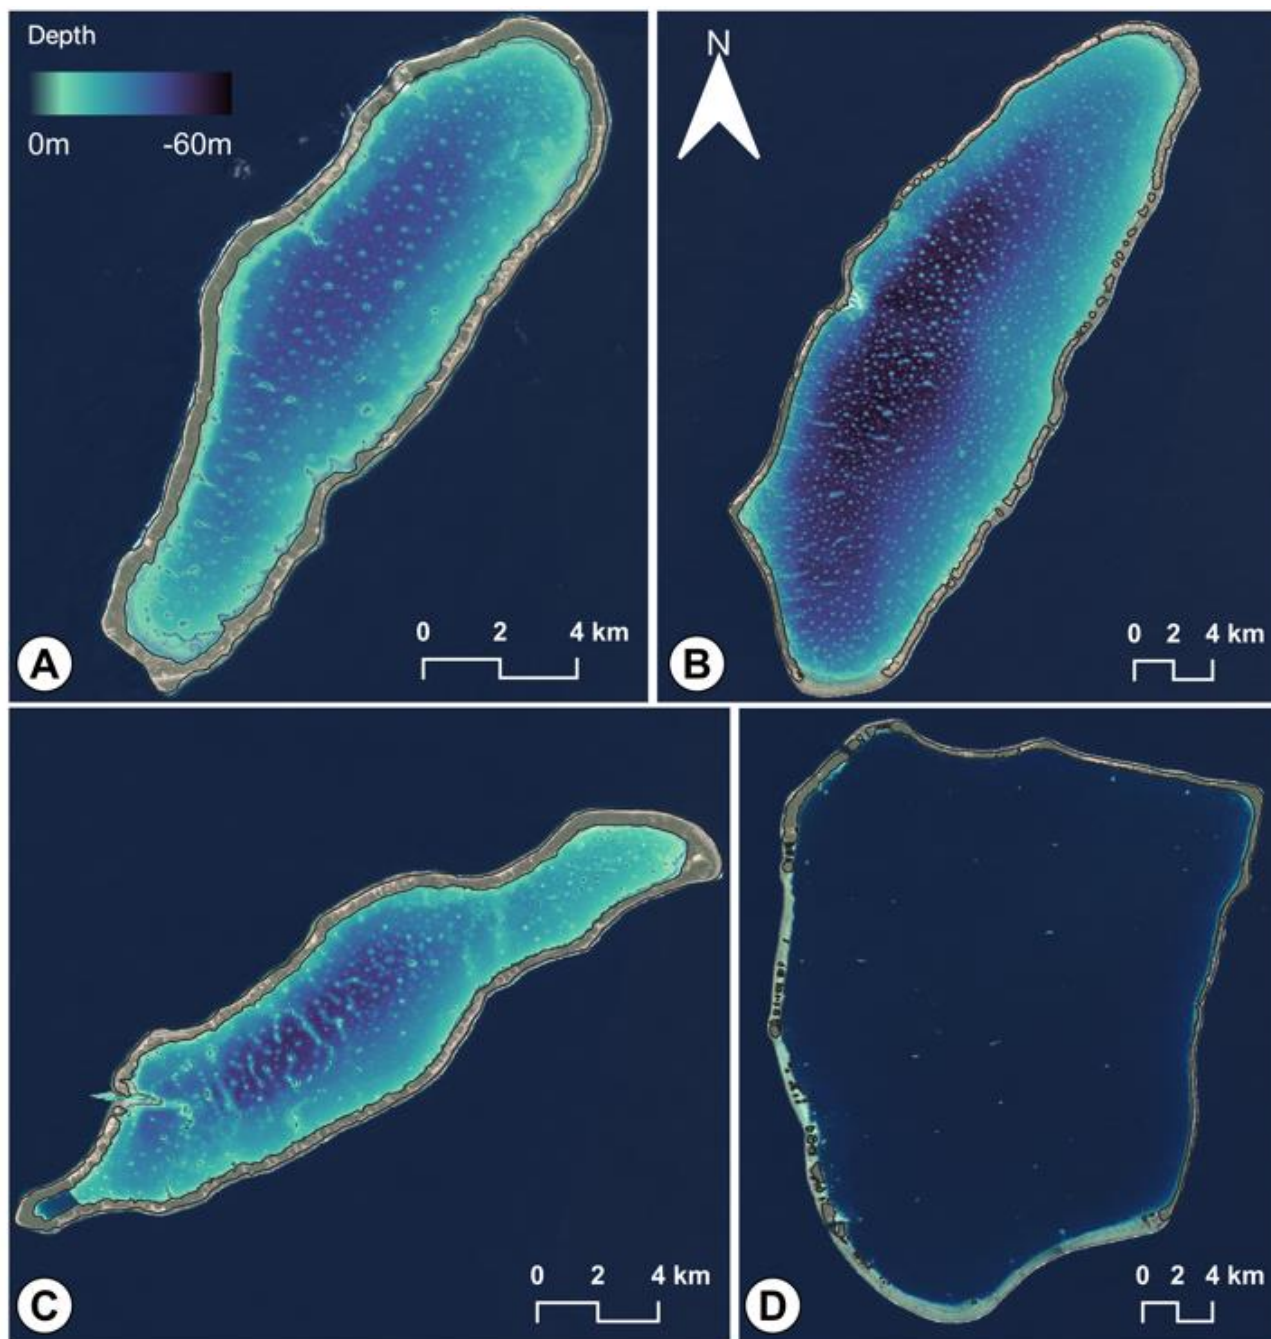

160

Figure 2: Bathymetry (described in Andréfouët et al., 2020) and *motu* (local names for reef islands) contours for (A) Takapoto Atoll, (B) Raroia Atoll, (C) Takaroa Atoll. Depth color-scale is identical for the three atolls. For Apataki Atoll (D), there are no complete lagoon bathymetry data available yet. Background satellite images are from Sentinel-2, European Space Agency (ESA).

165

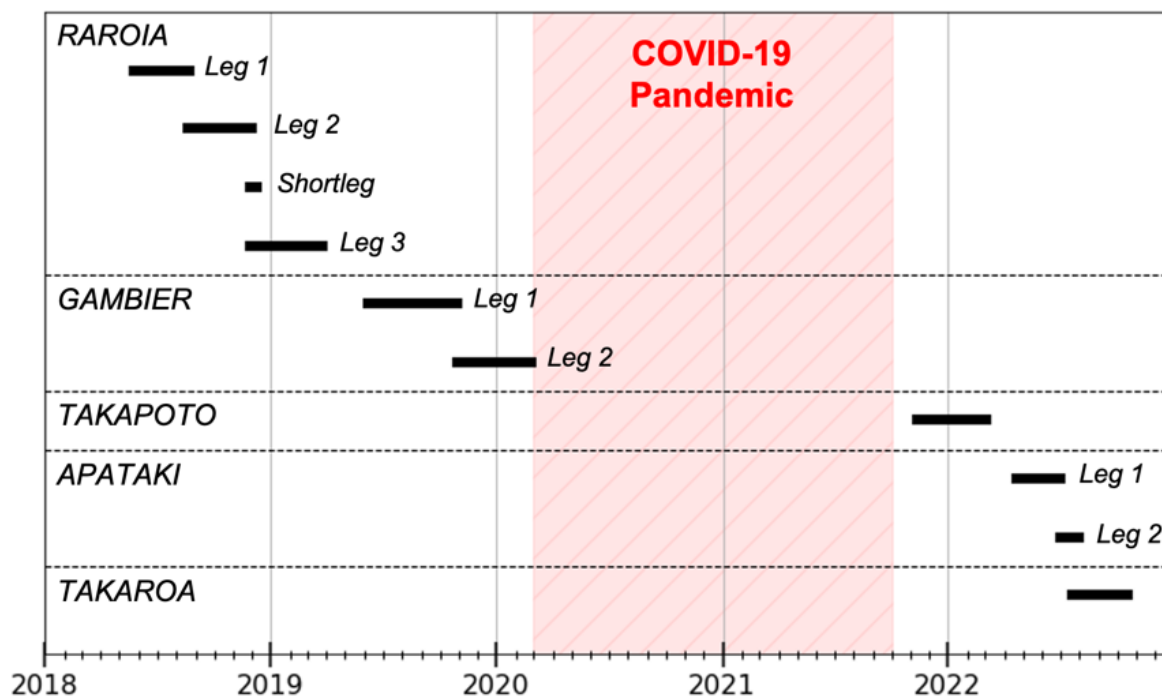

170 **Figure 3:** MANA project deployments between May 2018 and November 2022. Gambier Islands are another site studied from mid-2019 to February 2020. It is a group of high islands and data will be presented elsewhere because the sampling strategy obey to different criteria than atolls.

Table 1: Additional information about instrumented atolls (from Andréfouët et al. 2020).

Atoll	Type	Perimeter (km)	Area (km ²)	Mean depth (m)	Maximum depth (m)	Number of pinnacles
Raroia	Semi-open	93.70	367.95	32.2	68	1434
Takapoto	Closed	49.50	78.64	24.8	43	194
Apataki	Semi-open	109.23	678.45	NA	NA	63
Takarua	Semi-closed	61.52	85.96	25.8	48	246

175 Extrinsic factors (such as the wind or wave regimes) and intrinsic factors (such as the degree of aperture) are both strong driver of the differences in hydrobiogeochemical functioning between atolls (Dufour et al., 2001, Andréfouët al., 2001a). They both need to be taken into account when sampling atoll lagoons for their hydrodynamics as explained hereafter in generic terms.

180 Wind and wave influence the lagoon renewal and its circulation. At archipelago-scale, the swell climate of any given atoll is highly dependent on its position relative to other atolls that can block the incoming swells (Andréfouët et al., 2012b). For instance, the large Tuamotu atolls in the south of the archipelago (Rangiroa, Fakarava, Kaukura, etc.) block all incoming southern swells. It is therefore necessary to



measure incoming waves with pressure sensors on, if possible, all the sectors of exposition of the studied atoll. Regional wave models are also useful to assess the conditions during a survey, and Wave Watch III model data have been used at high spatial resolution in some cases (Andréfouët et al., 2012b; Dutheil et al., 2021; Andréfouët et al., 2022; Andréfouët et al., submitted). Wind data is generally not monitored during shore-based field campaigns as we relied on either nearby Météo-France weather station if possible (e.g., Takaroa, Gambier Islands) or ERA5 reanalysis data. When on board the R/V ALIS, the ship weather station also records wind data.

Although all atolls can be different in terms of lagoon bathymetry (Andréfouët et al., 2020), size, and exposure to wind and waves, all atolls share common geomorphological features that play a role in the lagoon hydrodynamics. Atoll landforms siting on the atoll rims are reef islands (locally named *motu*). They result from the accumulation of carbonate sediments above antecedent (Holocene) conglomerate platforms (Montaggioni et al., 2021). Rims can be vegetated or not (Andréfouët et al., 2001b). Atoll rims can have 0, 1, 2 or 3 (at maximum) deep passages (or pass) and a number of (from a handful to several hundreds) shallow spillways (locally named *hoa*) along the atoll rim that connect the ocean to the lagoon.

In generic terms, water movements from the ocean to the lagoon through the pass and shallow *hoa* are controlled by tide and waves. Note first that the tidal range in this region of the world is low (10 to 50cm maximum in the ocean from west Tuamotu to Gambier Archipelago) due to the presence of an amphidromic point west of Tuamotu (Dumas et al., 2012; Laurent and Maamaatuaiahutapu, 2019). All the sites treated here are thus in a micro-tidal environment. Incoming waves breaking on the atoll crest directly modulate the flows through the wave-exposed open spillways (Tartinville et al., 1997; Dumas et al., 2012; Aucan et al., 2021; Andréfouët et al., 2022b). Number and width of *hoa* are used to define the degree of aperture of an atoll, as a coarse proxy useful to characterize the water exchanges between ocean and lagoon and some biogeochemical variables (Dufour et al., 2001).

The degree of aperture of the atoll also influences the lag between oceanic and lagoonal tides. Even atolls with wide deep passes experience a few hours shift in tidal lagoon signal compared to the ocean. They are also subjected to a lagoon tidal amplitude lower than in the ocean (Dumas et al., 2012; Aucan et al., 2021). These differences are also a factor that complicates the establishment of a common water level baseline between lagoon and ocean (Callaghan et al., 2006). It is a problem specific to atolls with passes (Aucan et al., 2021). Without the availability of appropriate differential sensors (see Sensor section hereafter), the water level baseline is therefore established around the average sea level measured in the lagoon or ocean (Aucan et al., 2021).

In the lagoon, even if current speeds are typically low (Dumas et al., 2012), internal circulation cells occur, that are highly dynamic and predominantly controlled by wind speed and direction, as shown for instance for Ahe (Dumas et al., 2012) or Mururoa Atolls (Tartinville et al., 1997). A large lagoon is potentially much more complex in term of numbers and dynamics of these hydrodynamic cells than the smaller atolls. If there is a pass, its influence can generate locally strong currents; but it is nevertheless spatially limited due to the alternant incoming-outgoing tide-driven currents (Dumas et al., 2012).



225

Temperature in the lagoon influences oyster development, survival at larval and adult stages, and the final pearl quality, plus other indirect factors such as plankton availability (Thomas et al., 2010; Le Moullac et al., 2016; Latchere et al., 2018; Sangare et al., 2020). Temperature is monitored according to an array of temperature-measuring sensors deployed in the ocean, passes, *hoa* and lagoon. In the lagoon, a systematic spatial coverage is sought as well as a 3D coverage by deploying sensors vertically at sub-surface (approximately 2m), 10 meters and at last 40 meters depth. This information is also useful to assess lagoon stratification during low wind periods.

230

To summarize, the MANA observational strategy objectives is integrative of all the aforementioned processes. *In situ* instruments were thus deployed to capture:

235

- Sea level variations, tidal dynamics and surge (ocean, lagoon), using pressure sensors
- Incoming incident waves on the different atoll sectors and wave (wind-induced) in the lagoon, using pressure sensors
- Currents in *hoa* on different atoll sectors, using current meters or current profilers moored in *hoa* facing the pressure sensors that measure the incident waves
- Currents in passes and inside the lagoon using current profilers
- Water temperature variations in ocean and lagoon in different rim and lagoon sectors, using a variety of temperature-recording sensors (temperature-only, pressure or current-meter sensors)

240

245 3. Study sites and sampling strategy

This paper presents data collected between 2018 and 2022 in four Tuamotu Archipelago atolls, chronologically Raroia, Takapoto, Apataki and Takaroa Atoll. The following sections (Sect 3.1; 3.2; 3.3 and 3.4) present each atoll and the implemented observational strategy. The length of data acquisition ranged between 3 to 9 months. Raroia and Apataki deployments were organized in legs to achieve long deployment duration while allowing regular instrument maintenance (e.g., battery replacing, bio-fouling, offloaded data, check mooring component). The beginning or end of a leg is thus generally synonymous of short data collection interruption for maintenance. Long deployments were a combination of shore based and research vessel-based work. Atolls were equipped with five different types of instruments namely ADCPs, Aquadopps, Marotte HS, RBRduet T.D and SBE56 measuring physical process such as current velocity, temperature and pressure. Instrument configurations and specificities are presented hereafter in a dedicated Section (Section 4).

250

255

3.1 Raroia Atoll

Raroia is a large atoll (area 368 km²) in the central Tuamotu region. The atoll is oriented along the NE-SW direction (Figure 2) and exposed to the east trade winds. The eastern reef rim is open to the ocean with numerous *hoa* and *motu*. The western side has one deep and wide (500m) pass (Garue pass) as well as few shallow *hoa*. The southern portion has a wide uninterrupted 5km-long *hoa*. The northwest and north sides are closed by a vegetated rim.


260



265 The lagoon is deep with an average depth of 32m. It has a typical saucer-shaped geomorphology but
with the presence of a very high number of pinnacles (>1600) rising from the floor and distributed
homogenously throughout the lagoon (Table 1).

Raroia was the subject of the most complex and intensive deployment. The 9-month physical
observations started on middle of May 2019 and ended on late March 2020. The deployments are
organized in three legs (respectively between May-August 2018, August to December 2018 and January
to March 2019) and one extra “shortleg” conducted during the MALIS2 cruise with a specific setting
270 and deployment (Figure 2). Surveys were in part conducted during the oceanographic campaigns
MALIS 1 and MALIS 2 with the R/V ALIS.

The sampling strategy is summarized in Figure 4. The instruments moored in the lagoon, *hoa*, pass and
oceanic sides of the atoll were either moored at the same location during the entire three legs, or their
deployment was leg-dependent (see Table A1 in Appendix Section). Three stations were positioned on
275 the external reef slopes on the north-east (O2), south (O3), and north-west (O1) atoll side to measure
offshore incident waves with pressure sensors. These oceanic sensors were systematically paired with
current meter (profilers or drag-tilt current meters) moored inside *hoa* directly facing the oceanic
sensor’s location. Water level inside lagoon were recorded at five stations (L4, L5, L6, L7, L8) to
deduce surge and tide signal using pressure sensors. Those lagoonal pressure loggers were
280 systematically associated with two temperature sensors moored on the sub-surface and around 20m
depth. These 3-sensor stations were replicated spatially to characterize the within-lagoon spatial
heterogeneity. Current profilers were anchored inside three *hoa* (western, eastern and southern) that
faced the oceanic pressure sensors. Inside the Garue Pass deep current profilers were moored to
evaluate water fluxes lagoonward and oceanward as well as at the edge of the pass lagoonward to study
285 the pass gyre (Pass2). Finally, two additional loggers were positioned in the south lagoon to measure
lagoon currents in the spat collection area (L7 and L8). During the short leg, these 2 lagoon profilers
were moved to the north lagoon, close to H1 and H2. The Table A1 in Appendix Section refers to the
exact period and location of mooring for each sensor.

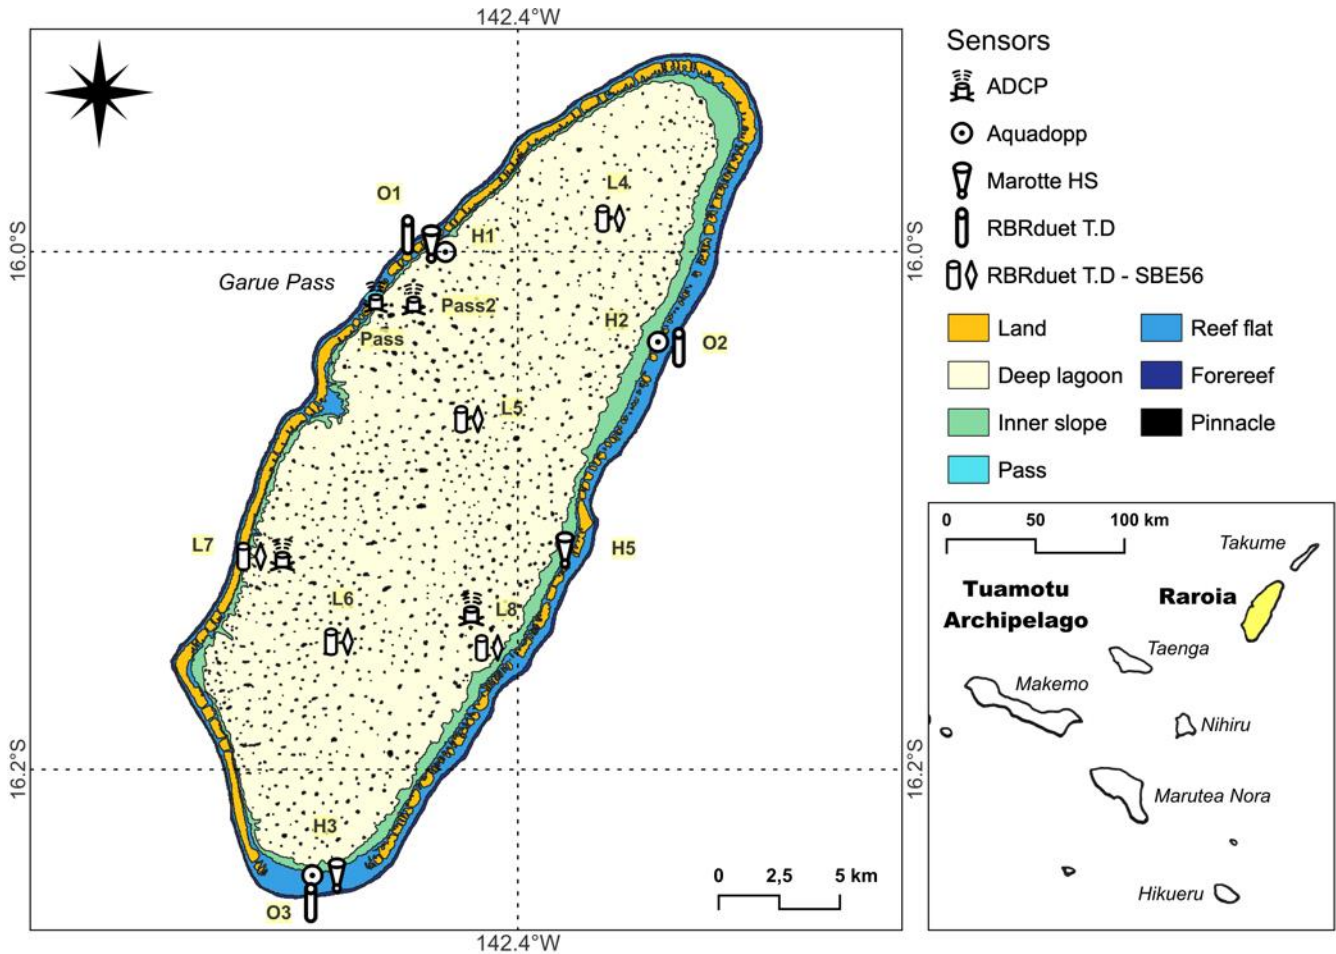

290

Figure 4: Observational strategy applied during Raroia experiments. ADCP: Acoustic Doppler Current Profiler. Inner slope category is defined approximately between 0-15m depth. Background map from the Millennium Coral Reef Mapping Project (Andréfouët and Bionaz, 2021).

295 3.2 Takapoto Atoll


300

Takapoto is a medium-size 78 km² northwestern Tuamotu atoll. This atoll is distinct from the other studied atolls due to the absence of deep passes connecting the lagoon to the open ocean. It is the most closed of all the study sites with only few several narrow *hoa* present on both the west and east flanks of the atoll. The maximal and average lagoon depth are respectively 43m and 25m (Table 1). Pinnacles can be found everywhere in the lagoon but their density is higher on the south-west region (Andréfouët et al., 2020).

This atoll was monitored over a 4-month period (November 2021 to March 2022). Measurements focused on the entry of oceanic water via the few active *hoa* present in two regions namely Teavatika



305 (southeast region) and Takai (northwest region) (Figure 5). Two stations with paired Aquadopp (in the
 deeper part of *hoa*) and RBRduet T.D (ocean side) were set in Teavatika (station O01 and Aqua2) and
 Takai (station O03 and Aqua1) areas in order to measure breaking wave parameters and current velocity
 related to waves and tides. Inside the lagoon, two additional stations in the middle and south lagoon
 310 were instrumented with one RBRduet T.D and two SBE56 (one in sub-surface and one below 30
 meters) following the strategy applied for Raroia (see 3.1 Section).

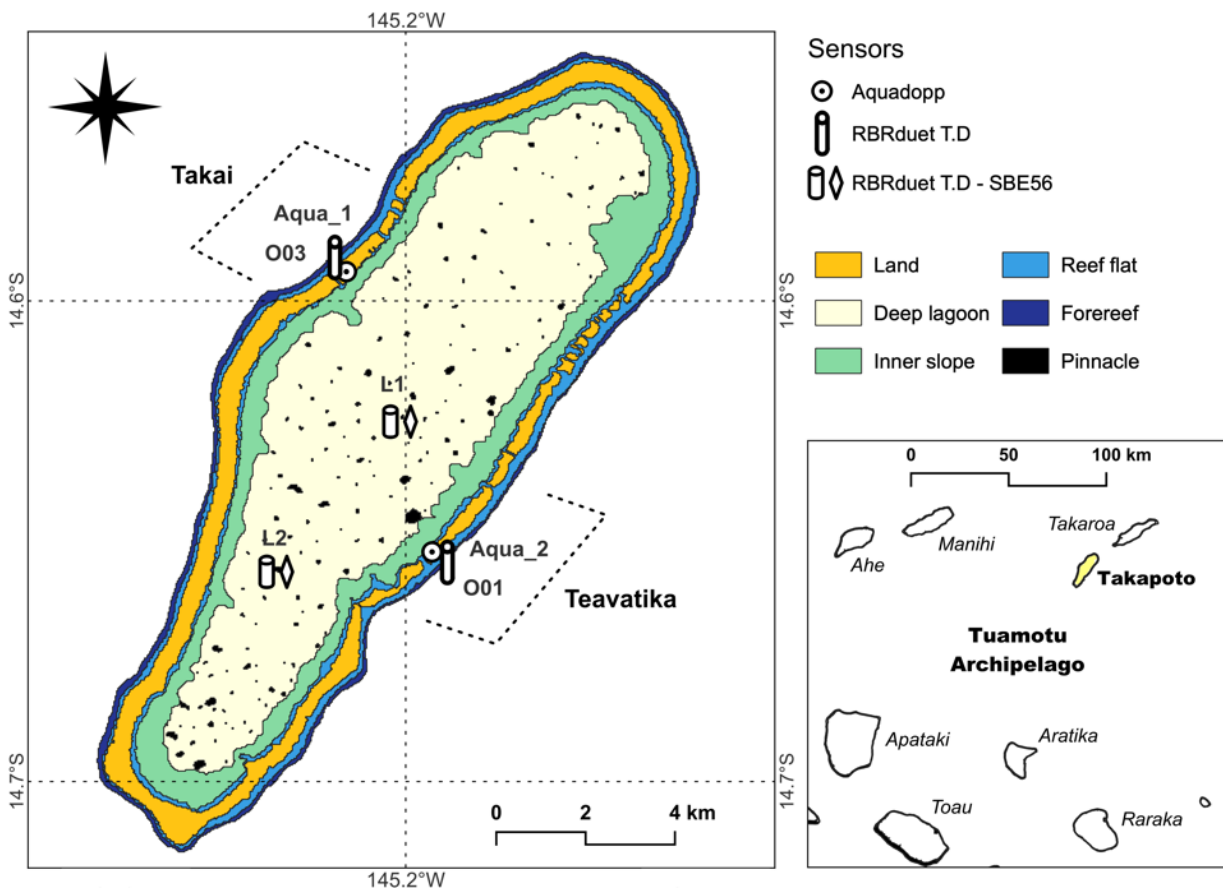

315 **Figure 5: Location of deployed instruments in Takapoto Atoll. Inner slope category is defined approximately between 0-15m depth. Background map from the Millennium Coral Reef Mapping Project (Andréfouët and Bionaz, 2021).**


3.3 Apataki Atoll

Apataki Atoll is a Western Tuamotu atoll and is the largest instrumented atoll (678 km²) of the MANA project, representing 8 times the area of Takapoto Atoll (Table 1). The atoll rim is almost completely
 320 closed on the east and north sides. The southern region is a 18km long, wide open reef flat highly subjected to oceanic entries caused by distant swells (south-south-east are the dominant swell



directions). Finally, the western rim is dominated by succession of wide reef flats, narrow *hoa* and *motu*. Two deep passes both located on the west side and respectively named (Pakaka in the south and Tehere in the north) allow to connect oceanic and lagoonal systems. As previously said, complete bathymetric coverage is not yet available for the lagoon and instrumented stations were selected and positioned using satellite imagery. Pinnacles visible on satellite images are few (63, cf. Table 1) and spread over the entire lagoon.

The resulting data set covers a 4-month period separated into 2 legs: Leg1 (April 2022 to July 2022) and Leg2 (July 2022). Leg2 measurements were managed during the MALIS 3 oceanographic cruise with the R/V ALIS. Lagoonal stations (L1, L2, L3, L6) with one RBRduet T.D and two SBE56 sensors follow the same strategy applied to Raroia and Takapoto (Figure 6). Pressure sensors moored on oceanic forereef were positioned on the south (O1 – O2) and east side (O3) to face *hoa*. The facing southern *hoa* were instrumented with two current profilers (O1 paired with Aqua2 and O2 with Aqua1) in order to record oceanic fluxes crossing the reef. Deep current profilers (P01, P02 and P03) were anchored inside or under the influence of the passes to evaluate current intensity and direction (Figure 6).

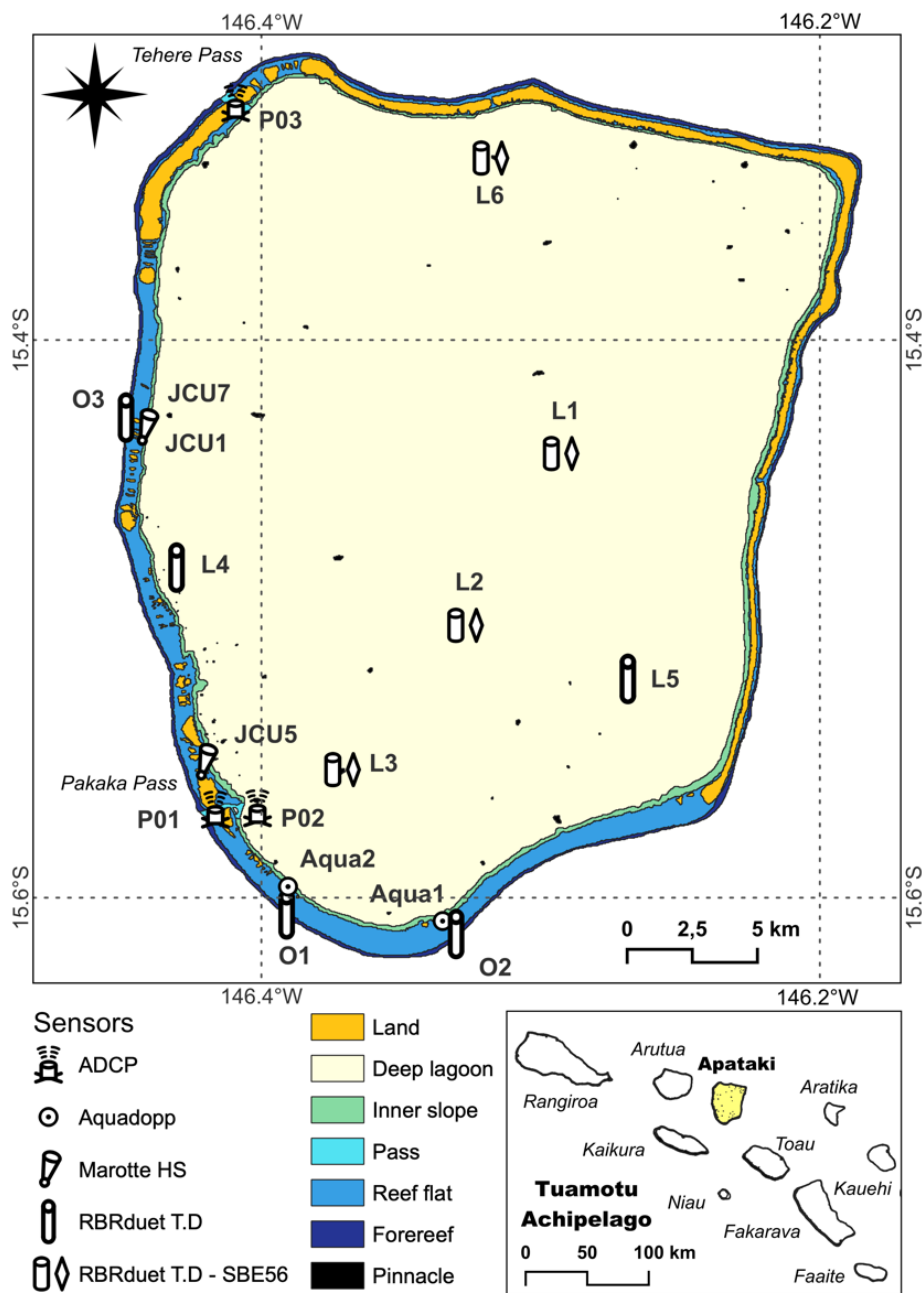


340 **Figure 6: Sampling strategy adopted during Apataki surveys in 2022. ADCP: Acoustic Doppler Current Profiler. Inner slope category is defined approximately between 0-15m depth. Background map from the Millennium Coral Reef Mapping Project (Andréfouët and Bionaz, 2021).**



3.4 Takaroa Atoll

345 Takaroa Atoll is located 10km eastward from Takapoto Atoll (Sect 3.3) in the Northwestern Tuamotu
region (14.27°S – 145°W). Its 86km² lagoon is characterized by a semi-closed continuous rim with
small *hoa* on the southern region, and by a narrow deep pass (Teauonae Pass) reaching 170m long and
20m depth (Figure 7). The lagoon has a depth average of 26m and a maximum depth of 47m (Table 1).
Pinnacles are abundant in the central deep lagoon area (Figure 7). This atoll has been previously studied
350 in 2009 (see Le Gendre, 2020b for sampling strategy), but limited data could be collected. During the
MALIS 3 cruise in July-August 2022, the pass was instrumented to get additional measurement (3
months) of currents velocity and direction using one current profiler sensor moored at 18m depth.

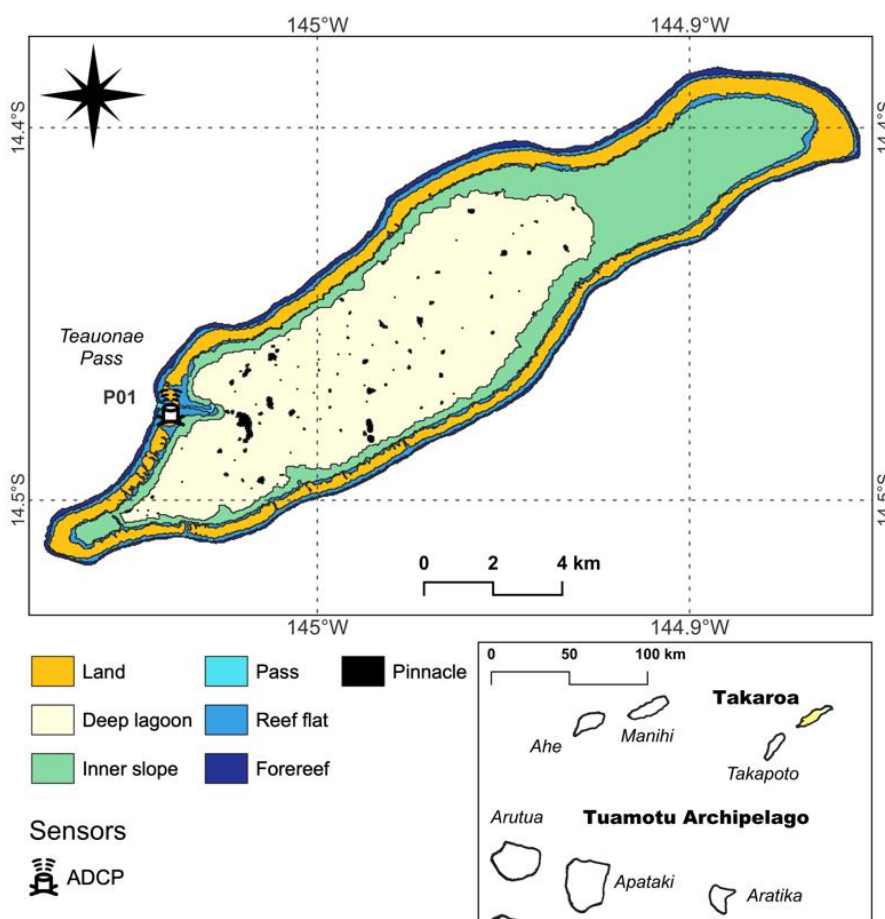

355

Figure 7: Position of the single station P01 in Takaroa Atoll during MALIS 3 cruise. ADCP: Acoustic Doppler Current Profiler. Inner slope category is defined approximately between 0-15m depth. Background map from the Millennium Coral Reef Mapping Project (Andréfouët and Bionaz, 2021).



360 2 Oceanographic instruments

Each sensor deployed in various atolls were autonomous and moored on the seabed by SCUBA with a suitable structure adapted to the station substrate (sand-rubble, rock-coraline, coral, pavement, etc.) to avoid displacements and ensure durability across the planned sampling period.

365 Figure 8 illustrates the main types of instruments and their installations. A detailed summary (location, measured parameters, frequency, station depth, etc.) of all deployed instruments is available in Appendix section (Table A1).



370 **Figure 8: Images of moored structures and deployed instruments in Raroia atoll. Left: PVC tube for RBRduet T.D or SBE56 sensors fixed on hard coralline bottom. Middle: Aquadopp (on the forefront) and Marotte HS (at the back) moored on same station on pavement or coral head. Right: ADCP Sentinel instrument moored at the bottom of a deep lagoon (photo: SA).**

4.1 Compact Temperature and Pressure sensors

Two types of compact loggers have been used to monitor respectively temperature/pressure or temperature data. First, RBRduet T.D is a data logger constructed by RBR Ltd (<https://rbr-global.com/products/compact-loggers/rbrduet-td/>, last access: 07 April 2023) recording temperature and pressure at high sampling frequency (continuous sampling were set at 1 Hz interval). Those precise sensors were anchored between 8 to 12m deep on external reef slopes into differently exposed atoll sectors to provide sea-state parameters during post processing steps (waves and sea level). RBRduet T.D loggers have also been deployed inside lagoons (6.7m to 13.5m deep) in order to measure tide and surge variations.

High precision temperature data were recorded with SBE56 sensors from SEABIRD Electronics Inc (<https://www.seabird.com/sbe-56-temperature-sensor/product?id=54627897760>, last access: 07 April 2023). Depending on atolls deployments, loggers were set up with a sampled frequency of 10 seconds (Raroia) or 1 min (Takapoto and Apataki).



390

To evaluate the temperature stratification in the water column, two SBE56 were systematically moored on the same station at different depths (mostly around 2m and until 40m), plus the setting also included one of the aforementioned RBRduet T.D moored at 6-13 m between the SBE56.

4.2 Current profilers

395

Two kinds of current profilers were deployed in the passes or *hoa* to measure current velocity and estimate the water fluxes between ocean and lagoon. ADCPs (Acoustic Doppler Current Profiler) were always bottom-mounted (upward-looking mode) to measure the water column until the sub surface. The number of cells were specific to each instrument and depth of mooring. ADCPs were set to sample in burst mode.

400

405

410

415

420

- ADCPs from Teledyne RD Instruments Inc. (TRD-I) measured current intensity and direction across the water column according to a pre-defined number of cells, as well as pressure and temperature related to the presence of a sensor in its transducer head (Figure 8, right image). The cell size was set to 50cm, 1m or 2m depending on the instrument configuration, and the number of cells was dependent of the station depth. This instrument model was deployed inside the passes (Raroia, Apataki, Takaroa), in the lagoon close to the pass to characterize lagoon areas under the pass influence (Raroia, Apataki), or inside the lagoon away from the pass to characterize the lagoonal wind-induced circulation (Raroia). For each deployment, instruments were set up with a 10-minute burst frequency except for two stations in Raroia (L7 and L8) where the sampling rate was 30 minutes. For Raroia, two Sentinel V20 model and two Sentinel V50 of respectively 1000 KHz and 500 KHz working frequency (<http://www.teledynemarine.com/workhorse-sentinel-adcp?ProductLineID=12>, last access: 07 April 2023) were moored during the Leg2 and “shortleg”. For Apataki, two Sentinel V50 were deployed inside passes and one V20 upstream the southern pass. Finally, for Takaroa, only one V20 was installed inside the pass.
- Aquadopp Profilers from Nortek are suitable instruments for shallow current measurements (Figure 8, middle image). As such, they were predominantly moored inside various *hoa* (station depth < 3m). This sensor measures pressure and 3D velocities which allow to deduce water elevation and vertical currents speed and direction. In Raroia, two Aquadopp 2 MHz (<https://www.nortekgroup.com/fr/products/aquadopp-profiler-2-mhz>, last access: 06 April 2023) were moored inside two different *hoa* with a 5-minute sampling rate with a cell size equal to 20 cm and 3 pings per ensemble. Beam coordinate systems for Raroia deployments were set in Cartesian coordinates (XYZ). Two stations in Takapoto and Apataki Atoll were also equipped with Aquadopps. Cell size was also set to 20 cm but settings were adjusted with 18 pings at each 10-minute frequency burst and beam coordinates were configured to measure in Earth normal coordinates (ENU).



4.3 Drag-tilt current meters

425 Marotte HS are low-cost drag-tilt current meters manufactured by the Marine Geophysics Laboratory of
James Cook University, Australia (<https://www.marinegeophysics.com.au/current-meter>, last access: 03
April 2023). They measure temperature and velocities components (u, v) at the instrument level (Figure
8, middle image). Speed and direction parameters are deduced from the sensor accelerometer and
magnetometer without considering the device orientation. Sampling frequency was set to 10 seconds
430 (Apataki) or 1 minute (Raroia). Marotte HS were always moored in shallow locations (< 2m depth).
During the Raroia legs, Marotte HS were paired with Aquadopp instruments (as showed in Figure 8) in
order to compare the measured velocity between sensors. In Apataki, two Marotte sensors were moored
on *hoa* along the western side during Leg 1 and 2. A number of these instruments were lost or failed in
the course of the MANA deployments shown Figure 3.

435 5 Data Processing and quality control

The processing and protocols applied to the data sets presented herein are similar with Bruyère et al.
(2022) for the study of New Caledonia lagoons. For each data logger types, after retrieving the data
from the instruments with the manufacturer's software, data were post-processed using Python 3.7
440 routines. Data were systematically converted in NetCDF format. Each NetCDF file contains variables
and related metadata information including global attributes. Global attributes describe the data
ensuring their reusability by giving geospatial position, temporal coverage, sampling frequency, depth,
instrument serial number, investigator's name and any additional other useful comments for data users.
Depending on instruments, specific processing steps were performed (or not), namely:

- 445 ○ For RBRduet T.D, pressure data were corrected from a constant atmospheric pressure (101 325 bar)
in order to avoid influence of weather conditions changes. None vertical referencing by DGPS
(Differential Global Positioning System) were achieved due to the vicinity of breaking waves in the
case of forereef stations. To deduce wave parameters (Significant wave height, Peak frequency and
450 Mean wave period), data were filtered using the Fourier transform to acquire a pressure spectrum
(in a range between 3-25 sec). Then, the methods referenced in Aucan et al., (2017) were applied
using the linear wave theory with a homogenous cut-off frequency (set to 0.33) to filter high
frequency spectrum. To calculate water level, depth measurements were subtracted from the mean
sea level (long-term depth-averaged of the temporal series). As a result, two output files were
455 created, one at one hour resolution containing waves parameters and another file at one minute
frequency with temperature and water level.
- Current meter profilers (ADCPs and Aquadopps) do not provide reliable current measurements
near the sea surface due to contamination of the Doppler velocity related to acoustic sidelobe
reflections from the boundary. To avoid contaminated cells, sea surface currents data were always
460 removed from the processed files. Vertical and temporal resolutions remain dependent on
deployment settings. No barometric correction was applied on depth but the mean depth of the



entire time serie were subtracted to data to obtain water elevation. For Raroia, Aquadopp's coordinate system was set to Cartesian coordinates, to be consistent with other measures, directions were recalculated in ENU coordinates using the heading orientation.

465

- Marotte HS data were averaged at 1 minute frequency to smooth the high frequency fluctuations. The by-default direction convention (initially ClockWise (CW) from east) was changed to be congruent with other instruments and with the oceanographic current convention (CW from north).

470

- Finally, for SBE56 instruments no specific treatments were applied on temperature records, and final NetCDF files keep the raw frequency settings.

For all sensors, a visual check was performed with Ferret to exclude all out-of-water data in order to set the correct start and end of time series. The screening step also helps to detect any remaining anomalous values (out of range values) from the processed files. If any remaining anomaly is observed a specific comment in the NetCDF Global attributes is included.

475

6 Example of results

Examples of collected data sets on the different atolls are provided hereafter for each category of sensors and deployment. They are by no means exhaustive (see Table A1 in Appendix Section). No lagoon processes that require taking into account multiple data sets are interpreted here as this makes the object of dedicated publications (Andréfouët et al. submitted; Le Gendre et al. in prep), but some basic descriptive interpretations are provided here.

480

6.1 Temperature records

The Figure 9 illustrates temperature time series. Figure 9B shows the temperature differences between Raroia lagoon and the ocean, for stations O1 and L5 (Figure 4). The 9-month deployment in Raroia includes almost the entire 2018 winter season and the 2018-2019 summer season. The example shows the passage from cool to warm season with August-September lows to the highest April values (approximately +4 degrees differences). The sampling period shows that the variations are not continuously linear, with different rates of changes (between Leg 2 and Leg 3 for instance) and with episodes of trend inversion (as in mid-November 2018) (Figure 9A).

490


Noteworthy are the differences between ocean and lagoon, with a lagoon cooler than the ocean during winter season, and the opposite in October, when lagoon became warmer than the ocean. The ocean-lagoon differences are less than 1 degree (-0.83°C to +0.42°C).

495

Inside the lagoon, (Figure 9B), the surface-bottom delta for three stations shows that fluctuations are spatially synchronous, but can be of different amplitude. High amplitudes reveal water column stratification more intense during Leg2 and Leg3. Surface temperatures are generally higher than bottom temperature. In some rare instances, the delta is negative as in three events in June 2018,



500 September 2018 and February 2019 during which bottom temperature was $+0.3^{\circ}\text{C}$ warmer than the surface. Interpretation of all these patterns require using wind data (not shown).

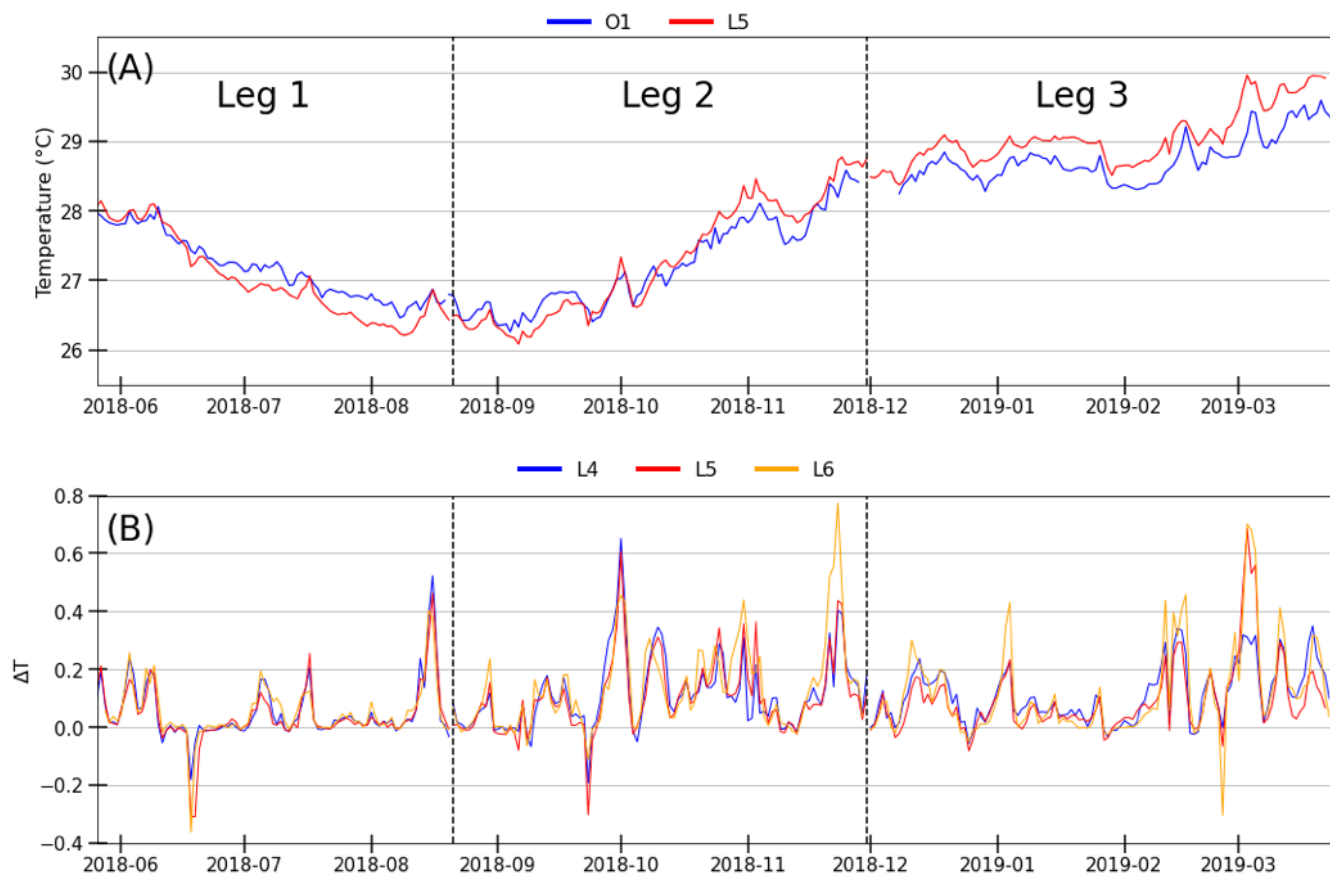

505 **Figure 9: (A) Daily temperature time series of oceanic station O1 (9m depth) and lagoon station L5 (2m depth) at daily scale over the entire deployment period. (B) Surface – bottom temperature differences at daily scale for L4, L5 and L6 lagoon stations.**

510

515




6.2 Current records

520 Figure 10 shows current intensities ($\text{m}\cdot\text{s}^{-1}$) and directions (degrees) distributed over the water column in the Takaroa pass. The ADCP was moored by 17m depth (Table A1). Current directions (Figure 10, middle window) inside the pass are vertically homogenous and follow the semi-diurnal tide cycles (ebb and flow) with a westward (red) orientation during ebb and eastward (blue) during flow which correspond to the channel orientation (see Figure 7). Changes in current direction are very abrupt when the tide changes, in a matter of minutes. Current intensities (Figure 10, first window) are also

525 homogenous according to depth. The weakest currents occur during slack water corresponding to high or low tide maximum. Figure 10 (bottom panel) shows how current speed is related to spring tide with stronger outgoing current at that time. During “normal” conditions (no meteorological or wave events), water exchanges between ocean and lagoon through the pass are mostly driven by tide but meteorological events can alter the rhythm if the lagoon fills up due to incoming swells for instance.

530

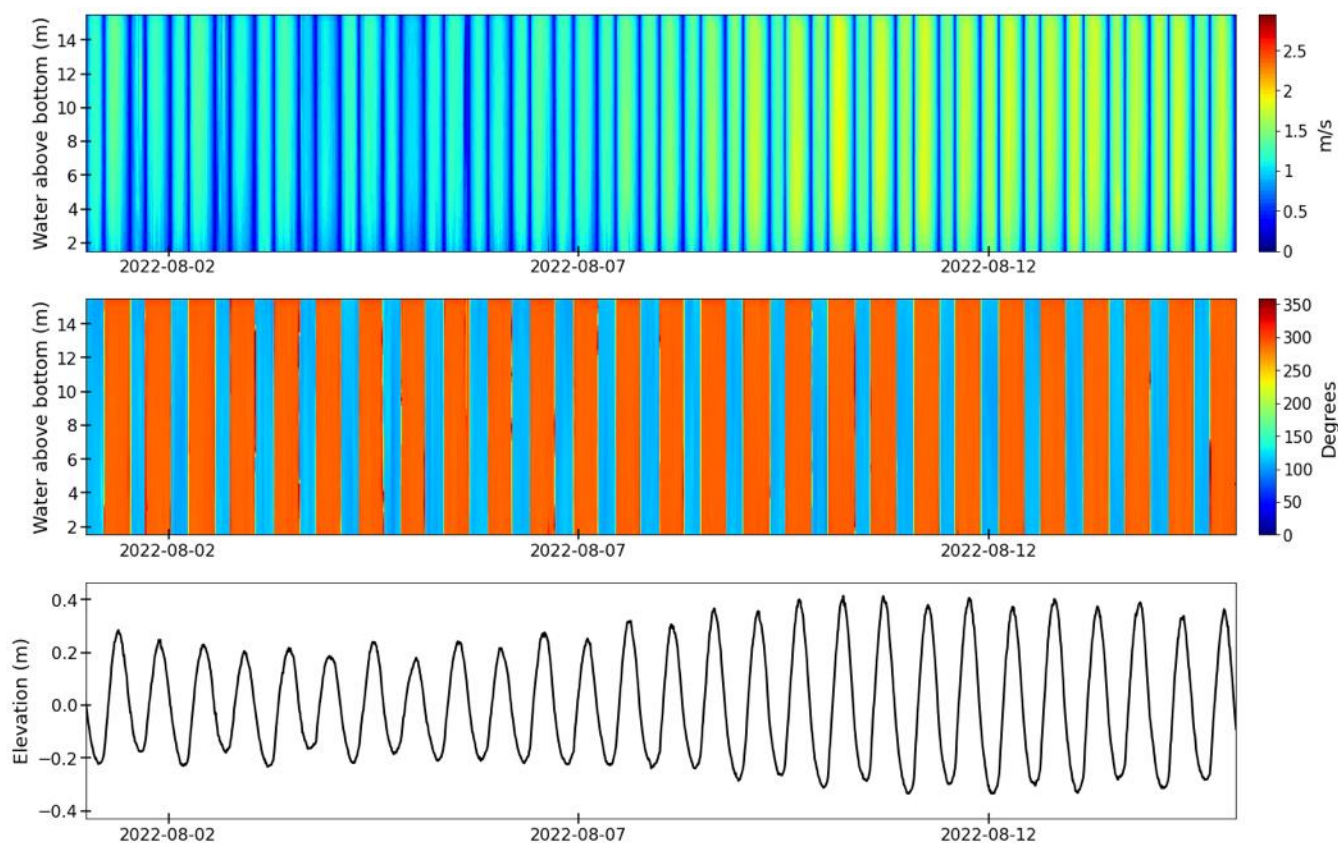


535

Figure 10: Fifteen days zoom of current speeds (upper), directions (middle) over water column and water elevation time serie (bottom window) measured with an ADCP Sentinel V20 moored into Teanonae Pass station (P01) in Takaroa Atoll. For direction interpretations, the oceanographic convention is employed (direction in which the current is propagated).



6.3 Sea state parameters

540 Wave parameters post-processed from pressure data measured by RBRduet T.D sensors deployed in
Apataki Atoll are shown Figure 11. The contrast between wave impacts in the different sides of an atoll
is demonstrated by station O01 where incident wave heights ranged between 0.8m and 2m, and up to
4m during the mega swell episode hitting French Polynesia mid-July 2022). Conversely, the incident
waves measured on the eastern station O03 never reach above 1m high (Figure 11A). Water elevation
measured inside the lagoon (station L05) show the entry of oceanic waters especially during the mid-
July 2022 mega-swell and the corresponding positive +50cm surge, as well as a strong distortion of the
545 tide signal (Figure 11B and Figure 11C).

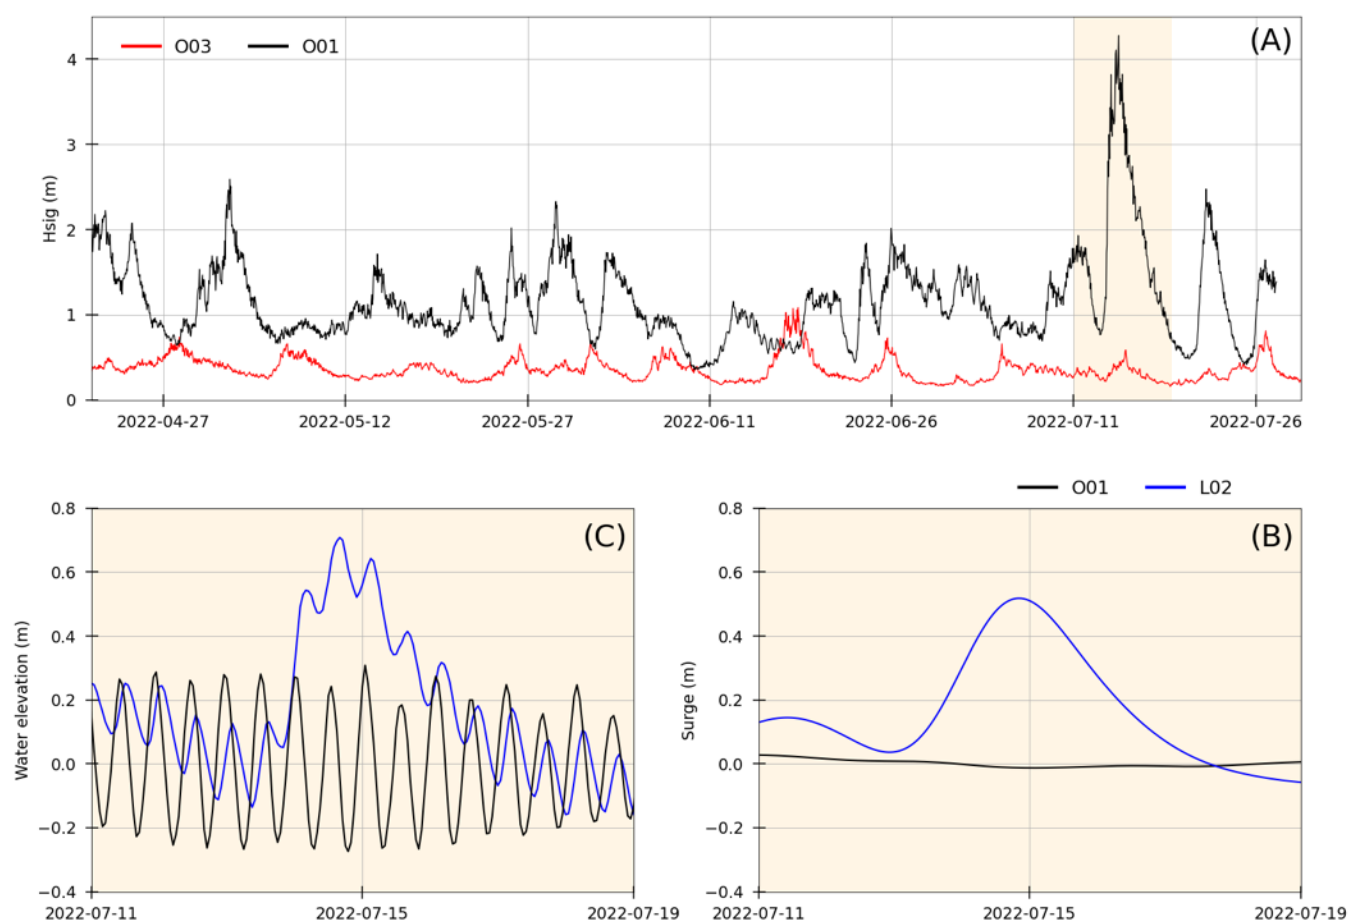

550 **Figure 11:** (A): Significant wave height observed in station O01 (south side) and O03 (east coast) over the entire period of measure in Apataki Atoll. (B): Surge elevation in oceanic station (O01) and inside lagoon (L05) during the wave event. (C): Zoom of tidal signal recorded in oceanic station (O01) and inside lagoon (L02) during the period of mega-swell.



7 Data availability

555 The data sets presented here are publicly available on SEANOE (SEA ScieNtific Open data Edition)
open data publisher (<https://www.seanoe.org/>, Seanoe, 2023). Data are in open source and are identified
per atoll and provided in NetCDF format with missing values set to -999. Permanent DOI's for each
individual repositories are the following for each atoll: Raroia: <https://doi.org/10.17882/94147>
(Andréfouët et al., 2023), Takapoto: <https://doi.org/10.17882/94032> (Bruyère et al., 2023b), Apataki:
560 <https://doi.org/10.17882/94031> (Bruyère et al., 2023a), Takaroa: <https://doi.org/10.17882/94146>
(Bruyère et al. (2023c). Those data sets have already been used for field investigations (Andréfouët et
al., submitted; Aucan et al., 2021), and hydrodynamics models cal/val (e.g., Le Gendre et al., in prep).

8 Conclusions

565 The data sets presented in this paper come from five years of investigations conducted in four specific
pearl farming atolls in the Tuamotu Archipelago (French Polynesia). Another pearl farming site
(Gambier) was not included here and will be presented in a separate publication as it was a lagoon with
several high islands and the sampling strategy was different. Combined, the four study sites represent
the largest volume of oceanographic data collected for any atoll archipelago worldwide. Those data
inform on the inter-atoll and intra-lagoon differences due to the replication of field sites in most
570 lagoons. Intra lagoon and ocean-lagoon temperature, sea levels and hydrodynamics variables can be
better understood with this existing data set. More investigations can nevertheless be required in
different configurations to continue representing the diversity of Tuamotu and Gambier pearl farming
sites. Besides pearl farming, the data provided here can also be useful for a variety of ecological,
geomorphological, sedimentological and management applications.

575

580

585



8 Appendix

Table A1: List of stations and instruments features (station position and depth, instrument type, raw and processed parameters, deployment date, sampling frequency and legs occurrence).

Station	Instrument	Raw parameters	Longitude (W)	Latitude (S)	Date Start	Date End	Freq	Depth (m)	Processed parameters	Legs
RAROIA										
H1	Aquadopp Nortek	Current - pressure	142.433389	15.997081	30/11/2018	25/03/2019	5 min	2	Current speed & direction – water level	3
H1	Marotte HS	Current – temperature	142.433389	15.997081	25/05/2018	25/03/2019	1 min	1	Temperature – current speed & direction	1,2,3
H1	ADCP Sentinel V50	Current – temperature – pressure	142.43138	16.00012	01/12/2018	10/12/2018	10 min	28.7	Temperature – current speed & direction – water level	shortleg
H2	ADCP Sentinel V50	Current – temperature – pressure	142.36775	16.02864	01/12/2018	10/12/2018	10 min	29.8	Temperature – current speed & direction – water level	shortleg
H2	Aquadopp Workhorse	Current - pressure	142.345943	16.034883	02/05/2018	22/03/2019	5 min	1.2	Current speed & direction – water level	1,2,3
H3	Marotte HS	Current – temperature	142.479320	16.240945	27/05/2018	23/03/2019	1 min	2	Temperature – current speed & direction	1,2,3
H3	Aquadopp Workhorse	Current - pressure	142.479320	16.240945	27/05/2018	29/11/2018	5 min	1.9	Current speed & direction – water level	1,2
H5	Marotte HS	Current – temperature	142.38182	16.11527	31/05/2018	23/03/2019	1 min	2	Temperature – current speed & direction	1,2,3
L4	RBRduet T.D	Temperature – pressure	142.364141	15.987224	25/05/2018	23/03/2019	1 Hz	8.5	Temperature – wave height & period – water level	1,2,3
L4	SBE56	Temperature	142.364223	15.987153	25/05/2018	23/03/2019	10s	2	Temperature	1,2,3
L4	SBE56	Temperature	142.364048	15.987401	25/05/2018	23/03/2019	10s	20	Temperature	1,2,3
L5	RBRduet T.D	Temperature – pressure	142.418776	16.064754	25/05/2018	22/03/2019	1 Hz	8.4	Temperature – wave height & period – water level	1,2,3
L5	SBE56	Temperature	142.418871	16.064706	25/05/2018	22/03/2019	10s	3	Temperature	1,2,3
L5	SBE56	Temperature	142.418481	16.064874	25/05/2018	22/03/2019	10s	18	Temperature	1,2,3
L6	RBRduet T.D	Temperature – pressure	142.469034	16.150707	27/05/2018	23/03/2019	1 Hz	8.4	Temperature – wave height & period – water level	1,2,3
L6	SBE56	Temperature	142.468992	16.150752	28/05/2018	23/03/2019	10s	2	Temperature	1,2,3
L6	SBE56	Temperature	142.469120	16.150592	28/05/2018	23/03/2019	10s	19	Temperature	1,2,3
L7	RBRduet T.D	Temperature – pressure	142.502743	16.117741	27/05/2018	23/03/2019	1 Hz	6.7	Temperature – wave height & period – water level	1,2,3
L7	SBE56	Temperature	142.502806	16.17779	28/05/2018	23/03/2019	10s	2	Temperature	1,2,3
L7	SBE56	Temperature	142.502613	16.117493	28/05/2018	23/03/2019	10s	19	Temperature	1,2,3



L7	ADCP SentinelV50	Current – temperature – pressure	142.50232	16.11715	21/08/2018	29/09/2018	30 min	27.2	Temperature – current speed & direction – water level	2
L8	RBRduet T.D	Temperature – pressure	142.411028	16.153079	27/05/2018	23/03/2019	1 Hz	8.2	Temperature – wave height & period – water level	1,2,3
L8	SBE56	Temperature	142.410957	16.153191	28/05/2018	23/03/2019	10s	2	Temperature	1,2,3
L8	SBE56	Temperature	142.411200	16.152837	28/05/2018	23/03/2019	10s	19	Temperature	1,2,3
L8	ADCP Sentinel V50	Current – temperature – pressure	142.41797	16.14340	21/08/2018	29/09/2018	30 min	30.7	Temperature – current speed & direction – water level	2
O1	RBRduet T.D	Temperature – pressure	142.436940	15.993521	26/05/2018	25/03/2019	1 Hz	8.8	Temperature – wave height & period – water level	1,2, shortleg, 3
O2	RBRduet T.D	Temperature – pressure	142.341032	16.036994	26/05/2018	22/03/2019	1 Hz	11.7	Temperature – wave height & period – water level	1,2,3
O3	RBRduet T.D	Temperature – pressure	142.479930	16.248699	26/05/2018	22/03/2019	1 Hz	10.3	Temperature – wave height & period – water level	1,2,3
Pass	ADCP Sentinel V20	Current – temperature – pressure	142.45482	16.01760	22/08/2018	11/12/2018	10 min	17.3	Temperature – current speed & direction – water level	2
Pass2	ADCP Sentinel V20	Current – temperature – pressure	142.44022	16.01851	23/08/2018	11/12/2018	10 min	20.2	Temperature – current speed & direction – water level	2
TAKAPOTO										
Aqua1	Aquadopp Nortek	Current - pressure	145.21235	14.593897	12/11/2021	02/03/2022	10 min	1.4	Current speed & direction – water level	1
Aqua2	Aquadopp Nortek	Current - pressure	145.19452	14.652203	12/11/2021	02/03/2022	10 min	1.6	Current speed & direction – water level	1
O01	RBRduet T.D	Temperature – pressure	145.19135	14.654374	13/11/2021	03/03/2022	1 Hz	12.3	Temperature – wave height & period – water level	1
O03	RBRduet T.D	Temperature – pressure	145.21473	14.590963	13/11/2021	03/03/2022	1 Hz	10.9	Temperature – wave height & period – water level	1
L1	SBE56	Temperature	145.20117	14.625101	18/11/2021	02/03/2022	1 min	37	Temperature	1
L1	RBRduet T.D	Temperature – pressure	145.2008	14.624614	18/11/2021	21/02/2022	1 Hz	10.6	Temperature – wave height & period – water level	1
L1	SBE56	Temperature	145.20077	14.624549	18/11/2021	02/03/2022	1 min	5	Temperature	1
L2	SBE56	Temperature	145.22712	14.656898	18/11/2021	02/03/2022	1 min	31	Temperature	1
L2	RBRduet T.D	Temperature – pressure	145.22689	14.656434	18/11/2021	02/03/2022	1 Hz	9.5	Temperature – wave height &	1



									period – water level	
L2	SBE56	Temperature	145.22691	14.656352	18/11/2021	02/03/2022	1 min	2	Temperature	1
APATAKI										
O1	RBRduet T.D	Temperature – pressure	146.39095	15.605983	21/04/2022	27/07/2022	1 Hz	11	Temperature – wave height & period – water level	1,2
O2	RBRduet T.D	Temperature – pressure	146.330261	15.613003	21/04/2022	27/07/2022	1 Hz	12.1	Temperature – wave height & period – water level	1,2
O3	RBRduet T.D	Temperature – pressure	146.448461	15.427796	21/04/2022	29/07/2022	1 Hz	7.8	Temperature – wave height & period – water level	1,2
JCU1	Marotte HS	Current – temperature	146.441272	15.431240	22/04/2022	28/07/2022	1 min	2	Temperature – current speed & direction	1,2
JCU5	Marotte HS	Current - temperature	146.420131	15.551322	22/04/2022	31/05/2022	1 min	1	Temperature – current speed & direction	1,2
JCU7	Marotte HS	Current – temperature	146.441272	15.431240	22/04/2022	28/07/2022	1 min	2	Temperature – current speed & direction	1,2
L1	RBRduet T.D	Temperature – pressure	146.292631	15.440699	22/04/2022	28/07/2022	1 Hz	12.1	Temperature – wave height & period – water level	1,2
L1	SBE56	Temperature	146.292631	15.440699	22/04/2022	28/07/2022	1 min	2	Temperature	1,2
L1	SBE56	Temperature	146.292631	15.440699	22/04/2022	28/07/2022	1 min	37	Temperature	1,2
L2	SBE56	Temperature	146.326862	15.501658	22/04/2022	28/07/2022	1 min	32	Temperature	1,2
L2	RBRduet T.D	Temperature – pressure	146.326799	15.502053	22/04/2022	28/07/2022	1 Hz	13.5	Temperature – wave height & period – water level	1,2
L2	SBE56	Temperature	146.326839	15.502305	22/04/2022	28/07/2022	1 min	3	Temperature	1,2
L5	RBRduet T.D	Temperature – pressure	146.268736	15.521516	22/04/2022	28/07/2022	1 Hz	10.7	Temperature – wave height & period – water level	1,2
L3	SBE56	Temperature	146.369834	15.553718	23/04/2022	27/07/2022	1 min	27	Temperature	1,2
L3	RBRduet T.D	Temperature – pressure	146.37076	15.553979	23/04/2022	27/07/2022	1 Hz	10.7	Temperature – wave height & period – water level	1,2
L3	SBE56	Temperature	146.370889	15.554061	23/04/2022	27/07/2022	1 min	3	Temperature	1,2
L4	RBRduet T.D	Temperature – pressure	146.430374	15.481611	23/04/2022	28/07/2022	1 Hz	9.1	Temperature – wave height & period – water level	1,2
L6	RBRduet T.D	Temperature – pressure	146,31786	15,33485	04/07/2022	05/07/2022	1 Hz	11.1	Temperature – wave height & period – water level	2



L6	SBE56	Temperature	146,31887	15,33591	04/07/2022	05/07/2022	1 min	30	Temperature	2
L6	SBE56	Temperature	146,31774	15,33471	04/07/2022	05/07/2022	1 min	4	Temperature	2
Aqua1	Aquadopp Nortek	Current - pressure	146.335086	15.608373	21/04/2022	27/07/2022	10 min	2.4	Current speed & direction – water level	1,2
Aqua2	Aquadopp Nortek	Current - pressure	146.390457	15.596022	23/04/2022	27/07/2022	10 min	3.3	Current speed & direction – water level	1,2
P01	ADCP Sentinel V50	Current – temperature – pressure	146,416472	15,568417	02/07/2022	02/07/2022	10 min	27.6	Temperature – current speed & direction – water level	2
P02	ADCP Sentinel V20	Current – temperature – pressure	146,401393	15,567935	02/07/2022	02/07/2022	10 min	21.3	Temperature – current speed & direction – water level	2
P03	ADCP Sentinel V50	Current – temperature – pressure	146,40919	15,31504	05/07/2022	05/07/2022	10 min	30.5	Temperature – current speed & direction – water level	2
TAKAROA										
P01	ADCP Sentinel V20	Current – temperature – pressure	-145.03939	-14.47516	20/07/2022	18/10/2022	10 min	17.6	Temperature – current speed & direction – water level	1

590 Author contributions

SA is the PI of the MANA project. SA, RLG, JA and VL raised funds. SA, RLG, VL, JA designed and conducted the experiments. SA, RLG, BB, DV, JB, TT, YF, JA; VL had repetitive implications in the field experiments. OB, MC, RLG, JA, SA, TT, YF, VL organized, processed, checked, and archived the data sets. OB and SA prepared the paper and designed the figures, with contributions from all co-
 595 authors.

Competing interests

The authors declare that they have no conflict of interest.

Acknowledgements

The authors acknowledge the Direction des Ressources Marines (DRM) of French Polynesia for their
 600 financial support and for providing oceanographic instruments. The CNFC and the crew of the R/V ALIS captained by Jean-François Barazer (scientific cruises MALIS 1, MALIS 2 and MALIS 3) were instrumental for the success of the field operations. The additional scientific staff that helped during one of the field operations described here include Joseph Campanozzi-Tarahu, Marcellino Raka, Tavi Tehei and Fabien Tertre (DRM), Magali Bousson (IRD), Benoit Beliaeff, Chloé Germain and Caline Basset



605 (IFREMER). We thank the mayors, Townhouse staff, boat drivers and local population of the different atolls for their support and welcome.

Financial support

This study was primarily funded by a grant ANR-16-CE32-0004 MANA (Management of Atolls project). For Takapoto Atoll, surveys were also funded by the Direction des Ressources Marines (DRM) through grant 7518/VP/DRM to IRD. Instruments were provided by the Direction des Ressources
610 Marines, OTI project, Contrat de Projet France–French Polynesia, Program 123, Action 2, 2015–2020. This work was made possible thanks to: the MALIS 1 and MALIS 2 oceanographic cruises in Raroia Atoll (<https://doi.org/10.17600/18000582>), and the MALIS 3 cruise in Apataki and Takaroa Atoll (<https://doi.org/10.17600/18001644>), all conducted on board R/V ALIS.

615 References

André, L.V., Chinain, M., Gatti, C.M., Liao, V., Van Wynsberge, S., Tedesco, P., and Andréfouët, S.: A systematic prioritization approach for identifying suitable pearl oyster restocking zones following a mass mortality event in Takaroa Atoll, French Polynesia. *Marine Pollution Bulletin.*, 176, 113472. <https://doi.org/10.1016/j.marpolbul.2022.113472>, 2022.

620 Andréfouët, S. and Adjeroud, M.: French Polynesia. In *World Seas: An Environmental Evaluation*. Elsevier., pp. 827–854. <https://doi.org/10.1016/B978-0-08-100853-9.00039-7>, 2019.

Andréfouët, S. and Bionaz, O.: Lessons from a global remote sensing mapping project. A review of the
625 impact of the Millennium Coral Reef Mapping Project for science and management. *Science of The Total Environment.*, 776, 145987. <https://doi.org/10.1016/j.scitotenv.2021.145987>, 2021.

Andréfouët, S., Ouillon, S., Brinkman, R., Falter, J., Douillet, P., Wolk, F., and Buestel, D.: Review of solutions for 3D hydrodynamic modeling applied to aquaculture in South Pacific atoll lagoons. *Marine
630 Pollution Bulletin.*, 52(10), 1138-1155, 2006.

Andréfouët, S., Arduin, F., Queffeuilou, P., and Le Gendre, R.: Island shadow effects and the wave climate of the Western Tuamotu Archipelago (French Polynesia) inferred from altimetry and numerical model data. *Marine Pollution Bulletin.*, 65, 415–424. <https://doi.org/10.1016/j.marpolbul.2012.05.042>,
635 2012b.

Andréfouët, S., Bruyère, O., Aucan, J., Liao, V., and Le Gendre, R.: Lagoon hydrodynamics of pearl farming atolls in French Polynesia: the case of Raroia Atoll (Tuamotu Archipelago), SEANOE [data set], <https://doi.org/10.17882/94147>, 2023.

640



- Andréfouët, S., Charpy, L., Lo-Yat, A., and Lo, C.: Recent research for pearl oyster aquaculture management in French Polynesia. *Marine Pollution Bulletin.*, 65, 407–414.
<https://doi.org/10.1016/j.marpolbul.2012.06.021>, 2012a.
- 645 Andréfouët, S., Pagès, J., and Tartinville, B.: Water renewal time for classification of atoll lagoons in the Tuamotu Archipelago (French Polynesia). *Coral Reefs.*, 20, 399–408.
<https://doi.org/10.1007/s00338-001-0190-9>, 2001a.
- Andréfouët, S., Claereboudt, M., Matsakis, P., Pagès, J., and Dufour, P.: Typology of atoll rims in
650 Tuamotu Archipelago (French Polynesia) at landscape scale using SPOT HRV images. *International Journal of Remote Sensing.*, 22, 987–1004. <https://doi.org/10.1080/014311601300074522>, 2001b.
- Andréfouët, S., Desclaux, T., Buttin, J., Jullien, S., Aucan, J., Le Gendre, R., and Liao, V.: Periodicity
655 of wave-driven flows and lagoon water renewal for 74 Central Pacific Ocean atolls. *Marine Pollution Bulletin.*, 179, 113748. <https://doi.org/10.1016/j.marpolbul.2022.113748>, 2022b.
- Andréfouët, S., Genthon, P., Pelletier, B., Le Gendre, R., Friot, C., Smith, R., and Liao, V.: The lagoon
geomorphology of pearl farming atolls in the Central Pacific Ocean revisited using detailed bathymetry
660 data. *Marine Pollution Bulletin.*, 160, 111580. <https://doi.org/10.1016/j.marpolbul.2020.111580>, 2020.
- Andréfouët, S., Lo-Yat, A., Lefebvre, S., Bionaz, O., and Liao, V.: The MANA (MANagement of
Atolls, 2017–2022) project for pearl oyster aquaculture management in the Central Pacific Ocean using
modelling approaches: Overview of first results. *Marine Pollution Bulletin.*, 178, 113649.
<https://doi.org/10.1016/j.marpolbul.2022.113649>, 2022a.
- 665 Aucan, J., Desclaux, T., Le Gendre, R., Liao, V., and Andréfouët, S.: Tide and wave driven flow across
the rim reef of the atoll of Raroia (Tuamotu, French Polynesia). *Marine Pollution Bulletin.*, 171,
112718. <https://doi.org/10.1016/j.marpolbul.2021.112718>, 2021
- 670 Aucan, J., Vendé-Leclerc, M., Dumas, P., and Bricquie, M.: Wave forcing and morphological changes
of New Caledonia lagoon islets: Insights on their possible relations, *C. R. Geosci.*, 349, 248–259.
<https://doi.org/10.1016/j.crte.2017.09.003>, 2017.
- Bruyère, O., Soulard, B., Lemonnier, H., Laugier, T., Hubert, M., Petton, S., Desclaux, T., Van
675 Wynsberge, S., Le Tesson, E., Lefèvre, J., Dumas, F., Kayara, J.-F., Bourassin, E., Lalau, N., Antypas,
F., Le Gendre, R.: Hydrodynamic and hydrological processes within a variety of coral reef lagoons:
field observations during six cyclonic seasons in New Caledonia. *Earth Syst. Sci. Data.*, 14, 5439–5462.
<https://doi.org/10.5194/essd-14-5439-2022>, 2022.
- 680 Bruyère, O., Le Gendre, R., Liao, V., and Andréfouët, S.: Lagoon hydrodynamics of pearl farming
atolls in French Polynesia: the case of Apataki Atoll (Tuamotu Archipelago), SEANOE [data set],
<https://doi.org/10.17882/94031>, 2023a.



- 685 Bruyère, O., Le Gendre, R., Liao, V., and Andréfouët, S.: Lagoon hydrodynamics of pearl farming
atolls in French Polynesia: the case of Takapoto Atoll (Tuamotu Archipelago), SEANOE [data set],
<https://doi.org/10.17882/94032>, 2023b.
- 690 Bruyère, O., Le Gendre, R., Liao, V., and Andréfouët, S.: Lagoon hydrodynamics of pearl farming
atolls in French Polynesia: the case of Takaroa Atoll (Tuamotu Archipelago), SEANOE [data set],
<https://doi.org/10.17882/94146>, 2023c.
- 695 Callaghan, D.P., Nielsen, P., Cartwright, N., Gourlay, M.R., and Baldock, T.E.: Atoll lagoon flushing
forced by waves. *Coastal Engineering.*, 53, 691–704. <https://doi.org/10.1016/j.coastaleng.2006.02.006>,
2006.
- Dufour, P. and Harmelin-Vivien, M.: A research program for a typology of atoll lagoons: strategy and
first results. In *Proc 8th Int Coral Reef Symp.*, Vol. 1, pp. 843-848. 1997.
- 700 Dufour, P., Andréfouët, S., Charpy, L., and Garcia, N.: Atoll morphometry controls lagoon nutrient
regime. *Limnology and Oceanography.*, 46(2), 456-461, <https://doi.org/10.4319/lo.2001.46.2.0456>,
2001.
- 705 Dumas, F., Le Gendre, R., Thomas, Y., and Andréfouët, S.: Tidal flushing and wind driven circulation
of Ahe atoll lagoon (Tuamotu Archipelago, French Polynesia) from in situ observations and numerical
modelling. *Marine Pollution Bulletin.*, 65, 425–440. <https://doi.org/10.1016/j.marpolbul.2012.05.041>,
2012.
- 710 DRM (Direction des Ressources Marines).: *Bulletin Statistique: Synthèse des données de la pêche
professionnelle, de l'aquaculture et de la perliculture*, Edition 2021, [http://www.ressources-
marines.gov.pf/wp-content/uploads/sites/24/2022/10/Bulletin-statistique-DRM-2021-light.pdf](http://www.ressources-marines.gov.pf/wp-content/uploads/sites/24/2022/10/Bulletin-statistique-DRM-2021-light.pdf), 2021.
- 715 Dutheil, C., Andréfouët, S., Jullien, S., Le Gendre, R., Aucan, J., and Menkes, C.: Characterization of
south central Pacific Ocean wind regimes in present and future climate for pearl farming application.
Marine Pollution Bulletin., 160, 111584. <https://doi.org/10.1016/j.marpolbul.2020.111584>, 2020.
- Dutheil, C., Jullien, S., Aucan, J., Menkes, C., Le Gendre, R., and Andréfouët, S.: The wave regimes of
the Central Pacific Ocean with a focus on pearl farming atolls. *Marine Pollution Bulletin.*, 162, 111751.
<https://doi.org/10.1016/j.marpolbul.2020.111751>, 2021.
- 720 Gueguen, Y., Gaertner-Mazouni, N., Lo, C., and Le Moullac, G.: Integrated management of pearl
culture in French Polynesia in the context of global change: Synopsis of existing results. *Estuarine,
Coastal and Shelf Science.*, 182, 229–234. <https://doi.org/10.1016/j.ecss.2016.07.010>, 2016.



- 725 Latchere, O., Mehn, V., Gaertner-Mazouni, N., Le Moullac, G., Fievet, J., Belliard, C., Cabral, P.,
Saulnier, D.: Influence of water temperature and food on the last stages of cultured pearl mineralization
from the black-lip pearl oyster *Pinctada margaritifera*. PLoS ONE 13., e0193863.
<https://doi.org/10.1371/journal.pone.0193863>, 2018.
- 730 Laurent, V. and Maamaatuaiahutapu, K.: Atlas climatologique de la Polynésie française, Météo France,
Faa'a-Tahiti, 242 pp., 2019.
- Laurent, V. and Varney, P.: Historique des cyclones de Polynésie française de 1831 à 2010. Météo-
France, Papeete, 192 pp., 2014.
- 735 Le Gendre, R.: Plan de pose des instruments : mesures de pression, houle, courant et température - Ahe.
SEXTANT(IFREMER). <https://doi.org/10.12770/be239ab6-bd5b-4dfd-9d3c-51e6c3793810>, 2020a.
- Le Gendre, R.: Plan de pose des instruments : mesures de pression, courant et température - Takaroa.
SEXTANT(IFREMER). <https://doi.org/10.12770/ec81af02-e049-4f99-8cc6-748ee0550d32>, 2020b.
- 740 Le Moullac, G., Soyez, C., Latchere, O., Vidal-Dupiol, J., Fremery, J., Saulnier, D., Lo Yat, A.,
Belliard, C., Mazouni-Gaertner, N., Gueguen, Y. : *Pinctada margaritifera* responses to temperature and
pH: Acclimation capabilities and physiological limits. Estuarine, Coastal and Shelf Science 182, 261–
269, <https://doi.org/10.1016/j.ecss.2016.04.011>, 2016.
- 745 Le Pennec, M.: Huître perlière et perle de Tahiti. Faa'a. Université de la Polynésie française, Punaauia-
Tahiti, 203 pp., 2010.
- 750 Montaggioni, L.F., Martin-Garin, B., Salvat, B., Aubanel, A., Pons-Branchu, E., Paterne, M., Richard,
M.: Coral conglomerate platforms as foundations for low-lying, reef islands in the French Polynesia
(central south Pacific): New insights into the timing and mode of formation. Marine Geology., 437,
106500. <https://doi.org/10.1016/j.margeo.2021.106500>, 2021.
- 755 Pagès, J. and Andréfouët, S.: A reconnaissance approach for hydrology of atoll lagoons. Coral
Reefs., 20, 409-414, <https://doi.org/10.1007/s00338-001-0192-7>, 2001.
- 760 Rodier, M., Longo, S., Henry, K., Ung, A., Lo-Yat, A., Darius, H., Viallon, J., Beker, B., Delesalle, B.,
and Chinain, M.: Diversity and toxic potential of algal bloom-forming species from Takaroa lagoon
(Tuamotu, French Polynesia): a field and mesocosm study. Aquat. Microb. Ecol., 83, 15–34.
<https://doi.org/10.3354/ame01900>, 2019.
- 765 Sangare, N., Lo-Yat, A., Moullac, G.L., Pecquerie, L., Thomas, Y., Lefebvre, S., Gendre, R.L.,
Beliaeff, B., Andréfouët, S.: Impact of environmental variability on *Pinctada margaritifera* life-history
traits: A full life cycle deb modeling approach. Ecological Modelling., 423, 109006.
<https://doi.org/10.1016/j.ecolmodel.2020.109006>, 2020.



- Seanoe: Sea scientific open data publication, <https://seanoe.org/>, last access: 16 April 2023.
- 770 Tartinville, B., Deleersnijder, E., and Rancher, J.: The water residence time in the Mururoa atoll lagoon: Sensitivity analysis of a three-dimensional model. *Coral-Reefs.*, 16, 193–203. <https://doi.org/10.1007/s003380050074>, 1997.
- 775 Thomas, Y., Garen, P., Courties, C., Charpy, L.: Spatial and temporal variability of the pico- and nanophytoplankton and bacterioplankton in a deep Polynesian atoll lagoon. *Aquat. Microb. Ecol.*, 59, 89–101. <https://doi.org/10.3354/ame01384>, 2010.
- 780 Thomas, Y., Dumas, F., and Andréfouët, S.: Larval Dispersal Modeling of Pearl Oyster *Pinctada margaritifera* following Realistic Environmental and Biological Forcing in Ahe Atoll Lagoon. *PLoS ONE* 9., e95050. <https://doi.org/10.1371/journal.pone.0095050>, 2014.
- Thomas, Y., Dumas, F., and Andréfouët, S.: Larval connectivity of pearl oyster through biophysical modelling; evidence of food limitation and broodstock effect. *Estuarine, Coastal and Shelf Science.*, 182, 283–293. <https://doi.org/10.1016/j.ecss.2016.03.010>, 2016.
- 785 Thomas, Y., Le Gendre, R., Garen, P., Dumas, F., and Andréfouët, S.: Bivalve larvae transport and connectivity within the Ahe atoll lagoon (Tuamotu Archipelago), with application to pearl oyster aquaculture management. *Marine Pollution Bulletin.*, 65, 441–452. <https://doi.org/10.1016/j.marpolbul.2011.12.027>, 2012.
- 790 Violette, C., Le Gendre, R., Chauveau, M., and Andréfouët, S.: A multivariate approach to synthesize large amount of connectivity matrices for management decisions: Application to oyster population restocking in the pearl farming context of Tuamotu Archipelago semi-closed atolls. *Marine Pollution Bulletin.*, 189, 114748. <https://doi.org/10.1016/j.marpolbul.2023.114748>, 2023.